




LED STRIP SPECIFICATION

15m 5050SMD 60LEDs RGB SUPER LONG STRIP



Note: LEDYI may change product specifications and installation guidance without prior notice.

15m 5050LED 60LEDs RGB SUPER LONG STRIP



Part Number: LY60-CS5050RGB-W24-IP20-15

↳ IP20/IP52/IP65

Description


24V DC, 15meters constant current super long flexible LED strip (6LED/step =100mm) with 3M adhesive tape on the back for easy installed. 120° beam angle. High light quality at a lifetime of 54,000 hours (L70). Double-layer FPC(3Oz) for good heat dissipation.



15meters with one end power !



Dimensions & Waterproof

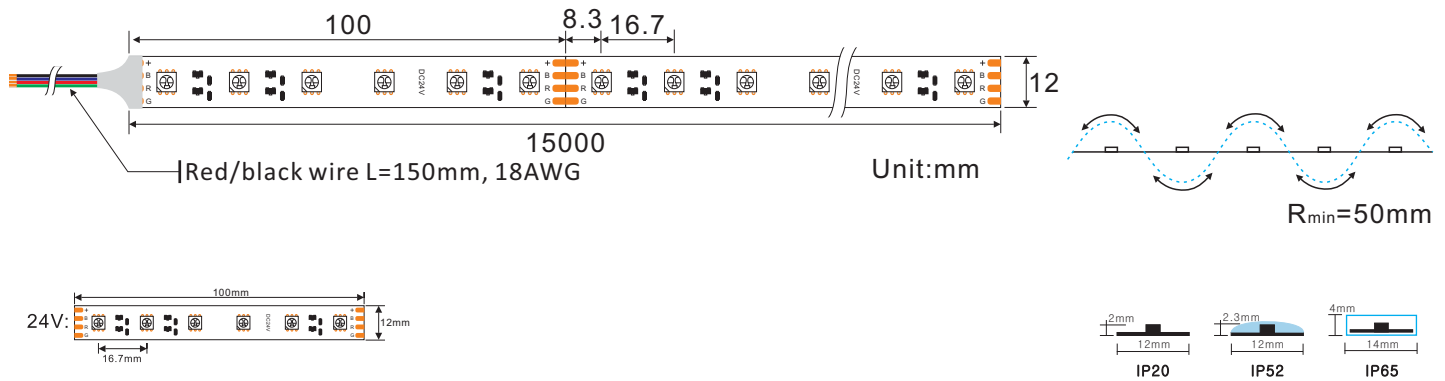

Product Specification

Dimension	15000x12x2mm
Chip Type	5050SMD
Chip Density	60LEDs/m
Step LEDs	6LEDs
Step Length	100mm

Voltage(V)	DC24V
Current(A/m)	0.45A
Power(W/m)	11W(3 colors 100% on)
Beam Angle	120°
Operation Temperature	-20°C~50°C


Product Photometrics - Red, Green and Blue Diodes (Data base on IP20)

Color	Peak Wavelength (nm)	Dominant Wavelength (nm)	Lumen (lm/m)	Power (w/m)	Efficacy (lm/w)
Red	632	622	120	3.87	31
Green	517	523	360	3.91	92
Blue	462	466	71	3.94	18


Product Photometrics - All Red, Green and Blue color at 100% on (Data base on IP20)

CCT (K)	Lumen (lm/m)	Power (w/m)	Efficacy (lm/w)	CRI	R9
30000K	550	11	50	50	-

Bining

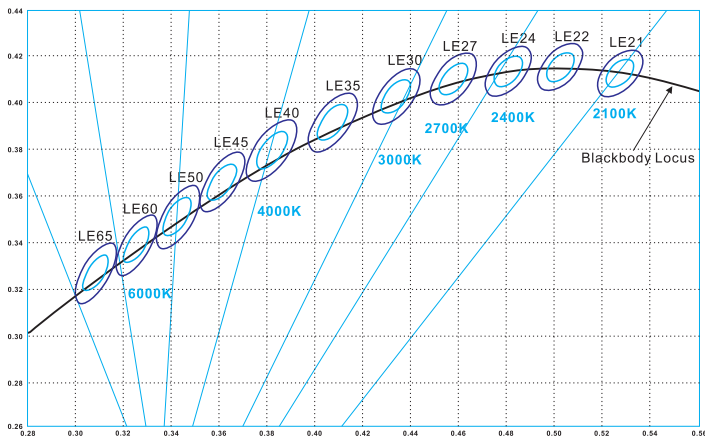

Graphic Description:



For all your order



Today and tomorrow

IP20: bare, max. light output and the best color consistency, indoor use.

IP52: Silicone coating, ~5% less output and 3rd best color consistency, indoor use, for damp environments.

IP65: Silicon tube / Heat shrink tube / Extrusion tube / U milky tube + clear cover, ~3% less output and 2nd best color consistency, Indoor use or semi-outdoor use, for raining environments.

Packing Information (Data base on IP20)

