



LED STRIP SPECIFICATION

2835SMD 140LEDs LED STRIP



Note: LEDYI may change product specifications and installation guidance without prior notice.

2835SMD 140LEDs LED STRIP



Part Number: LY140-S2835W30-W24-IP20 → IP20/IP52/IP65H/IP65/IP67/IP67E/IP68
 → W21/W24/W27/W30/W40/W60






Description

24V, flexible LED strip 7LEDs/step =50mm with 3M adhesive tape on the back for easy installed. 2800.20lm/m at 24W/m. 120° beam angle.
 Very good color reproduction with CRI>90. "One Bin Only" within 3 MacAdam guarantees constant color temperature and high light quality at a lifetime of 54,000 hours (L70). Double-layer FPC(2Oz) for good heat dissipation.



Dimensions & Waterproof

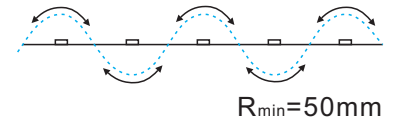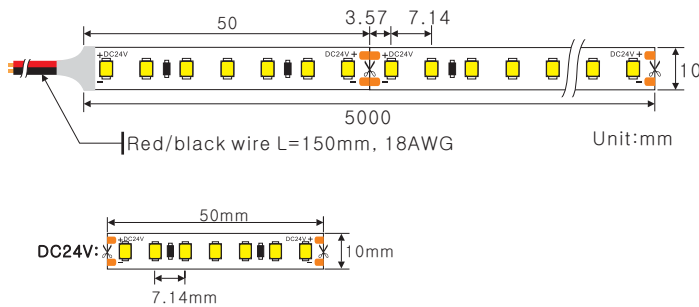

Product Specification


Dimension	5000x10x1.2mm
Chip Type	2835SMD
Chip Density	140LEDs/m
Step LEDs	7LEDs
Step Length	50mm

Voltage(V)	DC24V
Current(A/m)	1A(24V)
Power(W/m)	24W
Beam Angle	120°
Operation Temperature	-20°C~50°C


Product Photometrics (Data base on IP20 CRI>90)

CCT (K)	Lumen (lm/m)	Efficacy (lm/w)	CRI	R9	TM-30-15	
					Rf (Fidelity)	Rg (Gamut)
2100±100	1960.07	81.67	91.51	69.99	90.93	101.95
2400±100	2160.03	90.00	90.03	76.83	90.81	101.82
2700±100	2280.11	95.00	91.18	78.86	92.80	100.81
3000±100	2340.01	97.50	91.06	84.93	90.80	103.96
4000±200	2660.01	110.83	94.15	85.95	90.95	100.00
6000±300	2800.20	116.68	92.14	98.82	91.96	101.89

Bining

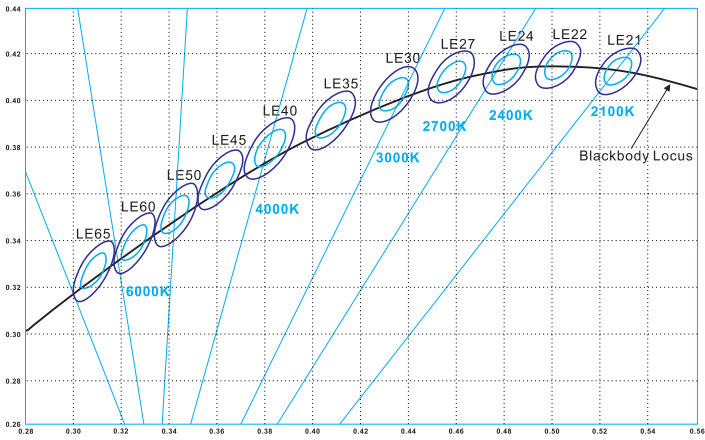

Graphic Description:





For all your order



Today and tomorrow

- IP20:** bare, max. light output and the best color consistency, indoor use.
- IP52:** Silicone coating, ~5% less output and 3rd best color consistency, indoor use, for damp environments.
- IP65:** Silicon tube / Heat shrink tube / Extrusion tube / U milky tube + clear cover, ~3% less output and 2nd best color consistency, Indoor use or semi-outdoor use, for raining environments.
- IP67:** Silicone tube + silicon filling, ~7% less output and 4th best color consistency, outdoor use, max length is 10 meters.
- IP67E:** Solid silicone extrusion, ~7% less output and 4th best color consistency, outdoor use, max length up to 50 meters.
- IP68:** PU(Polyurethane), ~7% less output and 4th best color consistency, under the water, within 2 meters deep.

Light Distribution Curve [Data base on 1m IP20 6000K CRI>90, Unit:cd]

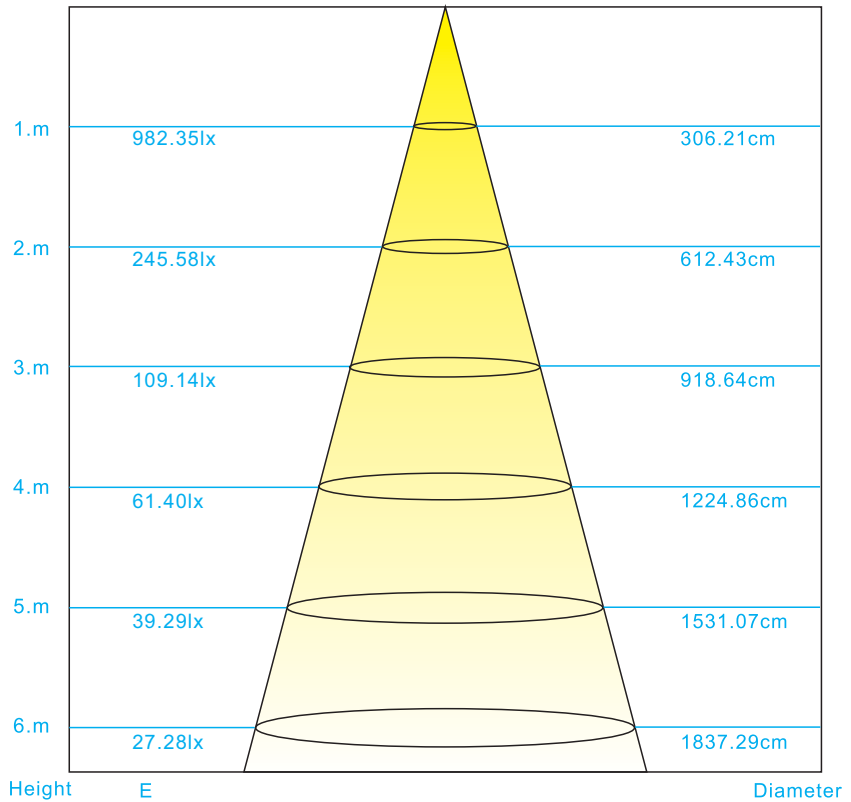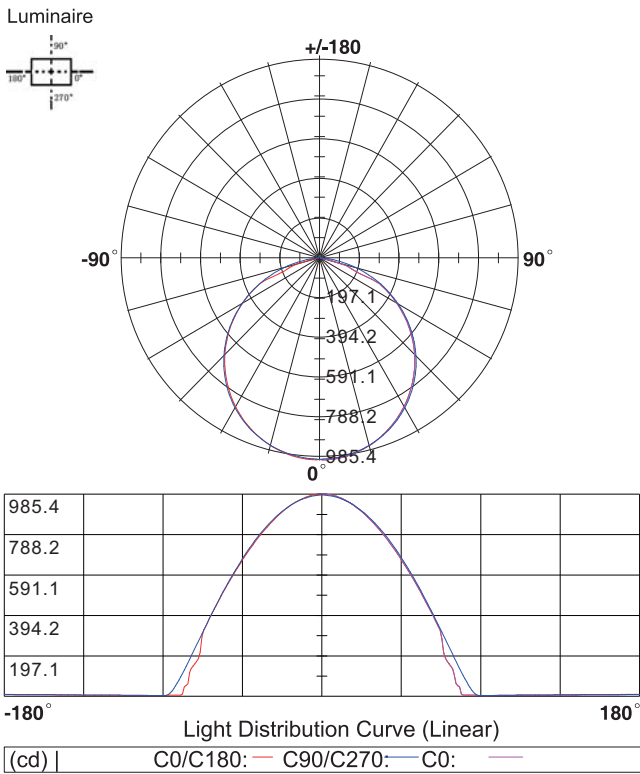

Packing Information (Data base on IP20)

