



LED STRIP SPECIFICATION

3528SMD 60LEDs LED STRIP




Note: LEDYI may change product specifications and installation guidance without prior notice.

3528SMD 60LEDs LED STRIP



Part Number: LY60-S3528 **W30-W24-IP20** → IP20/IP52/IP65H/IP65/IP67/IP67E/IP68
 → W12/W24
 → W21/W24/W27/W30/W40/W60

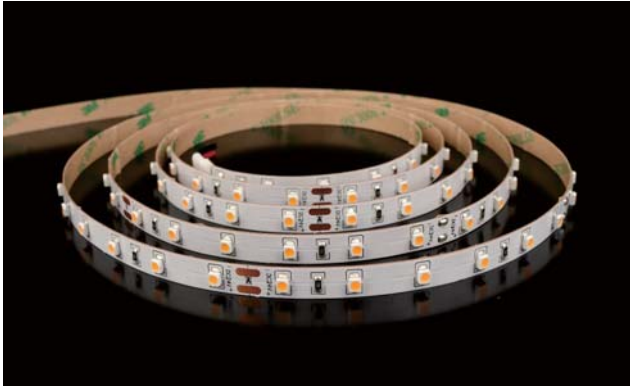


Description

12V or 24V for option, flexible LED strip (3LED/step =50mm(12V)/6LED/step =100mm(24V)) with 3M adhesive tape on the back for easy installed.
 308.78lm/m at 4.8W/m. 120° beam angle. Very good color reproduction with CRI>90. "One Bin Only" within 3 MacAdam guarantees constant color temperature and high light quality at a lifetime of 54,000 hours (L70).
 Double-layer FPC(2Oz) for good heat dissipation.



Dimensions & Waterproof

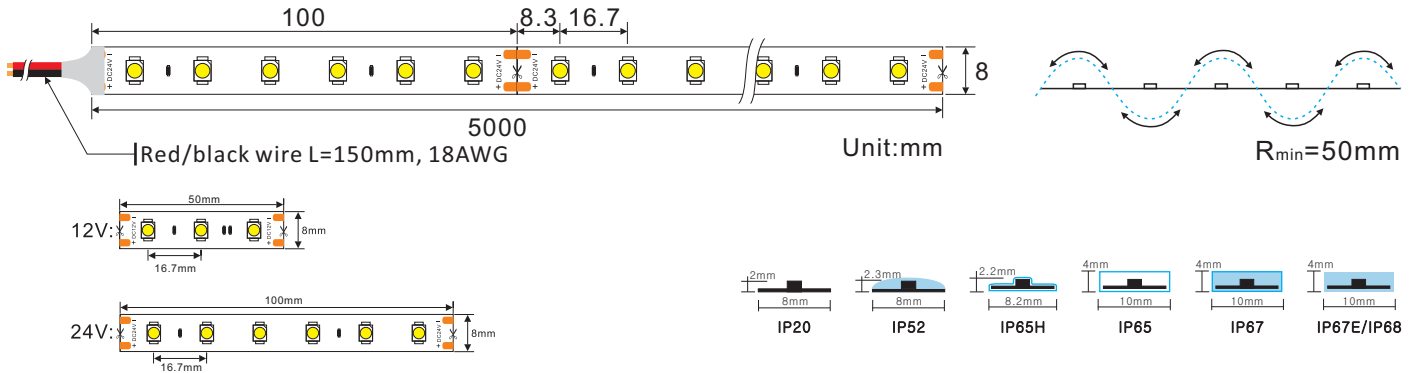

Product Specification

Dimension	5000x8x2mm
Chip Type	3528SMD
Chip Density	60LEDs/m
Step LEDs	3LEDs(12V)/6LEDs(24V)
Step Length	50mm(12V)/100mm(24V)


Voltage(V)	DC12V/DC24V
Current(A/m)	0.4A(12V)/0.2A(24V)
Power(W/m)	4.8W
Beam Angle	120°
Operation Temperature	-20°C~50°C

Product Photometrics (Data base on IP20 CRI>90)


CCT (K)	Lumen (lm/m)	Efficacy (lm/w)	CRI	R9	TM-30-15	
					R _f (Fidelity)	R _g (Gamut)
2100±100	250.94	52.28	91.28	82.33	89.54	100.3
2400±100	268.65	55.97	91.56	81.04	89.91	100.9
2700±100	277.72	57.86	94.37	82.05	91.38	101.7
3000±100	288.24	60.05	93.22	85.81	90.76	101.3
4000±200	299.32	62.36	95.89	90.36	93.66	102.8
6000±300	308.78	64.33	92.33	83.63	90.18	100.9

3528SMD 60LEDs LED STRIP

Bining

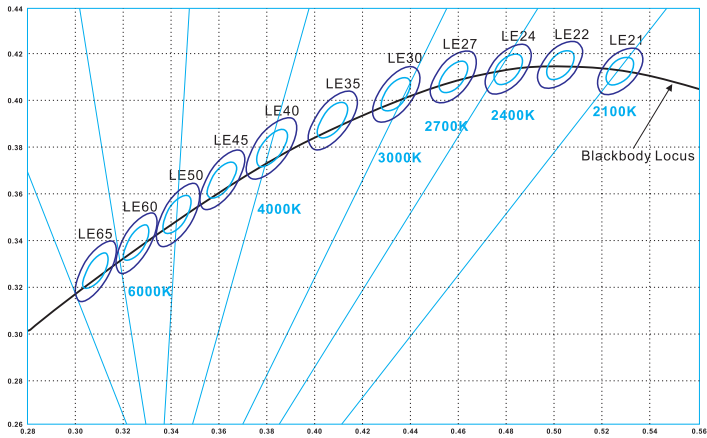

Graphic Description:





For all your order



Today and tomorrow

- IP20:** bare, max. light output and the best color consistency, indoor use.
- IP52:** Silicone coating, ~5% less output and 3rd best color consistency, indoor use, for damp environments.
- IP65:** Silicon tube / Heat shrink tube / Extrusion tube / U milky tube + clear cover, ~3% less output and 2nd best color consistency, Indoor use or semi-outdoor use, for raining environments.
- IP67:** Silicone tube + silicon filling, ~7% less output and 4th best color consistency, outdoor use, max length is 10 meters.
- IP67E:** Solid silicone extrusion, ~7% less output and 4th best color consistency, outdoor use, max length up to 50 meters.
- IP68:** PU(Polyurethane), ~7% less output and 4th best color consistency, under the water, within 2 meters deep.

Light Distribution Curve [Data base on 1m IP20 6000K CRI>90, Unit:cd]

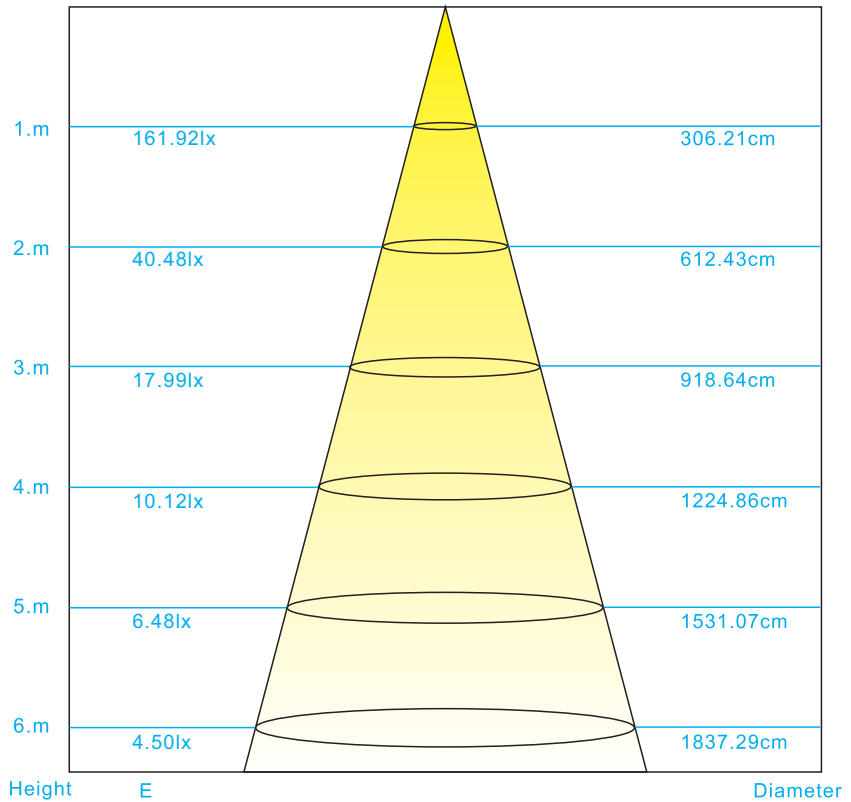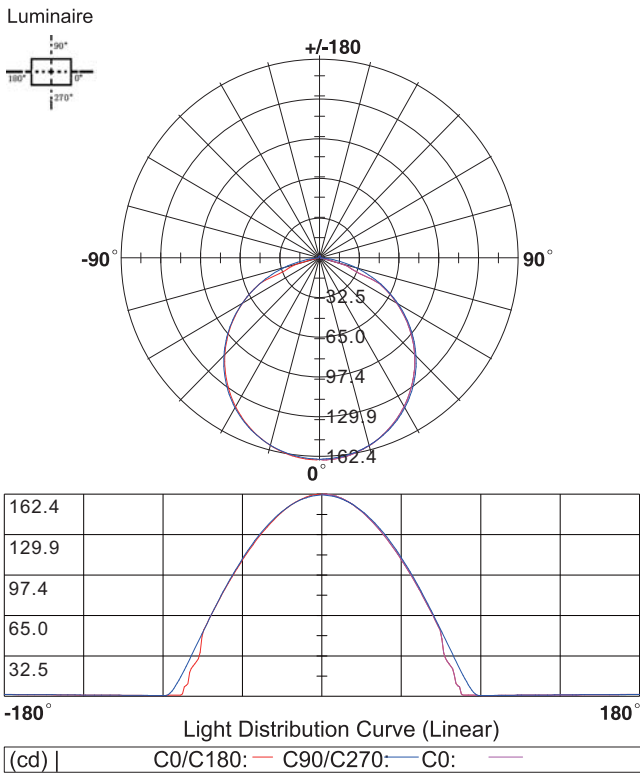

Packing Information (Data base on IP20)

