



LED STRIP SPECIFICATION

5050SMD 72LEDs UCS2904 RGBW MAGIC LED STRIP



Note: LEDYI may change product specifications and installation guidance without prior notice.

Part Number: LY72-UCS2904RGBW-W12-**IP20** → IP20/IP52/IP65H/IP65/IP67/IP67E/IP68




Description

UCS2904 is single signal IC:one data cable(DAT),two power lines,256 gray scale,high brightness,fast data transfer,fast screen refresh,etc.,with the controller,you can achieve monochrome,gradient,water,horse racing,text,numbers,chase,English,pictures,animations,video,any effects,and so on.



Dimensions & Waterproof

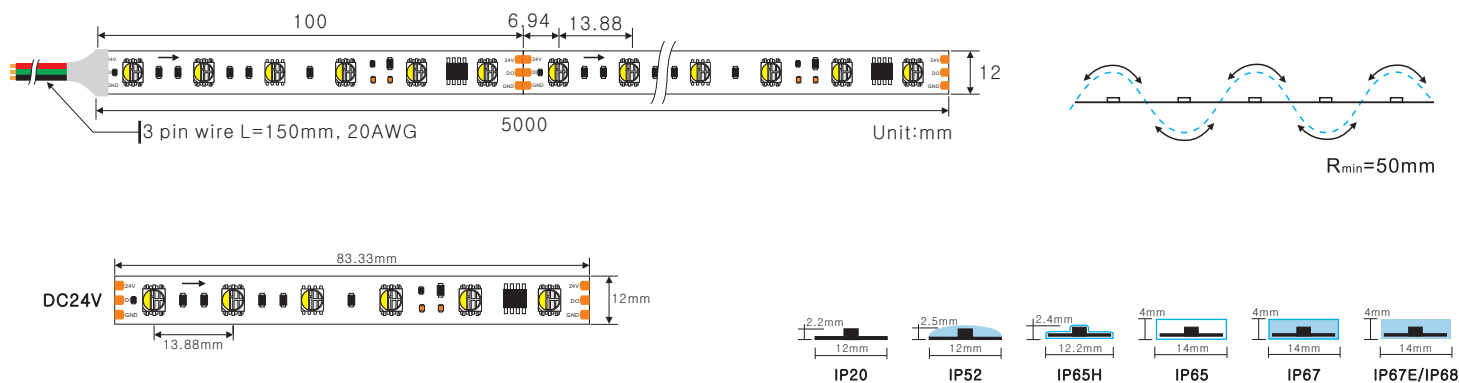

Product Specification


Dimension	5000x12x2.2mm
Chip Type	5050SMD
Chip Density	72LEDs/m
Step LEDs	6LEDs
Step Length	83.33mm

Voltage(V)	DC24V
Current(A/m)	0.96A
Power(W/m)	23W(4 colors 100% on)
Beam Angle	120°
Operation Temperature	-20°C~50°C

Product Photometrics (Data base on IP20)

Color	Lumen (lm/m)	Power (w/m)	Efficacy (lm/w)
RGB+3000K	1118.95	23	48.65
RGB+4000K	1203.59	23	52.33
RGB+6000K	1245.68	23	54.16

Wiring Diagram

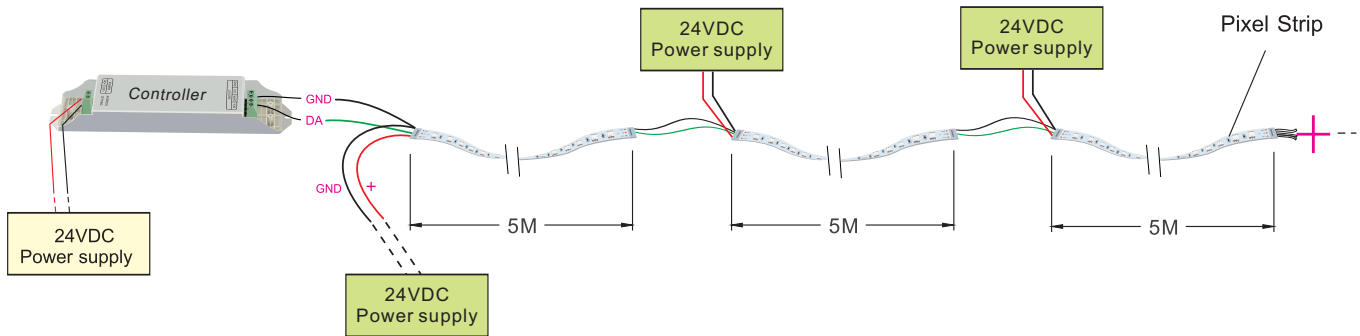

Packing Information (Data base on IP20)

