



LED NEON FLEX SPECIFICATION

IP67 NEON 0612 MINI CUTTING SIDE VIEW



Note: LEDYI may change product specifications and installation guidance without prior notice.



IP67 NEON 0612 24V MINI CUTTING SIDE VIEW



- Regular power 5W/m and 10W/m for option
- Max length 5 meters with one end power
- Silicone end cap
- Eight CCT optional from 2700K to 6000K




Dimensions & Waterproof

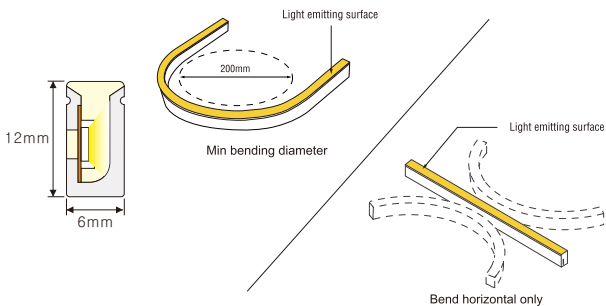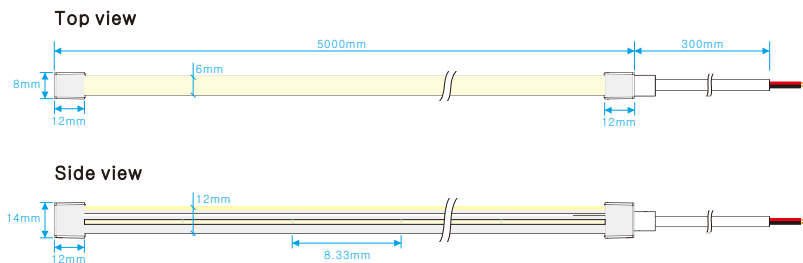

Product specification

Voltage	DC24 V
CRI/Ra	>90
Ambient temperature	-25°C~45°C


Polar curve (The data base on 10W 6000K)

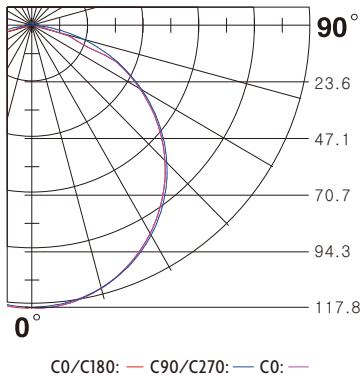


White color parameters

Part Number	CCT (K)	Low power(5w/m) (lm/m)	High power(10w/m) (lm/m)
▶ NS-S0612-MC-W27	2600~2800K	173.25	346.50
▶ NS-S0612-MC-W30	2900~3100K	173.25	346.50
▶ NS-S0612-MC-W40	3750~4350K	181.50	363.00
▶ NS-S0612-MC-W60	5800~6500K	181.50	363.00


Accessory



Endcap connector with hole



Endcap without hole

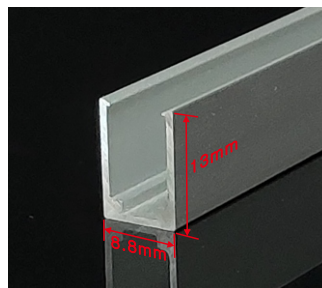


Mounting clip(length: 2cm)

Mounting channel(length: 1m, 2m,3m)




Scissors with angular scale


Installation

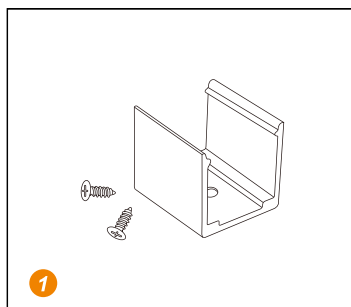


1 Prepare the screws and mounting clips

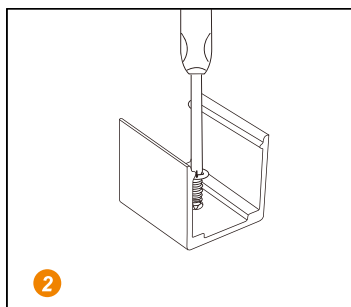

2 Adjust the fixed clips to the appropriate place, use a screwdriver to fix the screw.



3 Put the light emitting surface upwards, then insert the LED strip into the fixed clips.

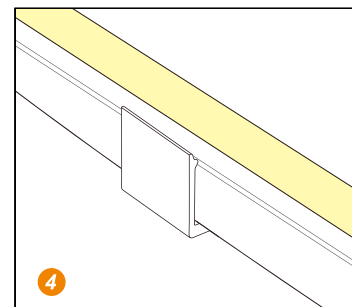

4 Fix NEON strip completely into the fixed clip.