

LED NEON FLEX SPECIFICATION

IP65 / IP67 NEON 1212 MINI CUTTING TOP VIEW









IP65 / IP67 NEON 1212 MINI CUTTING TOP VIEW



Regular power 5W/m and 10W/m for option

Max length 5 meters with one end power

Soldering-free and silicone end cap

Eight CCT optional from 2700K to 6000K






















Dimensions & Waterproof

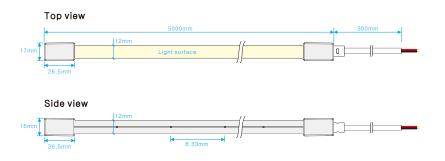


Luminous surface Luminous surface Luminous surface Luminous surface Bend vertical only

Product specification

Voltage	DC24 V
CRI/Ra	>90
Ambient temperature	-25°C~45°C

Polar curve (The data base on 10W 6000K)



White color parameters


Part Number	CCT (K)	Low power(5w/m) (Im/m)	High power(10w/m) (Im/m)
▶ NS-T1212-MC-W27	2600-2800K	299.25	598.50
NS-T1212-MC-W30	2900-3100K	299.25	598.50
NS-T1212-MC-W40	3750-4350K	313.50	627.00
NS-T1212-MC-W60	5800-6500K	313.50	627.00

IP65 / IP67 NEON 1212 MINI CUTTING TOP VIEW



Installation of solder-free connector with cable

Explosive drawing of Solder-free connector with cable



Cable outlet















- 1. The same installation step suit for different outlet cable of the connector
- 2. Please keep the cutting place as flat as possible to achieve better waterproof effect
- 3. This installation instruction is suitable of all the solder-free connector with similar structures


Installation instruction of Solder-free connector with cable



















Installation of solder-free connector without cable


Explosive drawing of Solder-free connector without cable





Installation instruction of Solder-free connector without cable



















IP65 / IP67 NEON 1212 MINI CUTTING TOP VIEW




Accessory







IP67 Silicone end cap




Mounting clip(length: 2cm) Mounting channel(length: 1m, 2m,3m) NOTE: IP65 version, solderless endcap fix by screw, more convenient; IP67 version, silicone endcap fix by silicone glue, more reliable.




Scissors with angular scale


Installation




Prepare the screws and mounting clips



Adjust the fixed clips to the appropriate place, use a screwdriver to fix the screw.



Put the light emitting surface upwards, then insert the LED strip into the fixed



Fix NEON strip completely into the fixed