


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: 2835 IP20	TYPE: 2835 2400LED 12V	WEIGHT:
SPEC.: 202-10017-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 118.19 lm/W			
MODEL	2700K	I _{max} (cd)	256.3	S/MH(C0/180)	1.28
NOMINAL POWER(W)	7.2	LOR(%)	100.0	S/MH(C90/270)	1.26
RATED VOLTAGE(V)	12	TOTAL FLUX(lm)	754.48	□ UP,DN(C0-180)	0.7,49.9
NOMINAL FLUX(lm)	3.14367	CIE CLASS	DIRECT	□ UP,DN(C180-360)	0.6,48.8
LAMPS INSIDE	240	□ up (%)	1.3	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	12	□ down (%)	98.7	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

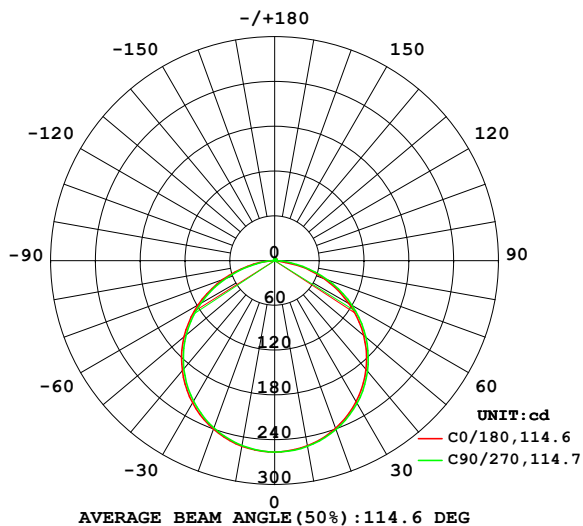

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

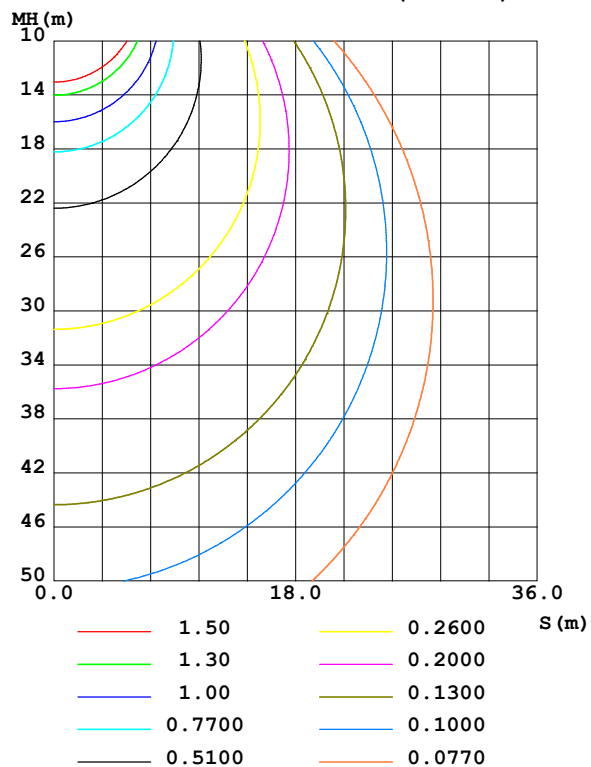

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-03-23

□ Range: 0 - 180DEG
 □ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity:65.0%
 Test Distance:5.749m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	251.9	252.3	252.7	252.8	252.5	252.1	251.6	251.5	0- 10	24.27	24.27	3.22,3.22
20	239.1	240.0	240.7	240.9	240.2	239.4	238.4	238.4	10- 20	69.70	93.97	12.5,12.5
30	218.5	219.7	220.8	221.1	220.1	218.9	217.5	217.4	20- 30	106.2	200.2	26.5,26.5
40	190.5	192.1	193.7	193.9	192.6	191.2	189.4	189.1	30- 40	129.0	329.2	43.6,43.6
50	155.8	157.7	159.6	160.0	158.5	156.8	154.6	154.2	40- 50	135.0	464.2	61.5,61.5
60	115.1	117.5	119.8	120.2	118.4	116.5	114.1	113.4	50- 60	122.9	587.2	77.8,77.8
70	69.99	72.58	75.33	75.82	73.61	71.66	69.11	68.15	60- 70	93.70	680.9	90.2,90.2
80	15.33	27.62	30.36	30.88	28.78	26.95	24.85	23.96	70- 80	51.85	732.7	97.1,97.1
90	0.2453	0.9547	1.632	2.010	0.2099	0.8306	0.6451	0.7299	80- 90	11.87	744.6	98.7,98.7
100	0.6264	0.6184	0.6035	0.5864	0.4986	0.5241	0.5521	0.5541	90-100	0.5584	745.2	98.8,98.8
110	1.172	1.104	1.081	1.073	0.9683	0.9431	0.9754	0.9818	100-110	0.8399	746.0	98.9,98.9
120	1.713	1.604	1.574	1.570	1.459	1.386	1.427	1.426	110-120	1.260	747.3	99,99
130	2.190	2.047	2.004	2.024	1.910	1.800	1.831	1.830	120-130	1.551	748.8	99.2,99.2
140	2.569	2.423	2.375	2.416	2.274	2.171	2.148	2.184	130-140	1.652	750.5	99.5,99.5
150	2.860	2.742	2.672	2.742	2.575	2.488	2.431	2.500	140-150	1.551	752.0	99.7,99.7
160	3.094	3.016	3.008	2.996	2.856	2.776	2.780	2.811	150-160	1.278	753.3	99.8,99.8
170	3.313	3.278	3.302	3.248	3.171	3.119	3.146	3.161	160-170	0.8632	754.2	100,100
180	3.513	3.492	3.550	3.531	3.511	3.492	3.548	3.526	170-180	0.3174	754.5	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 410.66 lm

%lum = 54.4%

%lamp = 54.4%

Conical surface Flux(120deg): 587.18 lm

%lum = 77.8%


%lamp = 77.8%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-23

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

NAME: 2835 IP20	TYPE: 2835 2400LED 12V	WEIGHT:
SPEC.: 202-10017-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

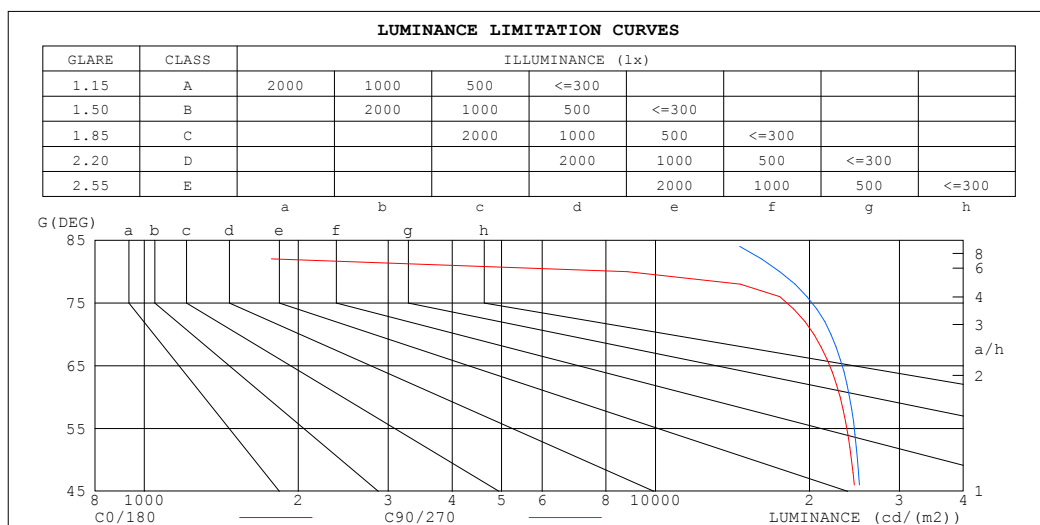

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	299	17514
80	8807	17483
75	19851	22025
70	20415	22028
65	22993	24241
60	22962	23954
55	24378	25170
50	24178	24840
45	25020	25566


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-03-23

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: 2835 IP20	TYPE: 2835 2400LED 12V	WEIGHT:
SPEC.: 202-10017-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

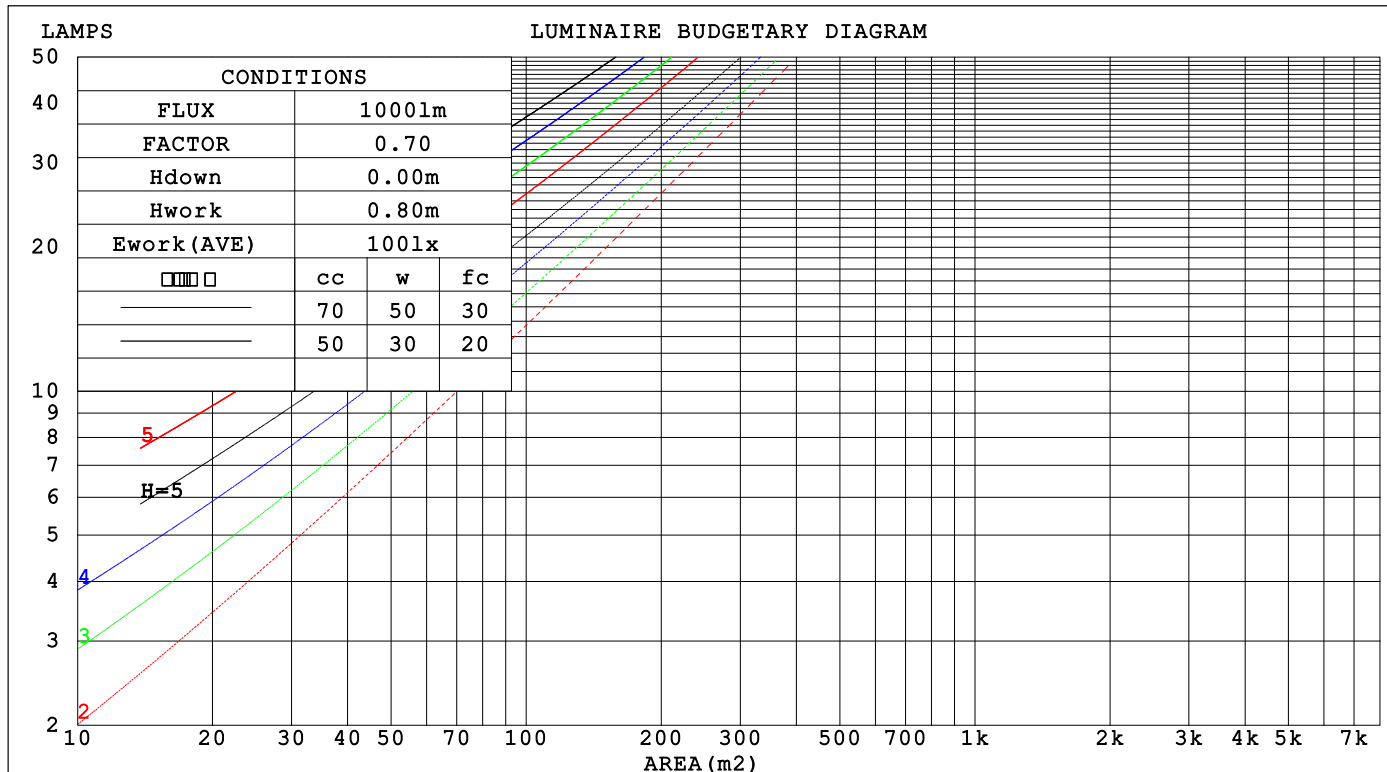

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-23

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: 2835 IP20	TYPE: 2835 2400LED 12V	WEIGHT:
SPEC.: 202-10017-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)					
0.0						
1.0	.307 .175 .055	.300 .171 .054	.286 .164 .052	.273 .157 .051	.261 .151 .049	
2.0	.291 .159 .049	.284 .156 .048	.272 .151 .047	.260 .146 .046	.250 .141 .045	
3.0	.269 .143 .043	.264 .141 .042	.253 .137 .042	.242 .133 .041	.233 .129 .040	
4.0	.249 .129 .038	.244 .128 .038	.234 .124 .037	.225 .121 .036	.216 .118 .036	
5.0	.230 .117 .034	.226 .116 .034	.217 .113 .033	.209 .110 .033	.201 .108 .032	
6.0	.214 .107 .031	.210 .106 .030	.202 .103 .030	.194 .101 .030	.188 .099 .029	
7.0	.199 .098 .028	.195 .097 .028	.188 .095 .027	.182 .093 .027	.176 .091 .027	
8.0	.186 .091 .026	.182 .090 .025	.176 .088 .025	.170 .086 .025	.165 .085 .025	
9.0	.174 .084 .024	.171 .083 .023	.165 .082 .023	.160 .080 .023	.155 .079 .023	
10.0	.164 .078 .022	.161 .078 .022	.156 .076 .022	.151 .075 .021	.146 .074 .021	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)					
0.0	.200 .200 .200	.171 .171 .171	.117 .117 .117	.067 .067 .067	.021 .021 .021	
1.0	.190 .166 .145	.163 .143 .124	.111 .098 .086	.064 .057 .050	.021 .018 .016	
2.0	.182 .142 .108	.156 .122 .094	.107 .085 .065	.062 .049 .038	.020 .016 .012	
3.0	.175 .124 .085	.150 .107 .073	.103 .075 .051	.059 .044 .030	.019 .014 .010	
4.0	.167 .111 .069	.143 .096 .060	.099 .067 .042	.057 .039 .025	.018 .013 .008	
5.0	.160 .101 .057	.137 .087 .050	.094 .061 .035	.055 .036 .021	.018 .012 .007	
6.0	.153 .092 .049	.131 .080 .043	.090 .056 .030	.052 .033 .018	.017 .011 .006	
7.0	.146 .086 .044	.125 .074 .038	.087 .052 .027	.050 .031 .016	.016 .010 .005	
8.0	.139 .080 .039	.120 .069 .034	.083 .049 .024	.048 .029 .014	.016 .009 .005	
9.0	.133 .075 .036	.115 .065 .031	.080 .046 .022	.046 .027 .013	.015 .009 .004	
10.0	.128 .071 .033	.110 .061 .029	.076 .043 .020	.044 .026 .012	.014 .008 .004	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-23

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME: 2835 IP20					TYPE: 2835 2400LED 12V			WEIGHT:			
SPEC.: 202-10017-00					DIM.:			SERIAL No.:			
MFR.:					SUR.: 0.01*0.5			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	2H	24.8	26.4	25.1	26.6	26.8	25.0	26.5	25.3	26.7	27.0
	3H	26.3	27.7	26.6	28.0	28.2	26.6	27.9	26.9	28.2	28.5
	4H	26.9	28.2	27.2	28.5	28.7	27.2	28.5	27.5	28.8	29.0
	6H	27.1	28.3	27.4	28.6	28.9	27.6	28.8	27.9	29.1	29.4
	8H	27.1	28.3	27.4	28.6	28.9	27.7	28.9	28.0	29.2	29.5
	12H	27.0	28.2	27.4	28.5	28.8	27.7	28.9	28.1	29.2	29.5
4H	2H	25.5	26.8	25.8	27.1	27.4	25.6	26.9	25.9	27.2	27.5
	3H	27.1	28.3	27.5	28.6	28.9	27.3	28.5	27.7	28.8	29.1
	4H	27.8	28.8	28.2	29.2	29.5	28.1	29.1	28.4	29.4	29.8
	6H	28.1	29.1	28.5	29.4	29.8	28.6	29.5	29.0	29.9	30.3
	8H	28.1	29.0	28.5	29.4	29.8	28.7	29.6	29.2	30.0	30.4
	12H	28.1	28.9	28.5	29.3	29.7	28.8	29.6	29.3	30.0	30.5
8H	4H	28.0	28.9	28.5	29.3	29.7	28.3	29.1	28.7	29.5	29.9
	6H	28.5	29.2	29.0	29.7	30.1	28.9	29.6	29.4	30.1	30.5
	8H	28.6	29.2	29.0	29.7	30.1	29.1	29.8	29.6	30.2	30.7
	12H	28.6	29.1	29.1	29.6	30.1	29.3	29.8	29.8	30.3	30.8
12H	4H	28.0	28.8	28.5	29.2	29.7	28.3	29.1	28.7	29.5	29.9
	6H	28.5	29.2	29.0	29.6	30.1	29.0	29.6	29.4	30.0	30.5
	8H	28.6	29.2	29.1	29.7	30.2	29.2	29.8	29.7	30.2	30.7
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H		+ 0.1 / - 0.2					+ 0.1 / - 0.2				
1.5H		+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H		+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 754.5 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.0)
Area: 0.01 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-23

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

NAME: 2835 IP20	TYPE: 2835 2400LED 12V	WEIGHT:
SPEC.: 202-10017-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	57	45	38	56	45	38	55	44	38	31
0.80	67	55	48	66	55	48	64	54	47	40
1.00	75	64	57	74	64	57	72	65	56	49
1.25	83	72	65	81	71	64	78	70	63	56
1.50	88	78	71	86	77	70	83	75	69	61
2.00	95	86	79	93	85	79	89	82	77	69
2.50	99	91	85	96	89	84	92	86	82	73
3.00	102	95	89	100	93	88	95	90	86	77
4.00	106	100	96	103	98	94	99	95	91	82
5.00	108	104	99	106	101	98	101	98	95	85
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-03-23

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME: 2835 IP20	TYPE: 2835 2400LED 12V	WEIGHT:
SPEC.: 202-10017-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

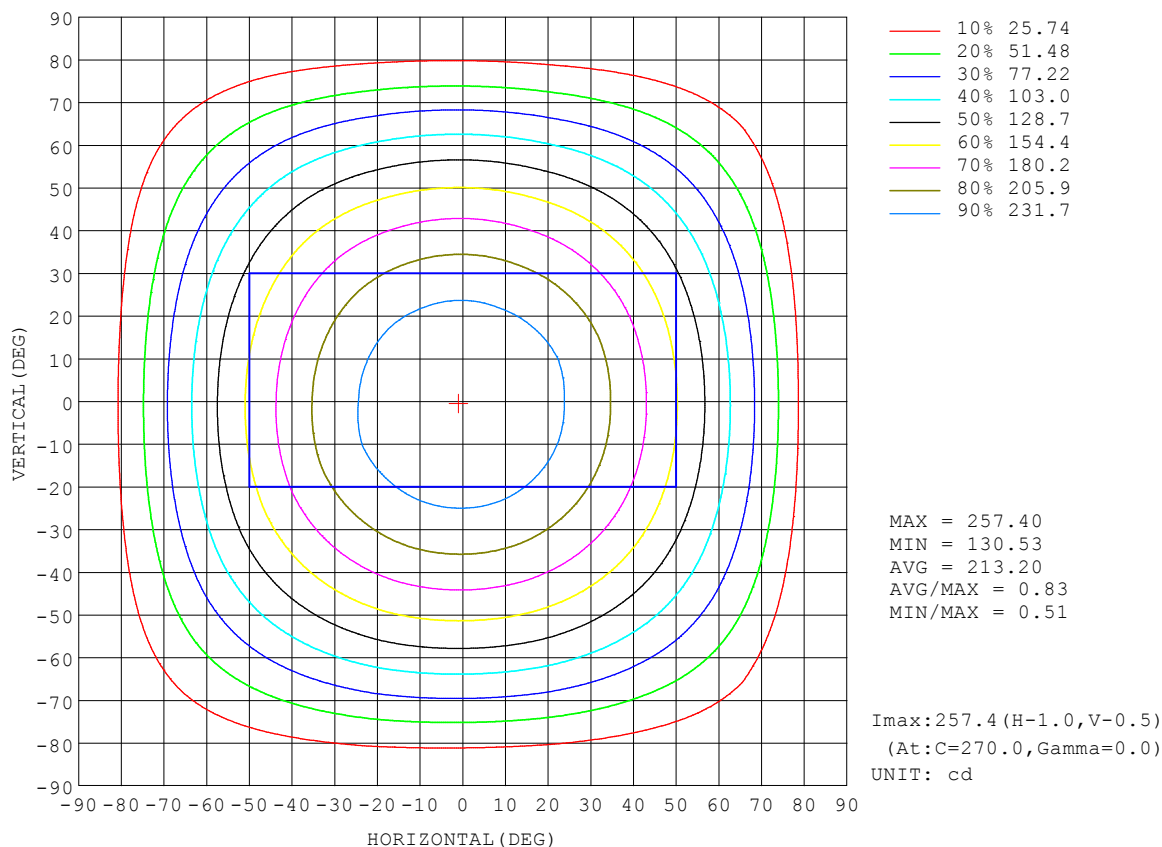


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-03-23

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

AAI Figure

NAME: 2835 IP20	TYPE: 2835 2400LED 12V	WEIGHT:
SPEC.: 202-10017-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

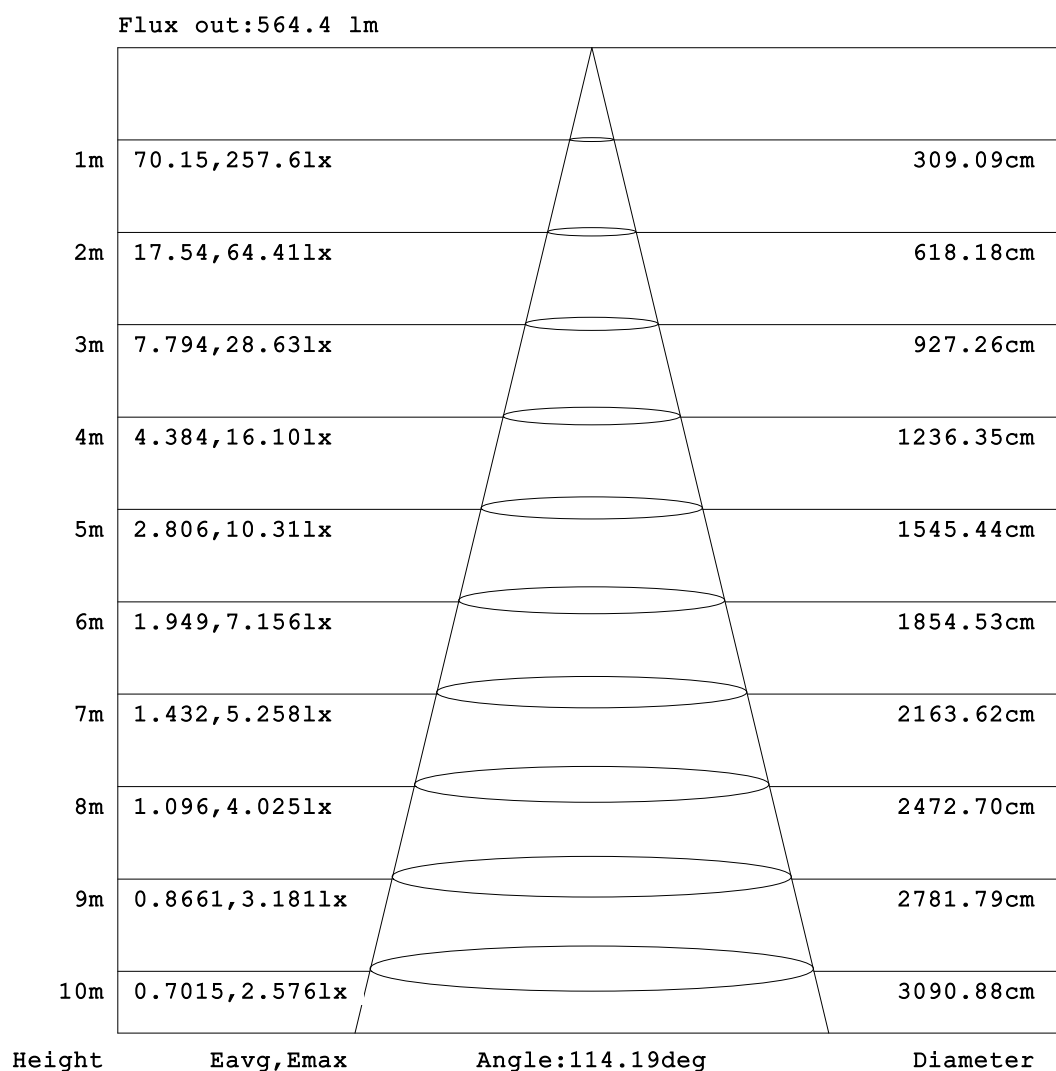


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-03-23

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

NAME: 2835 IP20	TYPE: 2835 2400LED 12V	WEIGHT:
SPEC.: 202-10017-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

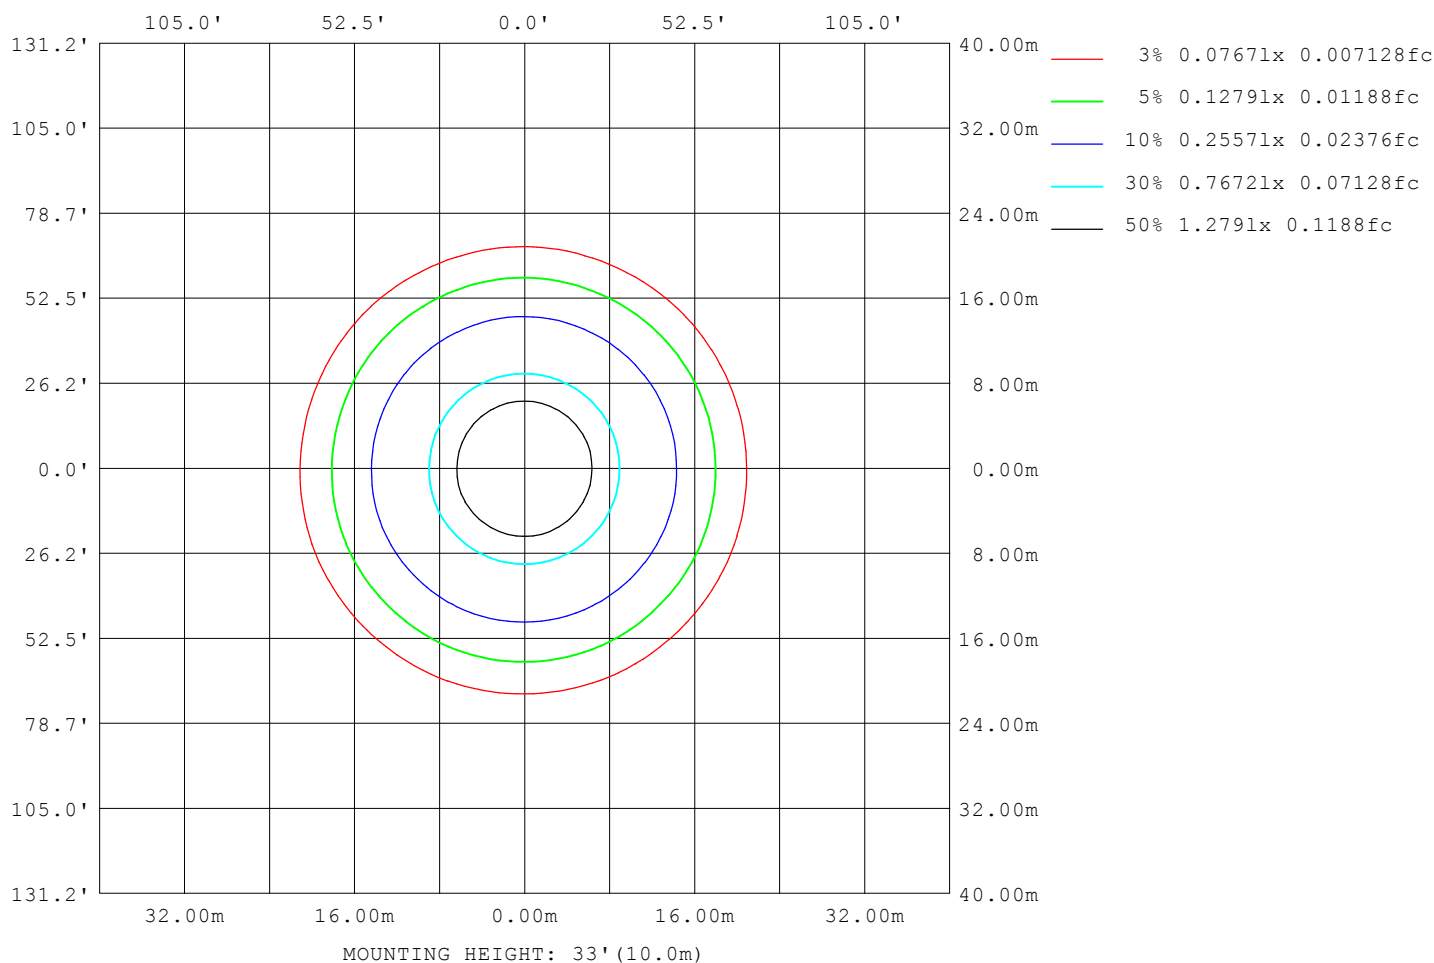

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-03-23

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

LED Avg.L Report

NAME: 2835 IP20	TYPE: 2835 2400LED 12V	WEIGHT:
SPEC.: 202-10017-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	22400
L_0~180 (75) av	18885
L_0~180 (85) av	5775
L_90~270 (65) av	22477
L_90~270 (75) av	19057
L_90~270 (85) av	11627
L_45 (65) av	22452
L_45 (75) av	18969
L_45 (85) av	11423

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-03-23

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

Planar Illuminance Curve

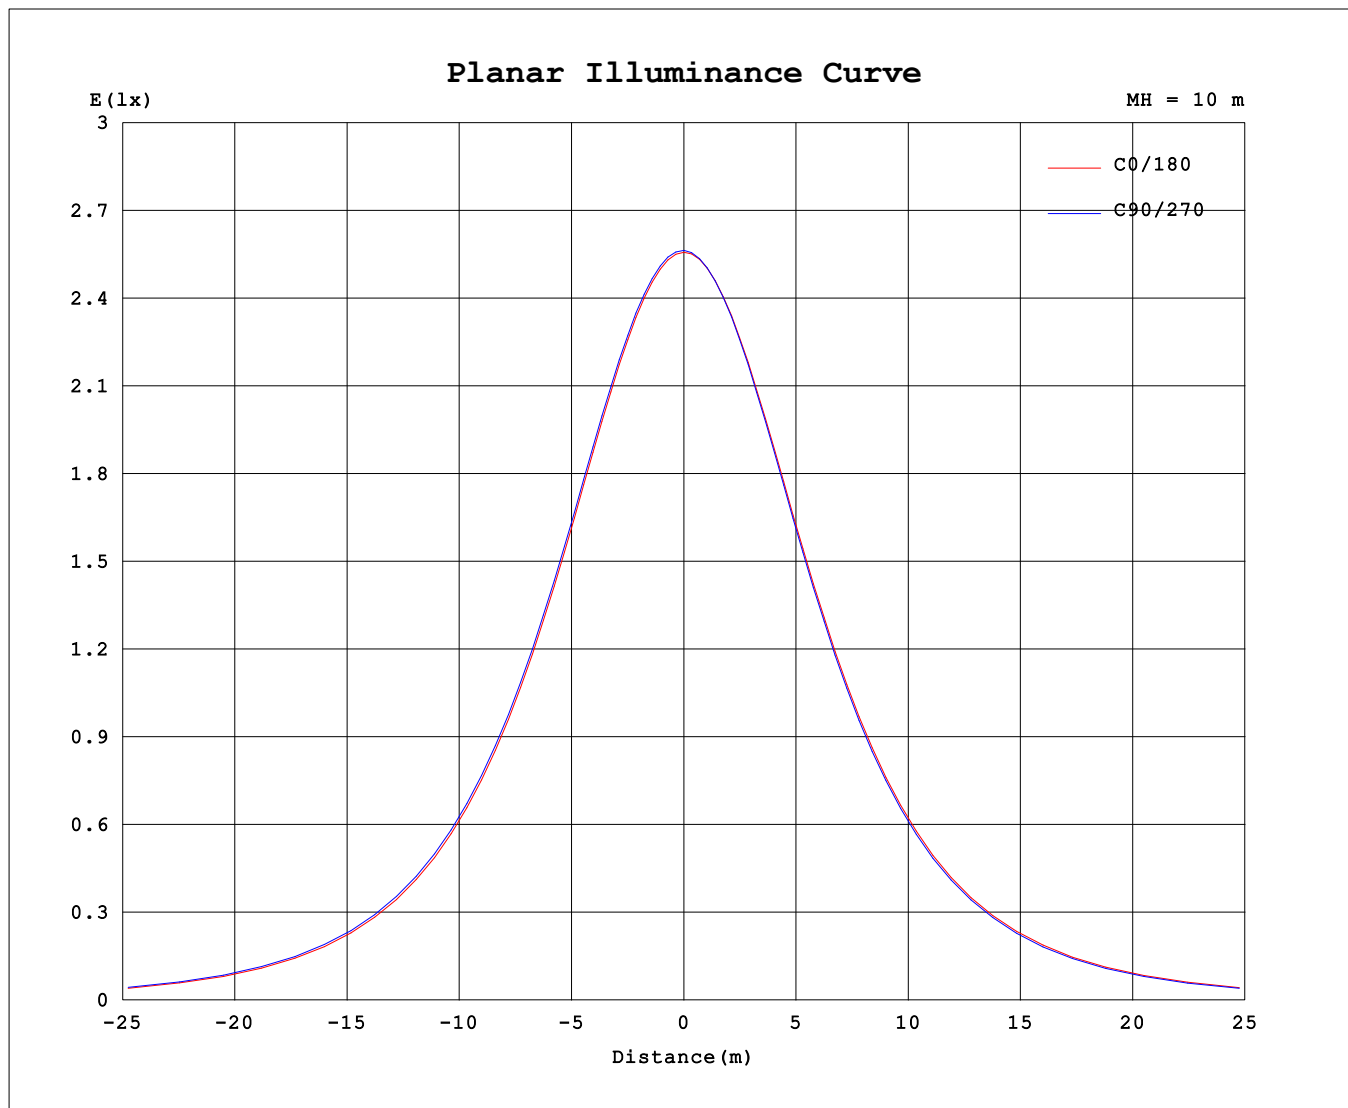

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-03-23

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: 2835 IP20	TYPE: 2835 2400LED 12V	WEIGHT:
SPEC.: 202-10017-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	256	256	256	256	256	256	256	256	256	256	256	256	256	256	256	256			
5	256	256	256	256	256	256	256	256	256	256	256	255	255	255	255	255			
10	252	252	252	253	253	253	253	253	252	252	252	252	252	251	252	252			
15	248	248	248	249	249	249	249	249	249	248	248	247	247	247	247	247			
20	239	240	240	241	241	241	241	241	240	240	239	239	238	238	238	239			
25	232	232	233	233	234	234	234	234	233	232	232	231	231	231	231	231			
30	219	219	220	221	221	221	221	221	220	219	219	218	218	217	217	218			
35	208	209	209	211	211	211	211	211	210	209	209	208	207	207	207	207			
40	191	192	192	193	194	194	194	194	193	192	191	190	189	189	189	190			
45	177	178	179	180	181	182	181	181	180	179	178	177	176	175	176	176			
50	156	157	158	159	160	161	160	160	158	157	157	155	155	154	154	155			
55	140	141	142	144	144	146	145	145	143	142	141	140	139	138	139	139			
60	115	117	117	119	120	121	120	120	118	117	116	115	114	113	113	114			
65	97.4	99.0	99.9	102	102	104	103	102	101	99.5	99.0	97.2	96.5	95.2	95.7	95.9			
70	70.0	71.6	72.6	74.6	75.3	76.6	75.8	75.3	73.6	72.2	71.7	69.9	69.1	67.8	68.1	68.4			
75	51.5	53.0	54.1	56.1	57.0	58.1	57.5	56.8	55.2	53.8	53.3	51.5	50.8	49.4	49.7	49.9			
80	15.3	26.6	27.6	29.5	30.4	31.4	30.9	30.1	28.8	27.5	27.0	25.4	24.9	23.7	24.0	24.1			
85	0.26	12.2	12.9	14.4	15.3	16.2	15.8	15.2	13.9	12.8	12.4	11.3	10.9	10.2	10.4	10.4			
90	0.25	0.78	0.95	1.35	1.63	2.05	2.01	1.64	0.21	0.80	0.83	0.68	0.65	0.63	0.73	0.67			
95	0.37	0.37	0.40	0.40	0.46	0.54	0.51	0.40	0.30	0.32	0.37	0.38	0.38	0.39	0.39	0.34			
100	0.63	0.62	0.62	0.61	0.60	0.59	0.59	0.58	0.50	0.50	0.52	0.54	0.55	0.56	0.55	0.54			
105	0.84	0.81	0.81	0.79	0.78	0.78	0.77	0.77	0.68	0.66	0.68	0.71	0.72	0.73	0.72	0.71			
110	1.17	1.12	1.10	1.09	1.08	1.08	1.07	1.07	0.97	0.92	0.94	0.97	0.98	0.99	0.98	0.97			
115	1.39	1.32	1.31	1.29	1.28	1.27	1.27	1.28	1.17	1.11	1.12	1.14	1.16	1.17	1.16	1.15			
120	1.71	1.62	1.60	1.58	1.57	1.57	1.57	1.58	1.46	1.39	1.39	1.40	1.43	1.43	1.43	1.42			
125	1.91	1.81	1.79	1.77	1.75	1.76	1.76	1.78	1.65	1.58	1.56	1.57	1.60	1.60	1.60	1.60			
130	2.19	2.09	2.05	2.02	2.00	2.02	2.02	2.05	1.91	1.84	1.80	1.82	1.83	1.83	1.83	1.86			
135	2.35	2.26	2.21	2.18	2.16	2.18	2.19	2.22	2.07	2.00	1.96	1.97	1.97	1.97	1.98	2.03			
140	2.57	2.48	2.42	2.39	2.37	2.41	2.42	2.45	2.27	2.21	2.17	2.17	2.15	2.17	2.18	2.25			
145	2.70	2.62	2.55	2.52	2.50	2.54	2.55	2.59	2.40	2.33	2.30	2.29	2.26	2.29	2.31	2.39			
150	2.86	2.80	2.74	2.68	2.67	2.73	2.74	2.76	2.57	2.51	2.49	2.48	2.43	2.46	2.50	2.57			
155	2.96	2.91	2.86	2.80	2.80	2.86	2.85	2.87	2.69	2.63	2.60	2.60	2.57	2.57	2.63	2.70			
160	3.09	3.06	3.02	2.96	3.01	3.02	3.00	3.01	2.86	2.81	2.78	2.78	2.78	2.76	2.81	2.88			
165	3.18	3.16	3.12	3.07	3.14	3.11	3.09	3.11	2.98	2.93	2.90	2.90	2.92	2.89	2.94	3.01			
170	3.31	3.31	3.28	3.25	3.30	3.27	3.25	3.27	3.17	3.14	3.12	3.11	3.15	3.12	3.16	3.22			
175	3.41	3.40	3.39	3.37	3.42	3.39	3.37	3.39	3.31	3.28	3.27	3.27	3.30	3.28	3.31	3.36			
180	3.51	3.50	3.49	3.50	3.55	3.52	3.53	3.55	3.51	3.50	3.49	3.50	3.55	3.52	3.53	3.55			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-23

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks: