


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: 2835 IP20	TYPE: 2835 140LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.008*0.5	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 110.20 lm/W			
MODEL	4000K	I <sub>max</sub> (cd)	281.7	S/MH(C0/180)	1.29
NOMINAL POWER(W)	7.2	LOR(%)	100.0	S/MH(C90/270)	1.26
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	835.92	□ UP,DN(C0-180)	0.7,50.1
NOMINAL FLUX(lm)	5.97087	CIE CLASS	DIRECT	□ UP,DN(C180-360)	0.6,48.6
LAMPS INSIDE	140	□ up (%)	1.3	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	24	□ down (%)	98.7	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

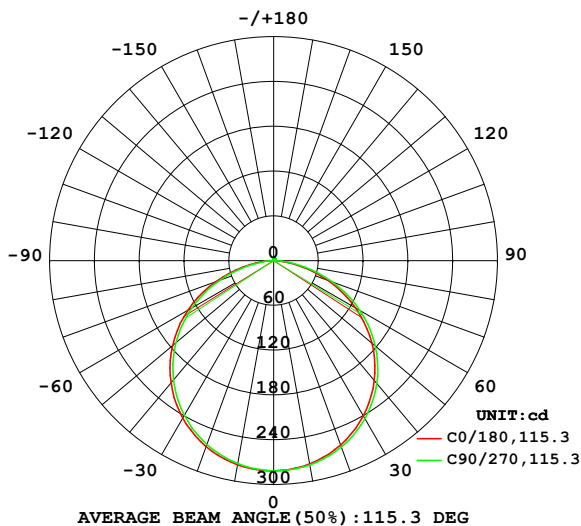

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

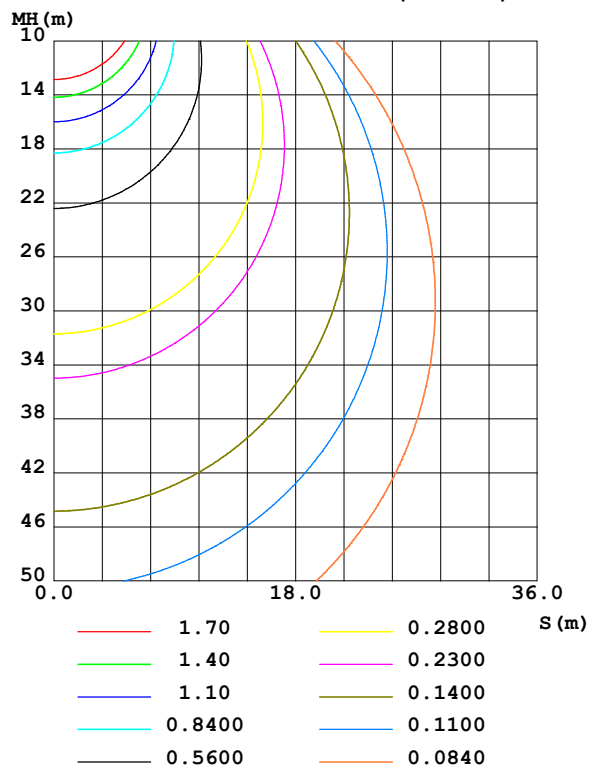

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-03-22

□ Range: 0 - 180DEG  
 □ Interval: 2.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
 Humidity:65.0%  
 Test Distance:5.749m [K=1.0000]  
 Remarks:

## ZONAL FLUX DIAGRAM

### ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	zone	total	%lum, lamp
10	276.6	277.5	278.1	278.3	277.8	276.9	276.2	276.0	0- 10	26.67	26.67	3.19,3.19
20	262.7	264.4	265.6	266.1	265.0	263.2	261.9	261.6	10- 20	76.68	103.3	12.4,12.4
30	240.3	242.8	244.5	245.1	243.6	241.2	239.3	238.8	20- 30	117.1	220.4	26.4,26.4
40	209.8	212.9	215.0	215.8	214.0	211.0	208.7	208.1	30- 40	142.6	363.0	43.4,43.4
50	171.8	175.3	177.7	178.8	176.7	173.3	170.8	169.9	40- 50	149.6	512.6	61.3,61.3
60	127.0	130.8	133.5	134.8	132.5	129.0	126.2	125.0	50- 60	136.5	649.1	77.7,77.7
70	77.17	80.88	83.66	85.11	82.78	79.35	76.46	75.17	60- 70	104.1	753.3	90.1,90.1
80	28.10	30.86	33.20	34.82	32.71	29.71	27.33	26.44	70- 80	57.68	810.9	97,97
90	0.3233	1.189	1.206	2.503	0.3117	1.186	0.8187	1.234	80- 90	13.84	824.8	98.7,98.7
100	0.7441	0.7585	0.8077	0.7390	0.5930	0.6141	0.6588	0.6494	90-100	0.7425	825.5	98.8,98.8
110	1.330	1.229	1.209	1.186	1.083	1.078	1.106	1.115	100-110	0.9648	826.5	98.9,98.9
120	1.910	1.764	1.735	1.732	1.635	1.570	1.603	1.612	110-120	1.410	827.9	99,99
130	2.415	2.243	2.208	2.229	2.126	2.041	2.045	2.062	120-130	1.729	829.6	99.2,99.2
140	2.822	2.659	2.607	2.667	2.535	2.458	2.420	2.458	130-140	1.837	831.5	99.5,99.5
150	3.138	3.018	2.964	3.028	2.870	2.810	2.734	2.810	140-150	1.726	833.2	99.7,99.7
160	3.388	3.313	3.337	3.313	3.184	3.131	3.110	3.136	150-160	1.422	834.6	99.8,99.8
170	3.641	3.615	3.663	3.606	3.527	3.495	3.511	3.495	160-170	0.9583	835.6	100,100
180	3.895	3.882	3.929	3.899	3.895	3.882	3.929	3.896	170-180	0.3522	835.9	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 453.21 lm

%lum = 54.2%

%lamp = 54.2%

Conical surface Flux(120deg): 649.12 lm

%lum = 77.7%


%lamp = 77.7%

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-03-22

□ Range: 0 - 180DEG  
□ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:

### LUMINANCE LIMITATION CURVES

NAME: 2835 IP20	TYPE: 2835 140LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.008*0.5	Shielding Angle:

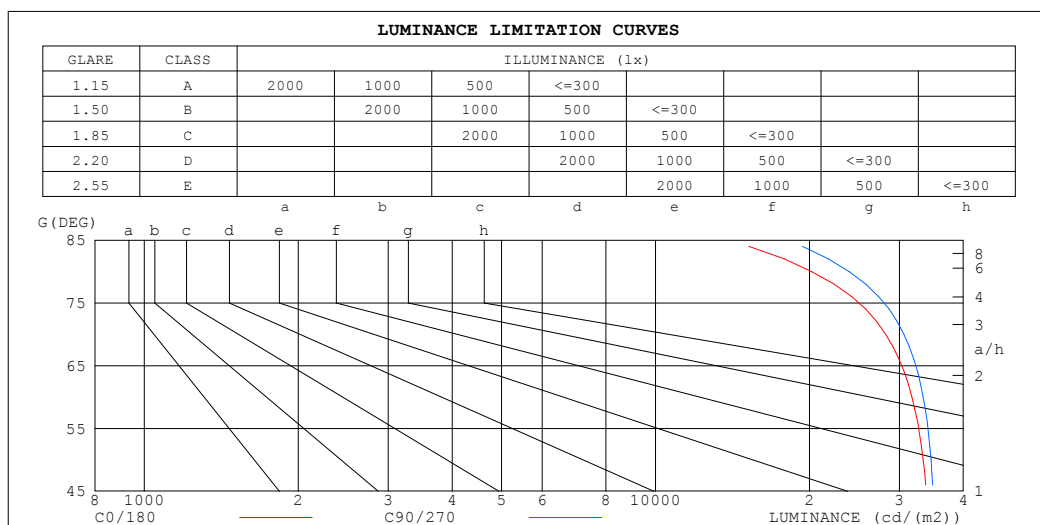

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	18266	23251
80	20213	23907
75	27465	30511
70	28186	30591
65	31793	33770
60	31739	33384
55	33682	35065
50	33396	34579
45	34538	35544


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-03-22

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
 Humidity: 65.0%  
 Test Distance: 5.749m [K=1.0000]  
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: 2835 IP20	TYPE: 2835 140LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.008*0.5	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.99
1.0	1.04	.99	.95	1.01	.97	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.83	.78	.88	.82	.76	.84	.79	.74	.81	.76	.73	.78	.74	.71	.69
3.0	.79	.71	.64	.77	.70	.64	.74	.68	.62	.71	.66	.61	.68	.64	.60	.58
4.0	.70	.61	.54	.68	.60	.54	.66	.59	.53	.63	.57	.52	.61	.56	.51	.49
5.0	.62	.53	.47	.61	.53	.46	.59	.51	.46	.57	.50	.45	.55	.49	.44	.42
6.0	.56	.47	.41	.55	.47	.40	.53	.45	.40	.51	.45	.39	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.41	.36	.48	.41	.35	.47	.40	.35	.45	.39	.34	.32
8.0	.46	.38	.32	.45	.37	.32	.44	.37	.31	.43	.36	.31	.41	.35	.31	.29
9.0	.42	.34	.29	.42	.34	.28	.41	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.37	.30	.26	.36	.30	.25	.35	.30	.25	.23

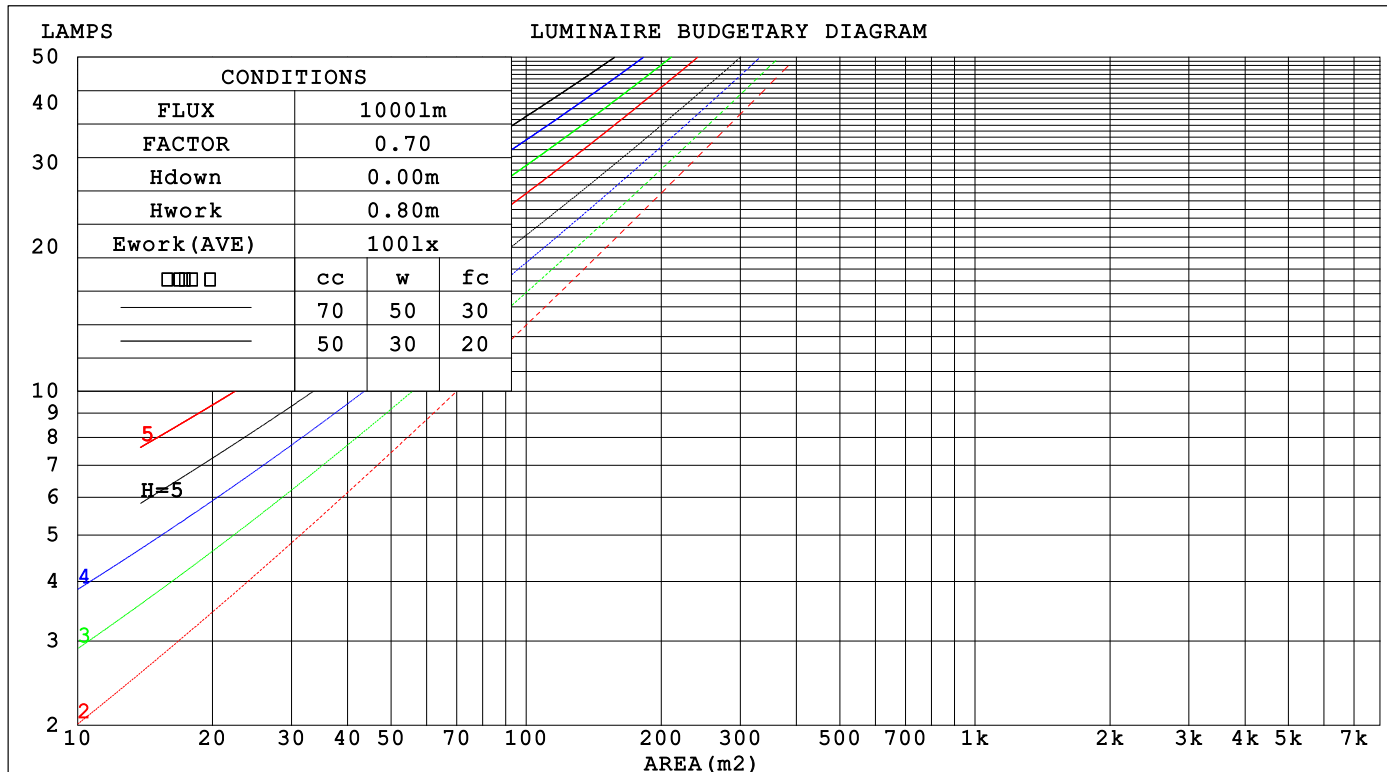

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-03-22

□ Range: 0 - 180DEG  
□ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:

### WEC AND CCEC

NAME: 2835 IP20	TYPE: 2835 140LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.008*0.5	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio					Wall Exitance Coefficients(WEC)
0.0						
1.0	.308 .175 .056	.301 .172 .055	.287 .165 .053	.274 .158 .051	.262 .152 .049	
2.0	.291 .160 .049	.285 .157 .048	.272 .151 .047	.261 .146 .046	.250 .142 .045	
3.0	.270 .144 .043	.264 .142 .043	.253 .137 .042	.243 .133 .041	.234 .129 .040	
4.0	.249 .130 .038	.244 .128 .038	.234 .124 .037	.225 .121 .037	.217 .118 .036	
5.0	.231 .118 .034	.226 .116 .034	.217 .113 .033	.209 .110 .033	.202 .108 .032	
6.0	.214 .107 .031	.210 .106 .031	.202 .104 .030	.195 .101 .030	.188 .099 .029	
7.0	.199 .098 .028	.195 .097 .028	.188 .095 .027	.182 .093 .027	.176 .091 .027	
8.0	.186 .091 .026	.183 .090 .025	.176 .088 .025	.170 .086 .025	.165 .085 .025	
9.0	.174 .084 .024	.171 .083 .023	.166 .082 .023	.160 .080 .023	.155 .079 .023	
10.0	.164 .079 .022	.161 .078 .022	.156 .076 .022	.151 .075 .021	.147 .074 .021	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio					Ceiling Cavity Exitance Coefficients(CCEC)
0.0	.201 .201 .201	.171 .171 .171	.117 .117 .117	.067 .067 .067	.021 .021 .021	
1.0	.190 .166 .145	.163 .143 .125	.111 .098 .086	.064 .057 .050	.021 .018 .016	
2.0	.182 .142 .108	.156 .122 .094	.107 .085 .065	.062 .049 .038	.020 .016 .012	
3.0	.175 .125 .085	.150 .108 .073	.103 .075 .051	.059 .044 .030	.019 .014 .010	
4.0	.167 .111 .069	.144 .096 .060	.099 .067 .042	.057 .039 .025	.018 .013 .008	
5.0	.160 .101 .058	.137 .087 .050	.095 .061 .035	.055 .036 .021	.018 .012 .007	
6.0	.153 .093 .050	.131 .080 .043	.091 .056 .031	.053 .033 .018	.017 .011 .006	
7.0	.146 .086 .044	.126 .074 .038	.087 .052 .027	.050 .031 .016	.016 .010 .005	
8.0	.140 .080 .039	.120 .069 .034	.083 .049 .024	.048 .029 .014	.016 .009 .005	
9.0	.134 .075 .036	.115 .065 .031	.080 .046 .022	.046 .027 .013	.015 .009 .004	
10.0	.128 .071 .033	.110 .062 .029	.076 .043 .020	.045 .026 .012	.014 .008 .004	

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-03-22

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:

### UGR(Unified Glare Rating) Table

NAME: 2835 IP20						TYPE: 2835 140LED 24V		WEIGHT:			
SPEC.:						DIM.:		SERIAL No.:			
MFR.:						SUR.: 0.008*0.5		Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H		25.6	27.1	25.9	27.4	27.6	25.8	27.3	26.1	27.6	27.8
3H		27.1	28.5	27.4	28.8	29.0	27.4	28.8	27.7	29.0	29.3
4H		27.6	29.0	28.0	29.2	29.5	28.0	29.3	28.3	29.6	29.9
6H		28.0	29.2	28.3	29.5	29.8	28.4	29.6	28.7	29.9	30.2
8H		28.0	29.2	28.4	29.5	29.9	28.5	29.7	28.8	30.0	30.3
12H		28.0	29.2	28.4	29.5	29.9	28.5	29.7	28.9	30.0	30.3
4H 2H		26.3	27.6	26.6	27.9	28.2	26.4	27.7	26.7	28.0	28.3
3H		27.9	29.1	28.3	29.4	29.7	28.1	29.3	28.5	29.6	30.0
4H		28.6	29.6	29.0	30.0	30.3	28.9	29.9	29.3	30.3	30.6
6H		29.0	29.9	29.4	30.3	30.7	29.4	30.3	29.8	30.7	31.1
8H		29.1	30.0	29.5	30.4	30.8	29.5	30.4	29.9	30.8	31.2
12H		29.2	30.0	29.6	30.4	30.8	29.6	30.4	30.0	30.8	31.2
8H 4H		28.8	29.7	29.3	30.1	30.5	29.1	30.0	29.5	30.4	30.8
6H		29.4	30.1	29.9	30.5	31.0	29.7	30.4	30.2	30.9	31.3
8H		29.6	30.2	30.0	30.6	31.1	29.9	30.6	30.4	31.0	31.5
12H		29.7	30.2	30.2	30.7	31.2	30.1	30.6	30.6	31.1	31.6
12H 4H		28.8	29.6	29.3	30.0	30.5	29.1	29.9	29.5	30.3	30.7
6H		29.4	30.1	29.9	30.5	31.0	29.8	30.4	30.2	30.8	31.3
8H		29.6	30.2	30.1	30.7	31.2	30.0	30.5	30.5	31.0	31.5
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H		+ 0.2 / - 0.2					+ 0.1 / - 0.2				
1.5H		+ 0.2 / - 0.4					+ 0.2 / - 0.3				
2.0H		+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 835.9 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.6)  
Area: 0.008 m2

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-03-22

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:


```

Range: 0 - 180DEG
Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

```

### ISOCANDELA DIAGRAM

NAME: 2835 IP20	TYPE: 2835 140LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.008*0.5	Shielding Angle:

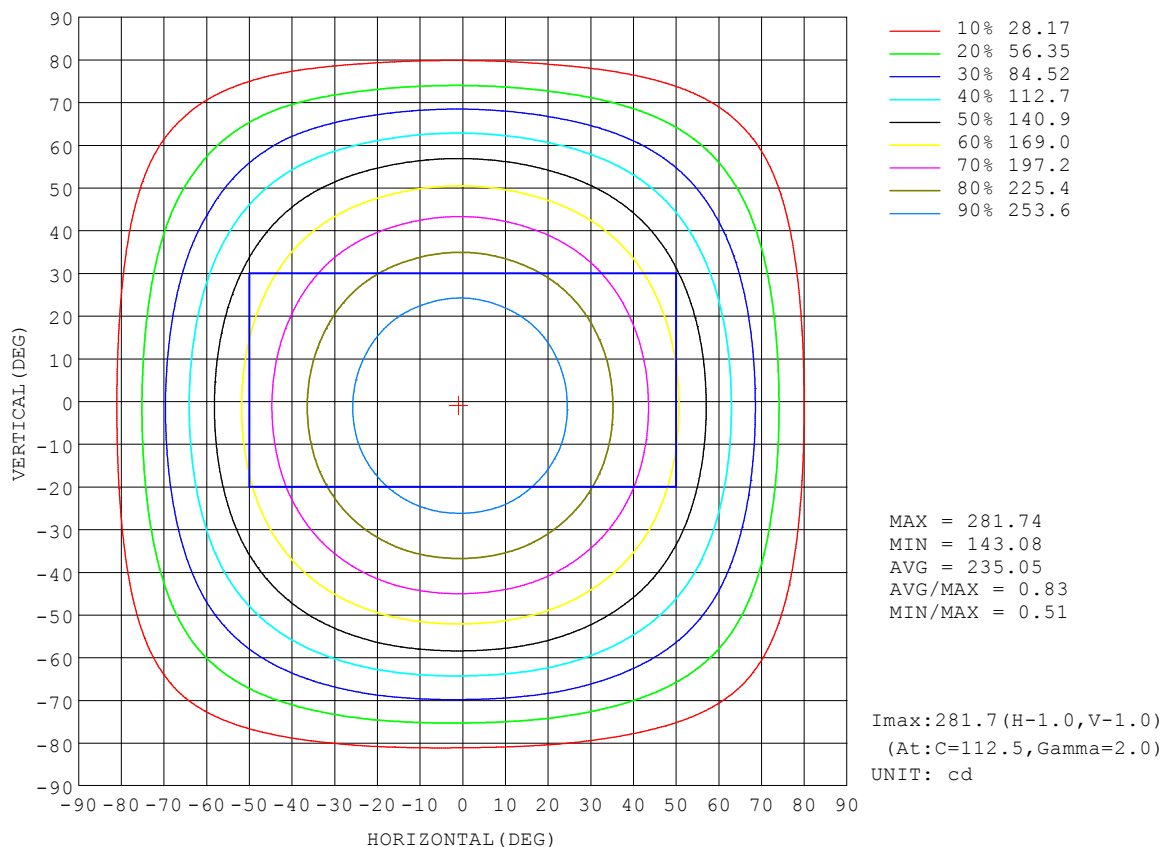


C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2022-03-22

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity: 65.0%  
Test Distance: 5.749m [K=1.0000]  
Remarks:



### AAI Figure

NAME: 2835 IP20	TYPE: 2835 140LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.008*0.5	Shielding Angle:

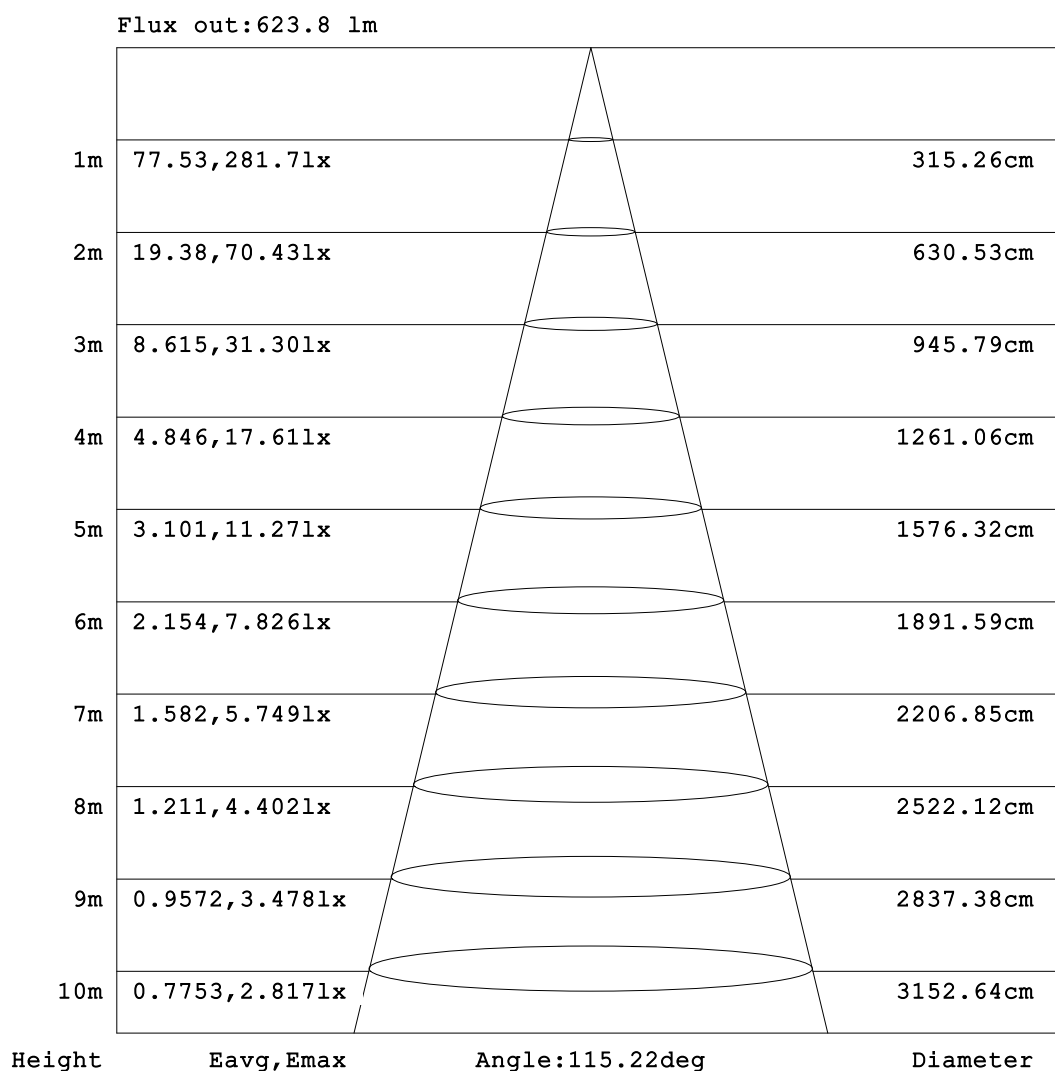


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-03-22

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:

**ISOLUX DIAGRAM**

NAME: 2835 IP20	TYPE: 2835 140LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.008*0.5	Shielding Angle:

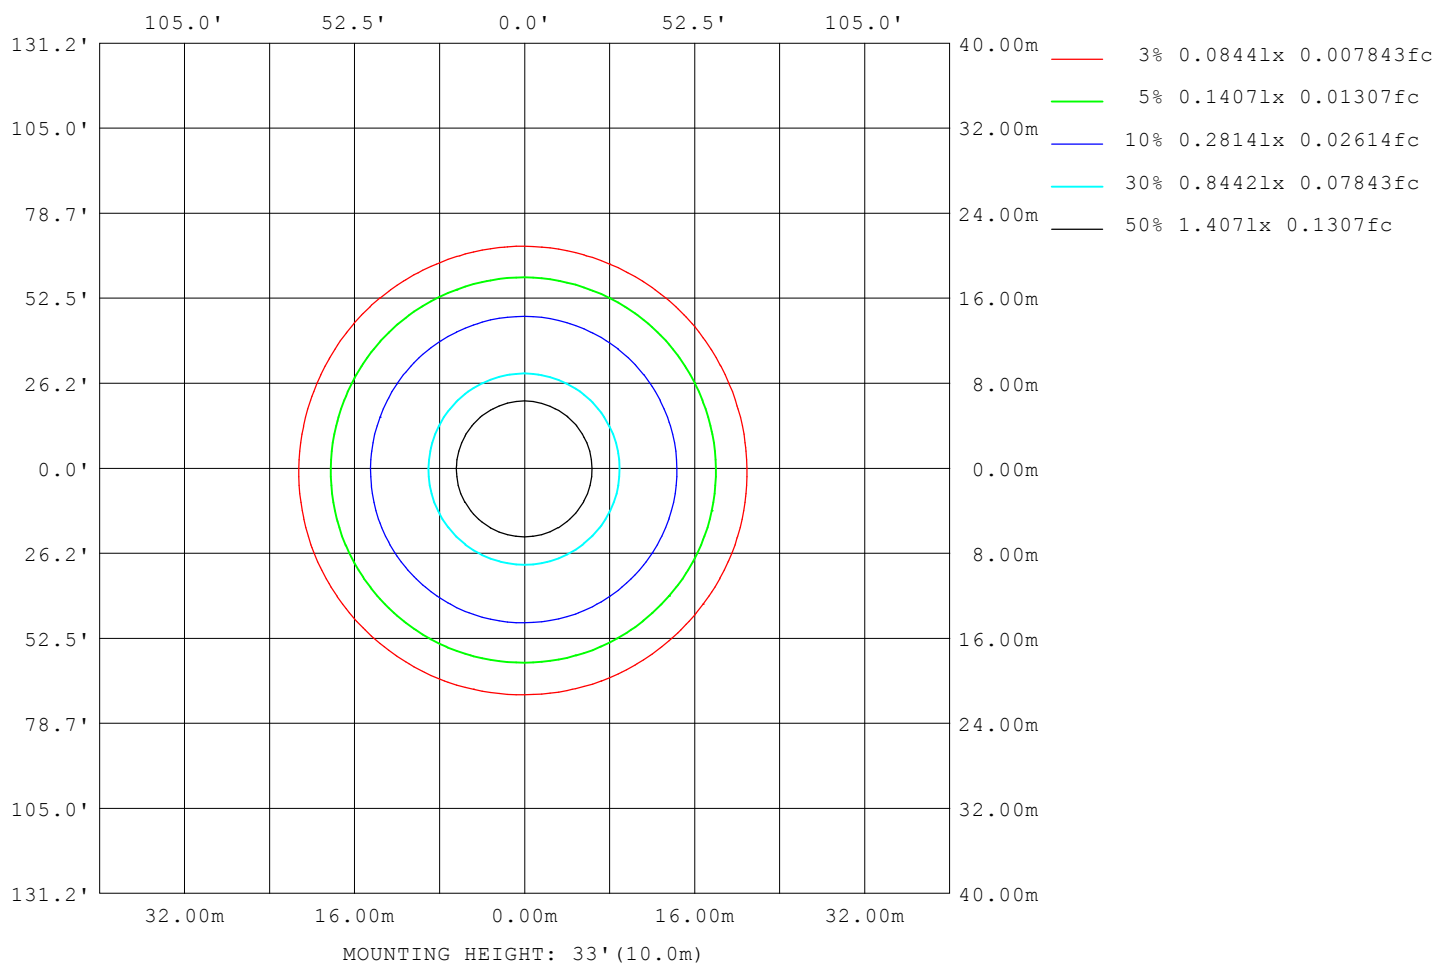

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-03-22

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
 Humidity: 65.0%  
 Test Distance: 5.749m [K=1.0000]  
 Remarks:

## LED Avg.L Report

NAME: 2835 IP20	TYPE: 2835 140LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.008*0.5	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	31165
L_0~180 (75) av	26322
L_0~180 (85) av	15188
L_90~270 (65) av	31196
L_90~270 (75) av	26346
L_90~270 (85) av	15301
L_45 (65) av	31211
L_45 (75) av	26389
L_45 (85) av	15974

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-03-22

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
 Humidity: 65.0%  
 Test Distance: 5.749m [K=1.0000]  
 Remarks:

### Planar Illuminance Curve

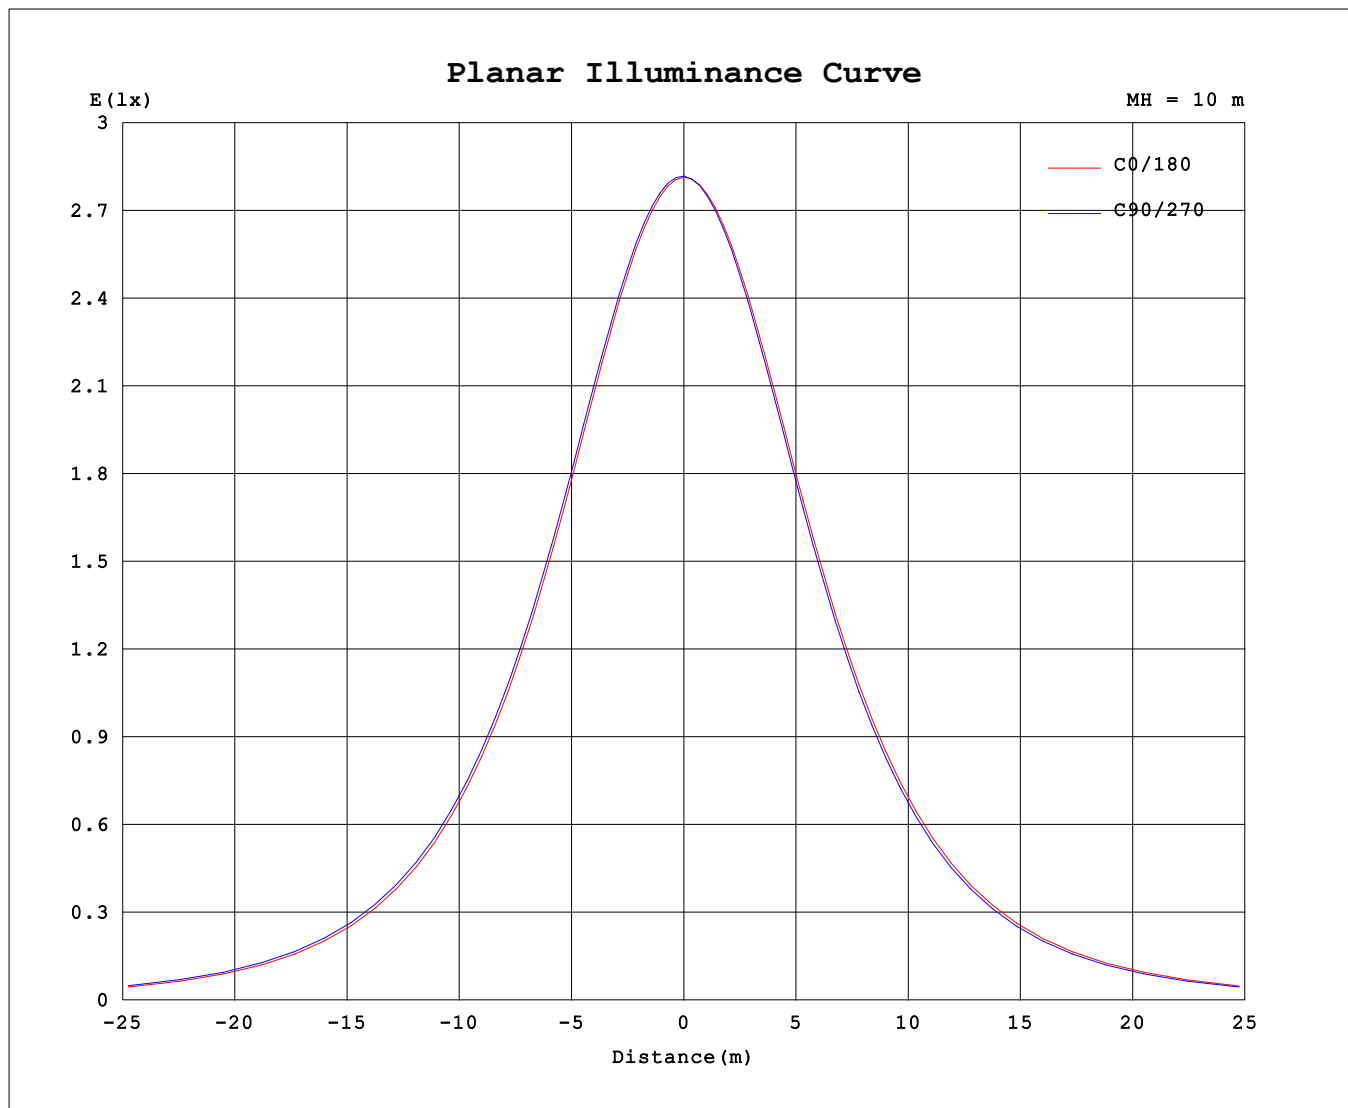

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-03-22

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
 Humidity: 65.0%  
 Test Distance: 5.749m [K=1.0000]  
 Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: 2835 IP20	TYPE: 2835 140LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.008*0.5	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	282	282	282	282	282	282	282	282	282	282	282	282	282	282	282	282			
5	281	281	281	281	281	281	281	281	281	281	281	281	280	280	280	280			
10	277	277	277	278	278	278	278	278	278	277	277	276	276	276	276	276			
15	272	273	273	274	274	275	274	274	274	273	272	272	272	271	271	272			
20	263	264	264	265	266	266	266	266	265	264	263	262	262	262	262	262			
25	255	256	257	258	258	259	259	258	257	256	255	254	254	253	253	254			
30	240	242	243	244	244	245	245	245	244	242	241	240	239	239	239	239			
35	229	231	232	233	234	235	234	234	233	231	230	229	228	227	227	228			
40	210	212	213	215	215	216	216	215	214	212	211	209	209	208	208	208			
45	196	198	199	201	201	202	202	202	200	198	197	195	194	193	194	194			
50	172	174	175	177	178	179	179	178	177	174	173	171	171	170	170	170			
55	155	157	158	160	161	162	162	162	160	157	156	154	154	152	153	153			
60	127	130	131	133	133	135	135	135	133	130	129	127	126	125	125	125			
65	108	110	111	114	114	116	115	115	113	111	110	107	107	105	106	106			
70	77.2	79.8	80.9	83.2	83.7	85.3	85.1	84.9	82.8	77.5	79.3	77.1	76.5	75.1	75.2	75.2			
75	56.9	59.2	60.4	62.5	63.1	64.6	64.7	64.3	62.2	58.1	58.9	56.8	56.1	54.9	54.9	54.9			
80	28.1	30.0	30.9	32.7	33.2	34.7	34.8	34.7	32.7	30.0	29.7	27.9	27.3	26.3	26.4	26.6			
85	12.7	14.1	14.5	15.8	16.2	17.5	17.9	17.9	15.8	14.3	13.6	12.2	11.8	11.3	11.6	11.8			
90	0.32	1.24	1.19	1.20	1.21	1.91	2.50	2.76	0.31	1.58	1.19	0.81	0.82	1.01	1.23	1.25			
95	0.45	0.49	0.60	0.59	0.56	0.62	0.71	0.71	0.37	0.46	0.58	0.58	0.57	0.62	0.61	0.49			
100	0.74	0.70	0.76	0.81	0.81	0.79	0.74	0.67	0.59	0.60	0.61	0.64	0.66	0.67	0.65	0.64			
105	0.97	0.90	0.91	0.94	0.97	0.93	0.88	0.86	0.77	0.77	0.79	0.80	0.82	0.82	0.82	0.81			
110	1.33	1.24	1.23	1.22	1.21	1.20	1.19	1.19	1.08	1.06	1.08	1.09	1.11	1.11	1.12	1.11			
115	1.57	1.46	1.45	1.43	1.42	1.41	1.41	1.42	1.31	1.27	1.27	1.29	1.31	1.31	1.32	1.31			
120	1.91	1.79	1.76	1.75	1.73	1.73	1.73	1.75	1.64	1.58	1.57	1.59	1.60	1.61	1.61	1.62			
125	2.12	2.00	1.96	1.94	1.93	1.93	1.94	1.96	1.84	1.79	1.76	1.78	1.79	1.80	1.81	1.82			
130	2.41	2.30	2.24	2.22	2.21	2.22	2.23	2.27	2.13	2.08	2.04	2.04	2.04	2.06	2.06	2.10			
135	2.59	2.49	2.41	2.39	2.38	2.40	2.41	2.46	2.30	2.26	2.22	2.20	2.20	2.22	2.23	2.28			
140	2.82	2.74	2.66	2.62	2.61	2.65	2.67	2.71	2.53	2.49	2.46	2.44	2.42	2.44	2.46	2.53			
145	2.96	2.89	2.81	2.75	2.75	2.81	2.82	2.85	2.68	2.64	2.61	2.59	2.55	2.57	2.60	2.67			
150	3.14	3.08	3.02	2.96	2.96	3.03	3.03	3.05	2.87	2.84	2.81	2.80	2.73	2.77	2.81	2.87			
155	3.24	3.20	3.14	3.09	3.12	3.16	3.15	3.17	2.99	2.96	2.93	2.93	2.88	2.90	2.94	3.00			
160	3.39	3.36	3.31	3.27	3.34	3.33	3.31	3.33	3.18	3.15	3.13	3.13	3.11	3.10	3.14	3.19			
165	3.49	3.47	3.43	3.39	3.48	3.45	3.43	3.44	3.31	3.28	3.26	3.27	3.27	3.23	3.27	3.33			
170	3.64	3.64	3.62	3.60	3.66	3.63	3.61	3.62	3.53	3.51	3.49	3.50	3.51	3.47	3.49	3.55			
175	3.75	3.75	3.74	3.74	3.79	3.75	3.74	3.76	3.68	3.67	3.66	3.67	3.68	3.64	3.67	3.71			
180	3.90	3.88	3.88	3.90	3.93	3.90	3.90	3.92	3.90	3.88	3.88	3.90	3.93	3.90	3.90	3.92			

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-03-22

□ Range: 0 - 180DEG  
□ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks: