


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: 2835 IP20	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.: 202-00312-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 125.46 lm/W
MODEL	3000K	I _{max} (cd)	304.9	S/MH(C0/180)	1.28	
NOMINAL POWER(W)	7.2	LOR(%)	100.0	S/MH(C90/270)	1.29	
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	901.44	□ UP,DN(C0-180)	0.7,48.3	
NOMINAL FLUX(lm)	5.634	CIE CLASS	DIRECT	□ UP,DN(C180-360)	0.6,50.4	
LAMPS INSIDE	160	□ up (%)	1.2	CIBSE SHR NOM	1.25	
TEST VOLTAGE(V)	24	□ down (%)	98.8	CIBSE SHR MAX	1.35	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

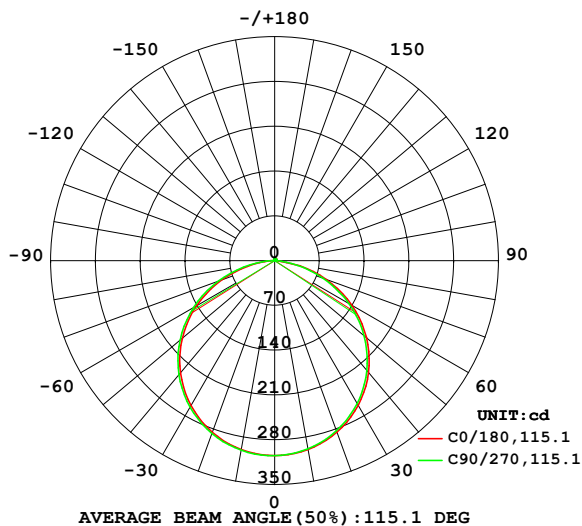

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

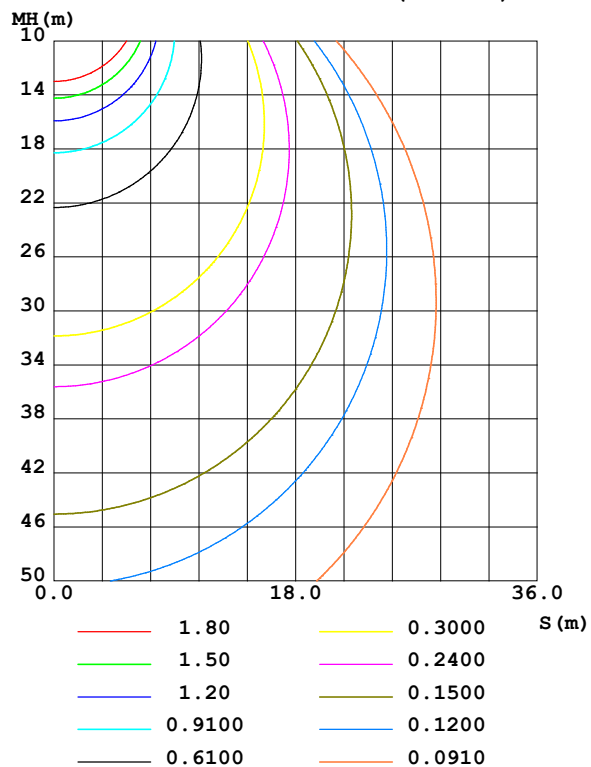

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-03-25

□ Range: 0 - 180DEG
 □ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity:65.0%
 Test Distance:5.749m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	299.8	299.0	298.8	299.3	300.0	300.9	301.0	300.6	0- 10	28.87	28.87	3.2,3.2
20	285.1	283.4	283.0	283.9	285.5	287.1	287.4	286.6	10- 20	82.94	111.8	12.4,12.4
30	261.1	258.7	258.0	259.3	261.7	264.1	264.5	263.3	20- 30	126.5	238.3	26.4,26.4
40	228.2	225.2	224.3	226.0	229.1	232.3	232.9	231.2	30- 40	153.9	392.2	43.5,43.5
50	187.3	183.6	182.6	184.8	188.6	192.6	193.2	191.1	40- 50	161.4	553.6	61.4,61.4
60	139.2	135.0	134.0	136.6	140.7	145.8	146.4	143.5	50- 60	147.2	700.8	77.7,77.7
70	85.38	80.89	80.11	82.84	87.39	92.72	93.49	90.28	60- 70	112.5	813.4	90.2,90.2
80	19.03	28.05	27.34	29.83	33.70	38.60	39.26	36.20	70- 80	62.57	876.0	97.2,97.2
90	0.2832	0.6952	0.6815	0.9087	0.2646	2.343	2.282	1.875	80- 90	14.26	890.2	98.8,98.8
100	0.7044	0.7655	0.8154	0.7507	0.5864	0.5523	0.5734	0.5733	90-100	0.7362	891.0	98.8,98.8
110	1.307	1.313	1.335	1.311	1.111	1.002	1.011	1.044	100-110	0.9604	891.9	98.9,98.9
120	1.902	1.850	1.875	1.865	1.658	1.487	1.515	1.546	110-120	1.426	893.3	99.1,99.1
130	2.431	2.336	2.348	2.367	2.154	1.956	1.971	2.009	120-130	1.747	895.1	99.3,99.3
140	2.853	2.740	2.741	2.793	2.563	2.372	2.337	2.413	130-140	1.856	896.9	99.5,99.5
150	3.179	3.090	3.055	3.147	2.894	2.734	2.678	2.784	140-150	1.741	898.7	99.7,99.7
160	3.432	3.371	3.404	3.413	3.199	3.062	3.065	3.143	150-160	1.432	900.1	99.9,99.9
170	3.691	3.656	3.725	3.687	3.547	3.445	3.488	3.535	160-170	0.9655	901.1	100,100
180	3.906	3.878	3.973	3.982	3.930	3.868	3.966	3.965	170-180	0.3550	901.4	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 489.54 lm

%lum = 54.3%

%lamp = 54.3%

Conical surface Flux(120deg): 700.85 lm

%lum = 77.7%


%lamp = 77.7%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-25

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

NAME: 2835 IP20	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.: 202-00312-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

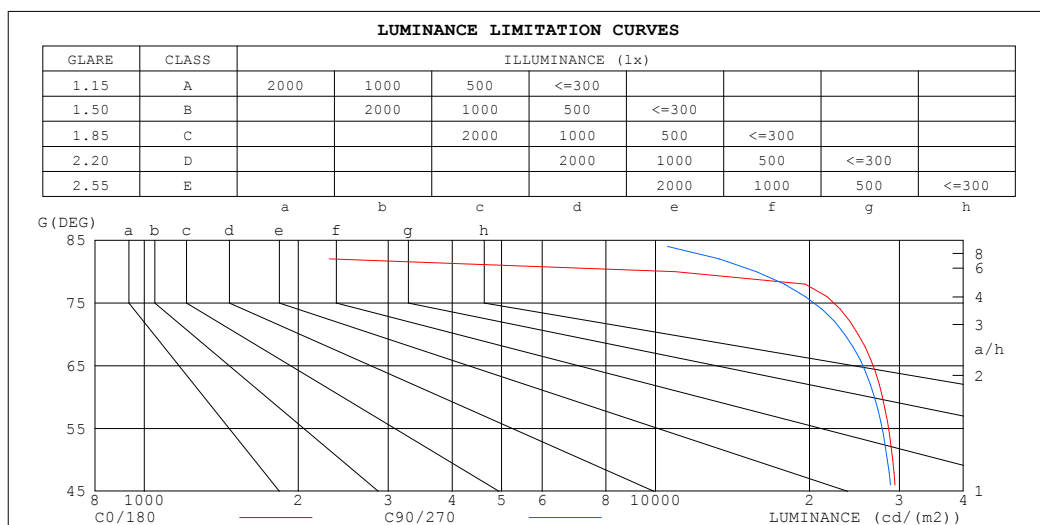

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	367	12640
80	10940	15750
75	24455	22527
70	24924	23428
65	27931	26727
60	27799	26812
55	29400	28594
50	29098	28420
45	30053	29503


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-03-25

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: 2835 IP20	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.: 202-00312-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.99
1.0	1.04	.99	.96	1.01	.97	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.83	.78	.88	.82	.77	.84	.79	.75	.81	.77	.73	.78	.74	.71	.69
3.0	.79	.71	.64	.77	.70	.64	.74	.68	.62	.71	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.54	.69	.60	.54	.66	.59	.53	.63	.57	.52	.61	.56	.51	.49
5.0	.62	.53	.47	.61	.53	.46	.59	.51	.46	.57	.50	.45	.55	.49	.44	.42
6.0	.56	.47	.41	.55	.47	.40	.53	.46	.40	.51	.45	.39	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.48	.41	.35	.47	.40	.35	.45	.39	.35	.33
8.0	.46	.38	.32	.46	.37	.32	.44	.37	.31	.43	.36	.31	.41	.35	.31	.29
9.0	.42	.34	.29	.42	.34	.28	.41	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.37	.30	.26	.36	.30	.25	.35	.30	.25	.23

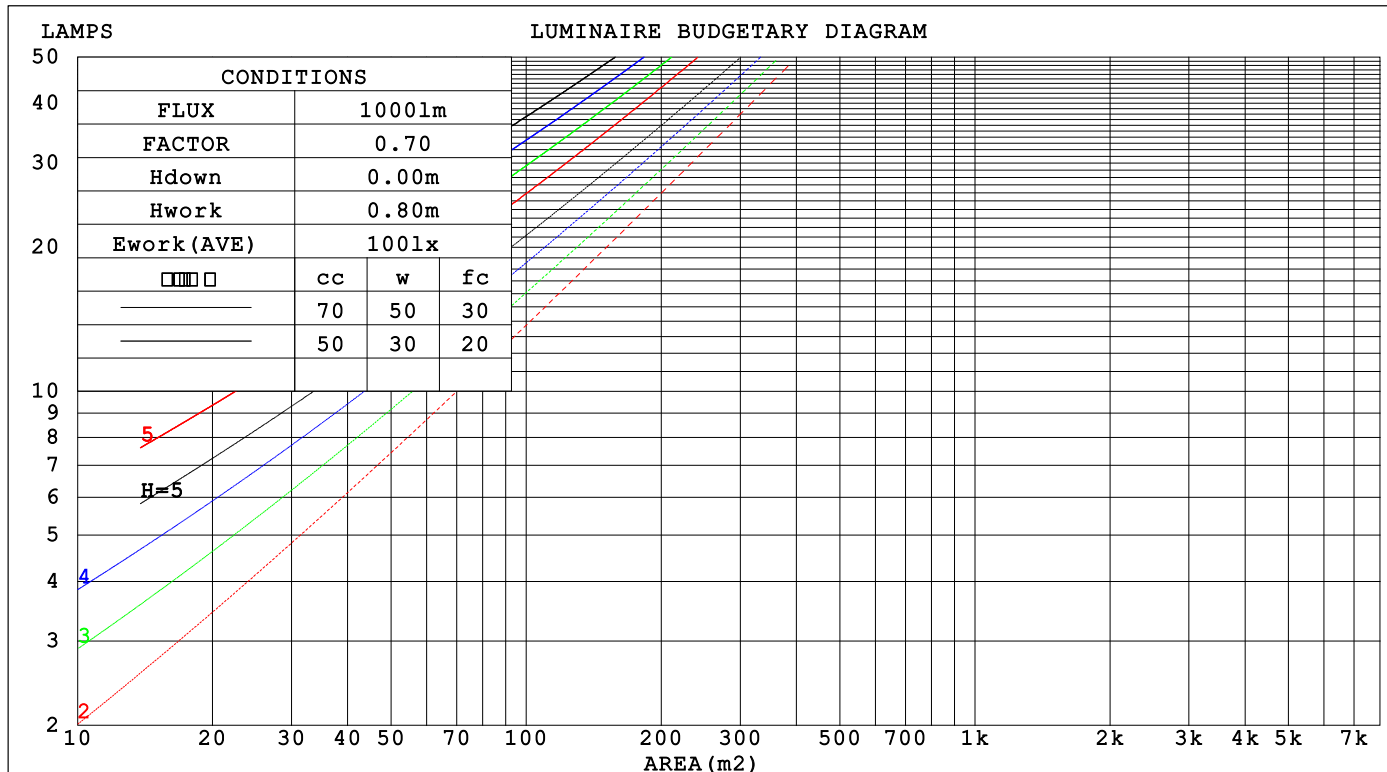

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-25

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: 2835 IP20	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.: 202-00312-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)					
0.0						
1.0	.308 .175 .055	.300 .171 .054	.286 .164 .052	.274 .158 .051	.262 .152 .049	
2.0	.291 .160 .049	.285 .157 .048	.272 .151 .047	.261 .146 .046	.250 .142 .045	
3.0	.270 .144 .043	.264 .141 .043	.253 .137 .042	.243 .133 .041	.234 .129 .040	
4.0	.249 .130 .038	.244 .128 .038	.234 .124 .037	.225 .121 .037	.217 .118 .036	
5.0	.231 .118 .034	.226 .116 .034	.217 .113 .033	.209 .110 .033	.202 .108 .032	
6.0	.214 .107 .031	.210 .106 .031	.202 .104 .030	.195 .101 .030	.188 .099 .029	
7.0	.199 .098 .028	.195 .097 .028	.188 .095 .027	.182 .093 .027	.176 .091 .027	
8.0	.186 .091 .026	.183 .090 .025	.176 .088 .025	.171 .086 .025	.165 .085 .025	
9.0	.174 .084 .024	.171 .083 .023	.166 .082 .023	.160 .080 .023	.155 .079 .023	
10.0	.164 .079 .022	.161 .078 .022	.156 .076 .022	.151 .075 .021	.147 .074 .021	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)					
0.0	.200 .200 .200	.171 .171 .171	.117 .117 .117	.067 .067 .067	.021 .021 .021	
1.0	.190 .166 .144	.162 .142 .124	.111 .098 .086	.064 .057 .050	.020 .018 .016	
2.0	.182 .142 .108	.156 .122 .093	.107 .084 .065	.062 .049 .038	.020 .016 .012	
3.0	.174 .124 .084	.149 .107 .073	.103 .074 .051	.059 .043 .030	.019 .014 .010	
4.0	.167 .111 .068	.143 .096 .059	.098 .067 .042	.057 .039 .025	.018 .013 .008	
5.0	.159 .100 .057	.137 .087 .049	.094 .061 .035	.055 .036 .021	.018 .012 .007	
6.0	.152 .092 .049	.131 .080 .043	.090 .056 .030	.052 .033 .018	.017 .011 .006	
7.0	.145 .085 .043	.125 .074 .037	.086 .052 .027	.050 .030 .016	.016 .010 .005	
8.0	.139 .079 .038	.120 .069 .034	.083 .048 .024	.048 .029 .014	.016 .009 .005	
9.0	.133 .074 .035	.114 .065 .031	.079 .045 .022	.046 .027 .013	.015 .009 .004	
10.0	.127 .070 .032	.110 .061 .028	.076 .043 .020	.044 .025 .012	.014 .008 .004	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-25

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME: 2835 IP20					TYPE: 2835 160LED 24V			WEIGHT:			
SPEC.: 202-00312-00					DIM.:			SERIAL No.:			
MFR.:					SUR.: 0.01*0.5			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	2H	24.8	26.3	25.1	26.5	26.8	24.7	26.2	25.0	26.4	26.6
	3H	26.3	27.7	26.6	27.9	28.2	26.1	27.5	26.4	27.7	28.0
	4H	26.8	28.2	27.2	28.4	28.7	26.6	27.9	26.9	28.2	28.5
	6H	27.1	28.4	27.5	28.7	29.0	26.9	28.1	27.2	28.4	28.7
	8H	27.1	28.3	27.4	28.6	28.9	26.9	28.1	27.3	28.4	28.7
	12H	27.0	28.2	27.4	28.5	28.8	26.9	28.1	27.3	28.4	28.7
4H	2H	25.4	26.7	25.7	27.0	27.2	25.3	26.6	25.6	26.9	27.1
	3H	27.0	28.2	27.4	28.5	28.8	26.9	28.0	27.2	28.3	28.7
	4H	27.7	28.7	28.1	29.1	29.5	27.5	28.5	27.9	28.9	29.2
	6H	28.1	29.0	28.5	29.4	29.8	27.8	28.8	28.3	29.2	29.5
	8H	28.0	28.9	28.5	29.3	29.7	27.9	28.8	28.4	29.2	29.6
	12H	28.0	28.8	28.5	29.2	29.6	27.9	28.7	28.4	29.1	29.6
8H	4H	27.9	28.8	28.3	29.1	29.6	27.7	28.6	28.1	28.9	29.4
	6H	28.4	29.1	28.8	29.5	30.0	28.2	28.9	28.6	29.3	29.8
	8H	28.4	29.1	28.9	29.5	30.0	28.3	28.9	28.8	29.4	29.9
	12H	28.4	29.0	28.9	29.4	29.9	28.3	28.9	28.8	29.4	29.9
12H	4H	27.9	28.7	28.3	29.1	29.5	27.7	28.5	28.1	28.9	29.3
	6H	28.4	29.0	28.9	29.5	30.0	28.2	28.8	28.7	29.3	29.8
	8H	28.5	29.0	29.0	29.5	30.0	28.3	28.9	28.8	29.4	29.9
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H		+ 0.1 / - 0.2					+ 0.2 / - 0.2				
1.5H		+ 0.2 / - 0.4					+ 0.2 / - 0.3				
2.0H		+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 901.4 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.4)
Area: 0.01 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-25

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:


```

Range: 0 - 180DEG
Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

```

ISOCANDELA DIAGRAM

NAME: 2835 IP20	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.: 202-00312-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

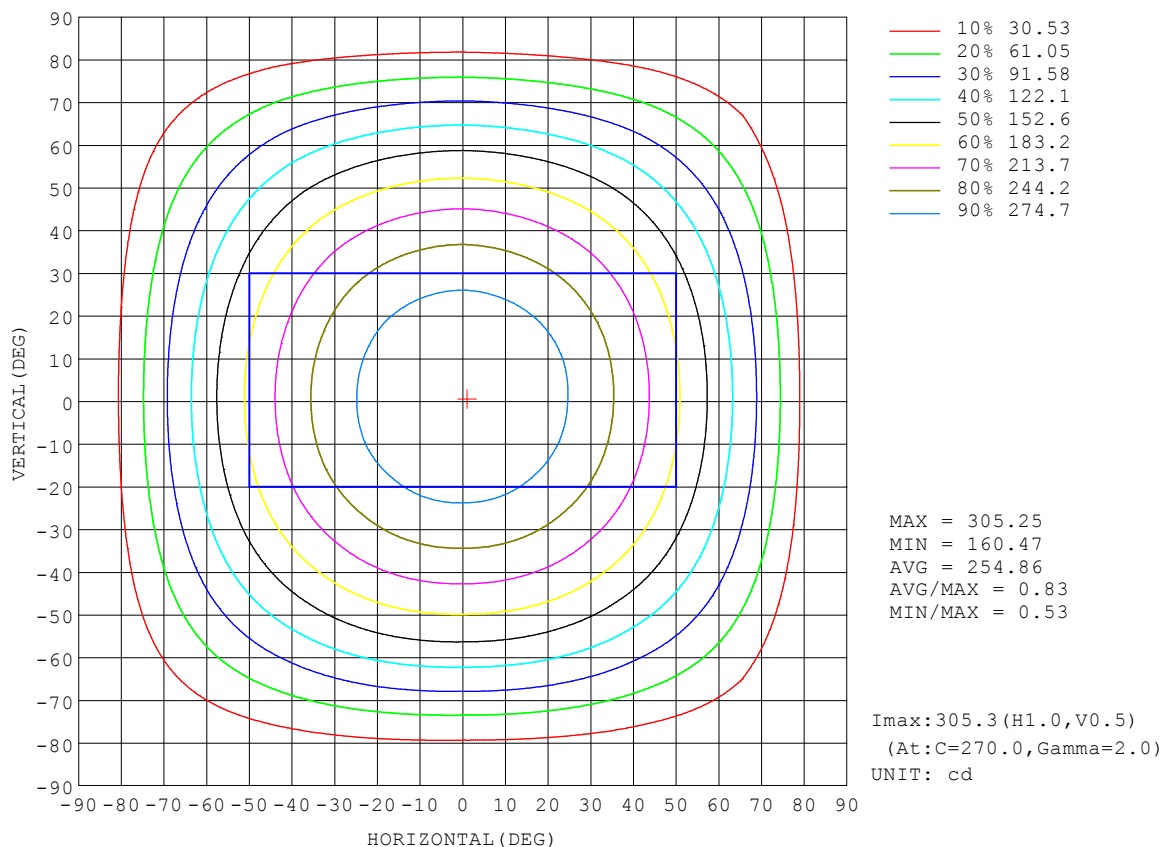


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-03-25

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

AAI Figure

NAME: 2835 IP20	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.: 202-00312-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

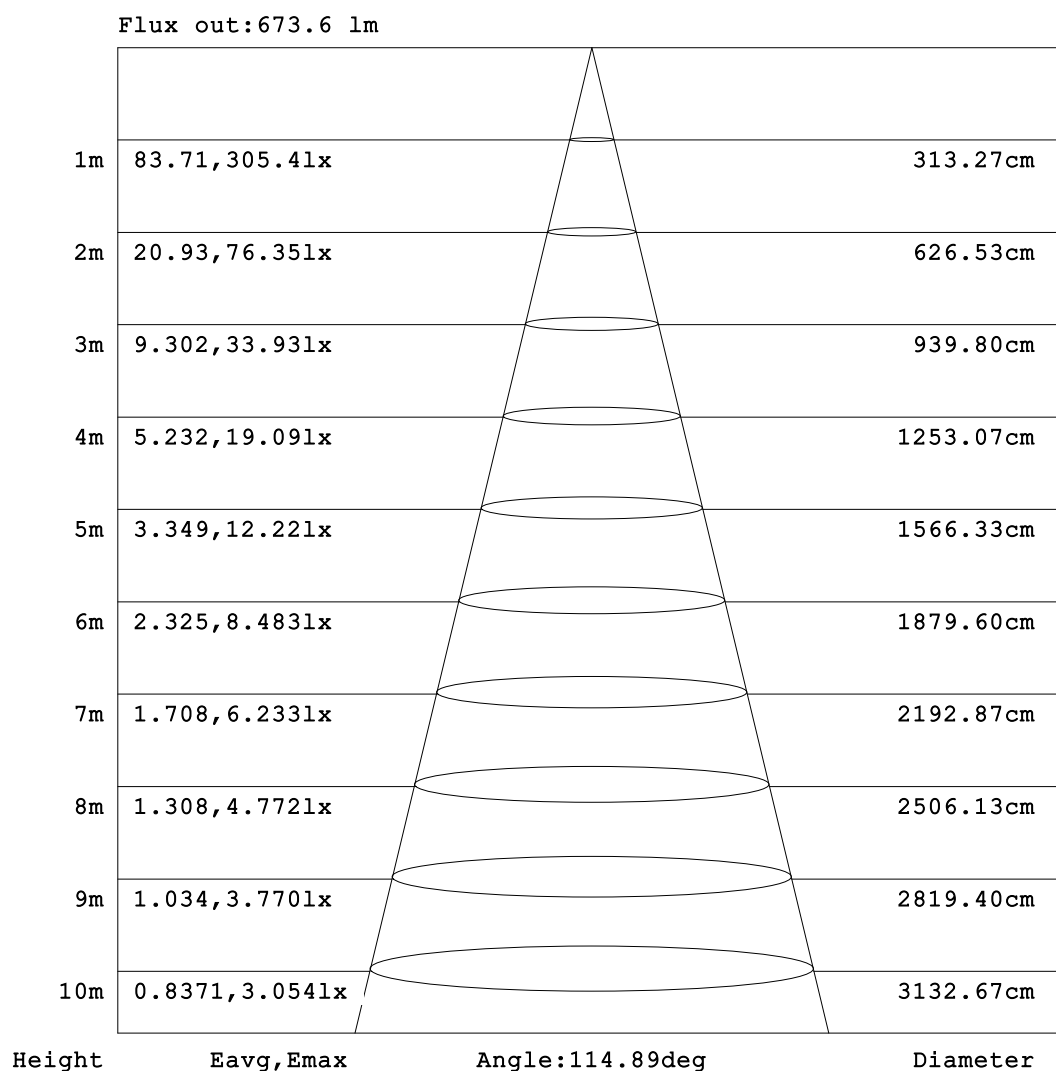


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-03-25

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

NAME: 2835 IP20	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.: 202-00312-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

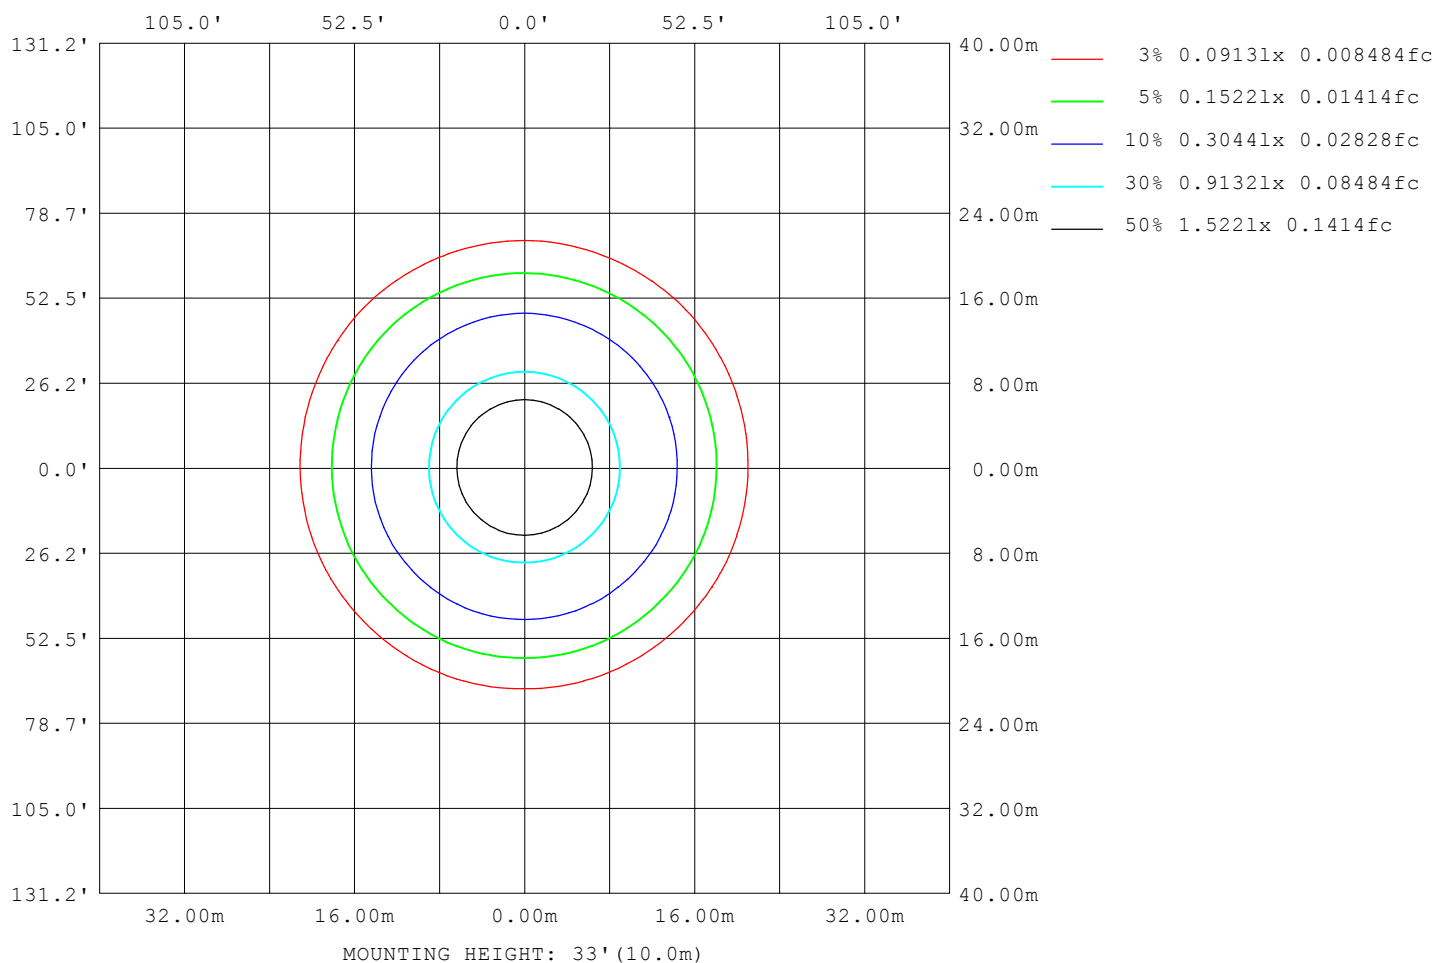

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-03-25

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

LED Avg.L Report

NAME: 2835 IP20	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.: 202-00312-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	26915
L_0~180 (75) av	22778
L_0~180 (85) av	6482
L_90~270 (65) av	26981
L_90~270 (75) av	22965
L_90~270 (85) av	13788
L_45 (65) av	26971
L_45 (75) av	22908
L_45 (85) av	13714

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-03-25

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

Planar Illuminance Curve

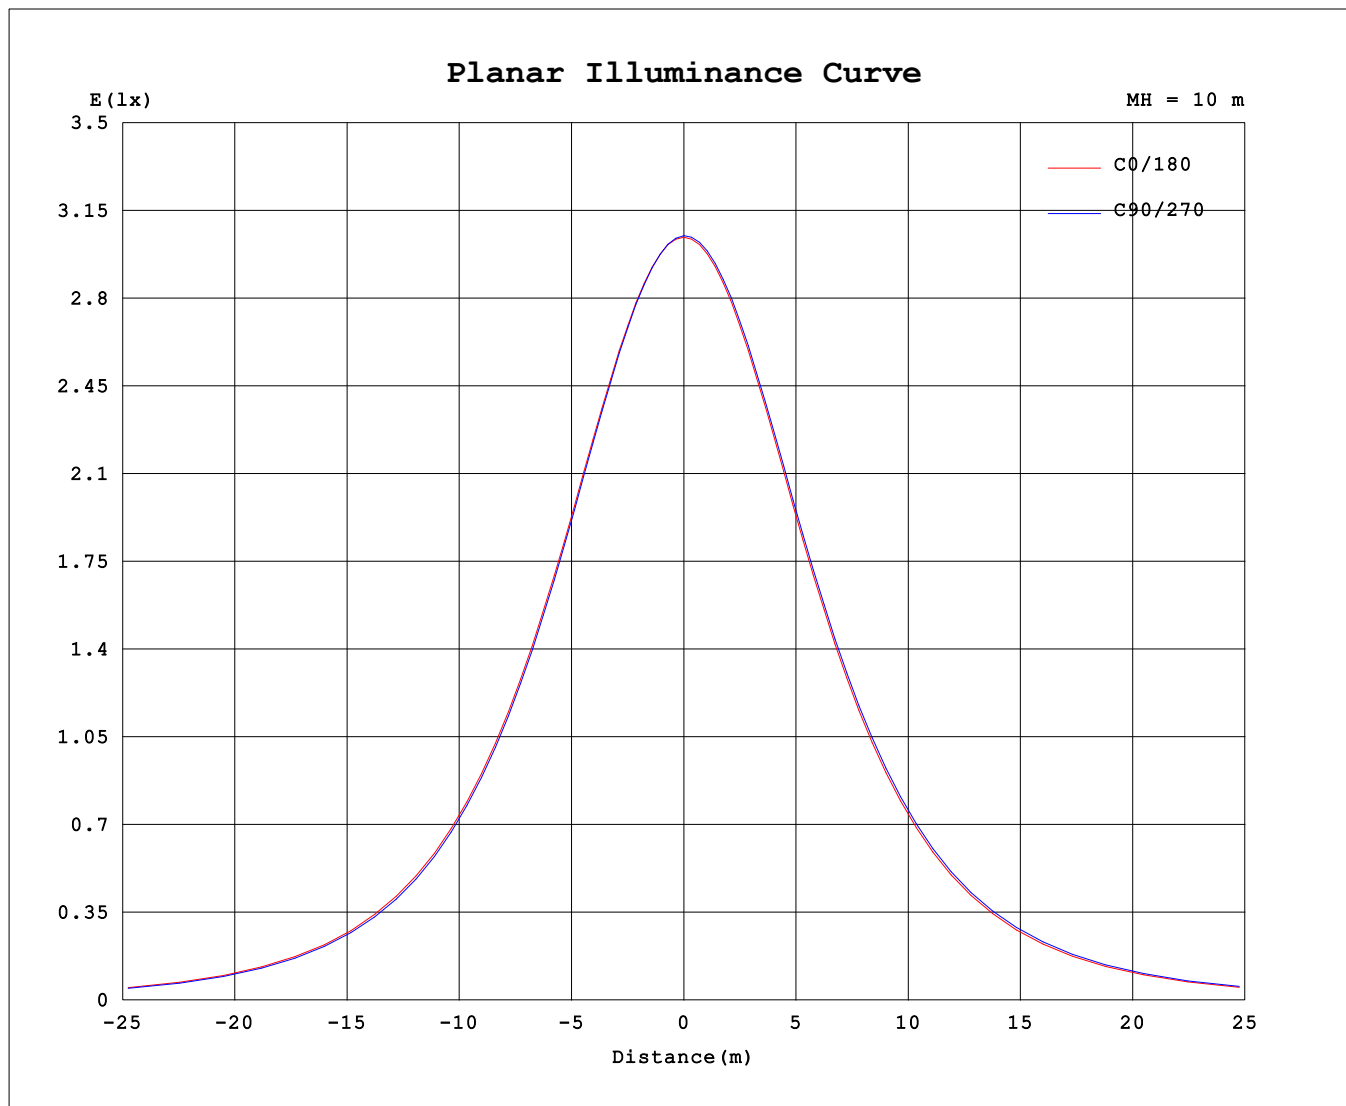

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-03-25

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: 2835 IP20	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.: 202-00312-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	305	305	305	305	305	305	305	305	305	305	305	305	305	305	305	305			
5	304	304	304	304	304	304	304	304	304	304	304	304	304	304	304	304			
10	300	300	299	299	299	299	299	300	300	300	301	301	301	301	301	300			
15	295	295	294	294	294	294	294	295	295	296	297	297	297	296	296	296			
20	285	284	283	283	283	284	284	285	285	286	287	287	287	287	287	286			
25	277	276	275	274	274	275	275	276	277	278	279	279	279	279	278	277			
30	261	260	259	258	258	259	259	261	262	263	264	264	264	264	263	262			
35	249	248	246	246	246	246	247	248	250	251	252	253	253	252	252	250			
40	228	227	225	225	224	225	226	228	229	231	232	233	233	232	231	230			
45	213	211	209	209	209	210	210	212	214	215	217	218	218	217	216	214			
50	187	186	184	183	183	184	185	187	189	190	193	193	193	192	191	189			
55	169	167	165	165	164	165	166	169	170	172	175	175	175	174	173	171			
60	139	138	135	135	134	136	137	139	141	143	146	146	146	145	143	141			
65	118	116	114	114	113	115	116	118	120	122	125	125	126	124	123	120			
70	85.4	83.6	80.9	80.8	80.1	82.0	82.8	85.4	87.4	89.7	92.7	93.0	93.5	91.5	90.3	87.4			
75	63.4	61.5	59.1	58.7	58.3	59.9	61.0	63.4	65.4	67.7	70.7	71.1	71.5	69.5	68.2	65.3			
80	19.0	30.2	28.1	27.7	27.3	28.8	29.8	31.6	33.7	35.8	38.6	39.0	39.3	37.4	36.2	33.6			
85	0.32	13.2	11.6	11.3	11.0	12.2	12.9	14.5	15.8	17.5	19.8	20.0	20.2	18.8	17.8	15.8			
90	0.28	0.74	0.70	0.70	0.68	0.75	0.91	1.17	0.26	1.79	2.34	2.29	2.28	2.01	1.87	1.38			
95	0.42	0.47	0.64	0.71	0.72	0.71	0.63	0.47	0.35	0.38	0.63	0.60	0.58	0.64	0.62	0.39			
100	0.70	0.73	0.77	0.79	0.82	0.78	0.75	0.72	0.59	0.56	0.55	0.57	0.57	0.58	0.57	0.59			
105	0.94	0.94	0.98	0.99	1.00	0.98	0.96	0.93	0.78	0.73	0.72	0.73	0.72	0.74	0.75	0.77			
110	1.31	1.28	1.31	1.32	1.34	1.32	1.31	1.28	1.11	1.02	1.00	1.01	1.01	1.03	1.04	1.06			
115	1.55	1.51	1.53	1.55	1.56	1.55	1.54	1.52	1.33	1.22	1.20	1.21	1.21	1.23	1.25	1.27			
120	1.90	1.84	1.85	1.86	1.88	1.87	1.87	1.86	1.66	1.53	1.49	1.50	1.51	1.53	1.55	1.58			
125	2.12	2.04	2.05	2.06	2.07	2.08	2.08	2.07	1.87	1.74	1.68	1.69	1.71	1.72	1.74	1.78			
130	2.43	2.35	2.34	2.34	2.35	2.36	2.37	2.38	2.15	2.03	1.96	1.97	1.97	1.99	2.01	2.07			
135	2.62	2.53	2.51	2.50	2.51	2.54	2.55	2.56	2.33	2.21	2.13	2.13	2.13	2.15	2.18	2.26			
140	2.85	2.78	2.74	2.73	2.74	2.78	2.79	2.82	2.56	2.44	2.37	2.36	2.34	2.38	2.41	2.52			
145	2.99	2.93	2.89	2.86	2.87	2.93	2.94	2.97	2.70	2.58	2.52	2.52	2.47	2.52	2.57	2.68			
150	3.18	3.13	3.09	3.04	3.05	3.13	3.15	3.16	2.89	2.79	2.73	2.73	2.68	2.72	2.78	2.89			
155	3.28	3.24	3.21	3.16	3.19	3.25	3.25	3.26	3.02	2.92	2.86	2.87	2.83	2.85	2.93	3.03			
160	3.43	3.40	3.37	3.33	3.40	3.42	3.41	3.43	3.20	3.11	3.06	3.08	3.07	3.06	3.14	3.24			
165	3.53	3.51	3.48	3.44	3.55	3.52	3.52	3.53	3.33	3.25	3.20	3.22	3.23	3.22	3.29	3.39			
170	3.69	3.68	3.66	3.63	3.73	3.69	3.69	3.71	3.55	3.48	3.45	3.46	3.49	3.47	3.54	3.63			
175	3.79	3.77	3.77	3.77	3.84	3.81	3.81	3.84	3.71	3.65	3.62	3.64	3.68	3.67	3.72	3.79			
180	3.91	3.88	3.88	3.89	3.97	3.95	3.98	4.00	3.93	3.88	3.87	3.91	3.97	3.96	3.96	4.01			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-25

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks: