


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: 2835 IP20	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.: 202-00312-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 126.59 lm/W
MODEL	4000K	I _{max} (cd)	303.1	S/MH(C0/180)	1.28	
NOMINAL POWER(W)	7.2	LOR(%)	100.0	S/MH(C90/270)	1.29	
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	903.17	□ UP, DN (C0-180)	0.7,49.1	
NOMINAL FLUX(lm)	5.6448	CIE CLASS	DIRECT	□ UP, DN (C180-360)	0.6,49.7	
LAMPS INSIDE	160	□ up (%)	1.3	CIBSE SHR NOM	1.25	
TEST VOLTAGE(V)	24	□ down (%)	98.7	CIBSE SHR MAX	1.35	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

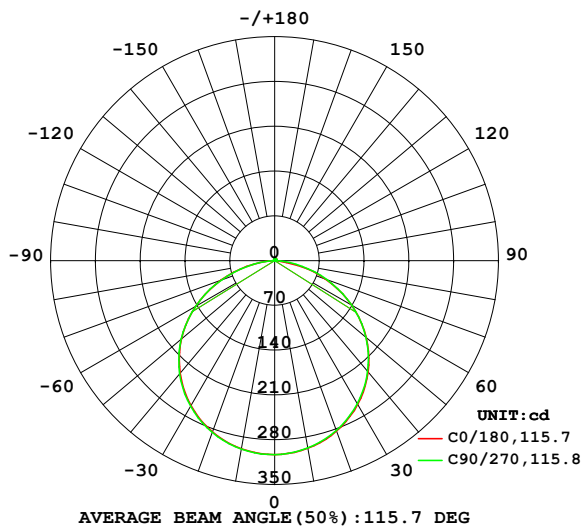

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

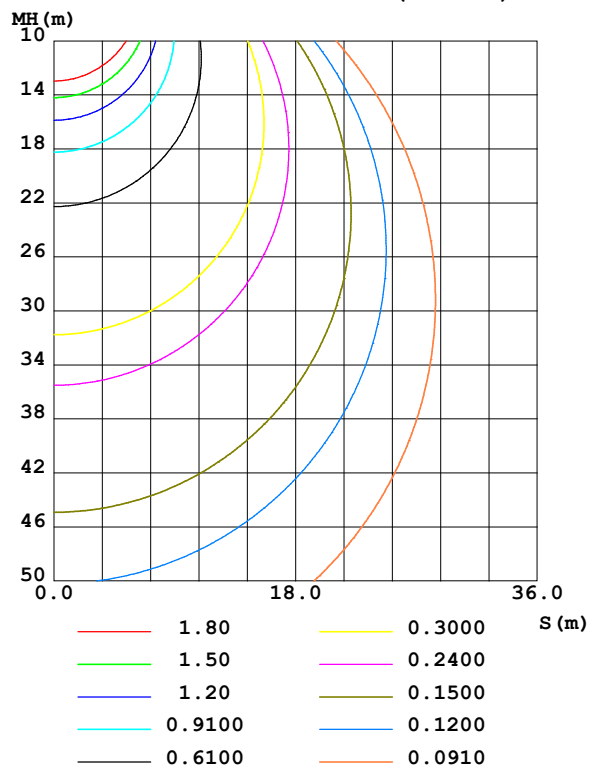

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-25

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	298.0	297.3	297.4	298.0	298.7	299.3	299.2	298.7	0- 10	28.71	28.71	3.18,3.18
20	283.4	282.3	282.4	283.5	284.8	285.9	285.7	284.7	10- 20	82.55	111.3	12.3,12.3
30	259.8	258.3	258.5	260.1	261.8	263.3	262.9	261.4	20- 30	126.1	237.4	26.3,26.3
40	227.4	225.8	226.2	228.1	230.0	231.7	231.1	229.2	30- 40	153.8	391.1	43.3,43.3
50	186.8	185.5	186.2	188.3	190.0	191.7	190.8	188.7	40- 50	161.6	552.7	61.2,61.2
60	138.9	138.1	139.2	141.4	142.4	143.9	142.5	140.2	50- 60	147.8	700.5	77.6,77.6
70	85.12	85.11	86.80	88.70	89.03	89.98	88.26	85.99	60- 70	113.3	813.8	90.1,90.1
80	19.09	32.24	33.89	35.44	35.01	35.25	33.40	31.59	70- 80	63.16	877.0	97.1,97.1
90	0.2975	1.702	2.021	2.128	0.2646	1.774	1.155	1.157	80- 90	14.67	891.7	98.7,98.7
100	0.7377	0.7585	0.8872	0.7222	0.5960	0.5999	0.6282	0.6304	90-100	0.8080	892.5	98.8,98.8
110	1.359	1.327	1.312	1.283	1.132	1.066	1.092	1.111	100-110	0.9863	893.5	98.9,98.9
120	1.974	1.890	1.873	1.853	1.689	1.563	1.596	1.612	110-120	1.462	894.9	99.1,99.1
130	2.512	2.392	2.361	2.367	2.189	2.030	2.045	2.068	120-130	1.787	896.7	99.3,99.3
140	2.934	2.809	2.765	2.797	2.601	2.448	2.407	2.470	130-140	1.894	898.6	99.5,99.5
150	3.253	3.163	3.089	3.156	2.928	2.803	2.735	2.827	140-150	1.772	900.4	99.7,99.7
160	3.511	3.449	3.443	3.425	3.235	3.133	3.120	3.178	150-160	1.455	901.8	99.9,99.9
170	3.765	3.737	3.769	3.700	3.592	3.519	3.539	3.573	160-170	0.9795	902.8	100,100
180	3.987	3.963	4.026	4.003	3.985	3.961	4.023	4.000	170-180	0.3602	903.2	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 488.52 lm

%lum = 54.1%

%lamp = 54.1%

Conical surface Flux(120deg): 700.55 lm

%lum = 77.6%


%lamp = 77.6%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-25

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

NAME: 2835 IP20	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.: 202-00312-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

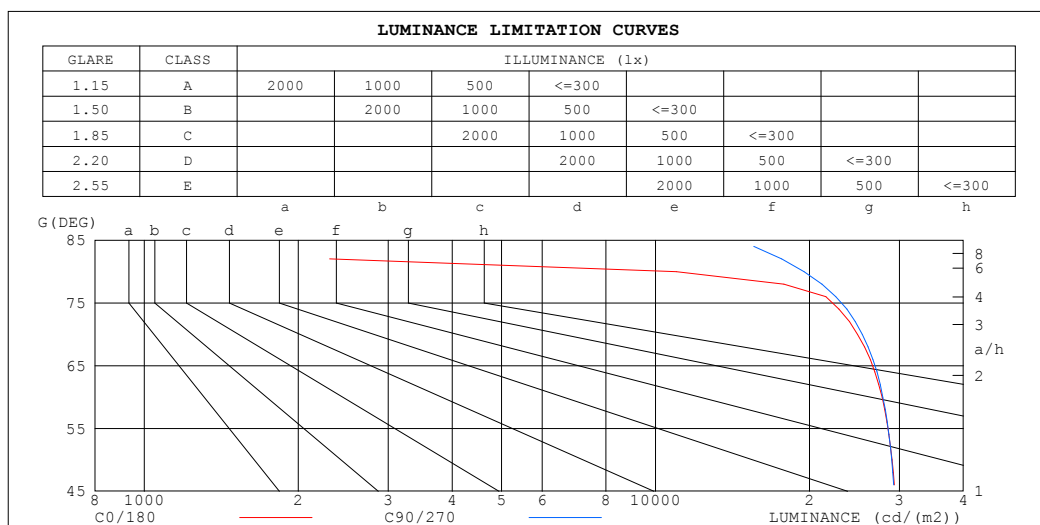

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	378	18679
80	10978	19516
75	24344	25204
70	24848	25382
65	27863	28116
60	27736	27846
55	29331	29322
50	29021	28972
45	29950	29861


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-03-25

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: 2835 IP20	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.: 202-00312-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.99
1.0	1.04	.99	.95	1.01	.97	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.83	.77	.88	.82	.76	.84	.79	.74	.81	.76	.73	.78	.74	.71	.69
3.0	.79	.71	.64	.77	.70	.63	.74	.68	.62	.71	.66	.61	.68	.64	.60	.57
4.0	.70	.61	.54	.68	.60	.54	.66	.59	.53	.63	.57	.52	.61	.56	.51	.49
5.0	.62	.53	.47	.61	.53	.46	.59	.51	.46	.57	.50	.45	.55	.49	.44	.42
6.0	.56	.47	.40	.55	.46	.40	.53	.45	.40	.51	.44	.39	.49	.44	.39	.37
7.0	.51	.42	.36	.50	.41	.35	.48	.41	.35	.47	.40	.35	.45	.39	.34	.32
8.0	.46	.38	.32	.45	.37	.32	.44	.37	.31	.43	.36	.31	.41	.35	.31	.29
9.0	.42	.34	.28	.42	.34	.28	.40	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.25	.35	.29	.25	.23

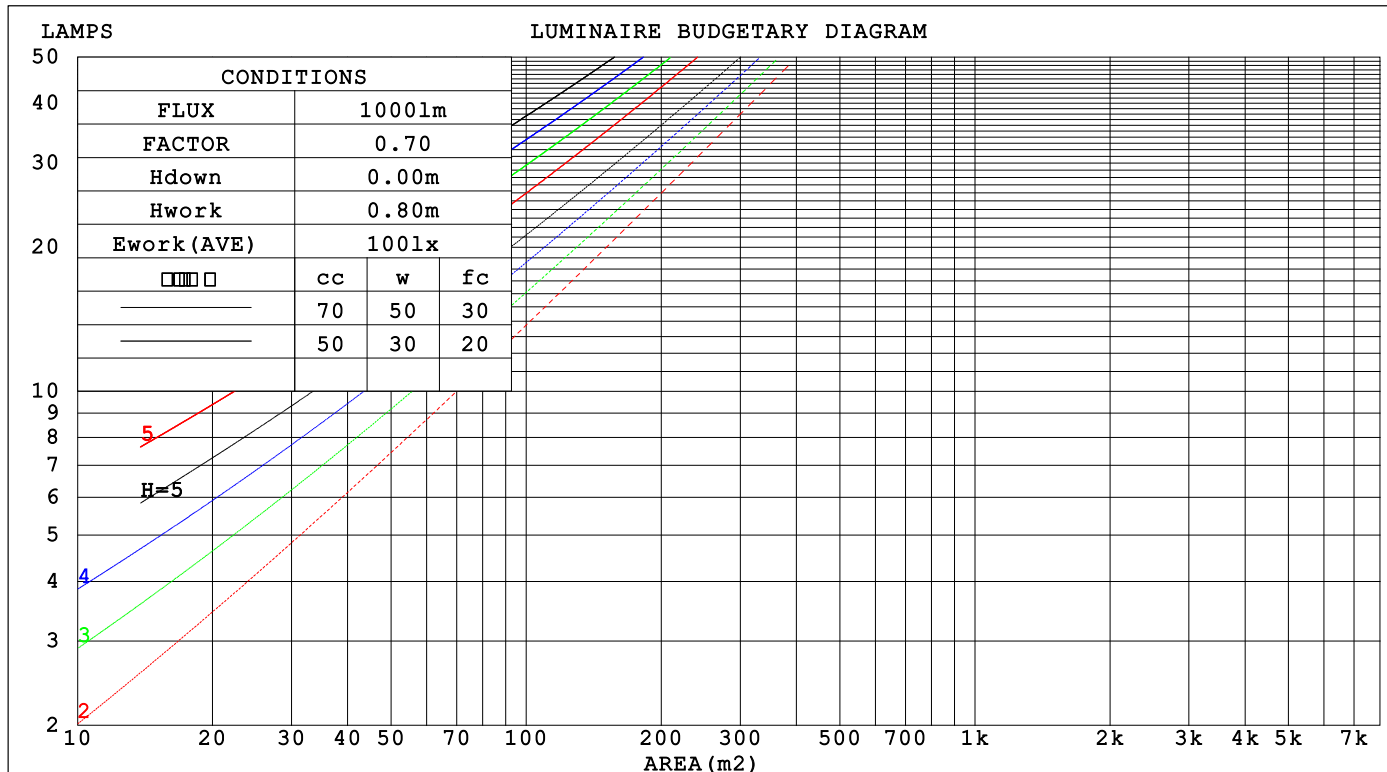

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-25

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: 2835 IP20	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.: 202-00312-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

□cc	80%	70%	50%	30%	10%	0
□w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
□fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)					
0.0						
1.0	.309 .176 .056	.301 .172 .055	.287 .165 .053	.275 .158 .051	.263 .152 .049	
2.0	.292 .160 .049	.285 .157 .048	.273 .152 .047	.262 .147 .046	.251 .142 .045	
3.0	.271 .144 .043	.265 .142 .043	.254 .137 .042	.244 .133 .041	.234 .130 .040	
4.0	.250 .130 .038	.245 .128 .038	.235 .125 .037	.226 .121 .037	.217 .118 .036	
5.0	.231 .118 .034	.226 .116 .034	.218 .113 .033	.210 .111 .033	.202 .108 .032	
6.0	.214 .107 .031	.210 .106 .031	.202 .104 .030	.195 .101 .030	.188 .099 .029	
7.0	.199 .099 .028	.196 .097 .028	.189 .095 .027	.182 .093 .027	.176 .091 .027	
8.0	.186 .091 .026	.183 .090 .025	.177 .088 .025	.171 .086 .025	.165 .085 .025	
9.0	.174 .084 .024	.171 .084 .023	.166 .082 .023	.160 .080 .023	.155 .079 .023	
10.0	.164 .079 .022	.161 .078 .022	.156 .077 .022	.151 .075 .021	.147 .074 .021	

□cc	80%	70%	50%	30%	10%	0
□w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
□fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)					
0.0	.200 .200 .200	.171 .171 .171	.117 .117 .117	.067 .067 .067	.021 .021 .021	
1.0	.190 .166 .144	.163 .142 .124	.111 .098 .086	.064 .057 .050	.021 .018 .016	
2.0	.182 .142 .108	.156 .122 .093	.107 .084 .065	.062 .049 .038	.020 .016 .012	
3.0	.174 .124 .084	.150 .107 .073	.103 .074 .051	.059 .043 .030	.019 .014 .010	
4.0	.167 .111 .068	.143 .096 .059	.099 .067 .042	.057 .039 .025	.018 .013 .008	
5.0	.160 .101 .057	.137 .087 .050	.094 .061 .035	.055 .036 .021	.018 .012 .007	
6.0	.152 .092 .049	.131 .080 .043	.090 .056 .030	.052 .033 .018	.017 .011 .006	
7.0	.146 .085 .043	.125 .074 .038	.087 .052 .027	.050 .031 .016	.016 .010 .005	
8.0	.139 .080 .039	.120 .069 .034	.083 .048 .024	.048 .029 .014	.016 .009 .005	
9.0	.133 .075 .035	.115 .065 .031	.079 .046 .022	.046 .027 .013	.015 .009 .004	
10.0	.127 .070 .032	.110 .061 .028	.076 .043 .020	.044 .025 .012	.014 .008 .004	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-25

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME: 2835 IP20					TYPE: 2835 160LED 24V			WEIGHT:			
SPEC.: 202-00312-00					DIM.:			SERIAL No.:			
MFR.:					SUR.: 0.01*0.5			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	2H	24.8	26.3	25.1	26.6	26.8	24.8	26.3	25.1	26.6	26.8
	3H	26.3	27.7	26.6	28.0	28.2	26.4	27.8	26.7	28.0	28.3
	4H	26.9	28.2	27.2	28.5	28.8	26.9	28.3	27.3	28.5	28.8
	6H	27.1	28.4	27.5	28.7	29.0	27.3	28.6	27.7	28.9	29.2
	8H	27.1	28.3	27.4	28.6	28.9	27.4	28.6	27.8	28.9	29.2
	12H	27.0	28.2	27.4	28.5	28.8	27.4	28.6	27.8	28.9	29.3
4H	2H	25.4	26.8	25.8	27.0	27.3	25.4	26.8	25.8	27.0	27.3
	3H	27.1	28.3	27.5	28.6	28.9	27.1	28.3	27.5	28.6	29.0
	4H	27.8	28.8	28.2	29.2	29.5	27.8	28.9	28.2	29.2	29.6
	6H	28.1	29.1	28.5	29.4	29.8	28.3	29.3	28.7	29.6	30.0
	8H	28.1	29.0	28.5	29.4	29.8	28.5	29.3	28.9	29.7	30.1
	12H	28.1	28.9	28.5	29.3	29.7	28.5	29.3	29.0	29.7	30.2
8H	4H	28.0	28.9	28.5	29.3	29.7	28.1	28.9	28.5	29.3	29.8
	6H	28.5	29.2	29.0	29.7	30.1	28.7	29.4	29.1	29.8	30.3
	8H	28.6	29.2	29.0	29.7	30.1	28.9	29.5	29.4	30.0	30.5
	12H	28.6	29.1	29.1	29.6	30.1	29.0	29.6	29.5	30.0	30.5
12H	4H	28.0	28.8	28.5	29.2	29.7	28.1	28.9	28.5	29.3	29.7
	6H	28.5	29.2	29.0	29.6	30.1	28.7	29.4	29.2	29.8	30.3
	8H	28.6	29.2	29.1	29.7	30.2	28.9	29.5	29.4	30.0	30.5
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H		+ 0.1 / - 0.2					+ 0.1 / - 0.2				
1.5H		+ 0.1 / - 0.3					+ 0.2 / - 0.3				
2.0H		+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 903.2 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.4)
Area: 0.01 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-25

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:


```

Range: 0 - 180DEG
Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

```

ISOCANDELA DIAGRAM

NAME: 2835 IP20	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.: 202-00312-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

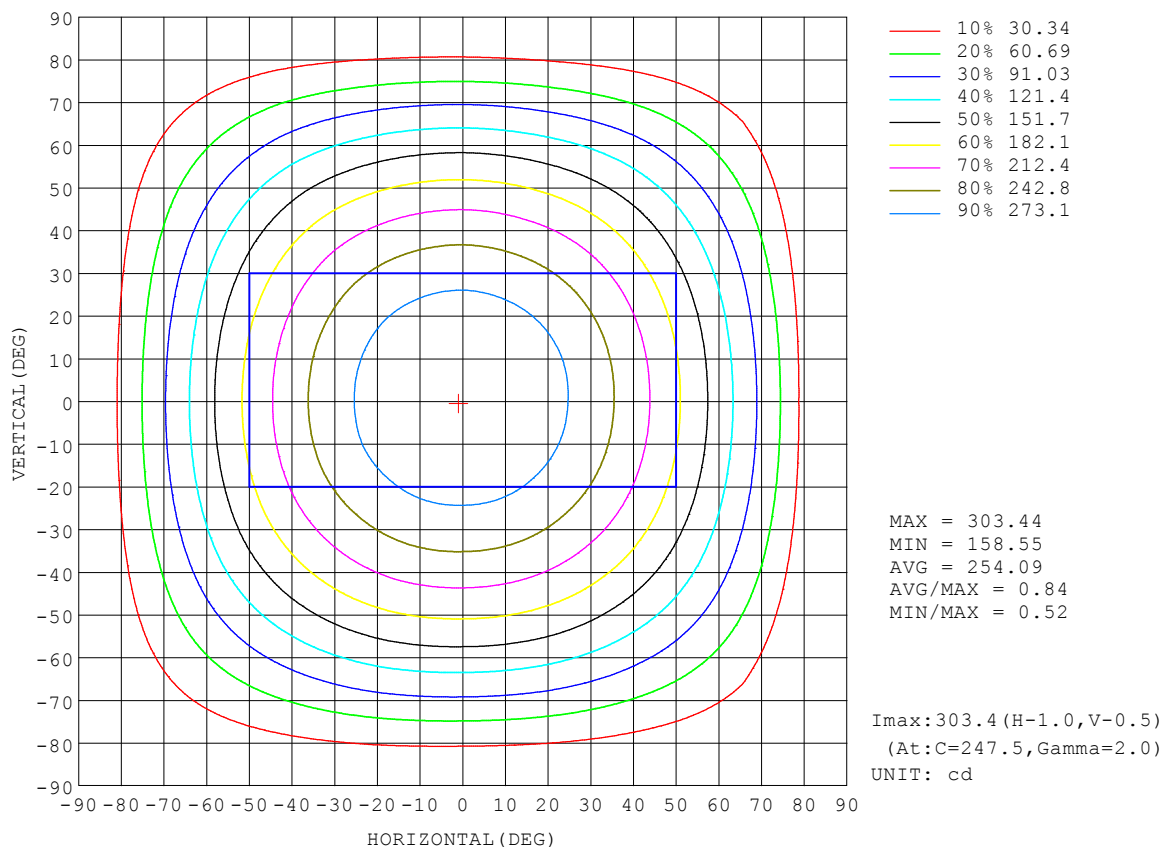


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-03-25

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

AAI Figure

NAME: 2835 IP20	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.: 202-00312-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

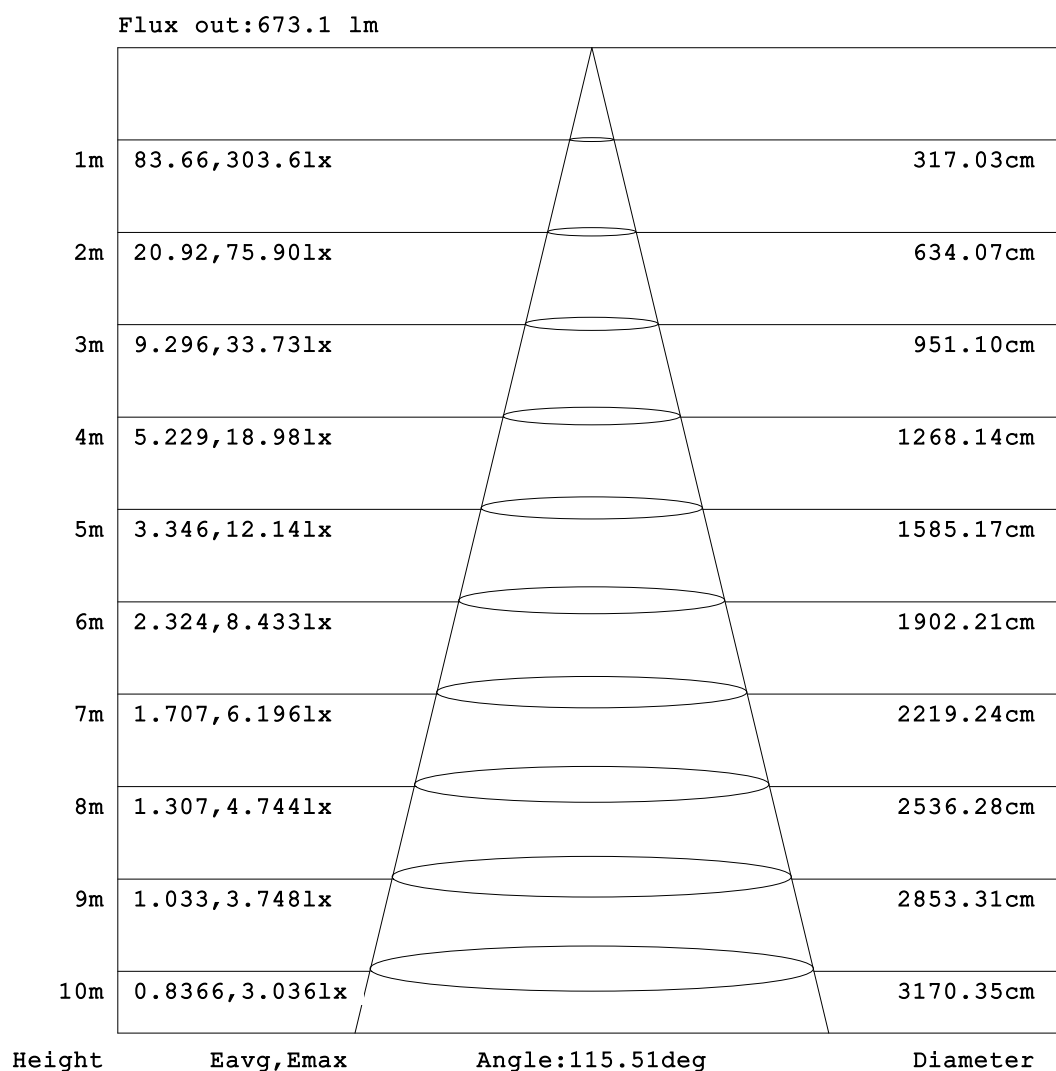


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-03-25

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity:65.0%
 Test Distance:5.749m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

NAME: 2835 IP20	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.: 202-00312-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

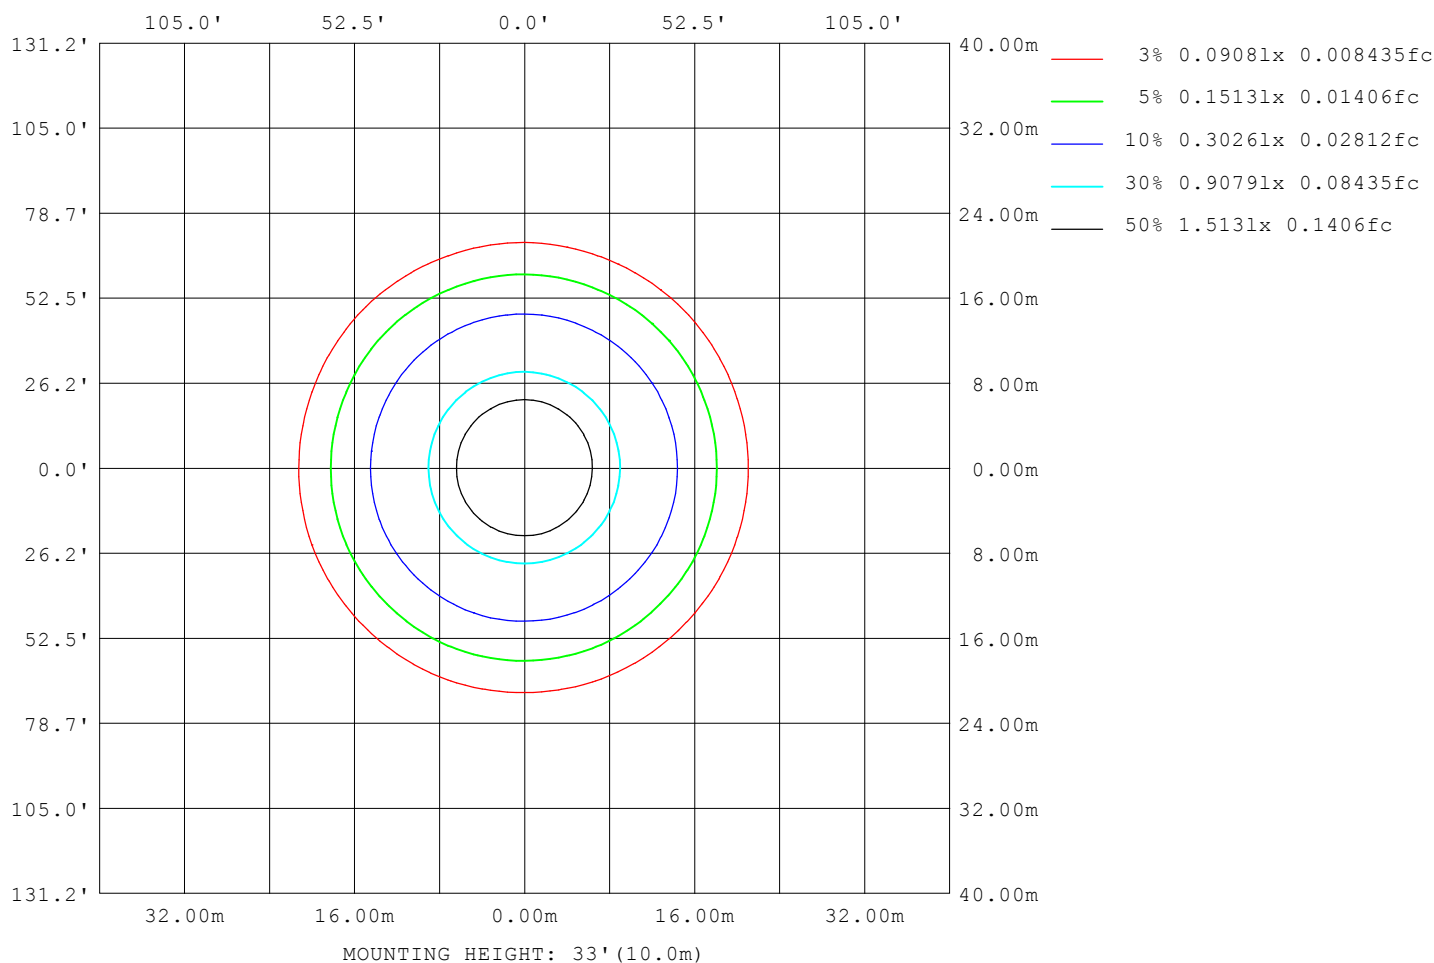

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-03-25

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

LED Avg.L Report

NAME: 2835 IP20	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.: 202-00312-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	27088
L_0~180 (75) av	23050
L_0~180 (85) av	7164
L_90~270 (65) av	27166
L_90~270 (75) av	23181
L_90~270 (85) av	14034
L_45 (65) av	27155
L_45 (75) av	23149
L_45 (85) av	14171

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-03-25

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

Planar Illuminance Curve

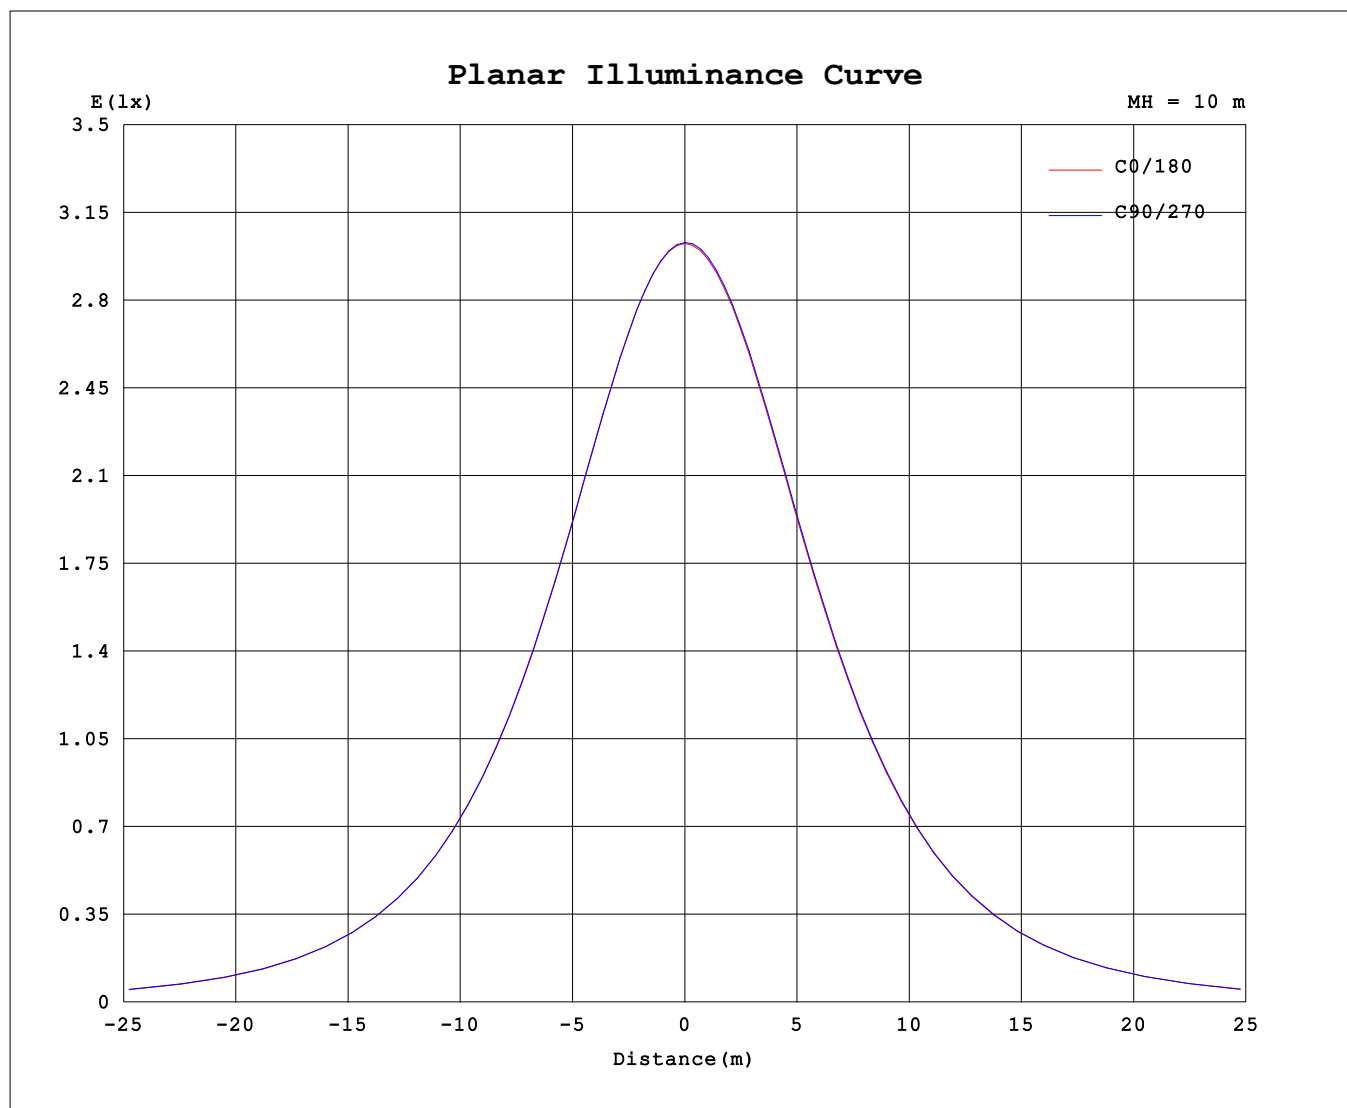

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-03-25

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: 2835 IP20	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.: 202-00312-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	303	303	303	303	303	303	303	303	303	303	303	303	303	303	303	303			
5	302	302	302	302	302	302	302	302	302	303	303	303	303	303	303	302	302		
10	298	298	297	297	297	298	298	298	299	299	299	299	299	299	299	298			
15	293	293	292	292	293	293	293	294	294	295	295	295	295	294	294	294			
20	283	283	282	282	282	283	283	284	285	285	286	286	286	285	285	284			
25	275	275	274	274	274	275	275	276	277	277	278	278	278	277	277	276			
30	260	259	258	258	259	260	260	261	262	262	263	263	263	262	261	260			
35	248	247	246	247	247	248	248	249	250	251	252	251	251	250	250	249			
40	227	227	226	226	226	227	228	229	230	231	232	231	231	230	229	228			
45	212	212	211	211	211	212	213	214	215	216	217	216	216	215	214	213			
50	187	186	185	186	186	188	188	190	190	191	192	191	191	189	189	187			
55	169	168	167	168	168	170	170	172	172	172	173	173	172	171	170	169			
60	139	139	138	139	139	141	141	142	142	143	144	143	143	141	140	139			
65	118	118	117	119	119	121	121	122	122	122	123	122	122	120	119	118			
70	85.1	85.6	85.1	86.5	86.8	88.6	88.7	89.5	89.0	89.0	90.0	88.7	88.3	86.3	86.0	84.7			
75	63.1	63.5	63.4	64.7	65.2	66.8	67.0	67.5	66.9	66.8	67.6	66.3	65.8	63.9	63.6	62.5			
80	19.1	32.2	32.2	33.4	33.9	35.4	35.4	35.7	35.0	34.8	35.2	34.0	33.4	31.8	31.6	30.9			
85	0.33	15.0	15.0	15.9	16.3	17.4	17.5	17.5	17.0	16.8	17.0	16.0	15.4	14.2	14.1	13.8			
90	0.30	1.41	1.70	1.97	2.02	2.24	2.13	1.99	0.26	1.61	1.77	1.40	1.15	1.04	1.16	1.06			
95	0.44	0.51	0.79	0.92	0.95	0.90	0.75	0.52	0.36	0.38	0.55	0.58	0.57	0.59	0.57	0.40			
100	0.74	0.74	0.76	0.82	0.89	0.81	0.72	0.70	0.60	0.59	0.60	0.62	0.63	0.63	0.63	0.63			
105	0.98	0.96	0.97	0.97	0.96	0.95	0.93	0.92	0.80	0.76	0.78	0.79	0.79	0.81	0.81	0.81			
110	1.36	1.31	1.33	1.32	1.31	1.30	1.28	1.27	1.13	1.06	1.07	1.09	1.09	1.11	1.11	1.11			
115	1.61	1.55	1.56	1.55	1.54	1.53	1.52	1.51	1.36	1.27	1.27	1.28	1.29	1.31	1.31	1.32			
120	1.97	1.89	1.89	1.88	1.87	1.86	1.85	1.85	1.69	1.59	1.56	1.57	1.60	1.60	1.61	1.62			
125	2.20	2.10	2.10	2.09	2.08	2.08	2.07	2.07	1.90	1.80	1.76	1.76	1.79	1.79	1.80	1.83			
130	2.51	2.42	2.39	2.38	2.36	2.37	2.37	2.38	2.19	2.09	2.03	2.04	2.05	2.06	2.07	2.12			
135	2.70	2.60	2.57	2.55	2.53	2.55	2.55	2.57	2.37	2.27	2.20	2.20	2.20	2.22	2.23	2.31			
140	2.93	2.86	2.81	2.78	2.77	2.80	2.80	2.82	2.60	2.51	2.45	2.43	2.41	2.43	2.47	2.56			
145	3.07	3.01	2.95	2.92	2.91	2.95	2.95	2.97	2.74	2.65	2.60	2.58	2.54	2.57	2.62	2.71			
150	3.25	3.20	3.16	3.10	3.09	3.15	3.16	3.16	2.93	2.85	2.80	2.79	2.74	2.77	2.83	2.92			
155	3.36	3.32	3.28	3.21	3.22	3.28	3.26	3.27	3.05	2.98	2.93	2.92	2.88	2.90	2.97	3.06			
160	3.51	3.49	3.45	3.39	3.44	3.45	3.42	3.43	3.23	3.18	3.13	3.13	3.12	3.11	3.18	3.27			
165	3.61	3.59	3.56	3.51	3.59	3.55	3.53	3.54	3.37	3.32	3.27	3.27	3.29	3.26	3.32	3.42			
170	3.77	3.76	3.74	3.70	3.77	3.73	3.70	3.72	3.59	3.56	3.52	3.52	3.54	3.52	3.57	3.65			
175	3.87	3.86	3.86	3.84	3.89	3.85	3.84	3.85	3.75	3.73	3.70	3.71	3.73	3.72	3.76	3.81			
180	3.99	3.97	3.96	3.97	4.03	3.99	4.00	4.02	3.98	3.97	3.96	3.97	4.02	4.00	4.00	4.03			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-25

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks: