


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: 2835 IP20	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.: 202-00487-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 128.44 lm/W
MODEL	6500K	I _{max} (cd)	310.5	S/MH(C0/180)	1.27	
NOMINAL POWER(W)	7.2	LOR(%)	100.0	S/MH(C90/270)	1.27	
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	926.85	□ UP,DN(C0-180)	0.7,50.4	
NOMINAL FLUX(lm)	5.79278	CIE CLASS	DIRECT	□ UP,DN(C180-360)	0.6,48.4	
LAMPS INSIDE	160	□ up (%)	1.3	CIBSE SHR NOM	1.25	
TEST VOLTAGE(V)	24	□ down (%)	98.7	CIBSE SHR MAX	1.35	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

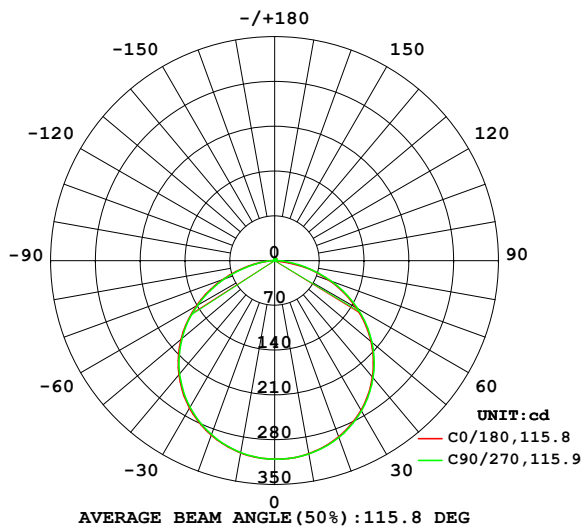

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

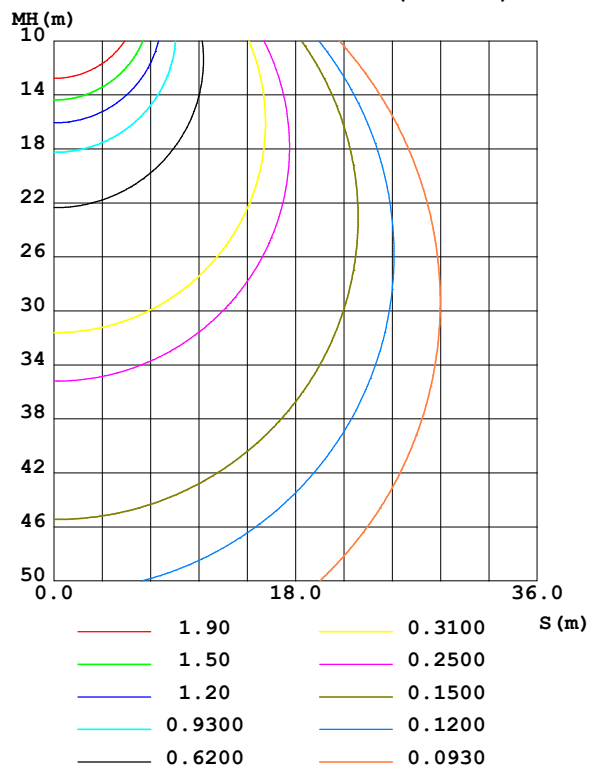

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-25

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	zone	total	%lum, lamp
10	306.6	307.0	307.0	306.2	305.2	304.7	304.7	305.5	0- 10	29.42	29.42	3.17,3.17
20	293.0	294.0	293.9	292.4	290.4	289.3	289.3	290.9	10- 20	84.69	114.1	12.3,12.3
30	270.1	271.5	271.4	269.2	266.2	264.7	264.8	266.9	20- 30	129.6	243.7	26.3,26.3
40	237.8	239.7	239.5	236.8	233.0	231.2	231.2	233.9	30- 40	158.2	401.9	43.4,43.4
50	196.6	199.0	198.8	195.7	191.2	189.2	189.1	192.1	40- 50	166.3	568.2	61.3,61.3
60	147.1	149.8	149.9	146.5	141.3	139.3	139.1	142.1	50- 60	151.9	720.0	77.7,77.7
70	91.20	94.00	94.40	91.13	85.63	83.41	83.17	86.18	60- 70	115.6	835.7	90.2,90.2
80	22.58	38.52	38.97	36.57	32.52	30.31	29.67	32.36	70- 80	63.92	899.6	97.1,97.1
90	0.2834	2.393	2.710	2.429	0.2910	0.8495	0.9603	1.480	80- 90	15.49	915.1	98.7,98.7
100	0.7096	0.7038	0.7128	0.7335	0.6512	0.6716	0.6805	0.6561	90-100	0.7282	915.8	98.8,98.8
110	1.341	1.270	1.274	1.308	1.209	1.174	1.187	1.155	100-110	1.005	916.8	98.9,98.9
120	1.975	1.858	1.854	1.895	1.791	1.692	1.722	1.680	110-120	1.503	918.3	99.1,99.1
130	2.540	2.381	2.365	2.429	2.305	2.176	2.186	2.157	120-130	1.844	920.2	99.3,99.3
140	2.988	2.822	2.791	2.871	2.725	2.604	2.552	2.571	130-140	1.956	922.1	99.5,99.5
150	3.325	3.198	3.131	3.237	3.054	2.956	2.875	2.941	140-150	1.830	924.0	99.7,99.7
160	3.596	3.512	3.516	3.525	3.356	3.268	3.256	3.293	150-160	1.501	925.5	99.9,99.9
170	3.863	3.828	3.866	3.817	3.714	3.656	3.679	3.697	160-170	1.011	926.5	100,100
180	4.104	4.088	4.156	4.138	4.100	4.081	4.151	4.131	170-180	0.3715	926.8	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 502.11 lm

%lum = 54.2%

%lamp = 54.2%

Conical surface Flux(120deg): 720.05 lm

%lum = 77.7%


%lamp = 77.7%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-03-25

□ Range: 0 - 180DEG
 □ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity:65.0%
 Test Distance:5.749m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

NAME: 2835 IP20	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.: 202-00487-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

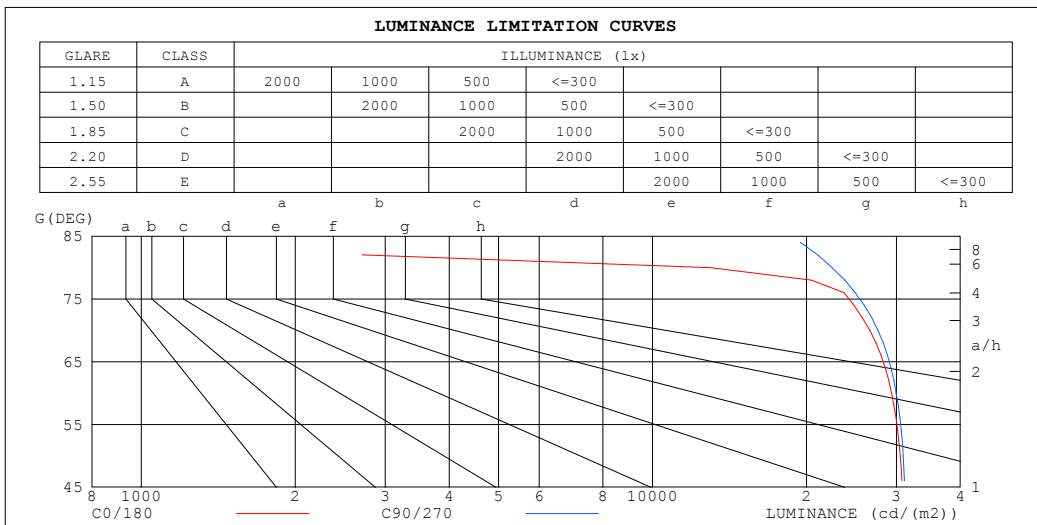

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	365	23341
80	12972	22446
75	26385	27622
70	26604	27604
65	29581	30359
60	29350	29977
55	30916	31412
50	30519	30938
45	31371	31722


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-03-25

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: 2835 IP20	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.: 202-00487-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0														
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Coefficients of Utilization(CU)														
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.99														
1.0	1.04	.99	.95	1.01	.97	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83														
2.0	.90	.83	.78	.88	.82	.76	.84	.79	.74	.81	.76	.73	.78	.74	.71	.69														
3.0	.79	.71	.64	.77	.70	.64	.74	.68	.62	.71	.66	.61	.68	.64	.60	.58														
4.0	.70	.61	.54	.68	.60	.54	.66	.59	.53	.63	.57	.52	.61	.56	.51	.49														
5.0	.62	.53	.47	.61	.53	.46	.59	.51	.46	.57	.50	.45	.55	.49	.44	.42														
6.0	.56	.47	.41	.55	.46	.40	.53	.45	.40	.51	.44	.39	.50	.44	.39	.37														
7.0	.51	.42	.36	.50	.41	.36	.48	.41	.35	.47	.40	.35	.45	.39	.34	.32														
8.0	.46	.38	.32	.45	.37	.32	.44	.37	.31	.43	.36	.31	.41	.35	.31	.29														
9.0	.42	.34	.29	.42	.34	.28	.40	.33	.28	.39	.33	.28	.38	.32	.28	.26														
10.0	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.25	.35	.29	.25	.23														

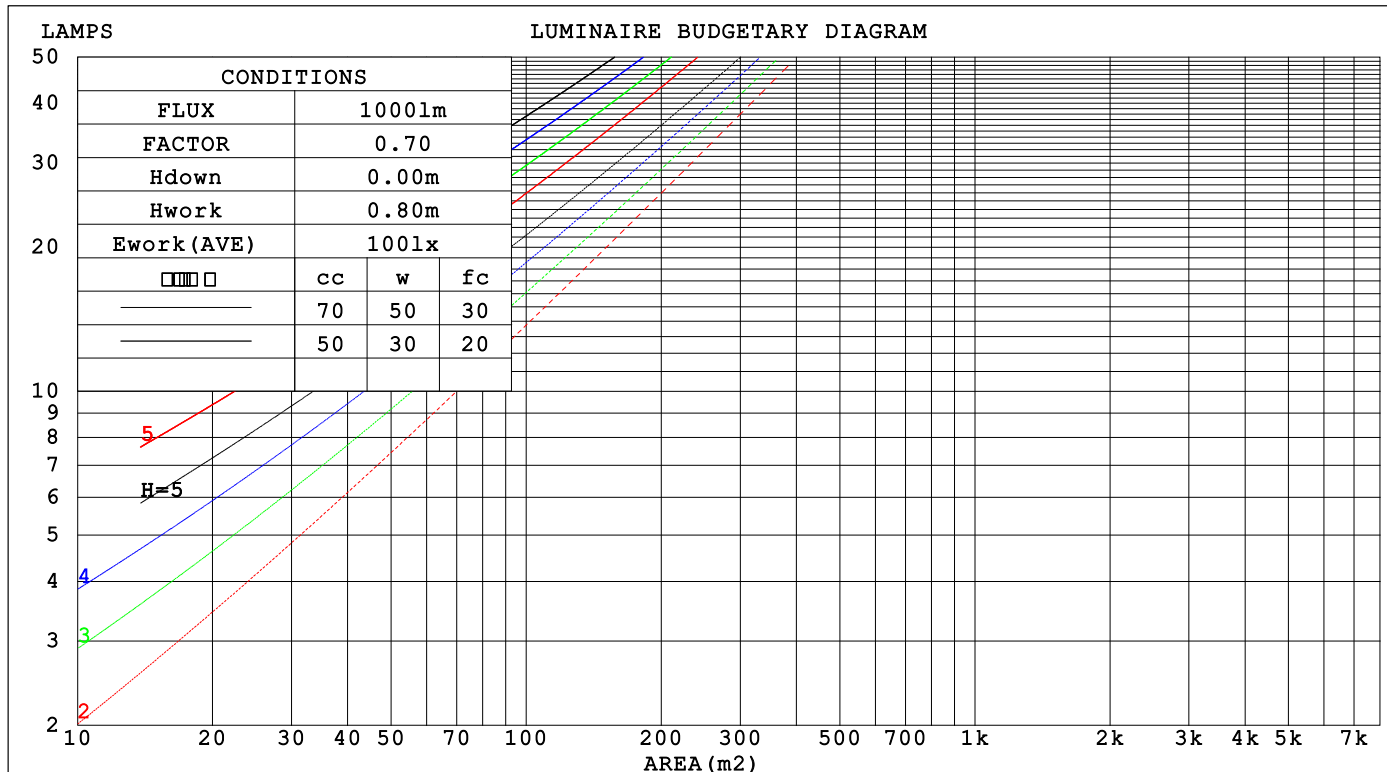

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-25

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: 2835 IP20	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.: 202-00487-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0	
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.309	.176	.056	.301	.172	.055	.287	.165	.053	.274	.158	.051	.263	.152	.049		
2.0	.292	.160	.049	.285	.157	.048	.273	.152	.047	.261	.147	.046	.251	.142	.045		
3.0	.270	.144	.043	.264	.142	.043	.253	.137	.042	.243	.133	.041	.234	.130	.040		
4.0	.250	.130	.038	.244	.128	.038	.235	.124	.037	.226	.121	.037	.217	.118	.036		
5.0	.231	.118	.034	.226	.116	.034	.218	.113	.033	.209	.111	.033	.202	.108	.032		
6.0	.214	.107	.031	.210	.106	.031	.202	.104	.030	.195	.101	.030	.188	.099	.029		
7.0	.199	.099	.028	.196	.097	.028	.189	.095	.027	.182	.093	.027	.176	.091	.027		
8.0	.186	.091	.026	.183	.090	.025	.177	.088	.025	.171	.086	.025	.165	.085	.025		
9.0	.174	.084	.024	.171	.084	.023	.166	.082	.023	.160	.080	.023	.155	.079	.023		
10.0	.164	.079	.022	.161	.078	.022	.156	.076	.022	.151	.075	.021	.147	.074	.021		

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0	
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.200	.200	.200	.171	.171	.171	.117	.117	.117	.067	.067	.067	.021	.021	.021		
1.0	.190	.166	.144	.163	.142	.124	.111	.098	.086	.064	.057	.050	.020	.018	.016		
2.0	.182	.142	.108	.156	.122	.093	.107	.084	.065	.062	.049	.038	.020	.016	.012		
3.0	.174	.124	.084	.150	.107	.073	.103	.074	.051	.059	.043	.030	.019	.014	.010		
4.0	.167	.111	.068	.143	.096	.059	.098	.067	.042	.057	.039	.025	.018	.013	.008		
5.0	.159	.101	.057	.137	.087	.050	.094	.061	.035	.055	.036	.021	.018	.012	.007		
6.0	.152	.092	.049	.131	.080	.043	.090	.056	.030	.052	.033	.018	.017	.011	.006		
7.0	.146	.085	.043	.125	.074	.038	.087	.052	.027	.050	.031	.016	.016	.010	.005		
8.0	.139	.080	.039	.120	.069	.034	.083	.048	.024	.048	.029	.014	.016	.009	.005		
9.0	.133	.075	.035	.115	.065	.031	.079	.046	.022	.046	.027	.013	.015	.009	.004		
10.0	.127	.070	.032	.110	.061	.028	.076	.043	.020	.044	.025	.012	.014	.008	.004		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-25

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME: 2835 IP20					TYPE: 2835 160LED 24V			WEIGHT:			
SPEC.: 202-00487-00					DIM.:			SERIAL No.:			
MFR.:					SUR.: 0.01*0.5			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H		25.1	26.6	25.4	26.8	27.1	25.2	26.7	25.4	26.9	27.1
3H		26.6	28.0	26.9	28.3	28.5	26.7	28.1	27.1	28.4	28.7
4H		27.2	28.5	27.5	28.8	29.1	27.3	28.7	27.7	28.9	29.2
6H		27.5	28.7	27.8	29.0	29.3	27.8	29.0	28.1	29.3	29.6
8H		27.5	28.7	27.8	29.0	29.3	27.9	29.1	28.2	29.4	29.7
12H		27.4	28.6	27.8	28.9	29.2	27.9	29.1	28.3	29.4	29.8
4H 2H		25.7	27.1	26.1	27.3	27.6	25.8	27.1	26.1	27.4	27.7
3H		27.4	28.6	27.8	28.9	29.2	27.5	28.7	27.9	29.0	29.3
4H		28.1	29.2	28.5	29.6	29.9	28.3	29.3	28.7	29.7	30.0
6H		28.6	29.5	29.0	29.9	30.3	28.8	29.8	29.2	30.1	30.5
8H		28.6	29.4	29.0	29.8	30.2	29.0	29.9	29.4	30.3	30.7
12H		28.5	29.3	29.0	29.7	30.2	29.1	29.9	29.5	30.3	30.7
8H 4H		28.4	29.3	28.8	29.7	30.1	28.5	29.4	29.0	29.8	30.2
6H		29.0	29.7	29.4	30.1	30.6	29.2	29.9	29.7	30.4	30.8
8H		29.1	29.7	29.6	30.2	30.6	29.5	30.1	29.9	30.6	31.0
12H		29.1	29.7	29.6	30.1	30.6	29.6	30.2	30.1	30.7	31.2
12H 4H		28.4	29.2	28.9	29.6	30.1	28.5	29.3	29.0	29.7	30.2
6H		29.0	29.7	29.5	30.1	30.6	29.3	29.9	29.7	30.4	30.8
8H		29.2	29.7	29.7	30.2	30.7	29.6	30.1	30.1	30.6	31.1
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H		+ 0.1 / - 0.2					+ 0.1 / - 0.2				
1.5H		+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H		+ 0.2 / - 0.4					+ 0.2 / - 0.3				

CIE Pub.117, 926.8 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.3)
Area: 0.01 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-25

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:


```

Range: 0 - 180DEG
Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

```

ISOCANDELA DIAGRAM

NAME: 2835 IP20	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.: 202-00487-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

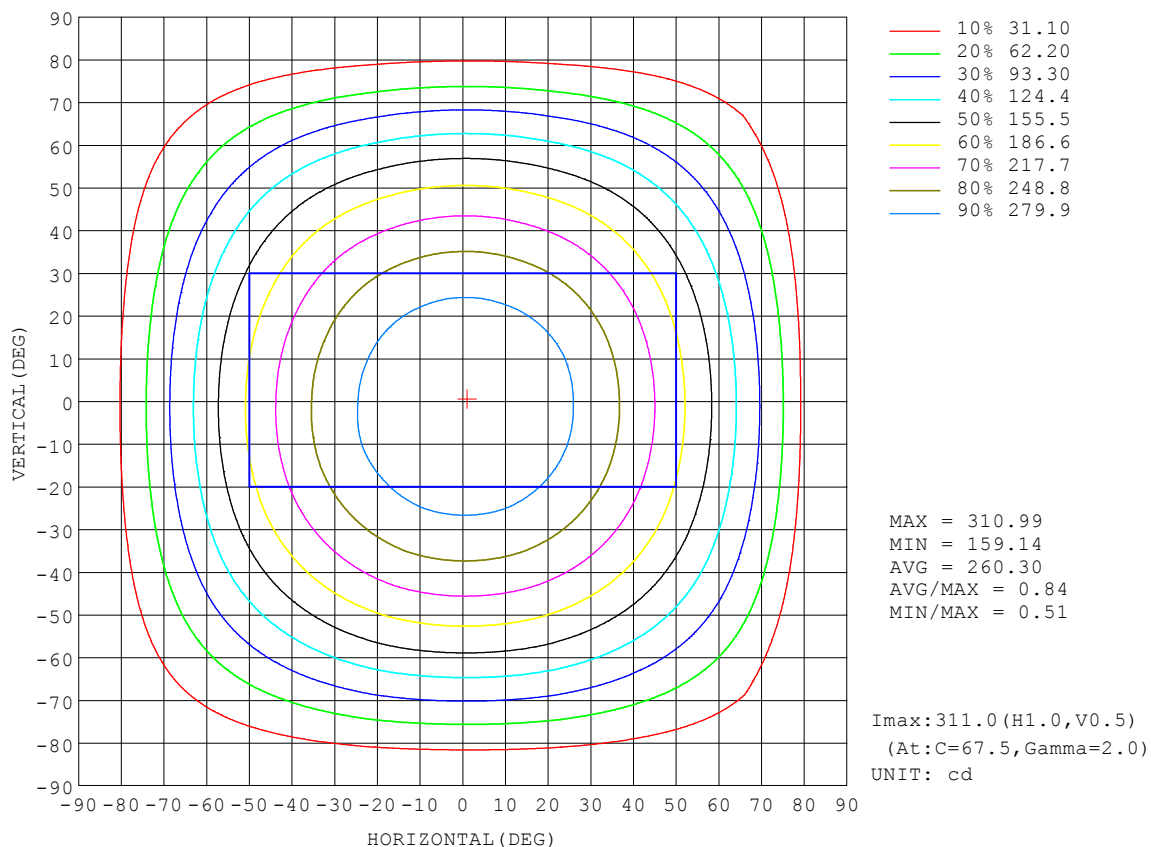


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-03-25

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

AAI Figure

NAME: 2835 IP20	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.: 202-00487-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

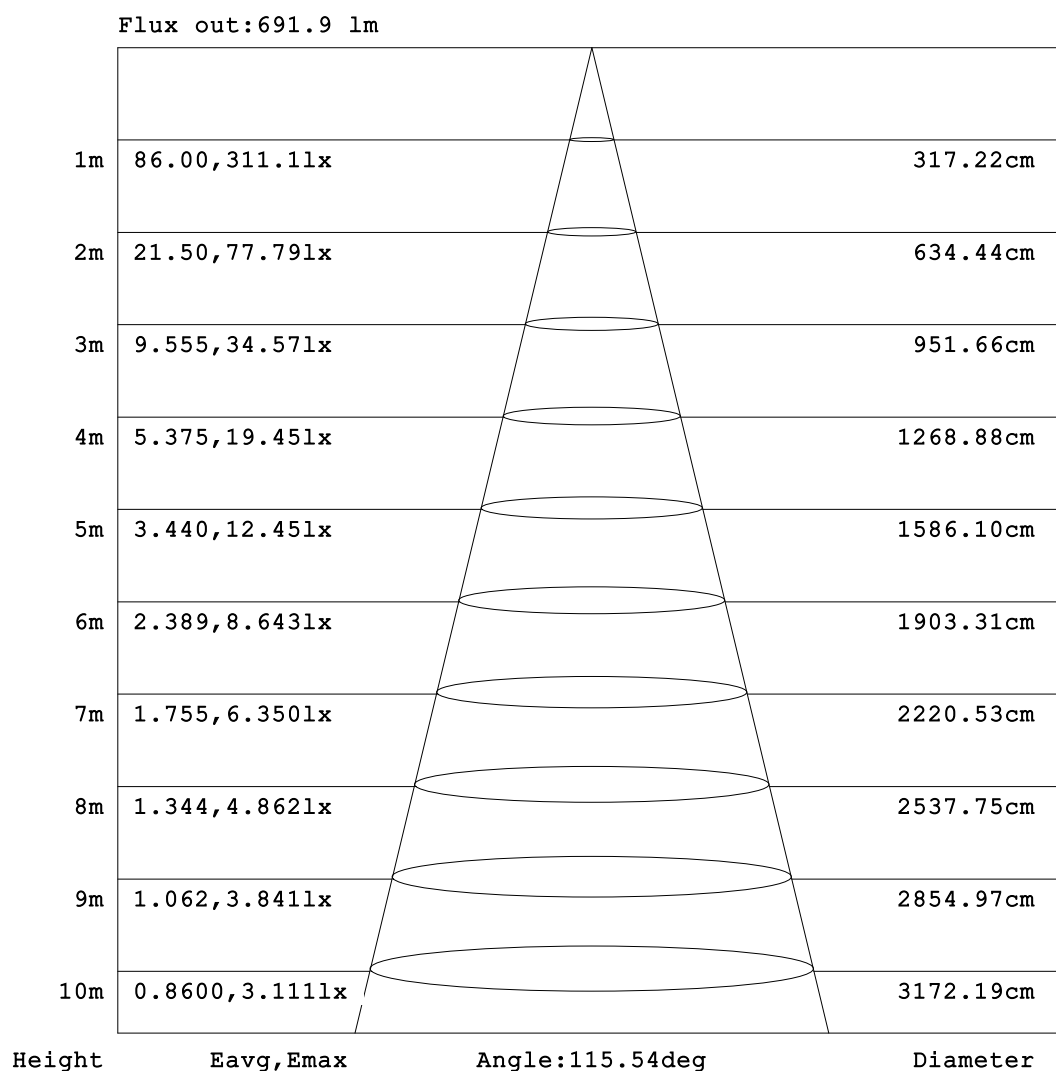


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-03-25

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity:65.0%
 Test Distance:5.749m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

NAME: 2835 IP20	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.: 202-00487-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

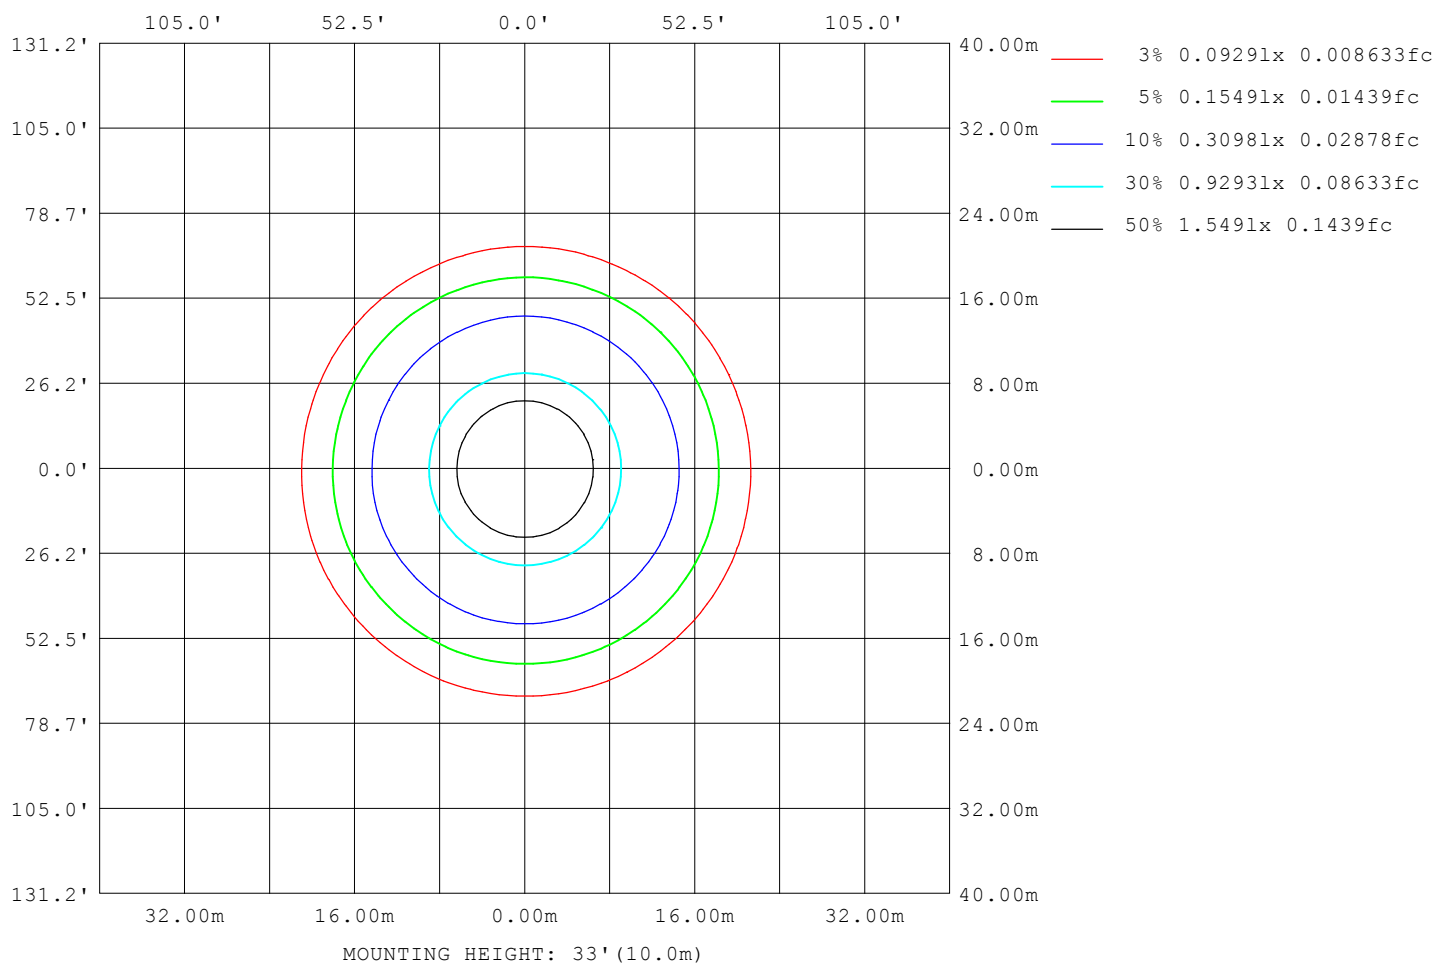

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-03-25

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

LED Avg.L Report

NAME: 2835 IP20	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.: 202-00487-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	27655
L_0~180 (75) av	23364
L_0~180 (85) av	6367
L_90~270 (65) av	27735
L_90~270 (75) av	23374
L_90~270 (85) av	14877
L_45 (65) av	27720
L_45 (75) av	23304
L_45 (85) av	15711

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-03-25

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

Planar Illuminance Curve

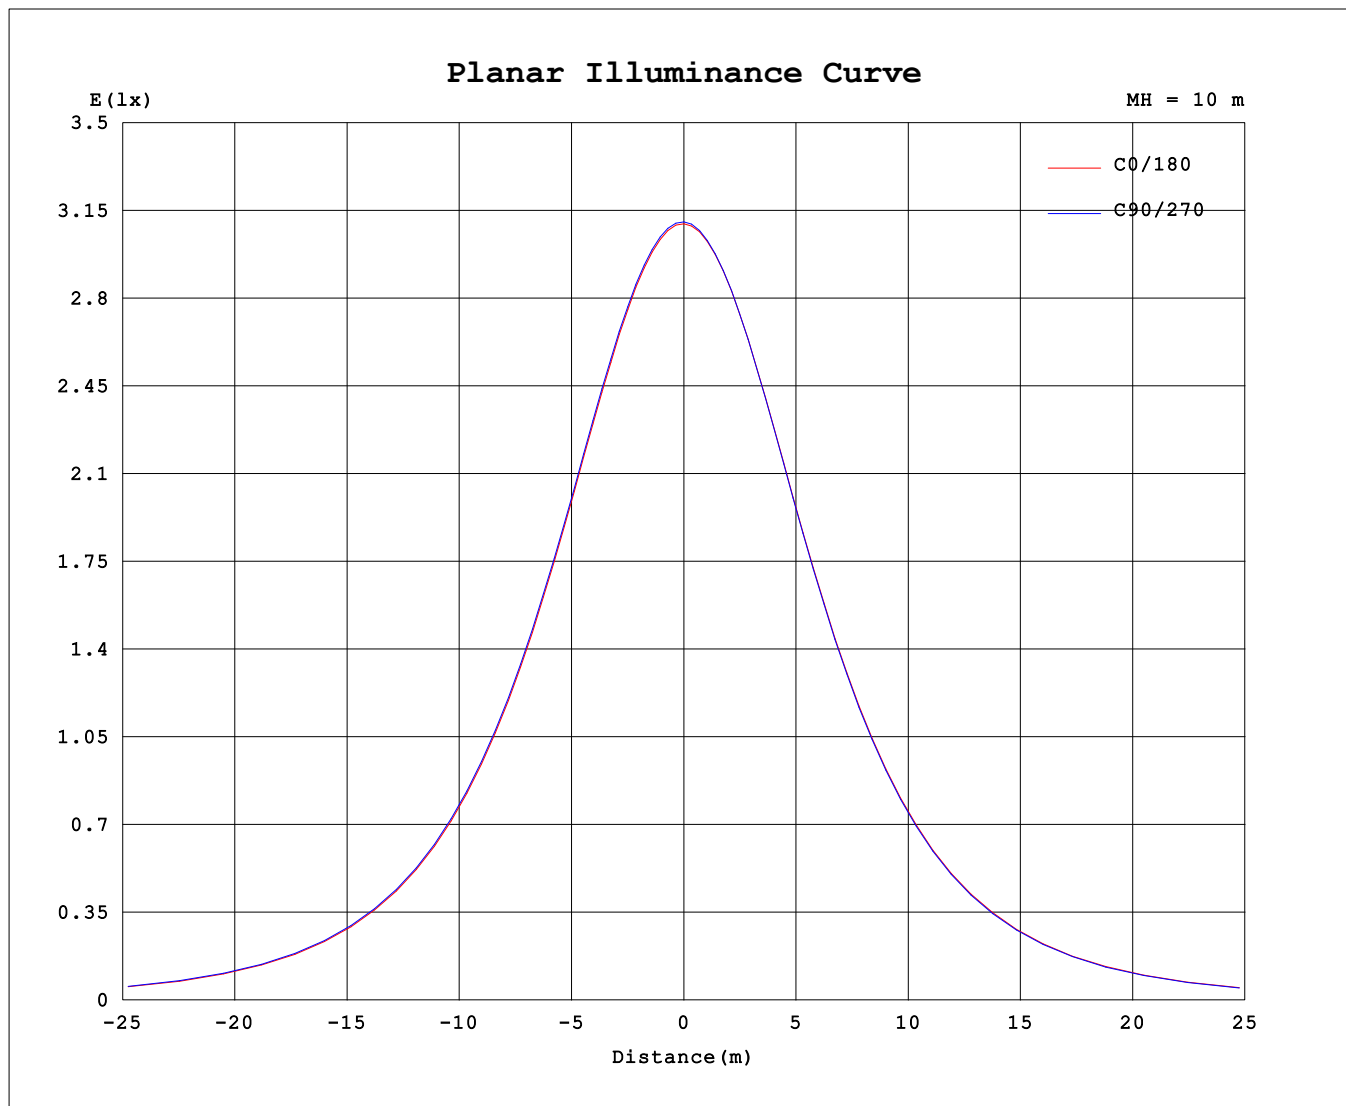

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-03-25

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: 2835 IP20	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.: 202-00487-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	310	310	310	310	310	310	310	310	310	310	310	310	310	310	310	310			
5	310	310	310	310	310	310	310	310	309	309	309	309	309	309	309	310	310		
10	307	307	307	307	307	307	306	306	305	305	305	305	305	305	305	306			
15	302	303	303	303	303	303	302	301	300	300	300	299	300	300	301	301			
20	293	294	294	294	294	294	292	291	290	290	289	289	289	290	291	292			
25	285	286	286	287	286	286	284	283	282	281	281	280	281	281	282	284			
30	270	271	272	272	271	271	269	268	266	265	265	264	265	265	267	268			
35	258	260	260	260	260	259	257	256	254	253	252	252	252	253	255	256			
40	238	239	240	240	240	239	237	235	233	232	231	231	231	232	234	236			
45	222	224	224	225	224	224	221	220	217	216	215	215	215	216	218	220			
50	197	198	199	200	199	198	196	194	191	189	189	188	189	190	192	194			
55	178	180	180	181	180	180	177	175	172	170	170	169	170	171	173	175			
60	147	149	150	151	150	149	146	144	141	139	139	138	139	140	142	144			
65	125	128	128	129	128	128	125	123	120	118	117	116	117	118	120	122			
70	91.2	93.5	94.0	95.3	94.4	94.0	91.1	88.9	85.6	83.5	83.4	82.2	83.2	83.5	86.2	88.0			
75	68.4	70.4	71.1	72.2	71.5	71.0	68.4	66.2	63.2	61.1	60.8	59.8	60.6	60.9	63.4	65.3			
80	22.6	38.3	38.5	39.4	39.0	38.5	36.6	34.6	32.5	30.8	30.3	29.1	29.7	30.1	32.4	34.1			
85	0.32	20.3	20.7	21.0	20.3	20.4	19.2	17.7	15.3	14.3	14.0	12.9	13.0	13.6	15.6	16.9			
90	0.28	2.25	2.39	2.76	2.71	2.89	2.43	1.96	0.29	0.79	0.85	0.83	0.96	1.14	1.48	1.60			
95	0.42	0.43	0.47	0.48	0.49	0.51	0.49	0.47	0.39	0.42	0.45	0.46	0.45	0.47	0.48	0.41			
100	0.71	0.70	0.70	0.71	0.71	0.72	0.73	0.75	0.65	0.65	0.67	0.68	0.68	0.67	0.66	0.63			
105	0.95	0.91	0.92	0.91	0.92	0.93	0.95	0.97	0.86	0.84	0.86	0.87	0.87	0.86	0.84	0.81			
110	1.34	1.27	1.27	1.27	1.27	1.28	1.31	1.33	1.21	1.16	1.17	1.19	1.19	1.18	1.16	1.12			
115	1.60	1.52	1.51	1.50	1.51	1.52	1.55	1.58	1.45	1.38	1.38	1.40	1.40	1.39	1.37	1.34			
120	1.98	1.87	1.86	1.85	1.85	1.87	1.89	1.93	1.79	1.71	1.69	1.70	1.72	1.70	1.68	1.66			
125	2.21	2.09	2.08	2.06	2.07	2.09	2.12	2.16	2.01	1.92	1.89	1.91	1.92	1.90	1.88	1.88			
130	2.54	2.42	2.38	2.36	2.37	2.40	2.43	2.48	2.31	2.23	2.18	2.19	2.19	2.18	2.16	2.18			
135	2.73	2.62	2.57	2.54	2.54	2.58	2.61	2.67	2.49	2.41	2.36	2.36	2.34	2.34	2.33	2.38			
140	2.99	2.89	2.82	2.80	2.79	2.84	2.87	2.93	2.72	2.65	2.60	2.58	2.55	2.56	2.57	2.64			
145	3.14	3.05	2.98	2.94	2.94	3.01	3.03	3.08	2.86	2.79	2.75	2.73	2.68	2.70	2.72	2.80			
150	3.32	3.25	3.20	3.13	3.13	3.22	3.24	3.27	3.05	2.99	2.96	2.94	2.88	2.90	2.94	3.02			
155	3.44	3.37	3.33	3.26	3.28	3.35	3.36	3.39	3.18	3.11	3.08	3.08	3.03	3.03	3.08	3.16			
160	3.60	3.56	3.51	3.46	3.52	3.54	3.52	3.55	3.36	3.31	3.27	3.27	3.26	3.23	3.29	3.38			
165	3.70	3.67	3.63	3.58	3.67	3.65	3.63	3.66	3.49	3.45	3.42	3.42	3.43	3.39	3.44	3.53			
170	3.86	3.85	3.83	3.79	3.87	3.83	3.82	3.84	3.71	3.68	3.66	3.65	3.68	3.65	3.70	3.77			
175	3.98	3.96	3.96	3.95	4.00	3.96	3.96	3.98	3.87	3.85	3.83	3.84	3.87	3.84	3.88	3.94			
180	4.10	4.09	4.09	4.09	4.16	4.12	4.14	4.15	4.10	4.09	4.08	4.09	4.15	4.13	4.13	4.16			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-25

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks: