


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 107.59 lm/W			
MODEL	2700K RA90 12MM 14.4W	I _{max} (cd)	219.7	S/MH(C0/180)	1.27
NOMINAL POWER(W)	7.2	LOR(%)	100.0	S/MH(C90/270)	1.29
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	784.36	□ UP,DN(C0-180)	5.9,45.4
NOMINAL FLUX(lm)	9.80451	CIE CLASS	DIRECT	□ UP,DN(C180-360)	3.2,45.5
LAMPS INSIDE	80	□ up (%)	9.1	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)	24	□ down (%)	90.9	CIBSE SHR MAX	1.50

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

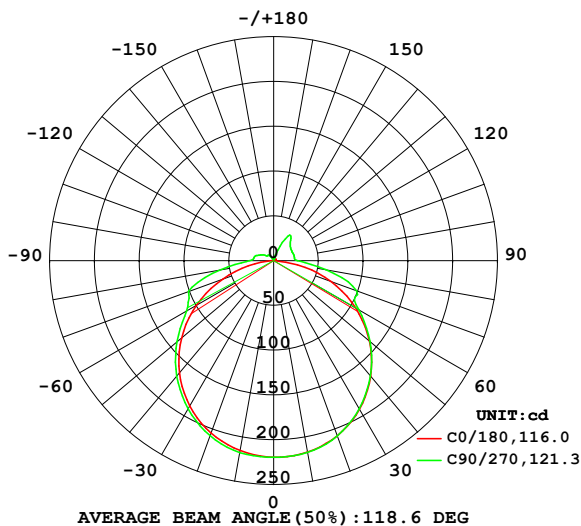

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

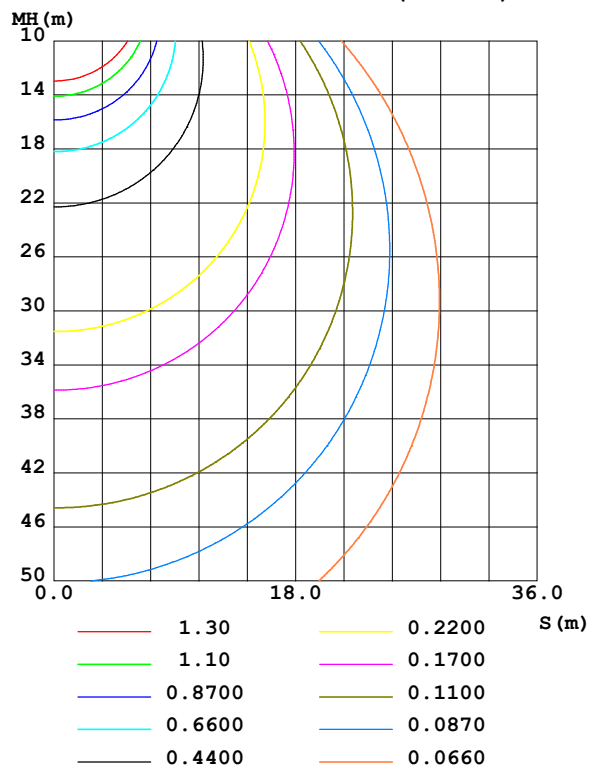

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-04-16

□ Range: 0 - 180DEG
 □ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity:65.0%
 Test Distance:5.749m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	zone	total	%lum, lamp
10	217.1	217.5	217.5	216.3	215.4	216.6	217.7	217.6	0- 10	20.84	20.84	2.66,2.66
20	208.0	209.0	208.3	207.2	204.8	207.1	207.9	209.0	10- 20	60.21	81.05	10.3,10.3
30	191.7	192.9	191.0	190.8	187.4	190.5	191.1	193.0	20- 30	92.35	173.4	22.1,22.1
40	168.6	169.7	168.1	167.5	163.6	167.4	168.4	170.3	30- 40	112.8	286.2	36.5,36.5
50	139.4	141.3	140.4	139.1	134.3	139.3	140.9	142.5	40- 50	119.3	405.5	51.7,51.7
60	105.7	108.8	109.8	107.1	99.59	107.8	112.4	111.3	50- 60	111.0	516.5	65.9,65.9
70	68.11	78.48	98.51	78.86	60.68	80.92	101.2	83.64	60- 70	92.97	609.5	77.7,77.7
80	27.17	51.62	59.14	52.14	21.62	52.89	60.84	54.37	70- 80	70.63	680.1	86.7,86.7
90	0.2913	19.58	26.63	22.47	0.3012	20.08	26.99	21.58	80- 90	33.03	713.1	90.9,90.9
100	0.6016	18.99	23.64	19.66	0.5810	14.57	22.34	17.76	90-100	17.51	730.7	93.2,93.2
110	1.048	18.19	23.29	18.71	0.9847	10.63	18.13	11.43	100-110	14.94	745.6	95.1,95.1
120	1.495	17.77	23.17	17.81	1.396	6.797	13.11	6.576	110-120	11.56	757.2	96.5,96.5
130	1.892	18.27	24.64	18.37	1.773	5.022	9.168	5.133	120-130	9.283	766.4	97.7,97.7
140	2.214	19.62	29.79	20.42	2.072	1.971	7.623	1.967	130-140	7.931	774.4	98.7,98.7
150	2.468	9.261	31.59	13.64	2.318	2.231	2.121	2.185	140-150	6.142	780.5	99.5,99.5
160	2.678	2.644	9.874	3.738	2.540	2.459	2.404	2.439	150-160	2.734	783.2	99.9,99.9
170	2.895	2.866	2.888	2.863	2.800	2.743	2.725	2.738	160-170	0.8401	784.1	100,100
180	3.099	3.066	3.095	3.084	3.091	3.064	3.090	3.084	170-180	0.2779	784.4	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 357.97 lm

%lum = 45.6%

%lamp = 45.6%

Conical surface Flux(120deg): 516.52 lm

%lum = 65.9%


%lamp = 65.9%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-16

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

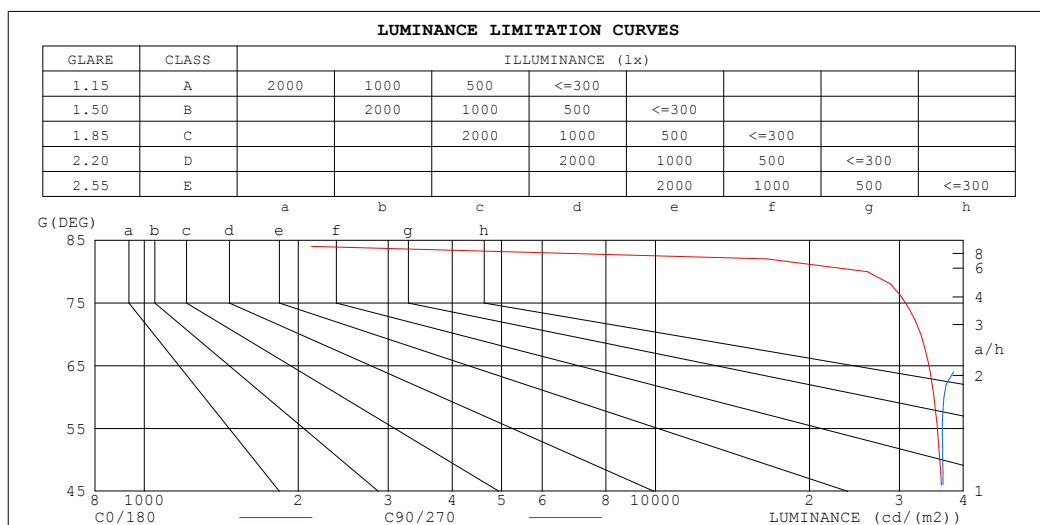

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	2545	80943
80	25961	56826
75	33418	55907
70	33037	48058
65	35744	39689
60	35057	36639
55	36546	37304
50	35982	36456
45	36966	37199


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-04-16

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0														
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
□fc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Coefficients of Utilization(CU)														
0.0	1.17	1.17	1.17	1.13	1.13	1.13	1.06	1.06	1.06	.00	.00	.00	.94	.94	.94	.91														
1.0	.00	.95	.91	.97	.92	.88	.91	.87	.84	.85	.82	.80	.80	.78	.76	.73														
2.0	.86	.79	.72	.83	.77	.71	.78	.73	.68	.74	.69	.65	.69	.65	.62	.59														
3.0	.75	.66	.59	.73	.65	.58	.68	.62	.56	.64	.59	.54	.61	.56	.52	.49														
4.0	.66	.57	.50	.64	.56	.49	.60	.53	.47	.57	.51	.46	.54	.49	.44	.42														
5.0	.59	.50	.43	.57	.49	.42	.54	.46	.41	.51	.45	.39	.48	.43	.38	.36														
6.0	.53	.44	.37	.51	.43	.37	.49	.41	.35	.46	.39	.34	.44	.38	.33	.31														
7.0	.48	.39	.33	.47	.38	.32	.44	.37	.31	.42	.35	.30	.40	.34	.30	.27														
8.0	.44	.35	.29	.42	.34	.29	.40	.33	.28	.38	.32	.27	.37	.31	.26	.24														
9.0	.40	.32	.26	.39	.31	.26	.37	.30	.25	.35	.29	.24	.34	.28	.24	.22														
10.0	.37	.29	.23	.36	.28	.23	.34	.27	.23	.33	.26	.22	.31	.26	.22	.20														

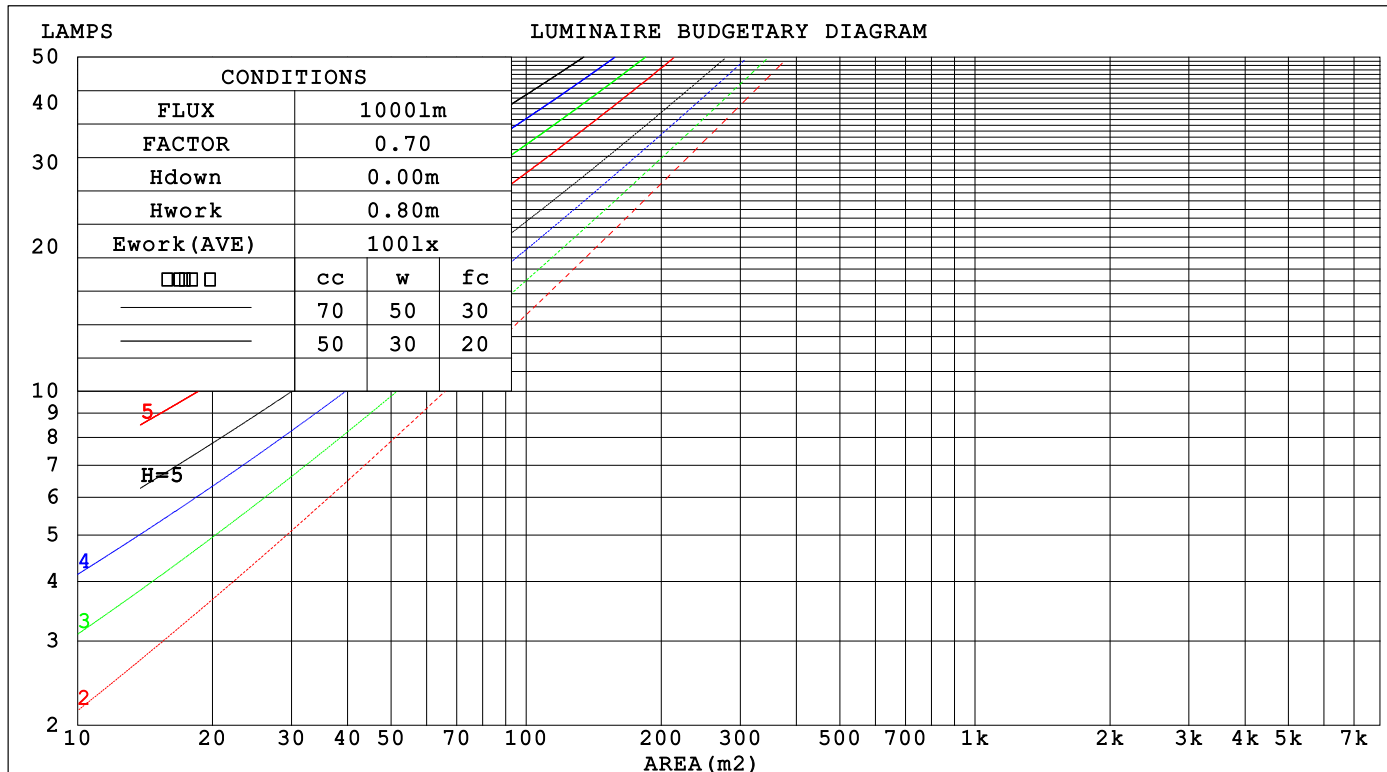

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-16

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio					Wall Exitance Coefficients(WEC)
0.0						
1.0	.346 .197 .062	.336 .192 .061	.318 .182 .058	.301 .173 .056	.285 .165 .053	
2.0	.313 .172 .053	.304 .168 .052	.287 .160 .050	.272 .153 .048	.258 .146 .046	
3.0	.284 .151 .045	.276 .148 .044	.261 .141 .043	.247 .135 .042	.234 .130 .040	
4.0	.258 .134 .039	.251 .131 .039	.238 .126 .038	.225 .121 .036	.214 .116 .035	
5.0	.237 .121 .035	.230 .118 .034	.218 .114 .033	.207 .109 .032	.196 .105 .032	
6.0	.218 .109 .031	.212 .107 .031	.201 .103 .030	.191 .099 .029	.182 .096 .028	
7.0	.202 .100 .028	.197 .098 .028	.187 .094 .027	.178 .091 .026	.169 .088 .026	
8.0	.188 .092 .026	.183 .090 .025	.174 .087 .025	.166 .084 .024	.158 .081 .024	
9.0	.176 .085 .024	.171 .083 .023	.163 .081 .023	.155 .078 .022	.148 .075 .022	
10.0	.165 .079 .022	.161 .078 .022	.153 .075 .021	.146 .073 .021	.139 .070 .020	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio					Ceiling Cavity Exitance Coefficients(CCEC)
0.0	.260 .260 .260	.222 .222 .222	.151 .151 .151	.087 .087 .087	.028 .028 .028	
1.0	.253 .226 .201	.216 .194 .173	.148 .133 .120	.085 .077 .070	.027 .025 .023	
2.0	.245 .202 .166	.210 .174 .143	.144 .120 .100	.083 .070 .059	.027 .023 .019	
3.0	.238 .185 .143	.204 .160 .124	.140 .111 .087	.081 .065 .051	.026 .021 .017	
4.0	.230 .172 .128	.197 .149 .111	.136 .104 .078	.079 .061 .046	.025 .020 .015	
5.0	.222 .162 .117	.191 .140 .102	.132 .098 .072	.076 .057 .043	.025 .019 .014	
6.0	.215 .154 .110	.185 .133 .096	.128 .093 .068	.074 .055 .040	.024 .018 .013	
7.0	.208 .147 .104	.179 .128 .091	.124 .089 .064	.072 .053 .038	.023 .017 .013	
8.0	.202 .141 .100	.174 .123 .087	.120 .086 .062	.070 .051 .037	.023 .017 .012	
9.0	.195 .137 .097	.168 .119 .084	.117 .083 .060	.068 .049 .036	.022 .016 .012	
10.0	.190 .132 .094	.163 .115 .082	.113 .081 .058	.066 .048 .035	.021 .016 .012	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-16

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME: 2835 IP67					TYPE: 2835 160LED 24V			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.:					SUR.: 0.012*0.5			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	25.5	27.0	25.9	27.4	27.7	25.7	27.1	26.1	27.5	27.9	
	3H	27.2	28.5	27.6	28.9	29.3	28.1	29.4	28.5	29.8	30.2
	4H	27.8	29.1	28.3	29.5	29.9	29.4	30.7	29.8	31.1	31.5
	6H	28.3	29.5	28.8	30.0	30.4	30.4	31.6	30.9	32.0	32.5
	8H	28.4	29.5	28.9	30.0	30.5	30.8	32.0	31.3	32.4	32.9
	12H	28.3	29.4	28.8	29.9	30.4	31.2	32.4	31.7	32.8	33.3
4H	2H	26.2	27.5	26.7	27.9	28.3	26.3	27.6	26.8	28.0	28.4
	3H	28.1	29.2	28.5	29.6	30.1	29.0	30.1	29.5	30.6	31.1
	4H	28.9	29.9	29.4	30.4	30.9	30.4	31.5	31.0	31.9	32.5
	6H	29.6	30.5	30.1	31.0	31.6	31.6	32.5	32.2	33.1	33.6
	8H	29.7	30.6	30.3	31.1	31.7	32.1	33.0	32.7	33.5	34.1
	12H	29.7	30.5	30.3	31.0	31.6	32.6	33.4	33.2	34.0	34.6
8H	4H	29.5	30.4	30.1	30.9	31.5	30.8	31.7	31.4	32.2	32.8
	6H	30.5	31.2	31.1	31.8	32.4	32.2	32.9	32.8	33.5	34.1
	8H	30.8	31.4	31.4	32.0	32.6	32.9	33.5	33.5	34.1	34.7
	12H	30.9	31.4	31.5	32.0	32.7	33.5	34.1	34.1	34.7	35.3
12H	4H	29.6	30.4	30.2	31.0	31.6	30.8	31.6	31.4	32.2	32.8
	6H	30.7	31.3	31.3	31.9	32.6	32.3	32.9	32.9	33.5	34.2
	8H	31.1	31.6	31.7	32.2	32.9	33.0	33.6	33.6	34.2	34.8
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.1					
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					
2.0H	+ 0.1 / - 0.3					+ 0.1 / - 0.2					

CIE Pub.117, 784.4 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.8)
Area: 0.006 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-16

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:


```

Range: 0 - 180DEG
Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

```

ISOCANDELA DIAGRAM

NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

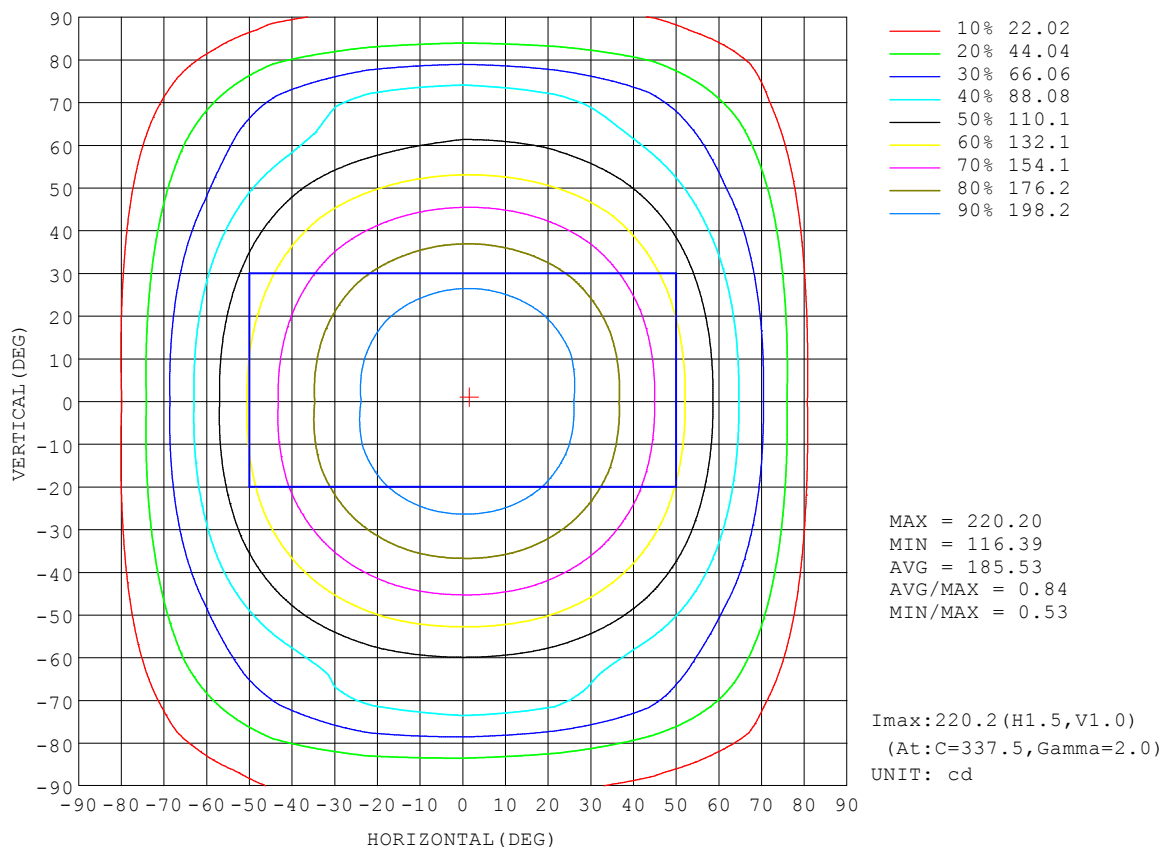


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-04-16

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

AAI Figure

NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

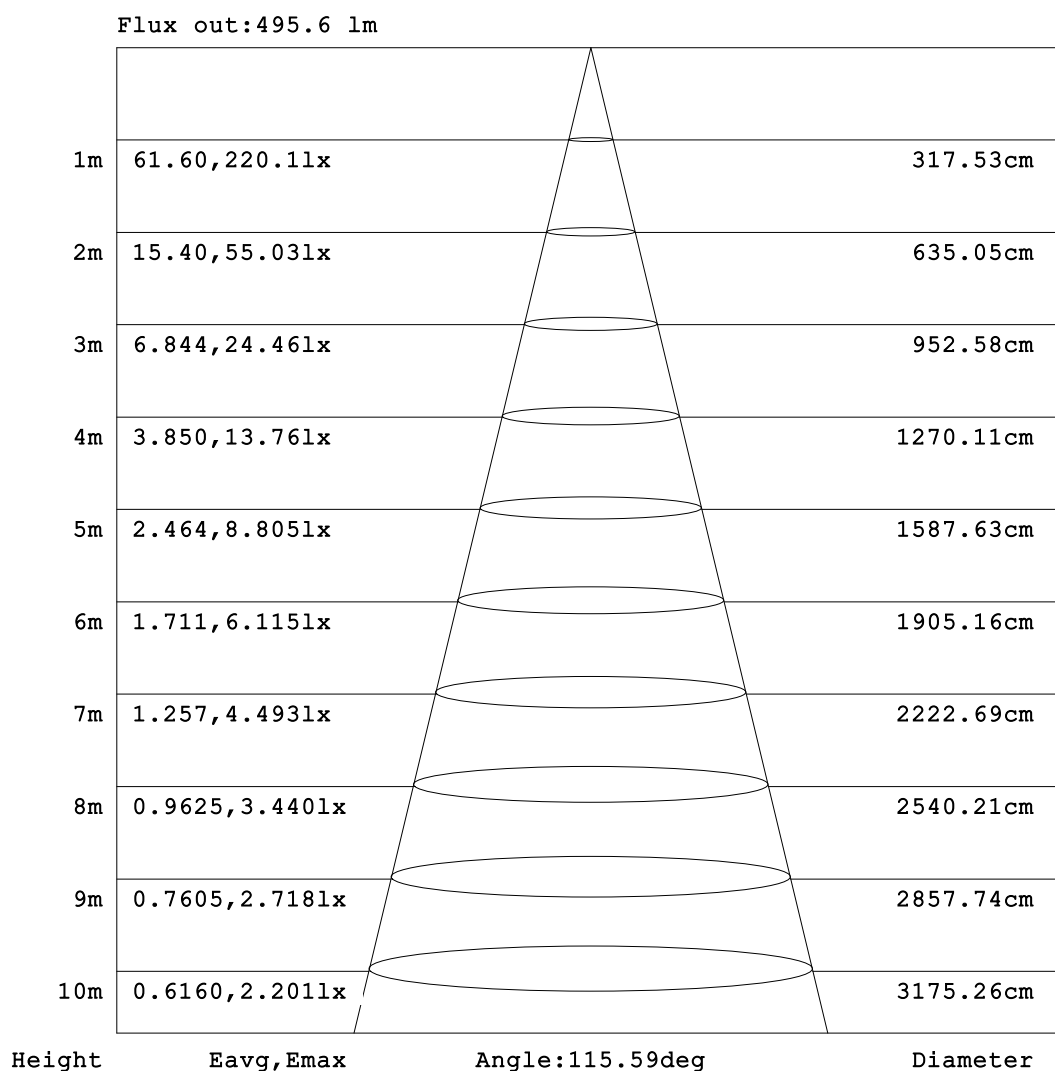


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-04-16

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity:65.0%
 Test Distance:5.749m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

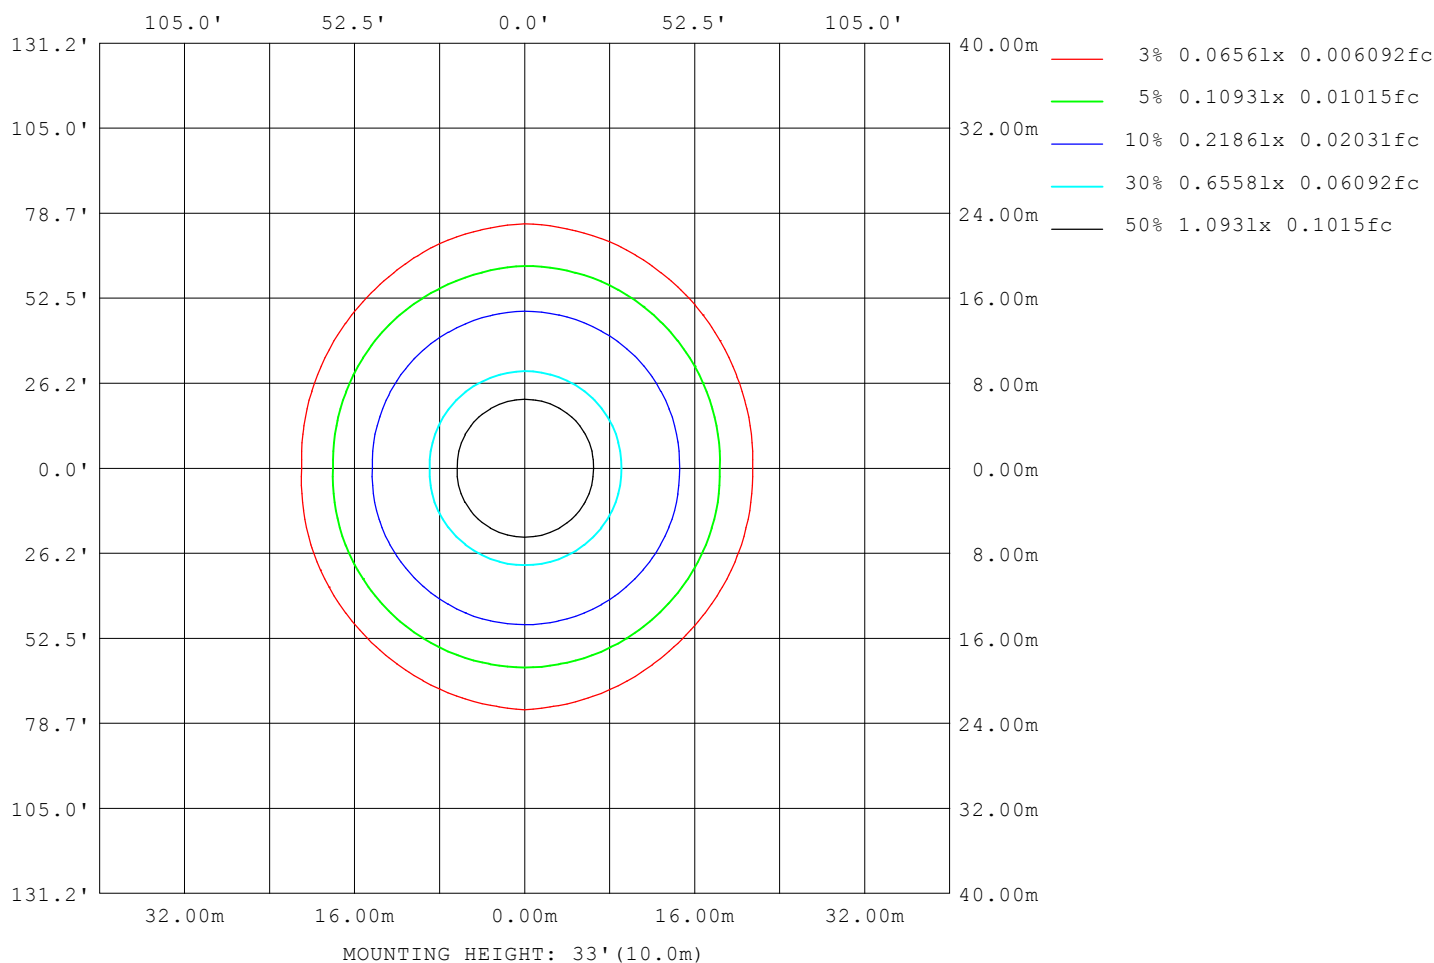

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-04-16

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

LED Avg.L Report

NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	33100
L_0~180 (75) av	28575
L_0~180 (85) av	4667
L_90~270 (65) av	40366
L_90~270 (75) av	53700
L_90~270 (85) av	74883
L_45 (65) av	36545
L_45 (75) av	46911
L_45 (85) av	63163

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-16

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

Planar Illuminance Curve

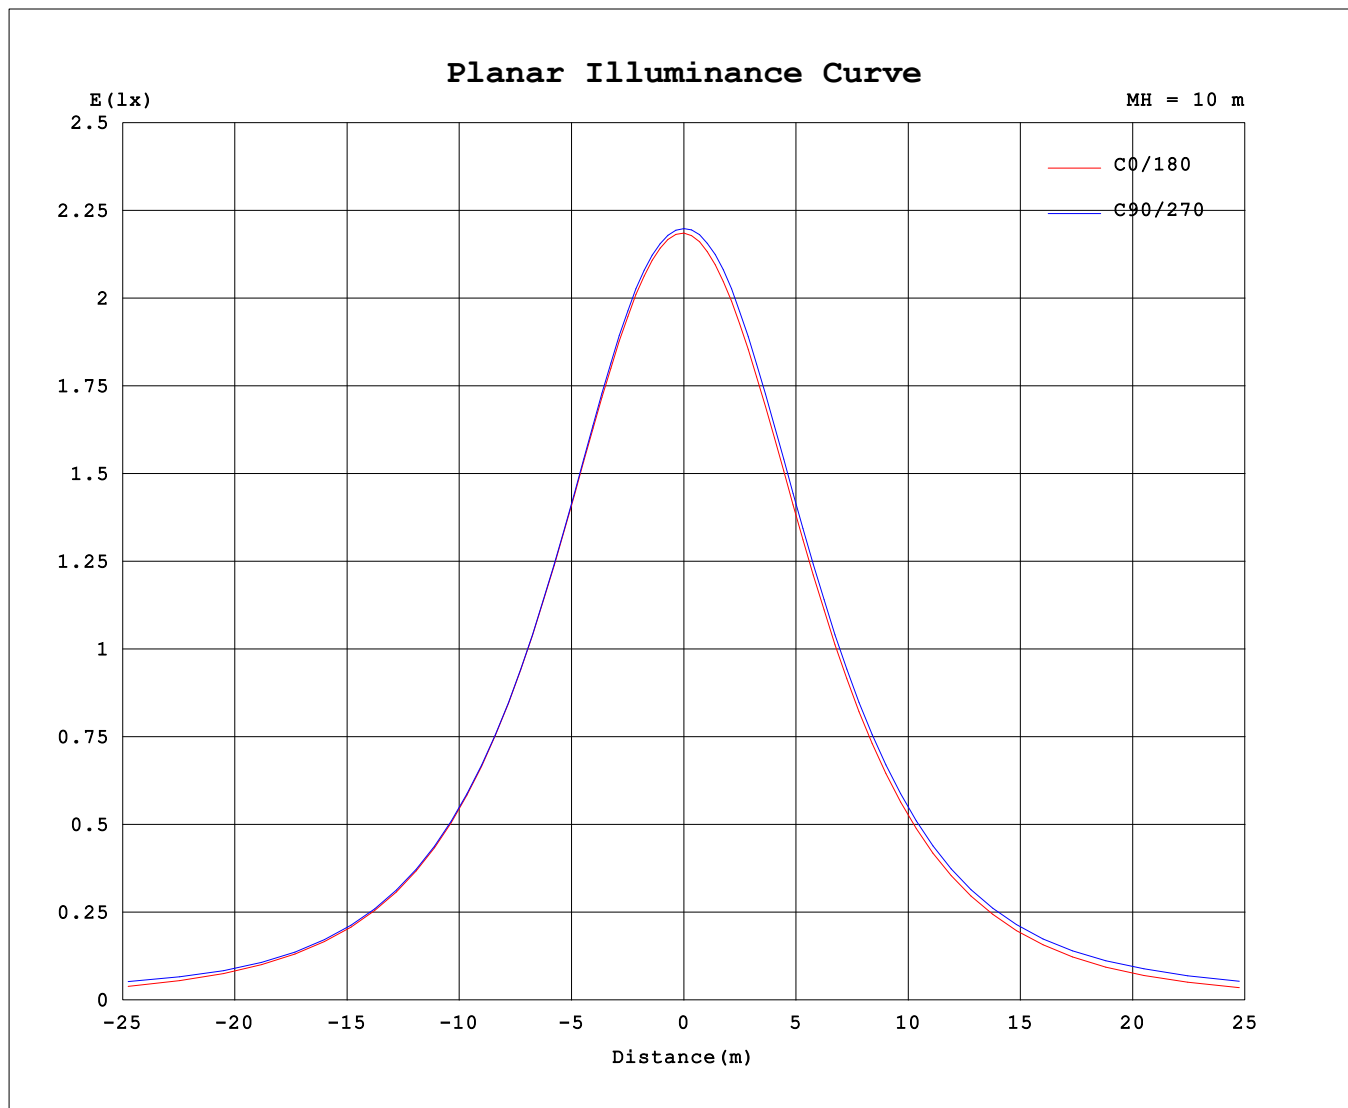

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-04-16

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	220	220	220	220	220	220	220	220	220	220	220	220	220	220	220	220			
5	219	219	219	219	219	219	219	219	219	219	219	219	219	219	219	219			
10	217	217	217	218	217	217	216	216	215	216	217	217	218	218	218	217			
15	214	215	215	215	215	214	214	212	212	213	214	214	215	215	215	215			
20	208	209	209	209	208	208	207	206	205	206	207	207	208	208	209	209			
25	202	203	203	203	202	202	202	200	199	200	201	201	202	202	203	203			
30	192	193	193	192	191	191	191	189	187	189	191	190	191	192	193	193			
35	183	185	184	183	182	182	182	181	179	181	182	182	182	183	185	185			
40	169	170	170	169	168	168	168	167	164	166	167	168	168	169	170	170			
45	158	159	159	159	158	158	157	156	153	155	157	157	158	159	160	159			
50	139	141	141	141	140	140	139	138	134	137	139	140	141	142	142	141			
55	126	128	129	129	128	128	127	125	121	124	127	128	129	130	130	128			
60	106	108	109	110	110	109	107	104	99.6	103	108	109	112	113	111	108			
65	91.1	93.6	95.1	98.3	101	97.7	93.8	89.7	84.5	89.2	94.8	100.0	106	104	99.4	94.2			
70	68.1	71.3	78.5	94.4	98.5	94.9	78.9	67.6	60.7	67.3	80.9	96.2	101	96.6	83.6	73.4			
75	52.1	57.0	74.9	84.9	86.7	82.7	73.6	54.5	44.6	54.5	76.8	86.0	88.2	84.9	77.6	60.2			
80	27.2	41.9	51.6	56.8	59.1	59.2	52.1	38.3	21.6	37.5	52.9	59.1	60.8	59.1	54.4	43.1			
85	1.34	26.2	34.6	39.7	42.3	42.1	37.3	24.9	7.60	23.4	36.5	41.5	43.6	42.2	38.6	28.2			
90	0.29	11.1	19.6	24.2	26.6	26.6	22.5	13.2	0.30	10.9	20.1	25.2	27.0	25.9	21.6	12.8			
95	0.39	10.2	18.2	22.2	23.9	23.4	19.8	11.6	0.39	10.1	18.2	22.1	23.1	22.2	18.4	10.4			
100	0.60	10.4	19.0	22.6	23.6	22.9	19.7	11.7	0.58	6.93	14.6	21.5	22.3	21.5	17.8	7.56			
105	0.77	10.2	19.2	22.7	23.7	23.0	19.7	11.2	0.74	4.66	13.4	20.2	21.7	20.4	15.5	4.88			
110	1.05	9.13	18.2	22.2	23.3	22.3	18.7	9.90	0.98	3.24	10.6	13.2	18.1	16.7	11.4	3.31			
115	1.23	8.30	18.0	21.9	23.0	22.0	18.2	9.36	1.15	2.43	8.45	12.0	16.1	14.6	8.87	2.70			
120	1.50	7.20	17.8	22.2	23.2	21.9	17.8	8.60	1.40	1.51	6.80	10.6	13.1	11.0	6.58	1.71			
125	1.66	6.31	17.8	22.4	23.4	22.2	17.8	8.21	1.55	1.49	6.22	8.91	10.1	8.73	6.15	1.46			
130	1.89	4.39	18.3	23.5	24.6	23.5	18.4	7.29	1.77	1.71	5.02	8.59	9.17	8.31	5.13	1.66			
135	2.03	3.21	18.6	24.8	26.1	25.0	18.9	6.21	1.90	1.84	3.84	8.09	8.91	7.81	3.93	1.80			
140	2.21	2.58	19.6	27.6	29.8	27.9	20.4	5.59	2.07	2.01	1.97	6.30	7.62	6.12	1.97	1.98			
145	2.32	2.29	17.5	29.9	33.1	30.2	19.0	4.60	2.17	2.12	2.08	4.30	5.94	4.17	2.03	2.09			
150	2.47	2.44	9.26	25.8	31.6	24.7	13.6	2.70	2.32	2.27	2.23	2.20	2.12	2.15	2.19	2.24			
155	2.55	2.53	5.85	16.6	22.8	17.9	9.80	2.57	2.41	2.36	2.32	2.30	2.22	2.24	2.28	2.35			
160	2.68	2.66	2.64	6.22	9.87	8.32	3.74	2.68	2.54	2.50	2.46	2.45	2.40	2.39	2.44	2.50			
165	2.76	2.75	2.72	2.91	4.11	3.60	2.74	2.76	2.64	2.61	2.56	2.55	2.53	2.50	2.55	2.61			
170	2.90	2.89	2.87	2.83	2.89	2.87	2.86	2.89	2.80	2.78	2.74	2.73	2.72	2.69	2.74	2.80			
175	2.99	2.99	2.97	2.95	2.98	2.96	2.96	2.99	2.91	2.90	2.87	2.87	2.87	2.85	2.89	2.93			
180	3.10	3.07	3.07	3.07	3.10	3.06	3.08	3.11	3.09	3.07	3.06	3.07	3.09	3.07	3.08	3.11			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-16

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks: