


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 118.81 lm/W			
MODEL	4000K RA90 12MM 14.4W	I <sub>max</sub> (cd)	242.8	S/MH(C0/180)	1.28
NOMINAL POWER(W)	7.2	LOR(%)	100.0	S/MH(C90/270)	1.34
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	858.48	□ UP,DN(C0-180)	4.8,44.9
NOMINAL FLUX(lm)	10.731	CIE CLASS	DIRECT	□ UP,DN(C180-360)	2.7,47.6
LAMPS INSIDE	80	□ up (%)	7.5	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)	24	□ down (%)	92.5	CIBSE SHR MAX	1.50

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

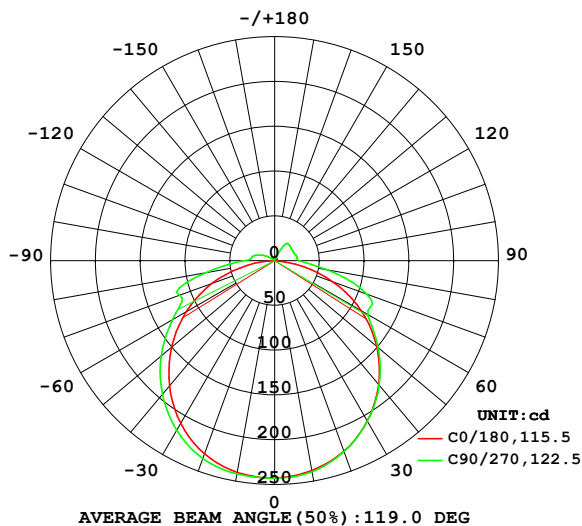

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

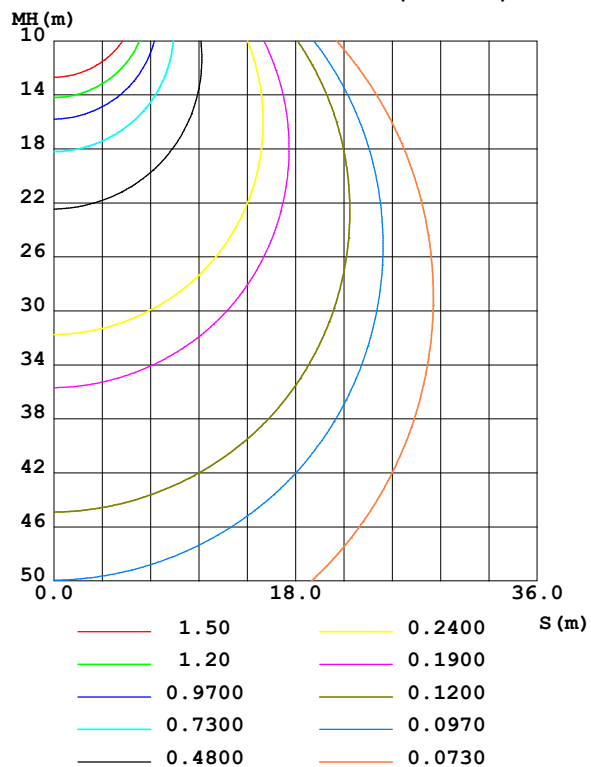

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-04-16

□ Range: 0 - 180DEG  
□ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:

## ZONAL FLUX DIAGRAM

### ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	zone	total	%lum, lamp
10	237.9	238.7	239.4	240.4	240.1	241.4	241.8	239.7	0- 10	23.04	23.04	2.68,2.68
20	226.4	226.3	226.9	229.2	229.4	234.5	235.0	231.6	10- 20	66.63	89.67	10.4,10.4
30	207.0	206.8	207.0	209.9	209.8	218.5	218.8	215.5	20- 30	102.3	192.0	22.4,22.4
40	180.6	180.1	181.7	183.4	182.7	193.1	194.9	190.6	30- 40	125.0	317.0	36.9,36.9
50	148.8	148.4	150.9	151.9	150.1	161.6	165.4	159.9	40- 50	132.0	449.0	52.3,52.3
60	111.7	113.4	120.0	117.3	114.0	126.4	131.7	124.9	50- 60	123.2	572.2	66.7,66.7
70	69.03	91.16	109.2	94.04	74.14	90.90	113.2	89.71	60- 70	104.1	676.3	78.8,78.8
80	23.84	52.32	59.15	55.45	31.25	67.60	78.62	66.14	70- 80	79.87	756.1	88.1,88.1
90	0.3788	21.76	27.11	22.10	0.3269	25.81	33.93	25.97	80- 90	37.68	793.8	92.5,92.5
100	0.7482	20.45	25.08	20.43	0.6037	15.33	25.70	19.80	90-100	19.51	813.3	94.7,94.7
110	1.232	17.97	23.64	18.54	1.038	8.898	18.48	9.548	100-110	15.14	828.5	96.5,96.5
120	1.707	16.70	23.29	17.34	1.491	1.755	10.13	1.804	110-120	10.46	838.9	97.7,97.7
130	2.131	15.70	23.35	14.87	1.899	1.797	2.021	1.843	120-130	7.293	846.2	98.6,98.6
140	2.487	12.88	24.07	10.16	2.232	2.107	2.082	2.128	130-140	5.721	851.9	99.2,99.2
150	2.768	2.768	17.42	2.751	2.518	2.402	2.303	2.410	140-150	3.891	855.8	99.7,99.7
160	2.997	2.979	2.980	2.951	2.778	2.675	2.622	2.695	150-160	1.503	857.3	99.9,99.9
170	3.231	3.203	3.220	3.167	3.088	3.013	2.999	3.033	160-170	0.8380	858.2	100,100
180	3.429	3.391	3.417	3.410	3.427	3.391	3.415	3.403	170-180	0.3076	858.5	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 396.37 lm

%lum = 46.2%

%lamp = 46.2%

Conical surface Flux(120deg): 572.18 lm

%lum = 66.7%


%lamp = 66.7%

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-04-16

° Range: 0 - 180DEG  
° Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:

## LUMINANCE LIMITATION CURVES

NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

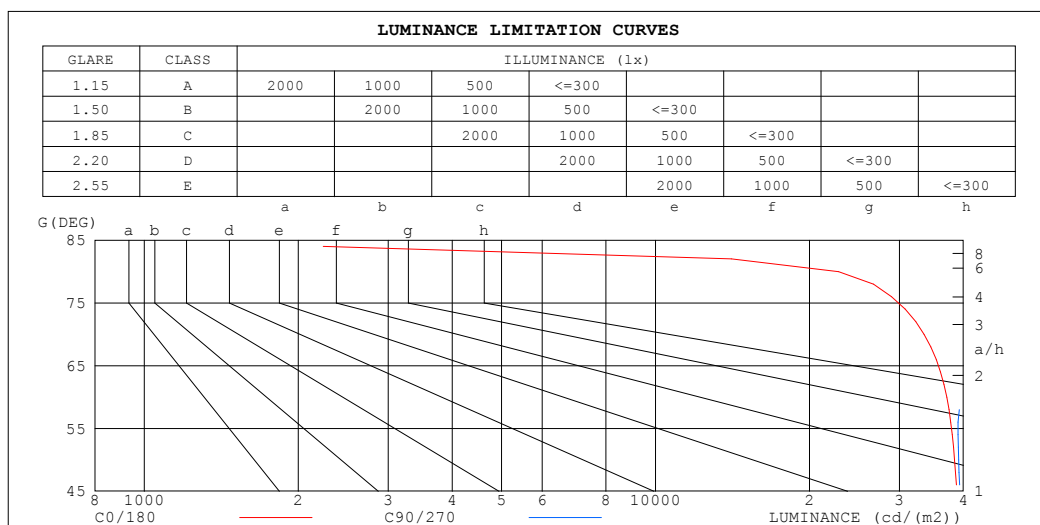

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	2683	79818
80	22816	56809
75	32794	59197
70	33546	53259
65	37435	46927
60	37121	40039
55	39012	40021
50	38468	39151
45	39600	40098


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-04-16

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
 Humidity: 65.0%  
 Test Distance: 5.749m [K=1.0000]  
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0														
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
□fc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Coefficients of Utilization(CU)														
0.0	1.17	1.17	1.17	1.14	1.14	1.14	1.07	1.07	1.07	1.01	1.01	1.01	.95	.95	.95	.92														
1.0	.00	.95	.91	.97	.93	.89	.91	.88	.84	.86	.83	.80	.81	.79	.77	.74														
2.0	.86	.79	.72	.84	.77	.71	.79	.73	.68	.74	.70	.65	.70	.66	.63	.60														
3.0	.75	.66	.59	.73	.65	.58	.69	.62	.56	.65	.59	.54	.61	.57	.53	.50														
4.0	.66	.57	.50	.64	.56	.49	.61	.53	.48	.58	.51	.46	.54	.49	.45	.42														
5.0	.59	.50	.43	.57	.49	.42	.54	.47	.41	.51	.45	.40	.49	.43	.39	.36														
6.0	.53	.44	.37	.51	.43	.37	.49	.41	.36	.46	.40	.35	.44	.38	.34	.32														
7.0	.48	.39	.33	.47	.38	.32	.44	.37	.31	.42	.36	.31	.40	.34	.30	.28														
8.0	.44	.35	.29	.43	.34	.29	.41	.33	.28	.39	.32	.27	.37	.31	.27	.25														
9.0	.40	.32	.26	.39	.31	.26	.37	.30	.25	.36	.29	.25	.34	.28	.24	.22														
10.0	.37	.29	.23	.36	.28	.23	.34	.27	.23	.33	.27	.22	.32	.26	.22	.20														

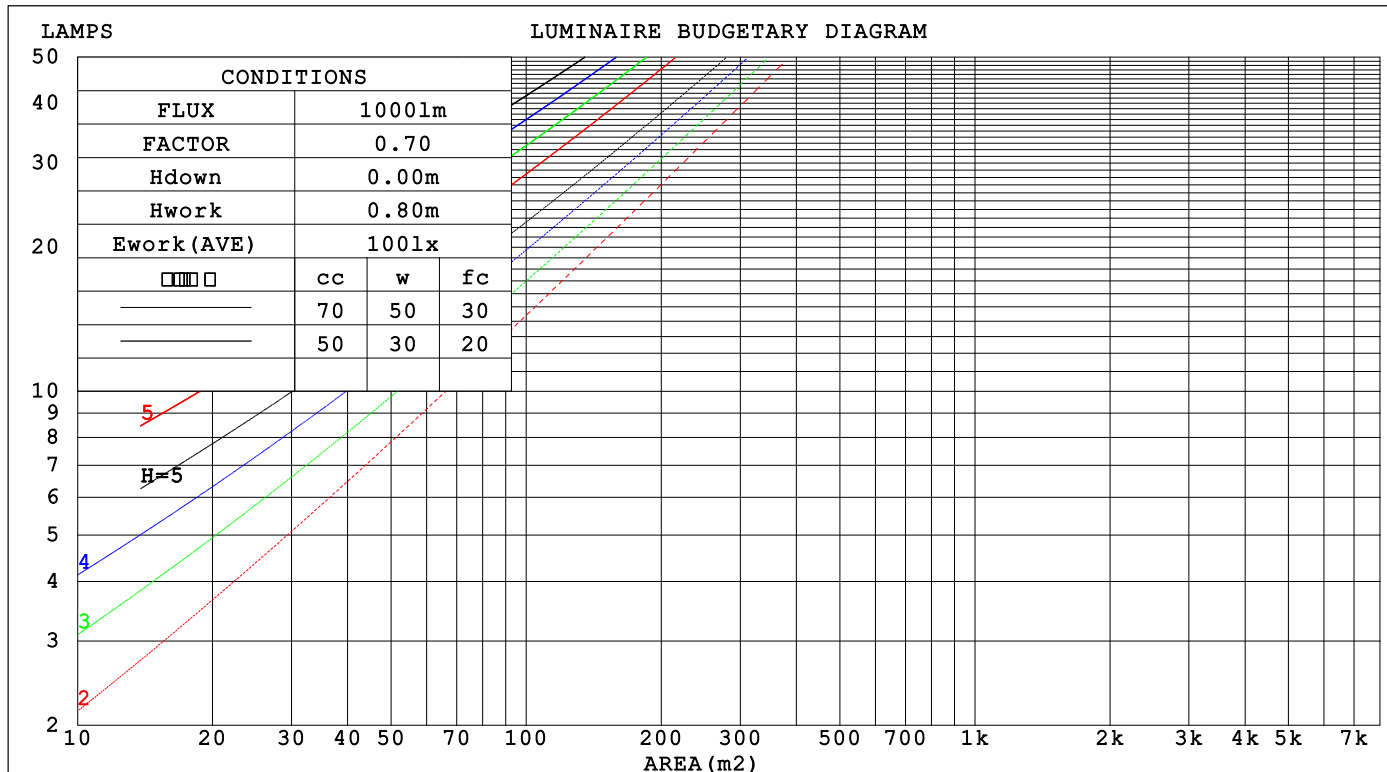

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-04-16

□ Range: 0 - 180DEG  
□ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:

### WEC AND CCEC

NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio					Wall Exitance Coefficients(WEC)
0.0						
1.0	.350 .199 .063	.340 .194 .062	.323 .185 .059	.306 .177 .057	.291 .169 .054	
2.0	.316 .173 .053	.307 .169 .052	.291 .162 .050	.277 .155 .049	.263 .149 .047	
3.0	.286 .152 .046	.278 .149 .045	.264 .143 .043	.251 .137 .042	.239 .132 .041	
4.0	.260 .135 .040	.253 .133 .039	.241 .128 .038	.229 .123 .037	.218 .118 .036	
5.0	.238 .121 .035	.232 .119 .035	.221 .115 .034	.210 .111 .033	.200 .107 .032	
6.0	.219 .110 .031	.214 .108 .031	.203 .104 .030	.194 .101 .030	.185 .097 .029	
7.0	.203 .100 .028	.198 .099 .028	.189 .095 .027	.180 .092 .027	.172 .089 .026	
8.0	.189 .092 .026	.184 .091 .026	.176 .088 .025	.168 .085 .025	.160 .082 .024	
9.0	.176 .085 .024	.172 .084 .024	.165 .081 .023	.157 .079 .023	.150 .076 .022	
10.0	.165 .079 .022	.162 .078 .022	.155 .076 .021	.148 .073 .021	.142 .071 .020	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio					Ceiling Cavity Exitance Coefficients(CCEC)
0.0	.248 .248 .248	.212 .212 .212	.145 .145 .145	.083 .083 .083	.027 .027 .027	
1.0	.241 .214 .189	.206 .183 .163	.141 .126 .113	.081 .073 .065	.026 .023 .021	
2.0	.234 .190 .153	.200 .164 .133	.137 .113 .092	.079 .066 .054	.025 .021 .018	
3.0	.226 .173 .131	.194 .149 .113	.133 .104 .079	.077 .061 .047	.025 .020 .015	
4.0	.218 .160 .116	.187 .138 .100	.129 .096 .071	.075 .056 .042	.024 .018 .014	
5.0	.211 .150 .105	.181 .130 .091	.125 .091 .065	.072 .053 .038	.023 .017 .013	
6.0	.203 .142 .098	.175 .123 .085	.121 .086 .060	.070 .051 .036	.023 .017 .012	
7.0	.196 .135 .092	.169 .117 .080	.117 .082 .057	.068 .048 .034	.022 .016 .011	
8.0	.190 .129 .088	.163 .112 .077	.113 .079 .054	.066 .046 .032	.021 .015 .011	
9.0	.183 .124 .084	.158 .108 .074	.110 .076 .052	.064 .045 .031	.021 .015 .010	
10.0	.178 .120 .082	.153 .104 .071	.106 .073 .051	.062 .043 .030	.020 .014 .010	

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-04-16

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:

### UGR(Unified Glare Rating) Table

NAME: 2835 IP67					TYPE: 2835 160LED 24V			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.:					SUR.: 0.012*0.5			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	25.3	26.8	25.7	27.1	27.5	25.6	27.1	26.0	27.4	27.8	
	26.8	28.2	27.2	28.6	29.0	28.2	29.6	28.6	30.0	30.4	
	27.5	28.7	27.9	29.1	29.6	29.4	30.7	29.8	31.1	31.5	
	27.9	29.1	28.3	29.5	29.9	30.3	31.5	30.8	31.9	32.4	
	27.9	29.1	28.3	29.5	29.9	30.7	31.8	31.1	32.3	32.7	
	27.8	29.0	28.3	29.4	29.9	31.0	32.1	31.5	32.6	33.0	
4H	2H	26.0	27.3	26.4	27.7	28.1	26.2	27.5	26.7	27.9	28.3
	3H	27.8	28.9	28.3	29.4	29.8	29.1	30.3	29.6	30.7	31.2
	4H	28.6	29.6	29.1	30.1	30.6	30.4	31.5	30.9	31.9	32.4
	6H	29.2	30.1	29.7	30.6	31.1	31.5	32.4	32.0	32.9	33.4
	8H	29.3	30.1	29.8	30.6	31.2	31.9	32.8	32.5	33.3	33.9
	12H	29.3	30.1	29.8	30.6	31.1	32.4	33.2	32.9	33.7	34.2
8H	4H	29.3	30.1	29.8	30.6	31.2	30.8	31.6	31.3	32.1	32.7
	6H	30.1	30.8	30.6	31.3	31.9	32.0	32.8	32.6	33.3	33.9
	8H	30.3	30.9	30.9	31.5	32.1	32.6	33.3	33.2	33.8	34.4
	12H	30.4	30.9	31.0	31.5	32.2	33.2	33.8	33.8	34.3	35.0
12H	4H	29.4	30.2	29.9	30.7	31.2	30.8	31.6	31.3	32.1	32.7
	6H	30.3	30.9	30.9	31.5	32.1	32.1	32.8	32.7	33.3	33.9
	8H	30.6	31.1	31.2	31.7	32.4	32.7	33.3	33.3	33.9	34.5
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.1					
1.5H	+ 0.1 / - 0.2					+ 0.1 / - 0.2					
2.0H	+ 0.1 / - 0.3					+ 0.1 / - 0.2					

CIE Pub.117, 858.5 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.5)  
Area: 0.006 m2

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-04-16

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:


```

Range: 0 - 180DEG
Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

```

### ISOCANDELA DIAGRAM

NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

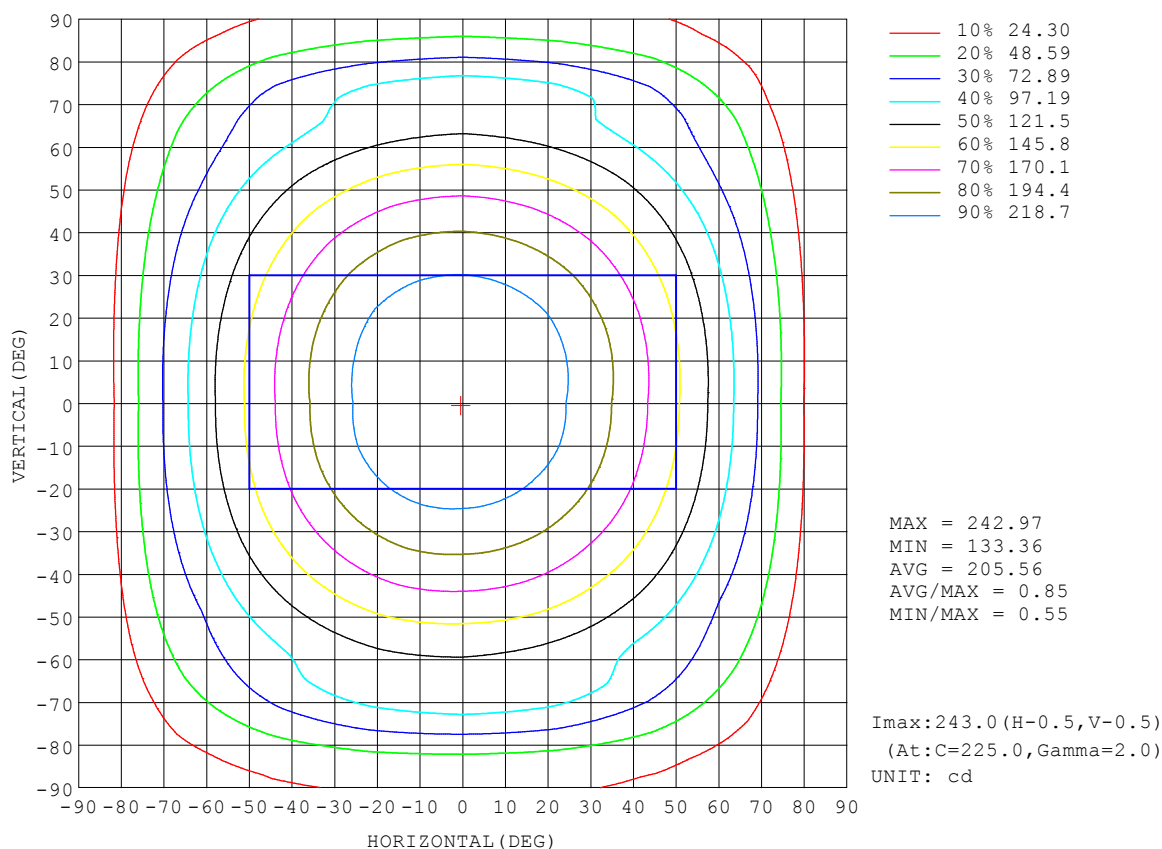


C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2022-04-16

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity: 65.0%  
Test Distance: 5.749m [K=1.0000]  
Remarks:



**AAI Figure**

NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

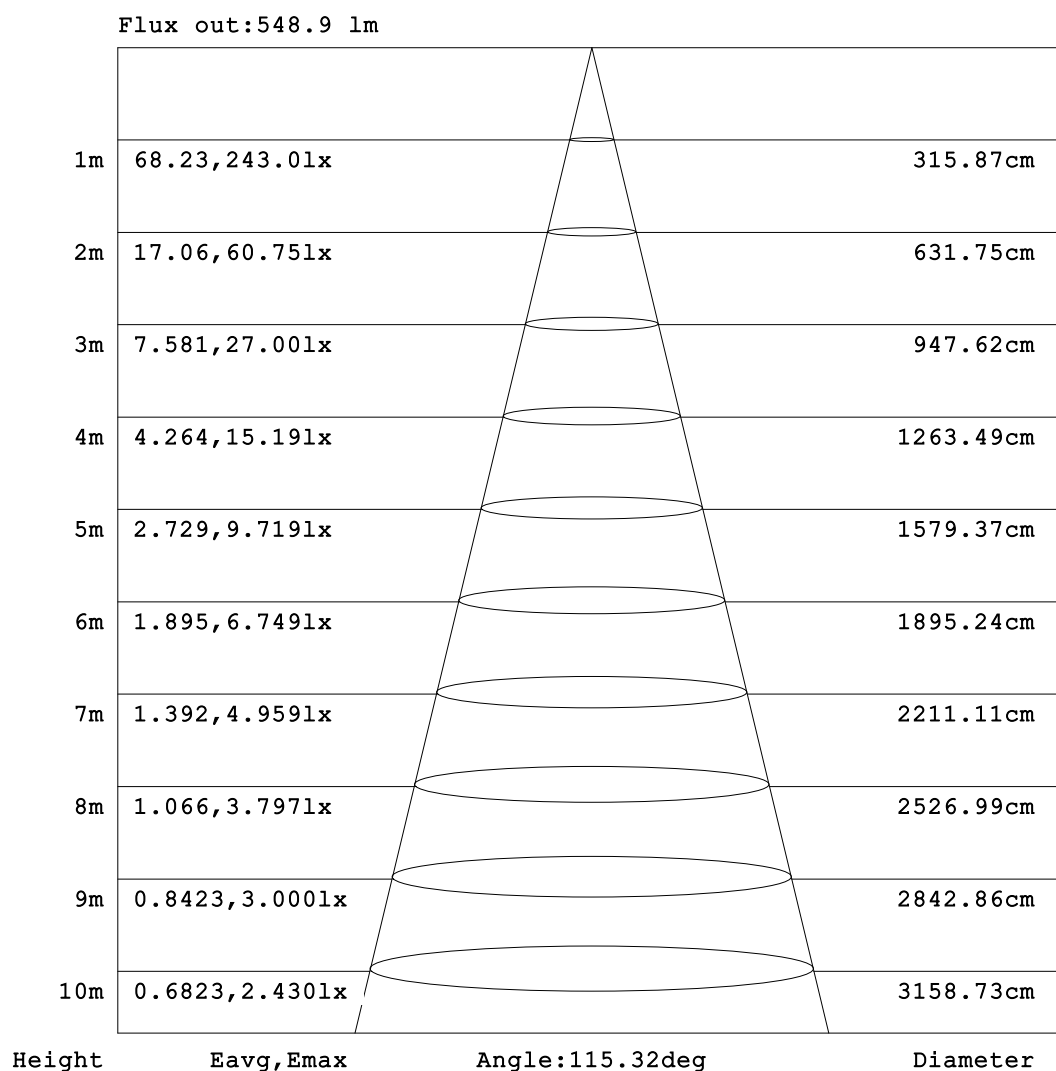


**Note:**The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-04-16

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
 Humidity:65.0%  
 Test Distance:5.749m [K=1.0000]  
 Remarks:

### ISOLUX DIAGRAM

NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

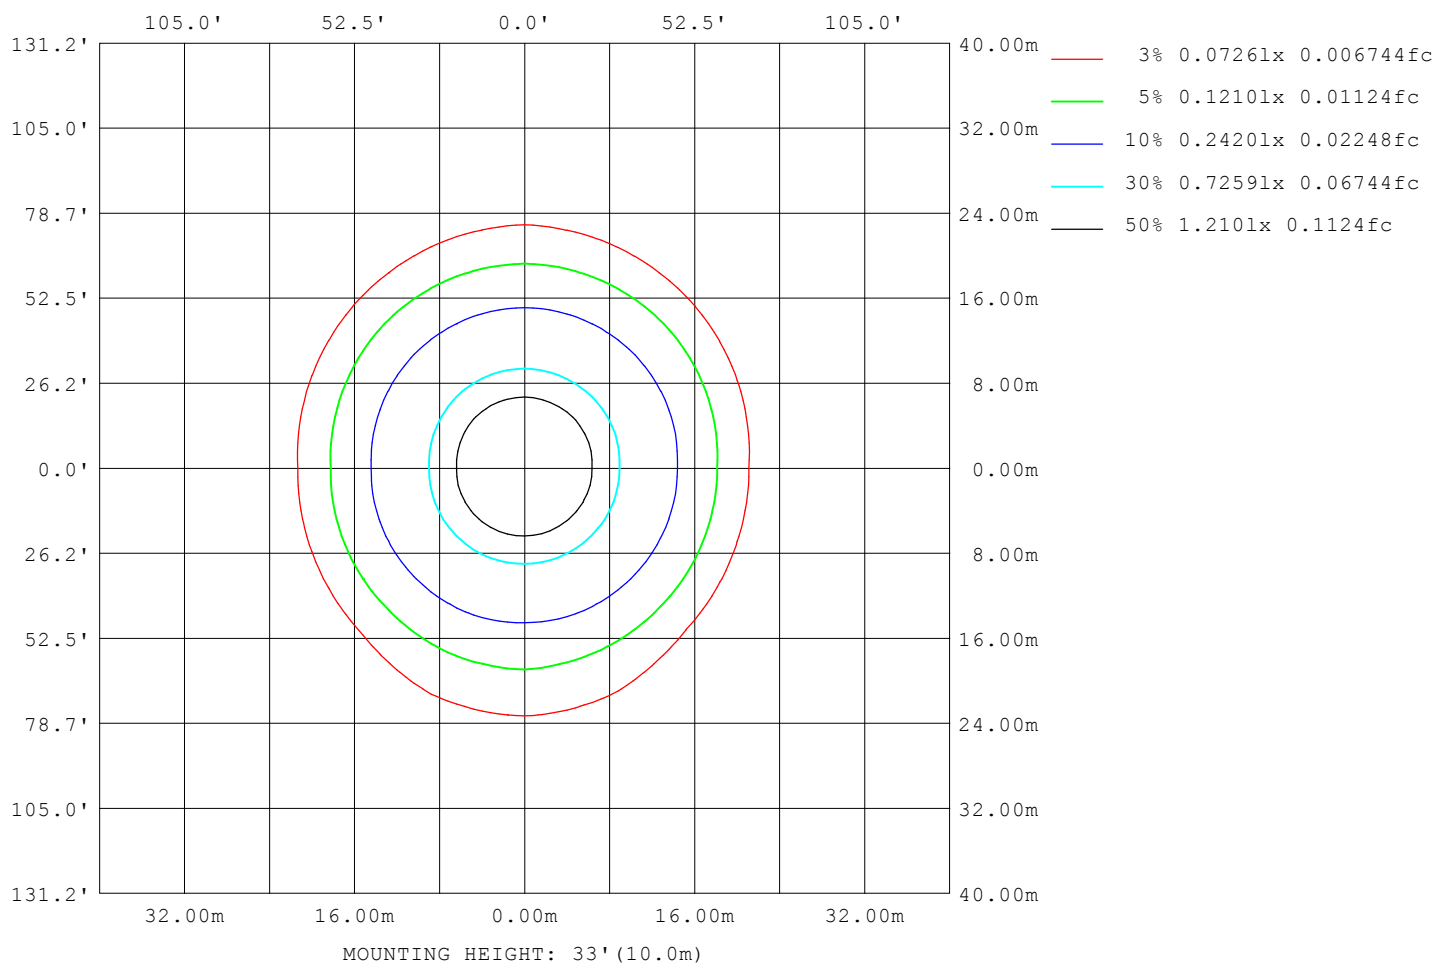

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2022-04-16

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity: 65.0%  
Test Distance: 5.749m [K=1.0000]  
Remarks:

## LED Avg.L Report

NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	36589
L_0~180 (75) av	31997
L_0~180 (85) av	8937
L_90~270 (65) av	46438
L_90~270 (75) av	62203
L_90~270 (85) av	86584
L_45 (65) av	40642
L_45 (75) av	52008
L_45 (85) av	71152

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2022-04-16

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity: 65.0%  
Test Distance: 5.749m [K=1.0000]  
Remarks:

### Planar Illuminance Curve

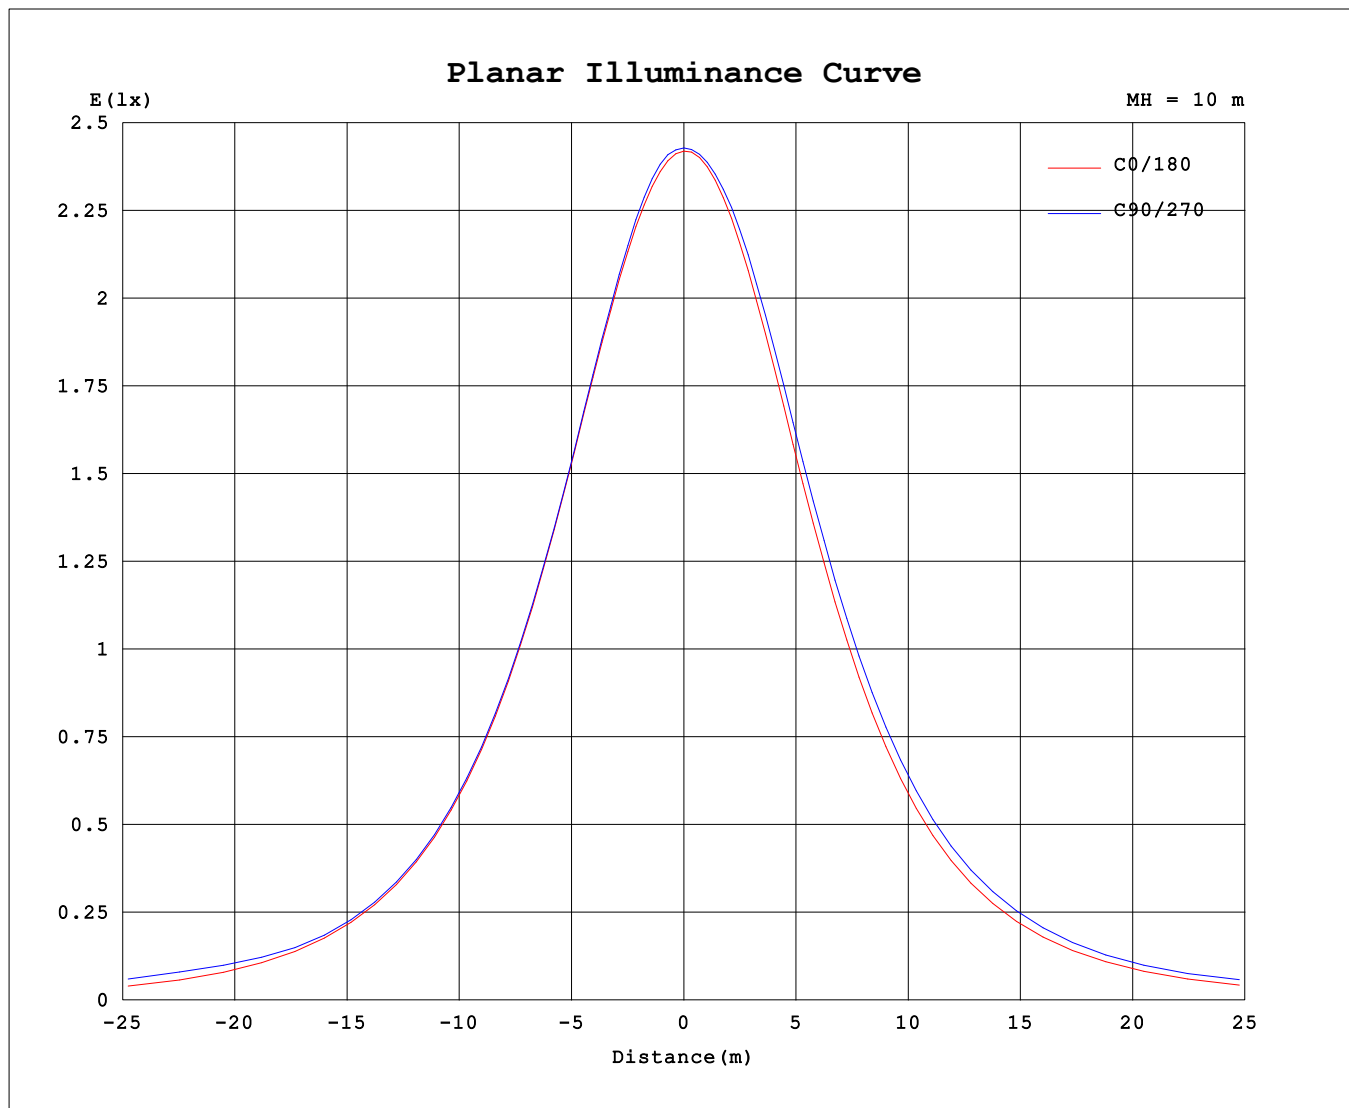

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-04-16

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
 Humidity: 65.0%  
 Test Distance: 5.749m [K=1.0000]  
 Remarks:

### LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	243	243	243	243	243	243	243	243	243	243	243	243	243	243	243	243			
5	242	242	242	242	242	243	242	242	243	243	243	243	243	243	242	242			
10	238	238	239	239	239	240	240	240	240	240	241	242	242	241	240	239			
15	234	235	235	235	235	236	237	237	237	238	239	240	240	239	237	235			
20	226	227	226	226	227	228	229	230	229	231	235	235	235	233	232	228			
25	220	220	219	219	220	221	222	223	223	225	229	230	230	228	226	223			
30	207	207	207	207	207	209	210	210	210	214	219	219	219	217	215	211			
35	197	197	197	197	198	199	200	200	200	205	209	211	210	208	207	202			
40	181	181	180	181	182	184	183	183	183	188	193	195	195	193	191	186			
45	168	168	168	169	170	172	171	171	170	176	181	184	184	182	179	174			
50	149	149	148	150	151	153	152	151	150	156	162	165	165	163	160	155			
55	135	134	135	137	138	140	138	137	136	142	148	151	152	150	146	141			
60	112	112	113	117	120	120	117	116	114	120	126	130	132	129	125	119			
65	95.2	96.3	99.4	110	119	114	104	101	98.6	105	112	116	119	115	110	103			
70	69.0	72.4	91.2	107	109	107	94.0	77.8	74.1	82.2	90.9	105	113	104	89.7	78.9			
75	51.1	60.0	79.8	89.2	91.9	90.2	83.2	65.0	57.1	66.9	84.7	104	111	106	85.3	63.3			
80	23.8	40.0	52.3	58.0	59.1	59.3	55.5	46.2	31.3	49.8	67.6	74.7	78.6	74.7	66.1	46.9			
85	1.41	23.9	34.2	40.1	41.7	41.3	36.7	28.3	13.4	32.9	47.1	54.0	57.1	53.8	46.1	30.8			
90	0.38	12.3	21.8	26.2	27.1	26.3	22.1	13.3	0.33	14.2	25.8	31.5	33.9	31.6	26.0	14.4			
95	0.50	11.6	20.9	24.5	25.4	24.4	20.7	12.0	0.42	11.4	20.9	25.7	27.3	26.2	21.7	12.5			
100	0.75	11.0	20.4	24.1	25.1	24.1	20.4	11.5	0.60	6.16	15.3	24.3	25.7	24.7	19.8	7.30			
105	0.94	10.2	19.6	23.9	24.9	23.9	20.1	10.7	0.77	2.43	13.4	21.6	23.9	22.2	15.9	2.99			
110	1.23	8.31	18.0	22.3	23.6	22.7	18.5	9.09	1.04	1.06	8.90	12.6	18.5	16.2	9.55	1.12			
115	1.43	7.06	17.6	21.9	23.2	22.3	18.2	7.88	1.22	1.20	5.25	10.1	15.1	12.8	5.80	1.25			
120	1.71	5.54	16.7	21.9	23.3	22.3	17.3	6.16	1.49	1.43	1.76	6.52	10.1	7.41	1.80	1.47			
125	1.88	4.44	16.2	21.6	23.2	22.0	16.4	4.83	1.66	1.58	1.61	3.06	5.45	3.13	1.65	1.62			
130	2.13	2.64	15.7	21.9	23.3	22.0	14.9	2.83	1.90	1.81	1.80	1.82	2.02	1.85	1.84	1.85			
135	2.28	2.27	15.1	22.3	23.9	22.0	13.2	2.29	2.04	1.96	1.93	1.93	1.93	1.96	1.96	1.99			
140	2.49	2.47	12.9	22.4	24.1	20.6	10.2	2.45	2.23	2.16	2.11	2.09	2.08	2.11	2.13	2.19			
145	2.61	2.60	7.91	21.6	24.2	19.5	6.24	2.56	2.35	2.28	2.23	2.21	2.17	2.21	2.24	2.32			
150	2.77	2.76	2.77	11.9	17.4	9.89	2.75	2.72	2.52	2.45	2.40	2.37	2.30	2.35	2.41	2.50			
155	2.87	2.86	2.84	4.00	7.29	3.39	2.83	2.81	2.62	2.56	2.51	2.48	2.42	2.45	2.52	2.61			
160	3.00	3.00	2.98	2.93	2.98	2.98	2.95	2.95	2.78	2.72	2.68	2.66	2.62	2.63	2.70	2.78			
165	3.09	3.09	3.06	3.02	3.09	3.06	3.03	3.03	2.90	2.84	2.80	2.79	2.78	2.75	2.82	2.91			
170	3.23	3.23	3.20	3.17	3.22	3.19	3.17	3.19	3.09	3.05	3.01	3.00	3.00	2.97	3.03	3.11			
175	3.33	3.32	3.30	3.27	3.31	3.28	3.28	3.29	3.22	3.20	3.17	3.15	3.16	3.14	3.19	3.25			
180	3.43	3.40	3.39	3.39	3.42	3.38	3.41	3.43	3.43	3.40	3.39	3.39	3.41	3.39	3.40	3.43			

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-04-16

□ Range: 0 - 180DEG  
□ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks: