


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: 2835 IP20	TYPE: 2835 192LED 24V	WEIGHT:
SPEC.: 202-00491-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 165.36 lm/W
MODEL	6500K	I _{max} (cd)	394.5	S/MH(C0/180)	1.30	
NOMINAL POWER(W)	7.2	LOR(%)	100.0	S/MH(C90/270)	1.29	
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	1192.9	□ UP,DN(C0-180)	0.7,50.2	
NOMINAL FLUX(lm)	12.4259	CIE CLASS	DIRECT	□ UP,DN(C180-360)	0.6,48.5	
LAMPS INSIDE	96	□ up (%)	1.3	CIBSE SHR NOM	1.25	
TEST VOLTAGE(V)	24	□ down (%)	98.7	CIBSE SHR MAX	1.35	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

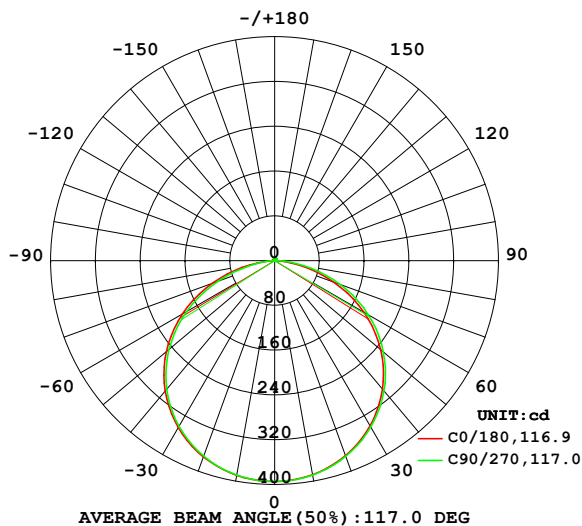

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

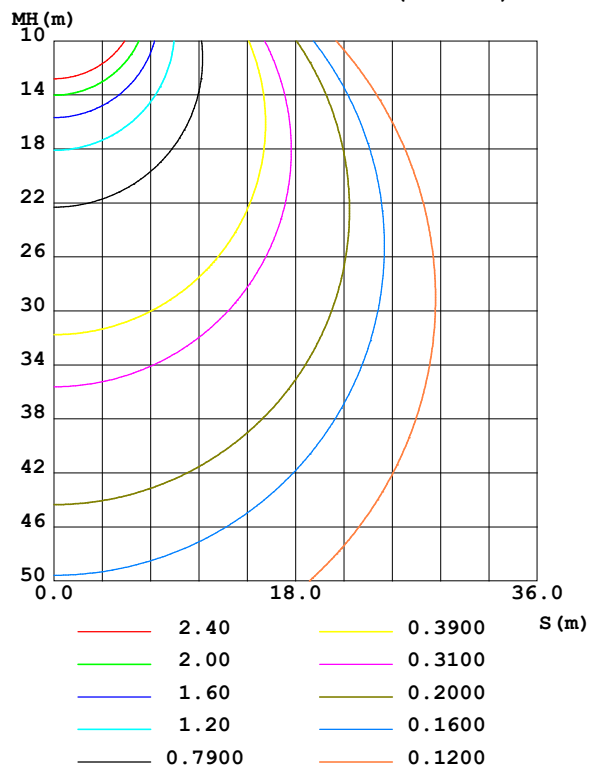

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-18

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	388.4	388.5	389.0	389.5	389.6	389.6	389.0	388.5	0- 10	37.40	37.40	3.14,3.14
20	370.6	371.0	371.9	372.9	372.9	372.5	371.4	370.5	10- 20	107.8	145.2	12.2,12.2
30	341.0	342.0	343.5	344.8	344.4	343.6	341.8	340.6	20- 30	165.4	310.6	26,26
40	299.8	301.8	303.9	305.4	304.3	302.7	300.0	298.6	30- 40	202.6	513.2	43,43
50	247.2	250.6	253.6	255.0	252.7	249.8	246.2	244.7	40- 50	213.9	727.0	60.9,60.9
60	183.8	189.2	193.2	194.3	190.1	185.5	180.9	179.6	50- 60	196.2	923.2	77.4,77.4
70	111.8	119.2	124.3	124.8	118.5	112.2	106.8	105.8	60- 70	150.2	1073	90,90
80	40.75	48.49	53.92	53.51	46.27	39.44	34.69	34.53	70- 80	83.21	1157	97,97
90	0.4490	2.714	4.074	4.352	0.3771	1.306	0.7122	0.7732	80- 90	20.41	1177	98.7,98.7
100	1.068	0.9726	0.9569	0.9258	0.8378	0.8884	0.9415	0.9387	90-100	1.044	1178	98.8,98.8
110	1.916	1.763	1.715	1.706	1.575	1.567	1.619	1.620	100-110	1.368	1179	98.9,98.9
120	2.746	2.543	2.499	2.502	2.352	2.264	2.305	2.321	110-120	2.035	1181	99,99
130	3.457	3.222	3.183	3.212	3.049	2.919	2.916	2.948	120-130	2.485	1184	99.3,99.3
140	4.015	3.800	3.739	3.825	3.611	3.478	3.417	3.484	130-140	2.625	1187	99.5,99.5
150	4.440	4.293	4.222	4.312	4.069	3.961	3.847	3.971	140-150	2.452	1189	99.7,99.7
160	4.784	4.690	4.723	4.692	4.496	4.399	4.365	4.415	150-160	2.011	1191	99.8,99.8
170	5.127	5.095	5.163	5.084	4.971	4.913	4.938	4.916	160-170	1.351	1192	100,100
180	5.485	5.467	5.529	5.483	5.478	5.460	5.524	5.483	170-180	0.4955	1193	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 641.96 lm

%lum = 53.8%

%lamp = 53.8%

Conical surface Flux(120deg): 923.23 lm

%lum = 77.4%


%lamp = 77.4%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-18

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

NAME: 2835 IP20	TYPE: 2835 192LED 24V	WEIGHT:
SPEC.: 202-00491-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

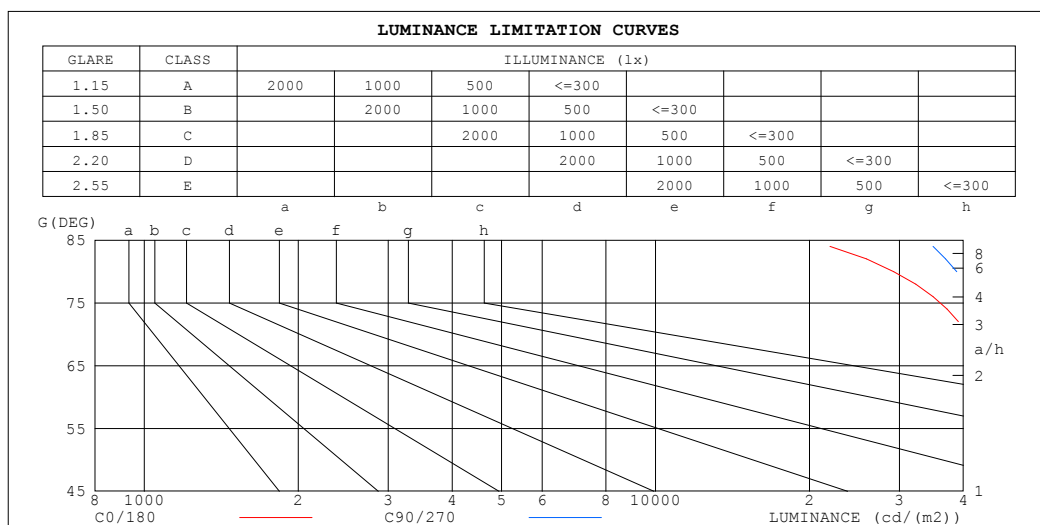

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	26304	41873
80	29247	38849
75	39585	46216
70	40761	45483
65	45955	49282
60	45822	48334
55	48463	50271
50	47931	49352
45	49379	50421


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-03-18

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: 2835 IP20	TYPE: 2835 192LED 24V	WEIGHT:
SPEC.: 202-00491-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.99
1.0	1.04	.99	.95	1.01	.97	.94	.97	.93	.90	.92	.90	.87	.89	.87	.85	.82
2.0	.90	.83	.77	.88	.82	.76	.84	.79	.74	.81	.76	.72	.78	.74	.71	.68
3.0	.79	.71	.64	.77	.70	.63	.74	.67	.62	.71	.65	.61	.68	.64	.60	.57
4.0	.70	.61	.54	.68	.60	.54	.66	.58	.53	.63	.57	.52	.61	.55	.51	.49
5.0	.62	.53	.46	.61	.52	.46	.59	.51	.45	.57	.50	.45	.55	.49	.44	.42
6.0	.56	.47	.40	.55	.46	.40	.53	.45	.40	.51	.44	.39	.49	.43	.39	.37
7.0	.51	.42	.35	.50	.41	.35	.48	.40	.35	.46	.40	.35	.45	.39	.34	.32
8.0	.46	.37	.32	.45	.37	.31	.44	.36	.31	.42	.36	.31	.41	.35	.31	.29
9.0	.42	.34	.28	.42	.34	.28	.40	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.38	.31	.26	.37	.30	.25	.36	.30	.25	.35	.29	.25	.23

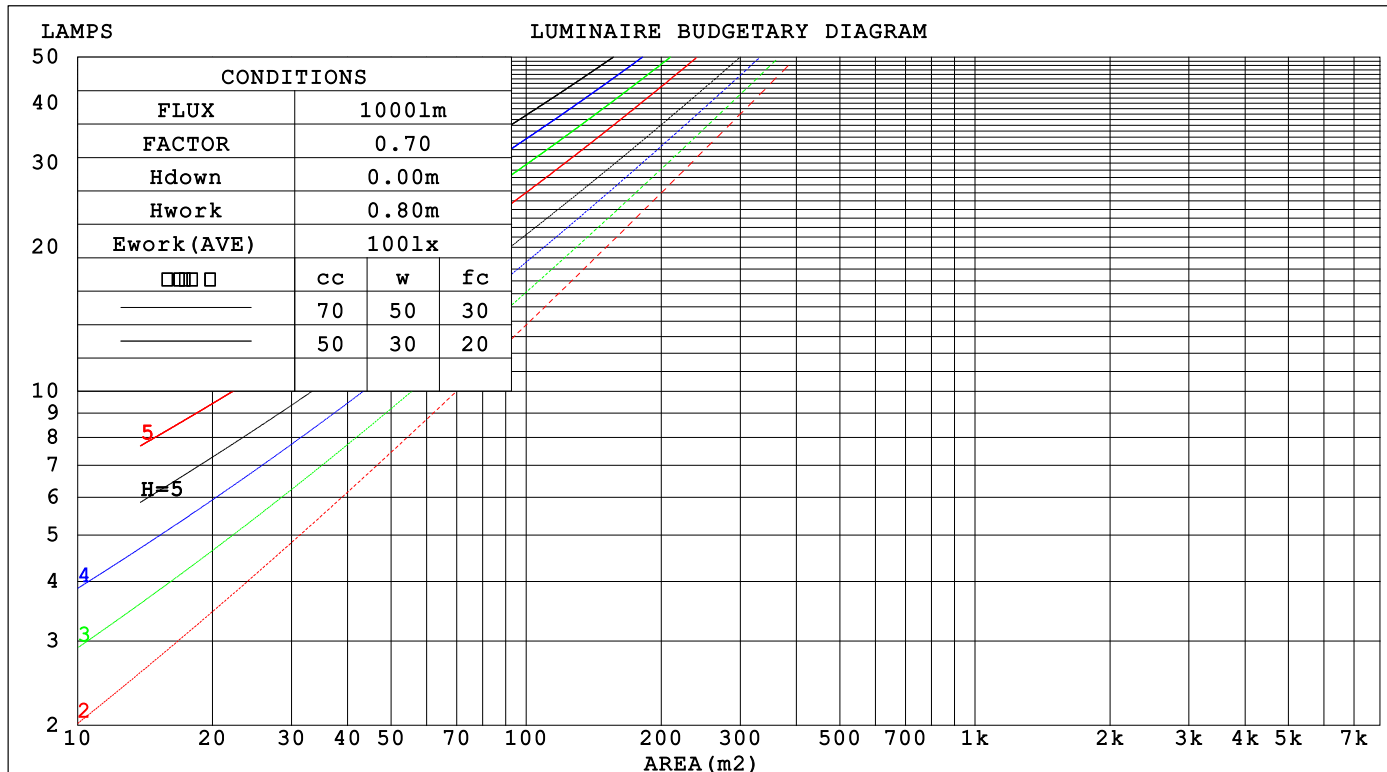

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-18

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: 2835 IP20	TYPE: 2835 192LED 24V	WEIGHT:
SPEC.: 202-00491-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio					Wall Exitance Coefficients(WEC)
0.0						
1.0	.310 .176 .056	.303 .173 .055	.289 .166 .053	.276 .159 .051	.264 .153 .049	
2.0	.293 .160 .049	.286 .158 .049	.274 .152 .047	.262 .147 .046	.252 .142 .045	
3.0	.271 .144 .043	.265 .142 .043	.254 .138 .042	.244 .134 .041	.235 .130 .040	
4.0	.250 .130 .038	.245 .128 .038	.235 .125 .037	.226 .121 .037	.218 .118 .036	
5.0	.231 .118 .034	.227 .116 .034	.218 .114 .033	.210 .111 .033	.202 .108 .032	
6.0	.215 .108 .031	.210 .106 .031	.203 .104 .030	.195 .102 .030	.189 .099 .029	
7.0	.200 .099 .028	.196 .098 .028	.189 .096 .028	.182 .094 .027	.176 .092 .027	
8.0	.186 .091 .026	.183 .090 .025	.177 .088 .025	.171 .087 .025	.165 .085 .025	
9.0	.175 .084 .024	.172 .084 .023	.166 .082 .023	.161 .081 .023	.156 .079 .023	
10.0	.164 .079 .022	.161 .078 .022	.156 .077 .022	.152 .075 .021	.147 .074 .021	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio					Ceiling Cavity Exitance Coefficients(CCEC)
0.0	.201 .201 .201	.171 .171 .171	.117 .117 .117	.067 .067 .067	.021 .021 .021	
1.0	.191 .166 .145	.163 .143 .124	.112 .098 .086	.064 .057 .050	.021 .018 .016	
2.0	.183 .142 .108	.156 .122 .094	.107 .085 .065	.062 .049 .038	.020 .016 .012	
3.0	.175 .125 .084	.150 .108 .073	.103 .075 .051	.060 .044 .030	.019 .014 .010	
4.0	.168 .111 .069	.144 .096 .060	.099 .067 .042	.057 .039 .025	.018 .013 .008	
5.0	.160 .101 .057	.138 .087 .050	.095 .061 .035	.055 .036 .021	.018 .012 .007	
6.0	.153 .093 .049	.132 .080 .043	.091 .056 .030	.053 .033 .018	.017 .011 .006	
7.0	.146 .086 .044	.126 .074 .038	.087 .052 .027	.050 .031 .016	.016 .010 .005	
8.0	.140 .080 .039	.120 .069 .034	.083 .049 .024	.048 .029 .014	.016 .009 .005	
9.0	.134 .075 .036	.115 .065 .031	.080 .046 .022	.046 .027 .013	.015 .009 .004	
10.0	.128 .071 .033	.110 .062 .029	.077 .043 .020	.045 .026 .012	.014 .008 .004	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-18

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME: 2835 IP20					TYPE: 2835 192LED 24V			WEIGHT:			
SPEC.: 202-00491-00					DIM.:			SERIAL No.:			
MFR.:					SUR.: 0.01*0.5			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	25.7	27.2	26.0	27.4	27.7	25.9	27.4	26.2	27.6	27.8	
	27.2	28.6	27.5	28.8	29.1	27.5	28.9	27.8	29.2	29.4	
	27.7	29.1	28.1	29.3	29.6	28.1	29.5	28.5	29.8	30.0	
	28.1	29.3	28.4	29.6	29.9	28.6	29.9	29.0	30.2	30.5	
	28.1	29.3	28.5	29.6	30.0	28.8	30.0	29.1	30.3	30.6	
	28.1	29.3	28.5	29.6	30.0	28.9	30.0	29.2	30.3	30.7	
4H	2H	26.3	27.7	26.7	27.9	28.2	26.5	27.8	26.8	28.1	28.4
	3H	28.0	29.2	28.4	29.5	29.8	28.3	29.4	28.7	29.8	30.1
	4H	28.7	29.7	29.1	30.1	30.4	29.1	30.1	29.5	30.5	30.8
	6H	29.1	30.1	29.5	30.4	30.8	29.7	30.6	30.1	31.0	31.4
	8H	29.2	30.1	29.7	30.5	30.9	29.9	30.7	30.3	31.1	31.5
	12H	29.3	30.1	29.7	30.5	30.9	30.0	30.8	30.4	31.2	31.6
8H	4H	29.0	29.8	29.4	30.2	30.6	29.3	30.2	29.7	30.6	31.0
	6H	29.5	30.3	30.0	30.7	31.2	30.0	30.8	30.5	31.2	31.7
	8H	29.7	30.4	30.2	30.8	31.3	30.3	31.0	30.8	31.4	31.9
	12H	29.8	30.4	30.3	30.9	31.4	30.5	31.1	31.0	31.6	32.1
12H	4H	29.0	29.8	29.4	30.2	30.6	29.3	30.1	29.8	30.5	31.0
	6H	29.6	30.2	30.1	30.7	31.2	30.1	30.7	30.6	31.2	31.7
	8H	29.8	30.4	30.3	30.8	31.4	30.4	31.0	30.9	31.4	31.9
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2					
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					
2.0H	+ 0.2 / - 0.4					+ 0.1 / - 0.3					

CIE Pub.117, 1193 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 0.6)
Area: 0.008 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-18

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:


```

Range: 0 - 180DEG
Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

```

ISOCANDELA DIAGRAM

NAME: 2835 IP20	TYPE: 2835 192LED 24V	WEIGHT:
SPEC.: 202-00491-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

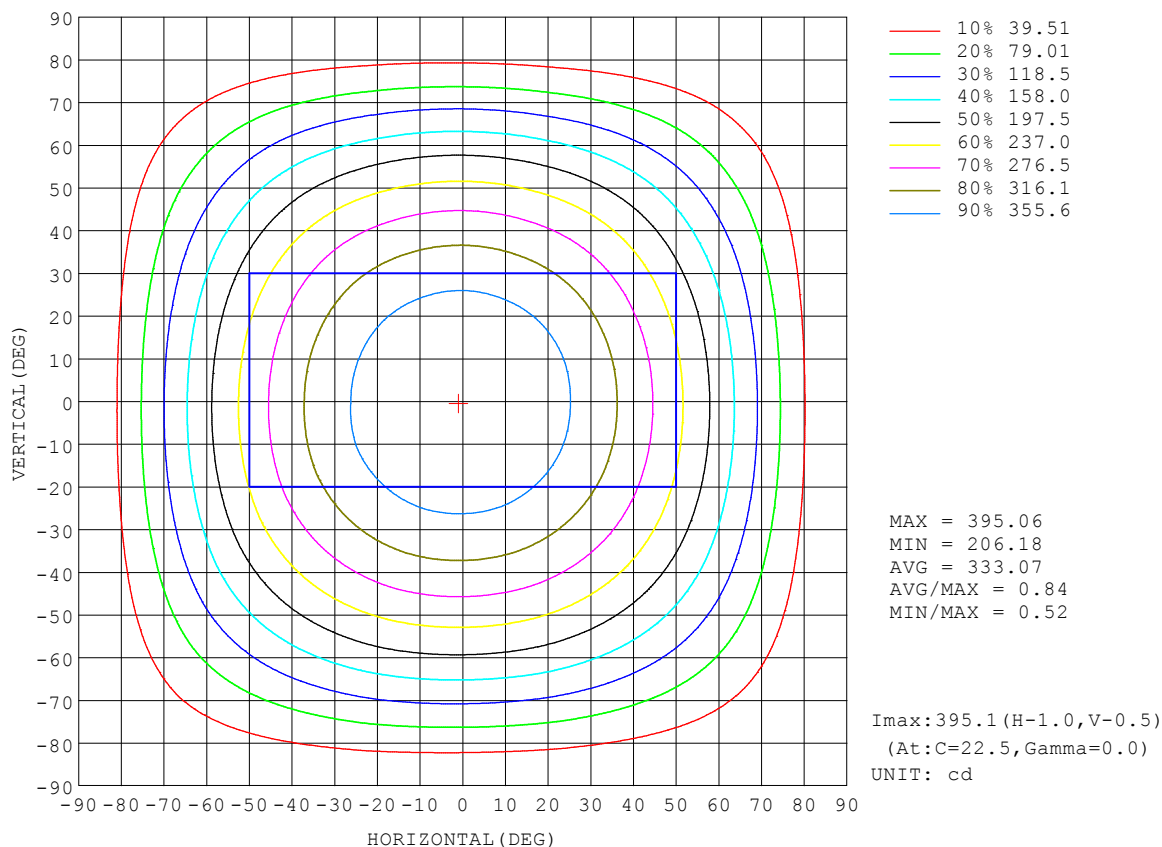


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-03-18

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

AAI Figure

NAME: 2835 IP20	TYPE: 2835 192LED 24V	WEIGHT:
SPEC.: 202-00491-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

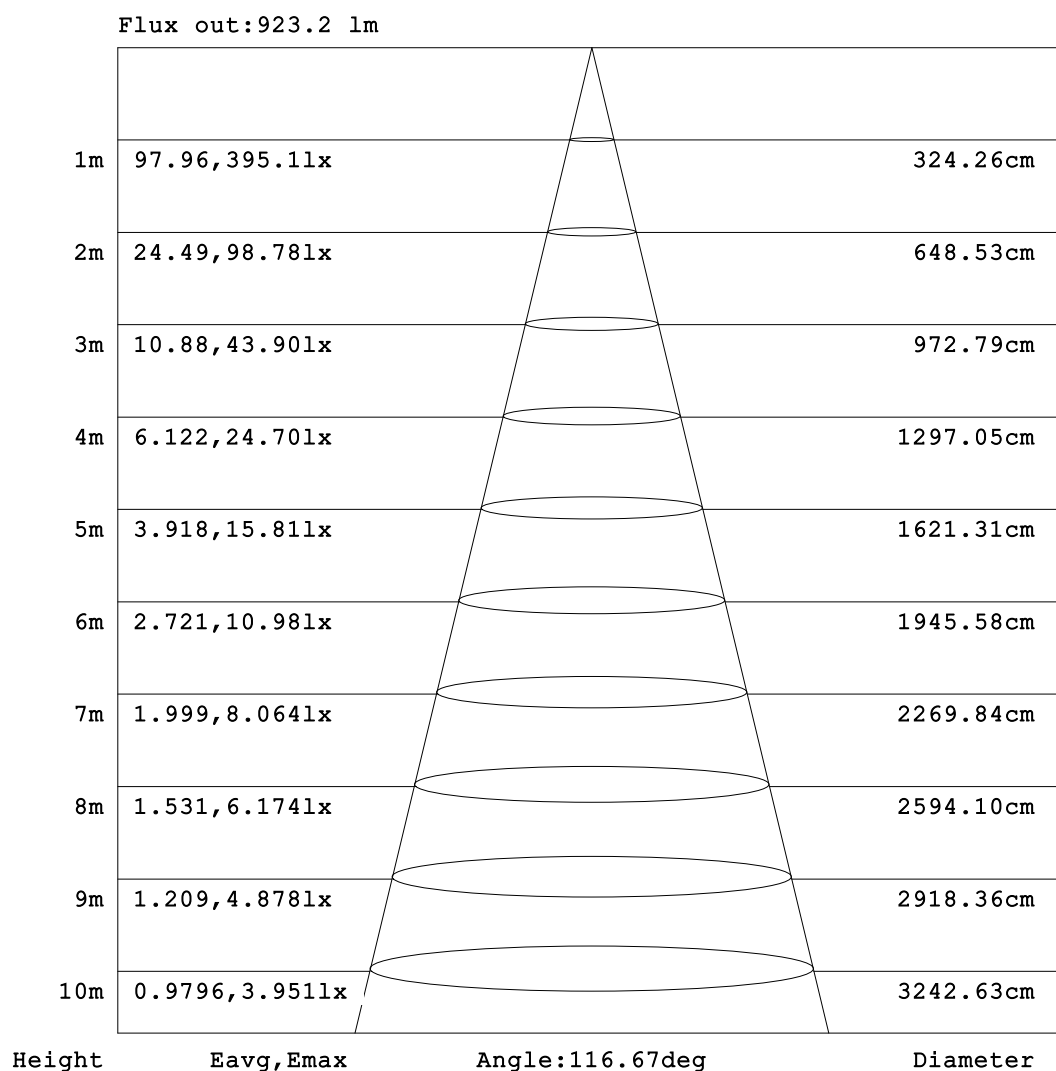


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-03-18

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity:65.0%
 Test Distance:5.749m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

NAME: 2835 IP20	TYPE: 2835 192LED 24V	WEIGHT:
SPEC.: 202-00491-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

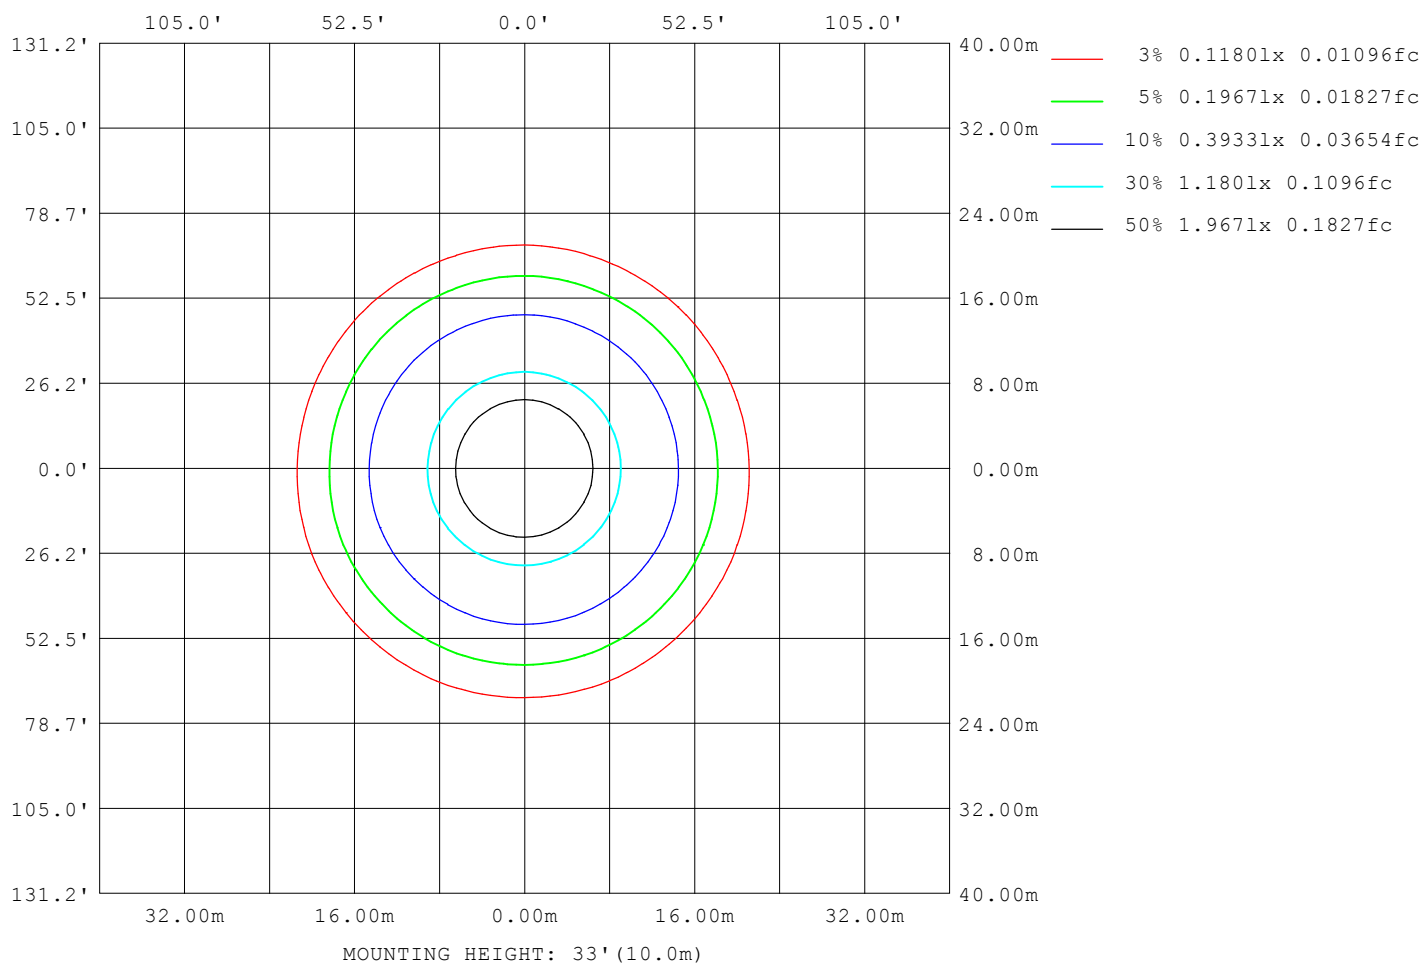

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-03-18

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

LED Avg.L Report

NAME: 2835 IP20	TYPE: 2835 192LED 24V	WEIGHT:
SPEC.: 202-00491-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	44948
L_0~180 (75) av	37755
L_0~180 (85) av	19631
L_90~270 (65) av	45006
L_90~270 (75) av	38019
L_90~270 (85) av	24216
L_45 (65) av	45005
L_45 (75) av	37947
L_45 (85) av	24001

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-03-18

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

Planar Illuminance Curve

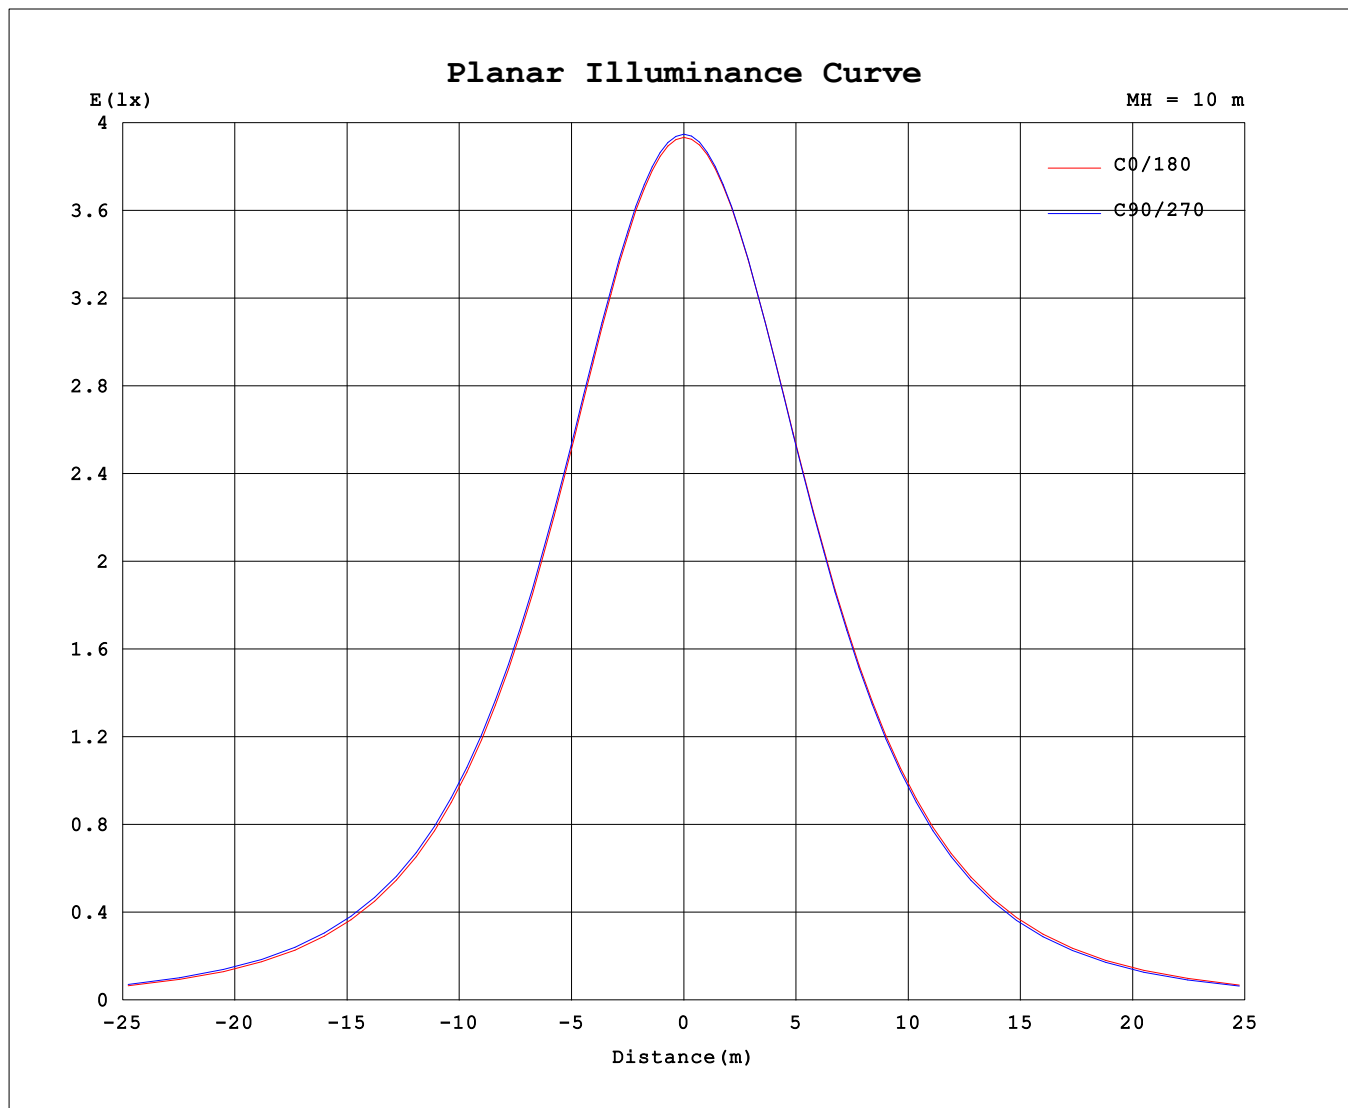

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-03-18

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: 2835 IP20	TYPE: 2835 192LED 24V	WEIGHT:
SPEC.: 202-00491-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	394	394	394	394	394	394	394	394	394	394	394	394	394	394	394	394			
5	393	393	393	394	394	394	394	394	394	394	394	394	394	394	394	393			
10	388	389	389	389	389	389	389	390	390	390	390	389	389	389	388	388			
15	383	383	383	383	384	384	384	385	384	384	384	384	383	383	383	382			
20	371	371	371	372	372	373	373	373	373	373	373	372	371	371	370	370			
25	360	361	361	362	362	363	363	363	363	362	362	361	361	360	360	359			
30	341	342	342	343	343	345	345	345	344	344	344	342	342	341	341	340			
35	326	327	327	328	329	330	330	331	330	329	329	327	327	325	325	325			
40	300	301	302	303	304	305	305	306	304	303	303	301	300	299	299	298			
45	280	282	283	284	285	286	286	287	285	284	283	281	280	278	278	278			
50	247	249	251	253	254	255	255	255	253	251	250	247	246	245	245	245			
55	223	226	227	230	230	232	232	232	229	227	225	223	221	220	220	220			
60	184	187	189	192	193	195	194	194	190	187	185	182	181	179	180	180			
65	156	160	162	165	166	168	167	167	162	159	157	154	152	150	151	151			
70	112	116	119	123	124	126	125	123	119	115	112	108	107	105	106	107			
75	82.2	87.0	90.2	94.2	95.6	97.3	95.7	94.0	88.8	84.4	81.9	77.9	76.4	74.7	75.7	76.9			
80	40.7	45.1	48.5	52.4	53.9	55.1	53.5	51.4	46.3	42.2	39.4	36.1	34.7	33.2	34.5	36.3			
85	18.4	22.2	24.9	27.9	29.2	30.2	28.9	26.8	18.6	19.3	17.5	15.0	13.9	13.2	14.2	15.3			
90	0.45	1.69	2.71	3.81	4.07	4.70	4.35	3.72	0.38	1.42	1.31	0.93	0.71	0.71	0.77	0.74			
95	0.64	0.62	0.69	0.80	0.87	0.94	1.12	1.26	0.52	0.73	0.70	0.67	0.68	0.69	0.67	0.60			
100	1.07	1.00	0.97	0.96	0.96	0.93	0.93	1.00	0.84	0.85	0.89	0.92	0.94	0.95	0.94	0.92			
105	1.40	1.31	1.28	1.25	1.23	1.21	1.22	1.24	1.11	1.11	1.15	1.18	1.20	1.21	1.20	1.18			
110	1.92	1.79	1.76	1.73	1.71	1.70	1.71	1.72	1.57	1.53	1.57	1.60	1.62	1.63	1.62	1.61			
115	2.26	2.11	2.08	2.05	2.04	2.02	2.03	2.04	1.89	1.83	1.85	1.87	1.90	1.91	1.90	1.90			
120	2.75	2.58	2.54	2.51	2.50	2.49	2.50	2.52	2.35	2.28	2.26	2.29	2.31	2.32	2.32	2.34			
125	3.05	2.88	2.83	2.80	2.79	2.79	2.80	2.83	2.65	2.57	2.53	2.55	2.56	2.58	2.58	2.62			
130	3.46	3.30	3.22	3.19	3.18	3.20	3.21	3.26	3.05	2.98	2.92	2.91	2.92	2.94	2.95	3.02			
135	3.70	3.56	3.46	3.43	3.42	3.46	3.47	3.53	3.29	3.22	3.16	3.13	3.13	3.16	3.17	3.27			
140	4.02	3.90	3.80	3.75	3.74	3.80	3.82	3.87	3.61	3.54	3.48	3.45	3.42	3.45	3.48	3.60			
145	4.20	4.10	4.01	3.94	3.93	4.02	4.04	4.06	3.80	3.74	3.68	3.65	3.59	3.63	3.69	3.80			
150	4.44	4.37	4.29	4.21	4.22	4.32	4.31	4.33	4.07	4.00	3.96	3.94	3.85	3.90	3.97	4.07			
155	4.58	4.53	4.46	4.39	4.43	4.50	4.47	4.48	4.24	4.18	4.13	4.13	4.05	4.08	4.14	4.24			
160	4.78	4.75	4.69	4.63	4.72	4.73	4.69	4.71	4.50	4.44	4.40	4.40	4.37	4.35	4.42	4.51			
165	4.92	4.90	4.85	4.80	4.93	4.87	4.85	4.86	4.68	4.63	4.59	4.59	4.59	4.54	4.60	4.70			
170	5.13	5.12	5.09	5.07	5.16	5.11	5.08	5.11	4.97	4.94	4.91	4.92	4.94	4.87	4.92	5.00			
175	5.28	5.27	5.26	5.26	5.34	5.29	5.27	5.28	5.18	5.16	5.15	5.16	5.18	5.12	5.16	5.22			
180	5.49	5.46	5.47	5.48	5.53	5.48	5.48	5.51	5.48	5.46	5.46	5.48	5.52	5.48	5.48	5.51			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-18

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks: