


## LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: 2835 IP20	TYPE: 2835 192LED 24V	WEIGHT:
SPEC.: 202-00488-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 160.34 lm/W
MODEL	2700K	I <sub>max</sub> (cd)	390.0	S/MH(C0/180)	1.28	
NOMINAL POWER(W)	7.2	LOR(%)	100.0	S/MH(C90/270)	1.28	
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	1154.0	□ UP,DN(C0-180)	0.7,49.6	
NOMINAL FLUX(lm)	12.0208	CIE CLASS	DIRECT	□ UP,DN(C180-360)	0.6,49.1	
LAMPS INSIDE	96	□ up (%)	1.3	CIBSE SHR NOM	1.25	
TEST VOLTAGE(V)	24	□ down (%)	98.7	CIBSE SHR MAX	1.35	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

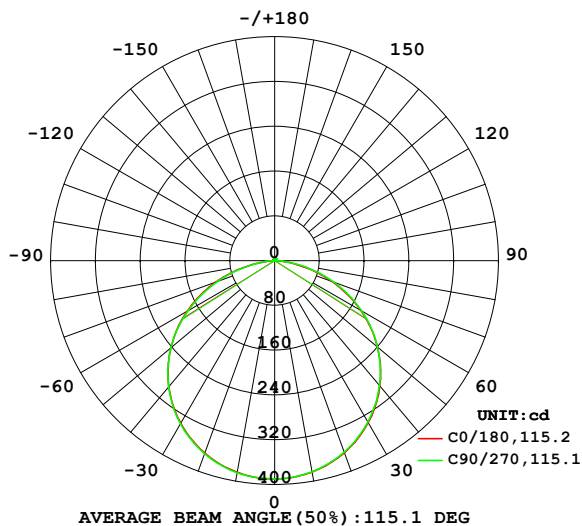

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

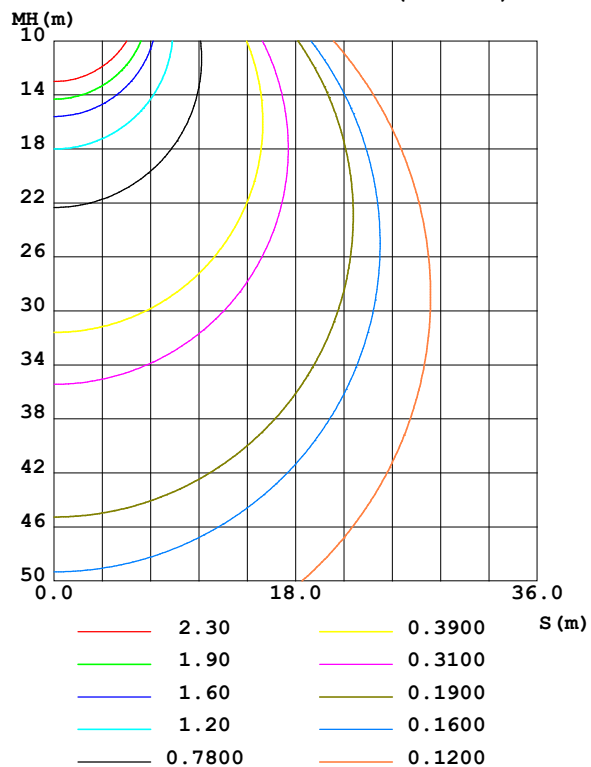

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-03-18

□ Range: 0 - 180DEG  
□ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:

## ZONAL FLUX DIAGRAM

### ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	383.6	383.1	383.0	383.7	384.1	384.7	384.7	384.0	0- 10	36.94	36.94	3.2,3.2
20	364.9	364.0	363.8	365.2	365.8	366.7	366.8	365.5	10- 20	106.2	143.1	12.4,12.4
30	334.3	333.3	333.0	335.0	335.7	336.7	336.7	334.9	20- 30	162.1	305.2	26.4,26.4
40	292.4	291.6	291.5	294.0	294.3	295.1	294.9	292.6	30- 40	197.4	502.6	43.6,43.6
50	240.0	239.8	240.0	242.8	242.2	242.4	241.9	239.5	40- 50	207.0	709.5	61.5,61.5
60	177.9	178.9	179.7	182.5	180.6	179.8	178.7	176.2	50- 60	188.6	898.2	77.8,77.8
70	108.4	110.9	112.5	114.9	111.5	109.4	107.8	105.4	60- 70	143.6	1042	90.3,90.3
80	39.61	42.76	44.81	46.68	38.75	39.39	37.56	35.97	70- 80	78.94	1121	97.1,97.1
90	0.4201	1.339	1.554	2.403	0.3553	0.8761	0.6461	0.7455	80- 90	18.12	1139	98.7,98.7
100	0.9998	0.9484	0.9573	0.9142	0.8107	0.8237	0.8538	0.8586	90-100	0.8090	1140	98.8,98.8
110	1.810	1.714	1.701	1.674	1.525	1.473	1.489	1.512	100-110	1.306	1141	98.9,98.9
120	2.620	2.471	2.459	2.449	2.283	2.149	2.164	2.192	110-120	1.954	1143	99,99
130	3.325	3.142	3.129	3.148	2.967	2.798	2.777	2.817	120-130	2.399	1145	99.2,99.2
140	3.890	3.715	3.674	3.747	3.522	3.364	3.292	3.354	130-140	2.547	1148	99.5,99.5
150	4.331	4.210	4.164	4.239	3.984	3.857	3.730	3.853	140-150	2.390	1150	99.7,99.7
160	4.688	4.615	4.665	4.629	4.413	4.304	4.262	4.314	150-160	1.969	1152	99.8,99.8
170	5.043	5.021	5.095	5.014	4.889	4.820	4.840	4.834	160-170	1.327	1154	100,100
180	5.401	5.379	5.443	5.406	5.394	5.376	5.440	5.404	170-180	0.4878	1154	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 627.38 lm

%lum = 54.4%

%lamp = 54.4%

Conical surface Flux(120deg): 898.16 lm

%lum = 77.8%


%lamp = 77.8%

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-03-18

□ Range: 0 - 180DEG  
□ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:

## LUMINANCE LIMITATION CURVES

NAME: 2835 IP20	TYPE: 2835 192LED 24V	WEIGHT:
SPEC.: 202-00488-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

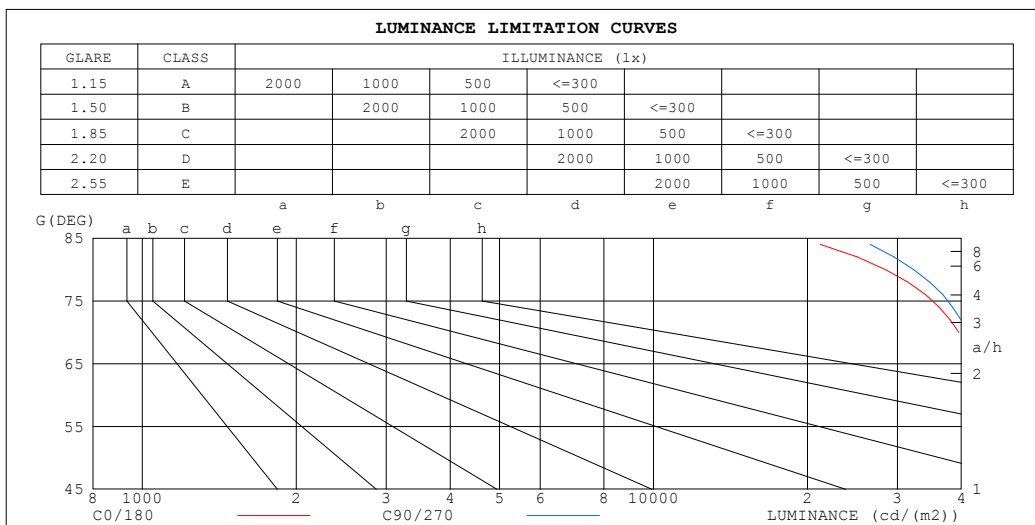

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	25408	31845
80	28461	32273
75	38524	40944
70	39558	41141
65	44533	45428
60	44393	44960
55	47023	47284
50	46580	46707
45	48114	48119


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-03-18

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
 Humidity: 65.0%  
 Test Distance: 5.749m [K=1.0000]  
 Remarks:

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: 2835 IP20	TYPE: 2835 192LED 24V	WEIGHT:
SPEC.: 202-00488-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

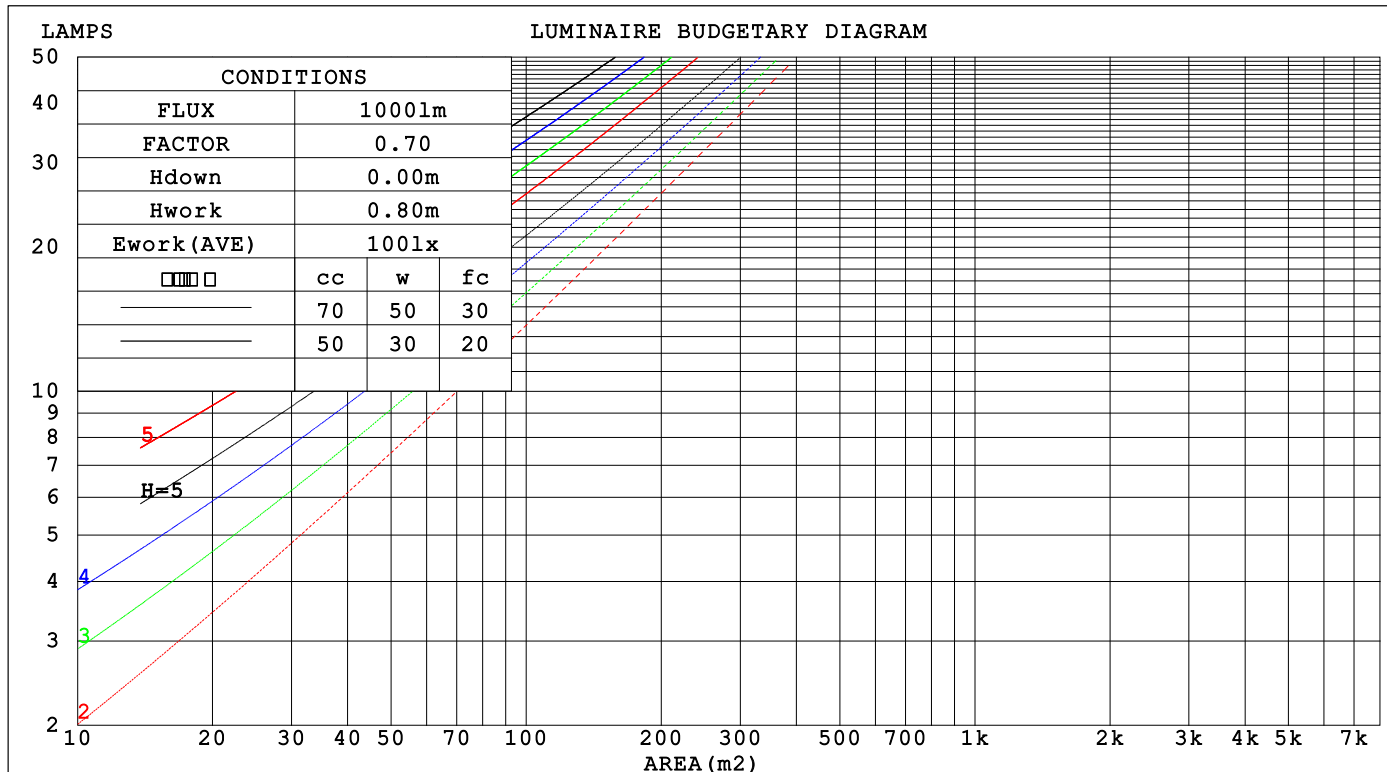

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-03-18

□ Range: 0 - 180DEG  
□ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:

### WEC AND CCEC

NAME: 2835 IP20	TYPE: 2835 192LED 24V	WEIGHT:
SPEC.: 202-00488-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)					
0.0						
1.0	.307 .175 .055	.300 .171 .054	.286 .164 .052	.273 .157 .050	.261 .151 .049	
2.0	.291 .159 .049	.284 .156 .048	.272 .151 .047	.260 .146 .046	.250 .141 .045	
3.0	.270 .143 .043	.264 .141 .043	.253 .137 .042	.243 .133 .041	.233 .129 .040	
4.0	.249 .129 .038	.244 .128 .038	.234 .124 .037	.225 .121 .036	.217 .118 .036	
5.0	.230 .117 .034	.226 .116 .034	.217 .113 .033	.209 .110 .033	.201 .108 .032	
6.0	.214 .107 .031	.210 .106 .030	.202 .103 .030	.195 .101 .030	.188 .099 .029	
7.0	.199 .098 .028	.195 .097 .028	.188 .095 .027	.182 .093 .027	.176 .091 .027	
8.0	.186 .091 .026	.183 .090 .025	.176 .088 .025	.170 .086 .025	.165 .085 .025	
9.0	.174 .084 .024	.171 .083 .023	.166 .082 .023	.160 .080 .023	.155 .079 .023	
10.0	.164 .078 .022	.161 .078 .022	.156 .076 .022	.151 .075 .021	.147 .074 .021	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)					
0.0	.201 .201 .201	.171 .171 .171	.117 .117 .117	.067 .067 .067	.021 .021 .021	
1.0	.190 .166 .145	.163 .143 .125	.111 .098 .086	.064 .057 .050	.021 .018 .016	
2.0	.182 .142 .108	.156 .122 .094	.107 .085 .065	.062 .049 .038	.020 .016 .012	
3.0	.175 .125 .085	.150 .107 .073	.103 .075 .051	.059 .044 .030	.019 .014 .010	
4.0	.167 .111 .069	.143 .096 .060	.099 .067 .042	.057 .039 .025	.018 .013 .008	
5.0	.160 .101 .057	.137 .087 .050	.094 .061 .035	.055 .036 .021	.018 .012 .007	
6.0	.153 .093 .049	.131 .080 .043	.091 .056 .030	.053 .033 .018	.017 .011 .006	
7.0	.146 .086 .044	.125 .074 .038	.087 .052 .027	.050 .031 .016	.016 .010 .005	
8.0	.139 .080 .039	.120 .069 .034	.083 .049 .024	.048 .029 .014	.016 .009 .005	
9.0	.133 .075 .036	.115 .065 .031	.080 .046 .022	.046 .027 .013	.015 .009 .004	
10.0	.128 .071 .033	.110 .061 .029	.076 .043 .020	.045 .026 .012	.014 .008 .004	

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-03-18

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:

### UGR(Unified Glare Rating) Table

NAME: 2835 IP20					TYPE: 2835 192LED 24V			WEIGHT:			
SPEC.: 202-00488-00					DIM.:			SERIAL No.:			
MFR.:					SUR.: 0.01*0.5			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	25.6	27.2	25.9	27.4	27.6	25.7	27.2	26.0	27.4	27.6	
	27.1	28.5	27.5	28.8	29.1	27.2	28.6	27.5	28.9	29.1	
	27.7	29.0	28.0	29.3	29.6	27.8	29.1	28.2	29.4	29.7	
	28.0	29.3	28.4	29.6	29.9	28.2	29.5	28.6	29.8	30.1	
	28.1	29.3	28.4	29.6	29.9	28.3	29.5	28.7	29.8	30.1	
	28.1	29.3	28.5	29.6	29.9	28.4	29.5	28.7	29.8	30.2	
4H	2H	26.3	27.6	26.6	27.9	28.1	26.3	27.6	26.6	27.9	28.2
	3H	27.9	29.1	28.3	29.4	29.7	28.0	29.2	28.4	29.5	29.8
	4H	28.6	29.7	29.0	30.0	30.4	28.7	29.8	29.1	30.1	30.5
	6H	29.0	30.0	29.5	30.4	30.7	29.2	30.2	29.7	30.5	30.9
	8H	29.2	30.0	29.6	30.4	30.8	29.4	30.3	29.8	30.6	31.1
	12H	29.2	30.0	29.6	30.4	30.8	29.5	30.3	29.9	30.7	31.1
8H	4H	28.9	29.7	29.3	30.1	30.5	29.0	29.8	29.4	30.2	30.6
	6H	29.4	30.1	29.9	30.6	31.0	29.6	30.3	30.1	30.8	31.2
	8H	29.6	30.2	30.1	30.7	31.2	29.8	30.5	30.3	30.9	31.4
	12H	29.7	30.2	30.2	30.7	31.2	30.0	30.5	30.5	31.0	31.5
12H	4H	28.9	29.7	29.3	30.1	30.5	29.0	29.8	29.4	30.2	30.6
	6H	29.5	30.1	29.9	30.5	31.0	29.6	30.3	30.1	30.7	31.2
	8H	29.7	30.2	30.2	30.7	31.2	29.9	30.4	30.4	30.9	31.4
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2					
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					

CIE Pub.117, 1154 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 0.5)  
Area: 0.008 m2

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-03-18

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:

### UTILIZATION FACTORS TABLE

NAME: 2835 IP20	TYPE: 2835 192LED 24V	WEIGHT:
SPEC.: 202-00488-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT)    k(RI) x RCR = 5									
k = 0.60	57	45	38	56	45	38	55	44	38	31
0.80	67	55	48	66	55	48	64	54	47	40
1.00	75	64	57	74	64	57	72	65	56	49
1.25	83	72	65	81	71	64	78	70	63	56
1.50	88	78	71	86	77	70	83	75	69	61
2.00	95	86	79	93	85	79	89	82	77	69
2.50	98	91	85	96	89	84	92	86	82	73
3.00	102	95	89	100	93	88	95	90	86	77
4.00	106	100	96	103	98	94	99	95	91	82
5.00	108	104	99	106	101	98	101	98	95	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004										
Suspended										
SHRNOM = 1.25										

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2022-03-18

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity: 65.0%  
Test Distance: 5.749m [K=1.0000]  
Remarks:

**ISOCANDELA DIAGRAM**

NAME: 2835 IP20	TYPE: 2835 192LED 24V	WEIGHT:
SPEC.: 202-00488-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

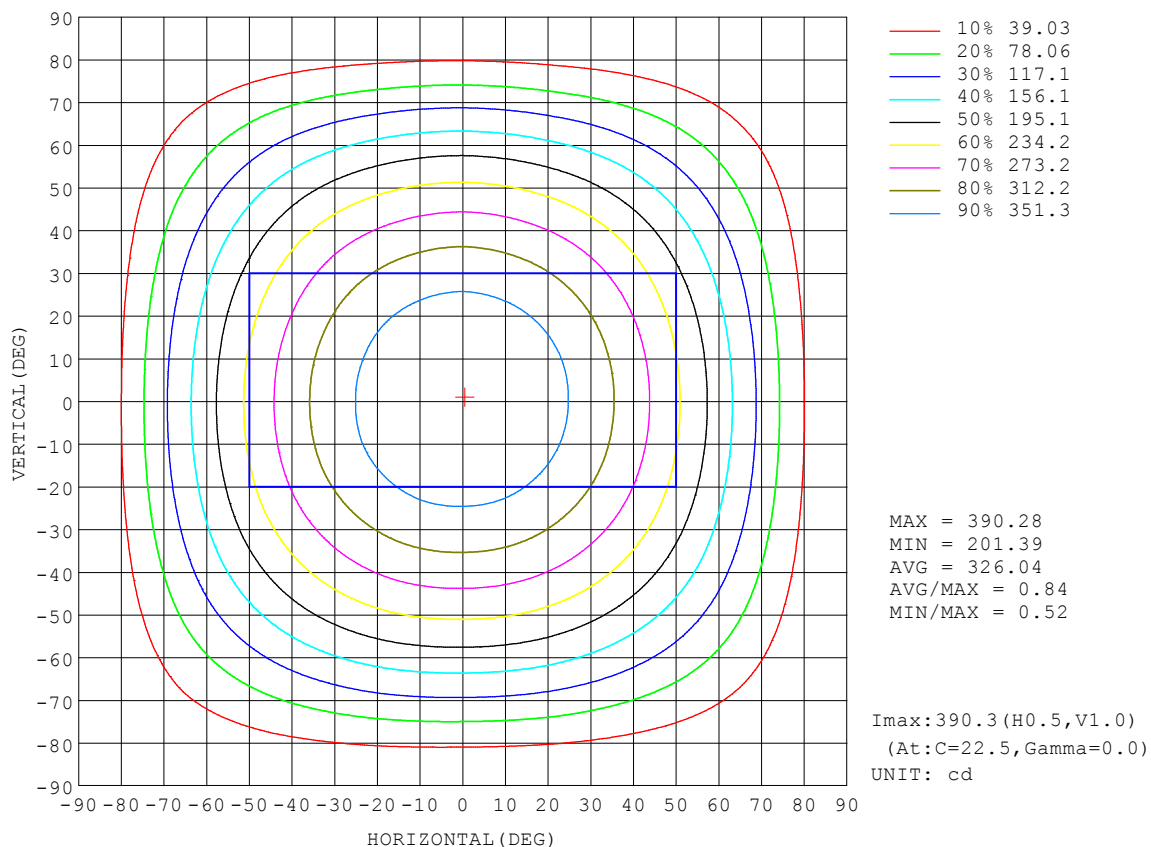


C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2022-03-18

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity: 65.0%  
Test Distance: 5.749m [K=1.0000]  
Remarks:



**AAI Figure**

NAME: 2835 IP20	TYPE: 2835 192LED 24V	WEIGHT:
SPEC.: 202-00488-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

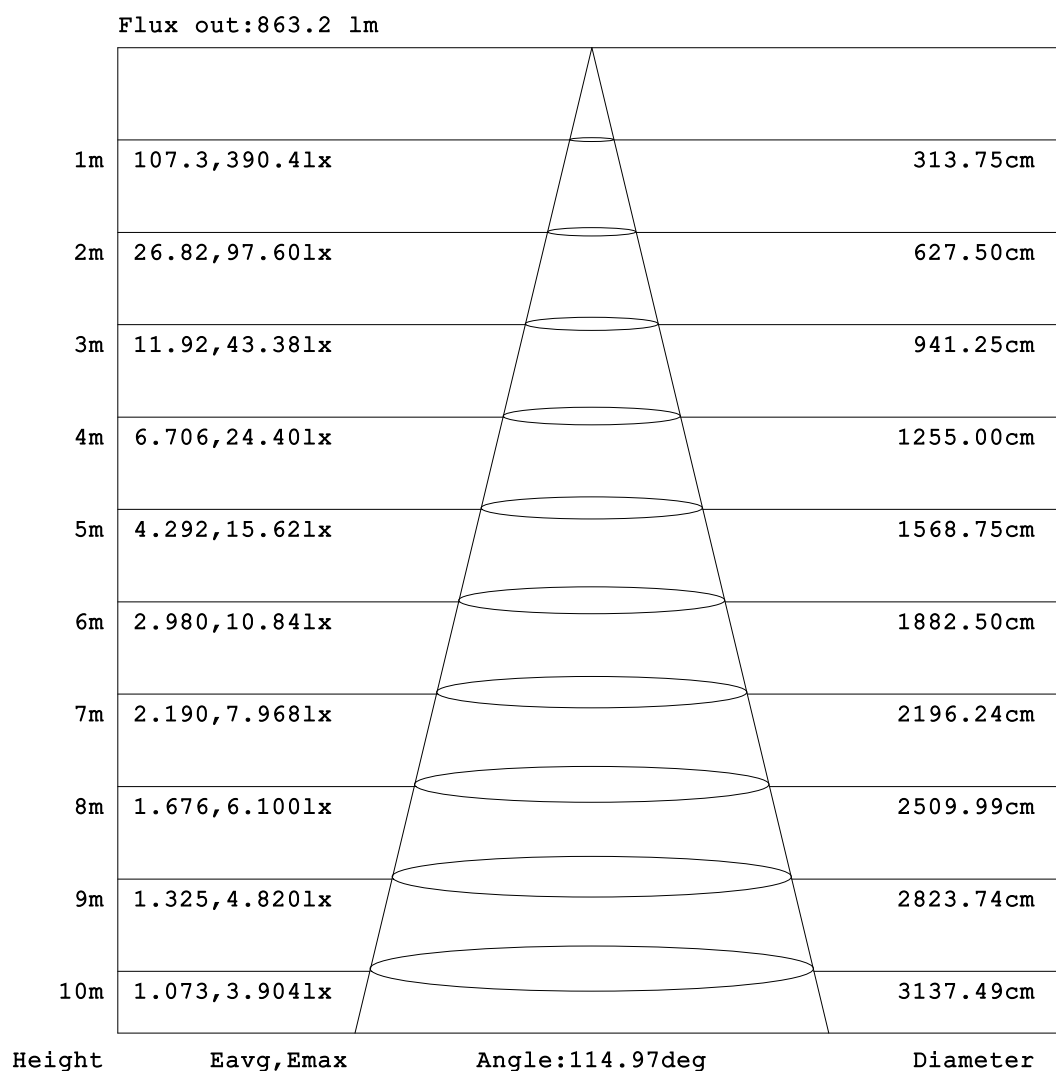


**Note:**The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-03-18

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
 Humidity:65.0%  
 Test Distance:5.749m [K=1.0000]  
 Remarks:

### ISOLUX DIAGRAM

NAME: 2835 IP20	TYPE: 2835 192LED 24V	WEIGHT:
SPEC.: 202-00488-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

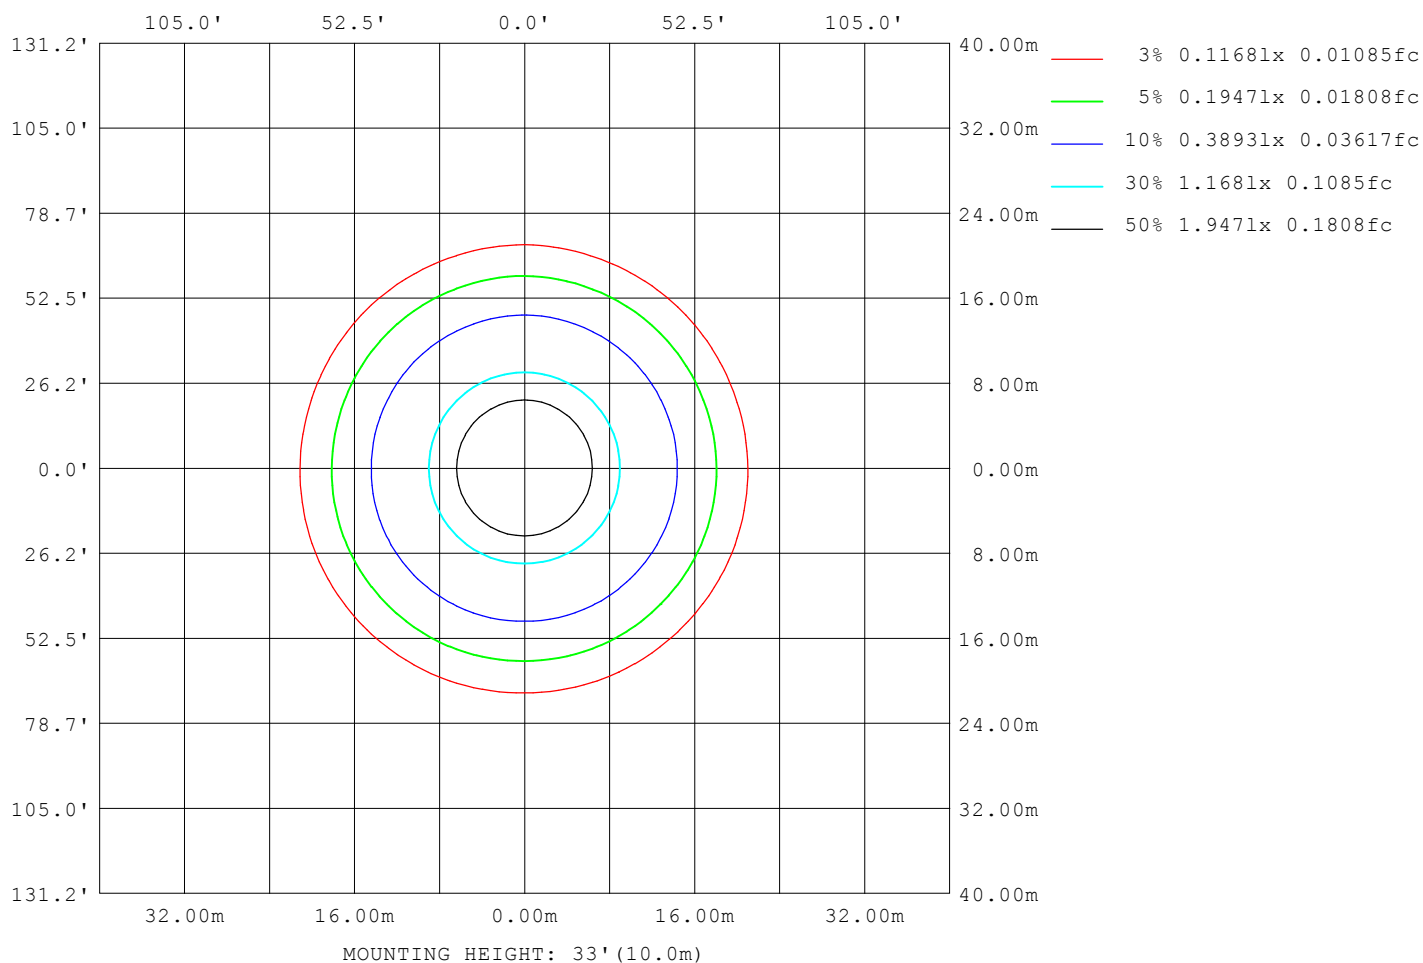

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2022-03-18

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity: 65.0%  
Test Distance: 5.749m [K=1.0000]  
Remarks:

## LED Avg.L Report

NAME: 2835 IP20	TYPE: 2835 192LED 24V	WEIGHT:
SPEC.: 202-00488-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	42995
L_0~180 (75) av	35902
L_0~180 (85) av	18603
L_90~270 (65) av	43005
L_90~270 (75) av	36083
L_90~270 (85) av	20585
L_45 (65) av	43029
L_45 (75) av	36083
L_45 (85) av	20914

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2022-03-18

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity: 65.0%  
Test Distance: 5.749m [K=1.0000]  
Remarks:

## Planar Illuminance Curve

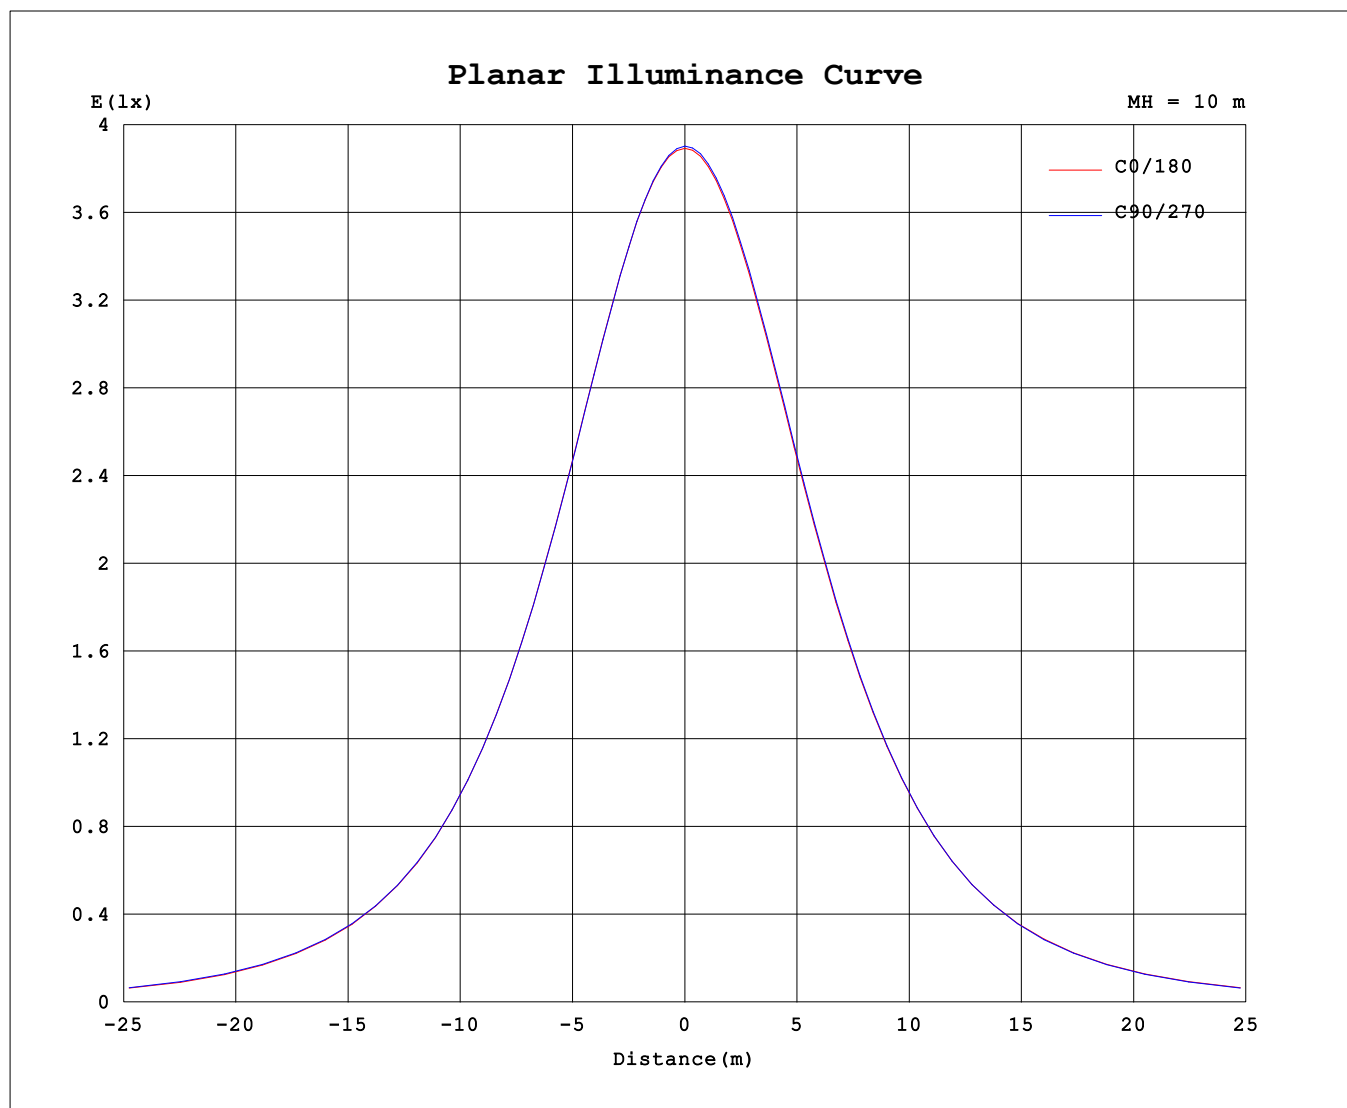

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2022-03-18

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity: 65.0%  
Test Distance: 5.749m [K=1.0000]  
Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: 2835 IP20	TYPE: 2835 192LED 24V	WEIGHT:
SPEC.: 202-00488-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	390	390	390	390	390	390	390	390	390	390	390	390	390	390	390	390			
5	389	389	389	389	389	389	389	389	389	389	389	389	389	389	389	389			
10	384	383	383	383	383	383	384	384	384	384	385	385	385	384	384	384			
15	378	377	377	377	377	377	378	378	378	378	379	379	379	378	378	378			
20	365	365	364	364	364	365	365	366	366	366	367	367	367	366	365	365			
25	354	354	353	353	353	354	355	355	355	355	356	356	356	355	355	354			
30	334	334	333	333	333	334	335	336	336	336	337	336	337	335	335	334			
35	319	319	318	318	318	319	320	321	320	321	321	321	321	320	319	319			
40	292	292	292	292	292	293	294	295	294	294	295	295	295	293	293	292			
45	273	273	272	272	272	274	275	275	275	274	275	275	275	273	273	272			
50	240	240	240	240	240	242	243	243	242	242	242	242	242	240	239	239			
55	216	217	216	217	217	219	220	220	219	218	218	217	218	215	215	215			
60	178	179	179	180	180	182	182	182	181	180	180	179	179	176	176	176			
65	151	152	152	154	154	156	156	156	154	152	152	151	151	149	149	149			
70	108	111	111	113	113	115	115	114	112	110	109	108	108	105	105	106			
75	79.9	82.2	82.9	84.7	84.7	87.0	87.0	86.2	83.1	80.8	80.5	78.5	78.7	76.0	76.5	76.9			
80	39.6	41.8	42.8	44.5	44.8	46.7	46.7	45.5	38.8	40.2	39.4	37.7	37.6	35.6	36.0	36.7			
85	17.7	19.5	20.3	21.9	22.2	23.7	23.6	22.5	16.6	17.9	17.2	15.8	15.6	14.4	14.9	15.5			
90	0.42	1.21	1.34	1.54	1.55	2.14	2.40	1.86	0.36	0.87	0.88	0.70	0.65	0.68	0.75	0.76			
95	0.60	0.59	0.68	0.68	0.66	0.68	0.67	0.57	0.50	0.57	0.60	0.63	0.62	0.65	0.64	0.54			
100	1.00	0.96	0.95	0.95	0.96	0.93	0.91	0.92	0.81	0.80	0.82	0.83	0.85	0.86	0.86	0.83			
105	1.31	1.25	1.25	1.23	1.23	1.21	1.21	1.21	1.08	1.05	1.07	1.08	1.08	1.11	1.11	1.08			
110	1.81	1.72	1.71	1.70	1.70	1.68	1.67	1.68	1.53	1.46	1.47	1.48	1.49	1.51	1.51	1.49			
115	2.14	2.03	2.02	2.01	2.01	1.99	1.99	2.01	1.83	1.75	1.75	1.75	1.76	1.78	1.78	1.78			
120	2.62	2.49	2.47	2.46	2.46	2.45	2.45	2.58	2.28	2.18	2.15	2.16	2.16	2.18	2.19	2.20			
125	2.92	2.79	2.75	2.74	2.74	2.73	2.74	2.78	2.57	2.47	2.41	2.41	2.42	2.45	2.45	2.48			
130	3.32	3.21	3.14	3.13	3.13	3.14	3.15	3.20	2.97	2.87	2.80	2.77	2.78	2.81	2.82	2.88			
135	3.57	3.46	3.37	3.36	3.36	3.39	3.39	3.46	3.20	3.12	3.04	3.00	3.00	3.03	3.04	3.13			
140	3.89	3.80	3.72	3.67	3.67	3.74	3.75	3.80	3.52	3.44	3.36	3.33	3.29	3.32	3.35	3.46			
145	4.08	4.00	3.92	3.87	3.87	3.95	3.96	3.99	3.72	3.63	3.57	3.54	3.47	3.51	3.56	3.67			
150	4.33	4.28	4.21	4.15	4.16	4.25	4.24	4.26	3.98	3.91	3.86	3.83	3.73	3.78	3.85	3.95			
155	4.48	4.44	4.38	4.32	4.37	4.43	4.40	4.42	4.16	4.08	4.03	4.02	3.94	3.97	4.04	4.12			
160	4.69	4.66	4.61	4.57	4.67	4.66	4.63	4.65	4.41	4.35	4.30	4.30	4.26	4.25	4.31	4.40			
165	4.83	4.82	4.77	4.73	4.86	4.81	4.77	4.79	4.60	4.54	4.50	4.49	4.49	4.44	4.51	4.60			
170	5.04	5.04	5.02	5.00	5.10	5.04	5.01	5.04	4.89	4.85	4.82	4.83	4.84	4.78	4.83	4.92			
175	5.20	5.20	5.19	5.18	5.26	5.21	5.20	5.22	5.10	5.08	5.06	5.06	5.08	5.03	5.08	5.13			
180	5.40	5.38	5.38	5.39	5.44	5.40	5.41	5.43	5.39	5.38	5.38	5.39	5.44	5.40	5.40	5.43			

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-03-18

□ Range: 0 - 180DEG  
□ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks: