


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: 2835 IP20	TYPE: 2835 192LED 24V	WEIGHT:
SPEC.: 202-00486-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 134.54 lm/W
MODEL	6500K	I <sub>max</sub> (cd)	321.8	S/MH(C0/180)	1.29	
NOMINAL POWER(W)	7.2	LOR(%)	100.0	S/MH(C90/270)	1.29	
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	966.03	□ UP,DN(C0-180)	0.7,49.6	
NOMINAL FLUX(lm)	10.0629	CIE CLASS	DIRECT	□ UP,DN(C180-360)	0.6,49.1	
LAMPS INSIDE	96	□ up (%)	1.3	CIBSE SHR NOM	1.25	
TEST VOLTAGE(V)	24	□ down (%)	98.7	CIBSE SHR MAX	1.35	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

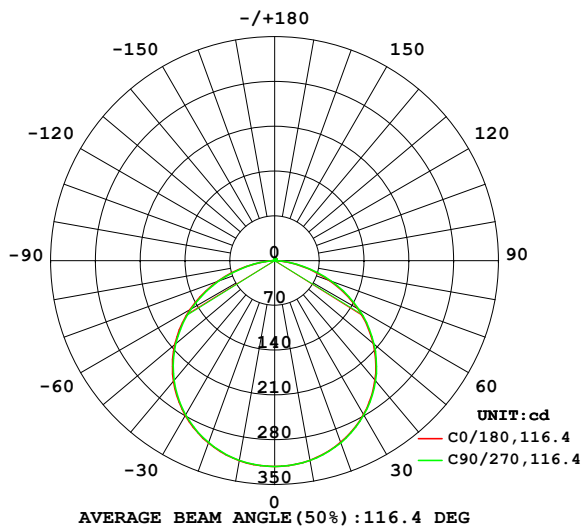

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

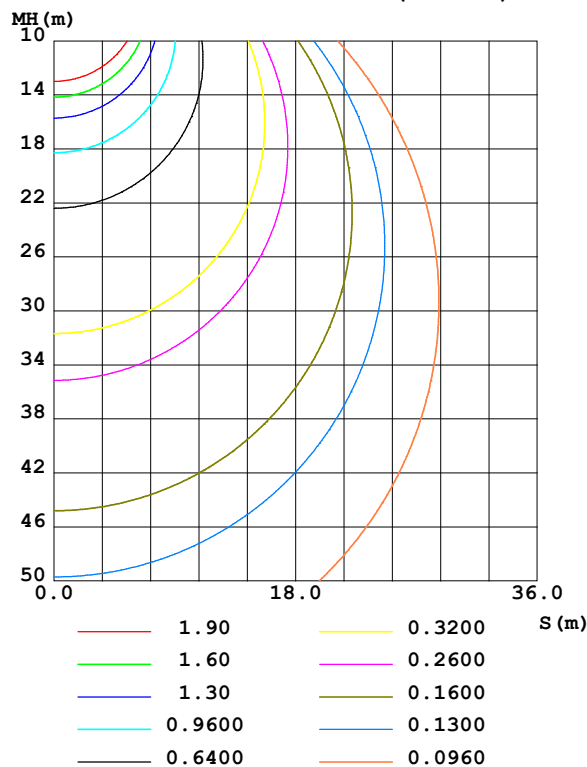

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-03-18

□ Range: 0 - 180DEG  
 □ Interval: 2.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
 Humidity:65.0%  
 Test Distance:5.749m [K=1.0000]  
 Remarks:

## ZONAL FLUX DIAGRAM

### ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	316.9	317.0	317.2	317.6	317.4	317.3	317.1	316.7	0- 10	30.50	30.50	3.16,3.16
20	302.1	302.5	302.8	303.6	303.3	303.0	302.5	301.8	10- 20	87.85	118.4	12.3,12.3
30	277.9	278.4	278.9	279.8	279.5	279.1	278.4	277.4	20- 30	134.6	252.9	26.2,26.2
40	244.1	244.8	245.4	246.8	246.2	245.7	244.7	243.4	30- 40	164.6	417.5	43.2,43.2
50	201.1	202.1	202.9	204.5	203.7	203.0	201.9	200.3	40- 50	173.4	590.9	61.2,61.2
60	149.7	151.0	152.0	153.9	152.6	151.8	150.5	148.6	50- 60	158.8	749.6	77.6,77.6
70	91.52	93.13	94.34	96.19	94.42	93.47	92.07	90.06	60- 70	121.3	871.0	90.2,90.2
80	33.55	35.18	36.36	37.79	34.82	34.91	33.70	31.90	70- 80	66.93	937.9	97.1,97.1
90	0.3548	1.180	1.193	1.434	0.3005	1.143	0.8793	0.8465	80- 90	15.47	953.4	98.7,98.7
100	0.8428	0.8107	0.8051	0.7883	0.6844	0.6834	0.7181	0.7110	90-100	0.6802	954.0	98.8,98.8
110	1.522	1.448	1.435	1.418	1.273	1.231	1.246	1.258	100-110	1.099	955.1	98.9,98.9
120	2.201	2.067	2.055	2.052	1.907	1.802	1.818	1.835	110-120	1.638	956.8	99,99
130	2.787	2.619	2.601	2.623	2.472	2.347	2.332	2.362	120-130	2.006	958.8	99.2,99.2
140	3.240	3.092	3.046	3.114	2.936	2.817	2.759	2.811	130-140	2.126	960.9	99.5,99.5
150	3.595	3.483	3.436	3.507	3.305	3.212	3.118	3.213	140-150	1.989	962.9	99.7,99.7
160	3.884	3.813	3.847	3.818	3.653	3.569	3.546	3.584	150-160	1.632	964.5	99.8,99.8
170	4.170	4.147	4.203	4.139	4.044	3.995	4.012	4.002	160-170	1.098	965.6	100,100
180	4.458	4.444	4.496	4.462	4.454	4.440	4.494	4.458	170-180	0.4033	966.0	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 521.92 lm

%lum = 54.0%

%lamp = 54.0%

Conical surface Flux(120deg): 749.64 lm

%lum = 77.6%


%lamp = 77.6%

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-03-18

□ Range: 0 - 180DEG  
□ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:

LUMINANCE LIMITATION CURVES

NAME: 2835 IP20	TYPE: 2835 192LED 24V	WEIGHT:
SPEC.: 202-00486-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

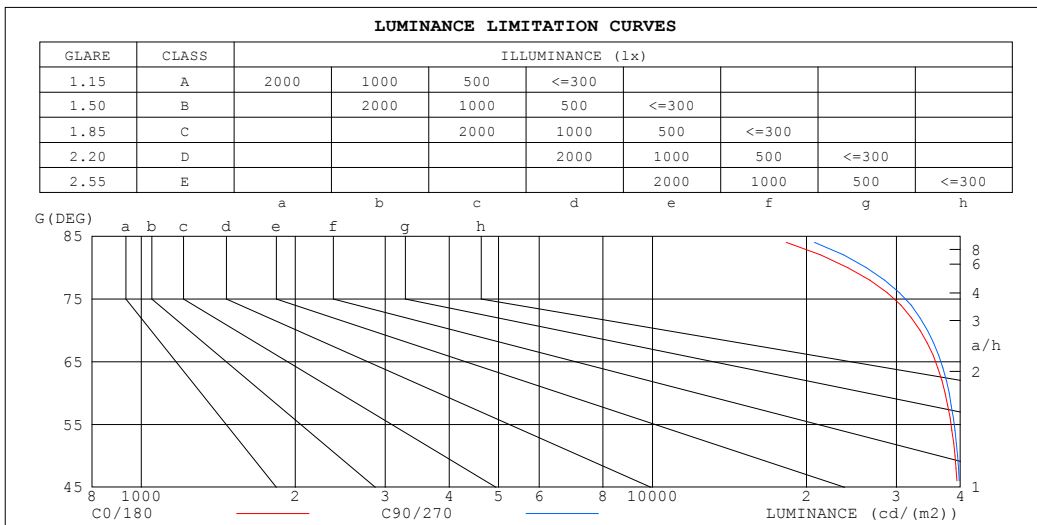

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	21900	24879
80	24105	26192
75	32588	34125
70	33380	34506
65	37487	38359
60	37360	38032
55	39481	40011
50	39038	39490
45	40207	40590


C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2022-03-18

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity: 65.0%  
Test Distance: 5.749m [K=1.0000]  
Remarks:

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: 2835 IP20	TYPE: 2835 192LED 24V	WEIGHT:
SPEC.: 202-00486-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

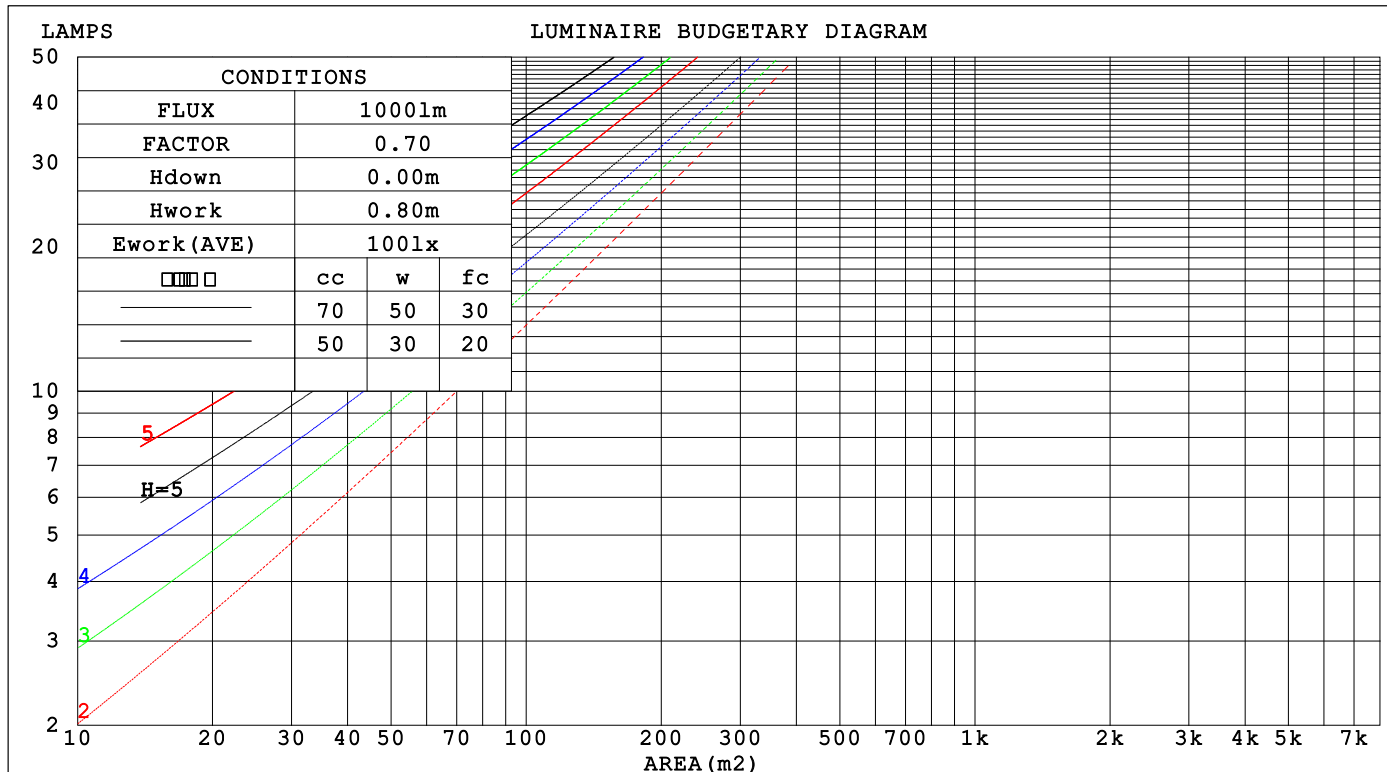

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-03-18

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:

### WEC AND CCEC

NAME: 2835 IP20	TYPE: 2835 192LED 24V	WEIGHT:
SPEC.: 202-00486-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)					
0.0						
1.0	.308 .175 .056	.301 .172 .055	.287 .165 .053	.274 .158 .051	.262 .152 .049	
2.0	.292 .160 .049	.285 .157 .048	.273 .152 .047	.261 .147 .046	.251 .142 .045	
3.0	.270 .144 .043	.265 .142 .043	.254 .137 .042	.243 .133 .041	.234 .130 .040	
4.0	.250 .130 .038	.245 .128 .038	.235 .125 .037	.226 .121 .037	.217 .118 .036	
5.0	.231 .118 .034	.226 .116 .034	.218 .113 .033	.210 .111 .033	.202 .108 .032	
6.0	.214 .107 .031	.210 .106 .031	.202 .104 .030	.195 .101 .030	.188 .099 .029	
7.0	.199 .099 .028	.196 .098 .028	.189 .095 .027	.182 .093 .027	.176 .091 .027	
8.0	.186 .091 .026	.183 .090 .025	.177 .088 .025	.171 .087 .025	.165 .085 .025	
9.0	.174 .084 .024	.172 .084 .023	.166 .082 .023	.161 .080 .023	.156 .079 .023	
10.0	.164 .079 .022	.161 .078 .022	.156 .077 .022	.151 .075 .021	.147 .074 .021	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)					
0.0	.200 .200 .200	.171 .171 .171	.117 .117 .117	.067 .067 .067	.021 .021 .021	
1.0	.190 .166 .145	.163 .143 .124	.111 .098 .086	.064 .057 .050	.021 .018 .016	
2.0	.182 .142 .108	.156 .122 .093	.107 .085 .065	.062 .049 .038	.020 .016 .012	
3.0	.175 .124 .084	.150 .107 .073	.103 .075 .051	.059 .044 .030	.019 .014 .010	
4.0	.167 .111 .068	.144 .096 .059	.099 .067 .042	.057 .039 .025	.018 .013 .008	
5.0	.160 .101 .057	.137 .087 .050	.095 .061 .035	.055 .036 .021	.018 .012 .007	
6.0	.153 .093 .049	.131 .080 .043	.091 .056 .030	.053 .033 .018	.017 .011 .006	
7.0	.146 .086 .043	.126 .074 .038	.087 .052 .027	.050 .031 .016	.016 .010 .005	
8.0	.140 .080 .039	.120 .069 .034	.083 .049 .024	.048 .029 .014	.016 .009 .005	
9.0	.133 .075 .036	.115 .065 .031	.080 .046 .022	.046 .027 .013	.015 .009 .004	
10.0	.128 .071 .033	.110 .061 .029	.076 .043 .020	.045 .026 .012	.014 .008 .004	

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-03-18

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:

### UGR(Unified Glare Rating) Table

NAME: 2835 IP20					TYPE: 2835 192LED 24V			WEIGHT:			
SPEC.: 202-00486-00					DIM.:			SERIAL No.:			
MFR.:					SUR.: 0.01*0.5			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	25.7	27.2	26.0	27.4	27.7	25.7	27.3	26.0	27.5	27.7	
	27.2	28.6	27.5	28.8	29.1	27.3	28.7	27.6	28.9	29.2	
	27.7	29.1	28.1	29.3	29.6	27.9	29.2	28.2	29.5	29.7	
	28.1	29.3	28.4	29.6	29.9	28.2	29.5	28.6	29.8	30.1	
	28.1	29.3	28.5	29.6	30.0	28.3	29.5	28.7	29.8	30.1	
	28.1	29.3	28.5	29.6	30.0	28.3	29.5	28.7	29.8	30.2	
4H	2H	26.3	27.6	26.6	27.9	28.2	26.4	27.7	26.7	28.0	28.2
	3H	28.0	29.1	28.3	29.5	29.8	28.1	29.2	28.4	29.5	29.9
	4H	28.6	29.7	29.0	30.0	30.4	28.8	29.8	29.2	30.2	30.5
	6H	29.1	30.0	29.5	30.4	30.8	29.2	30.2	29.7	30.5	30.9
	8H	29.2	30.1	29.6	30.5	30.9	29.4	30.2	29.8	30.6	31.0
	12H	29.2	30.0	29.7	30.4	30.9	29.4	30.2	29.9	30.6	31.1
8H	4H	28.9	29.8	29.3	30.1	30.6	29.0	29.9	29.4	30.3	30.7
	6H	29.4	30.2	29.9	30.6	31.1	29.6	30.3	30.1	30.7	31.2
	8H	29.6	30.3	30.1	30.7	31.2	29.8	30.4	30.3	30.9	31.4
	12H	29.7	30.3	30.2	30.7	31.2	29.9	30.5	30.4	30.9	31.4
12H	4H	28.9	29.7	29.3	30.1	30.5	29.0	29.8	29.4	30.2	30.6
	6H	29.5	30.1	30.0	30.6	31.0	29.6	30.3	30.1	30.7	31.2
	8H	29.7	30.2	30.2	30.7	31.2	29.9	30.4	30.3	30.9	31.4
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H	+ 0.2 / - 0.2					+ 0.1 / - 0.2					
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					

CIE Pub.117, 966.0 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.1)  
Area: 0.008 m2

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-03-18

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:

### UTILIZATION FACTORS TABLE

NAME: 2835 IP20	TYPE: 2835 192LED 24V	WEIGHT:
SPEC.: 202-00486-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	57	45	38	56	45	38	55	44	38	31
0.80	67	55	48	66	55	47	64	54	47	40
1.00	75	64	57	74	63	56	72	65	56	48
1.25	82	72	65	81	71	64	78	69	63	56
1.50	87	77	70	86	76	70	82	75	69	61
2.00	94	86	79	92	85	78	89	82	77	69
2.50	98	91	84	96	89	83	92	86	81	73
3.00	102	95	89	100	93	88	95	90	86	77
4.00	106	100	95	103	98	94	99	95	91	82
5.00	108	103	99	106	101	98	101	98	94	85
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2022-03-18

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity: 65.0%  
Test Distance: 5.749m [K=1.0000]  
Remarks:

**ISOCANDELA DIAGRAM**

NAME: 2835 IP20	TYPE: 2835 192LED 24V	WEIGHT:
SPEC.: 202-00486-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

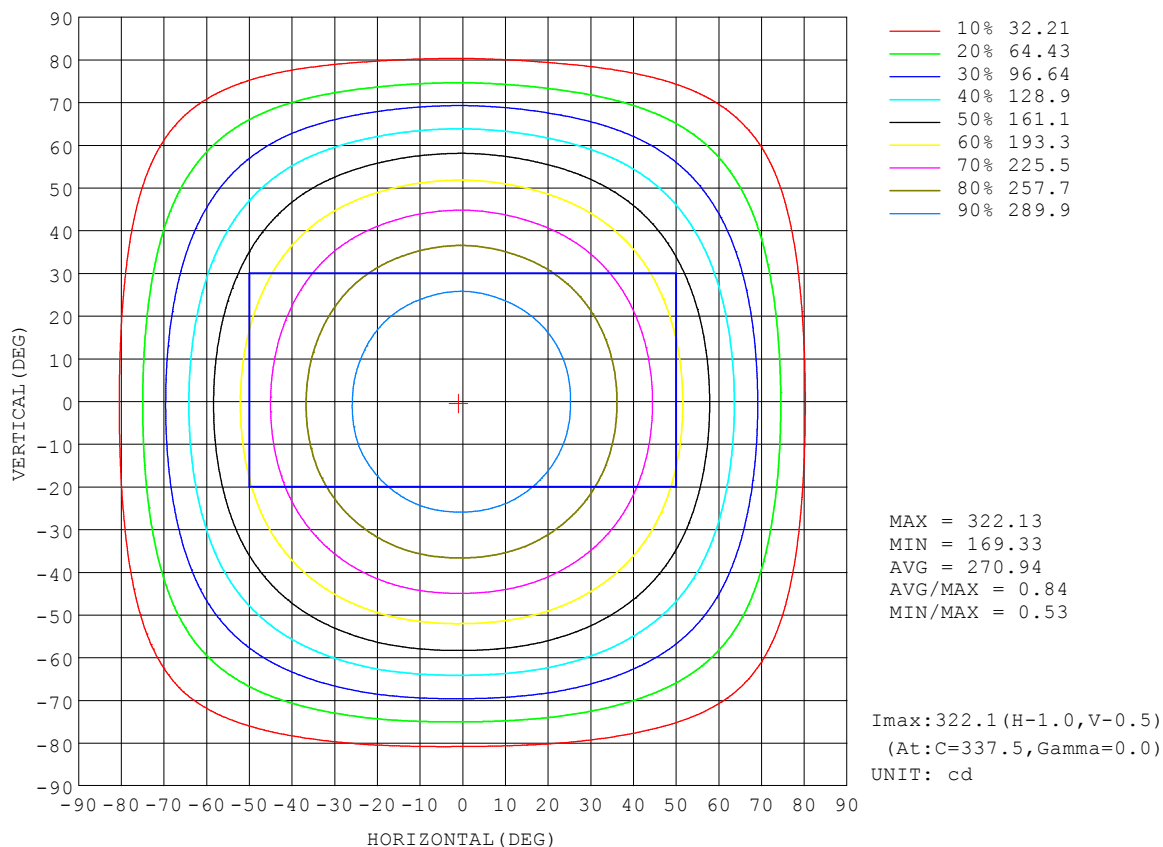


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-03-18

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
 Humidity: 65.0%  
 Test Distance: 5.749m [K=1.0000]  
 Remarks:

**AAI Figure**

NAME: 2835 IP20	TYPE: 2835 192LED 24V	WEIGHT:
SPEC.: 202-00486-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

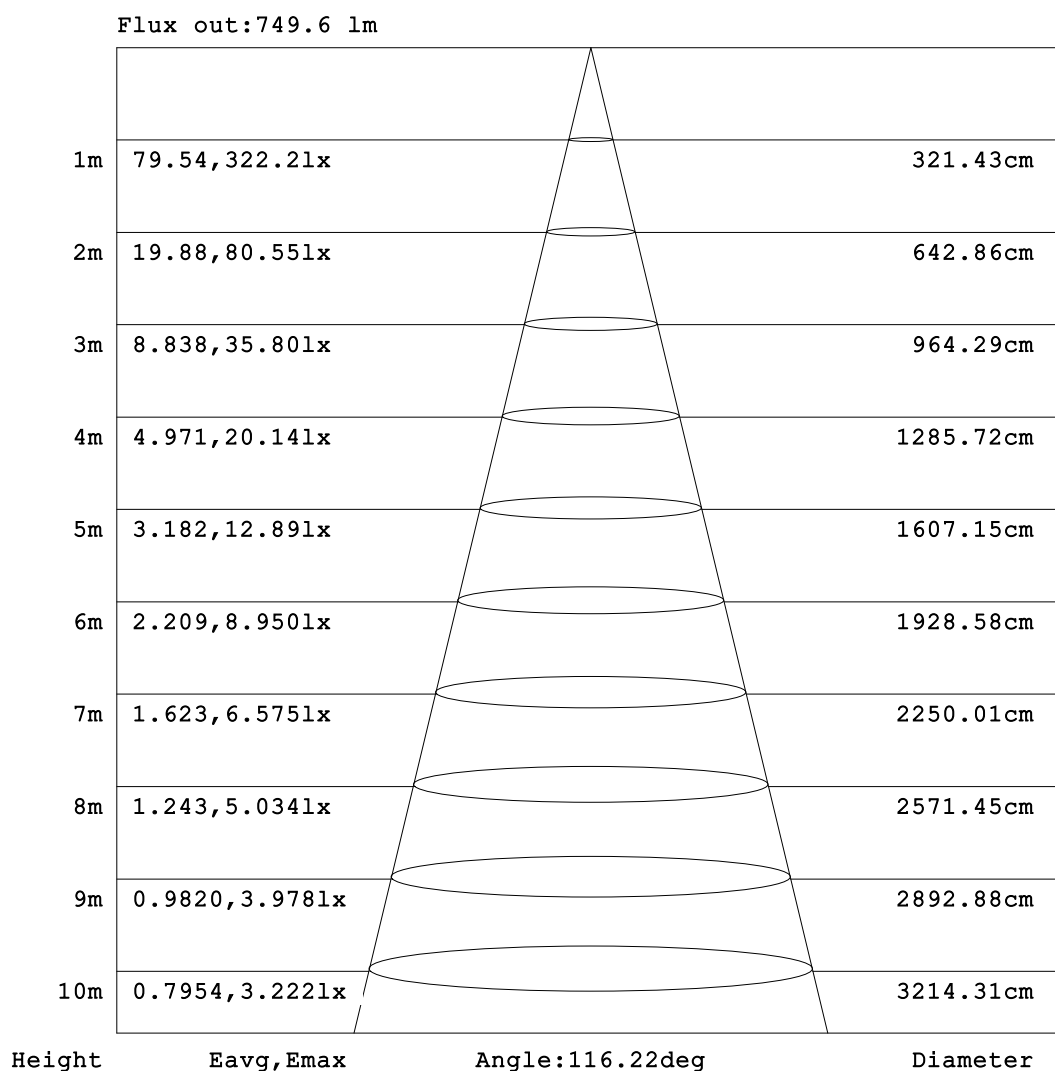


**Note:**The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-03-18

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
 Humidity:65.0%  
 Test Distance:5.749m [K=1.0000]  
 Remarks:

### ISOLUX DIAGRAM

NAME: 2835 IP20	TYPE: 2835 192LED 24V	WEIGHT:
SPEC.: 202-00486-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

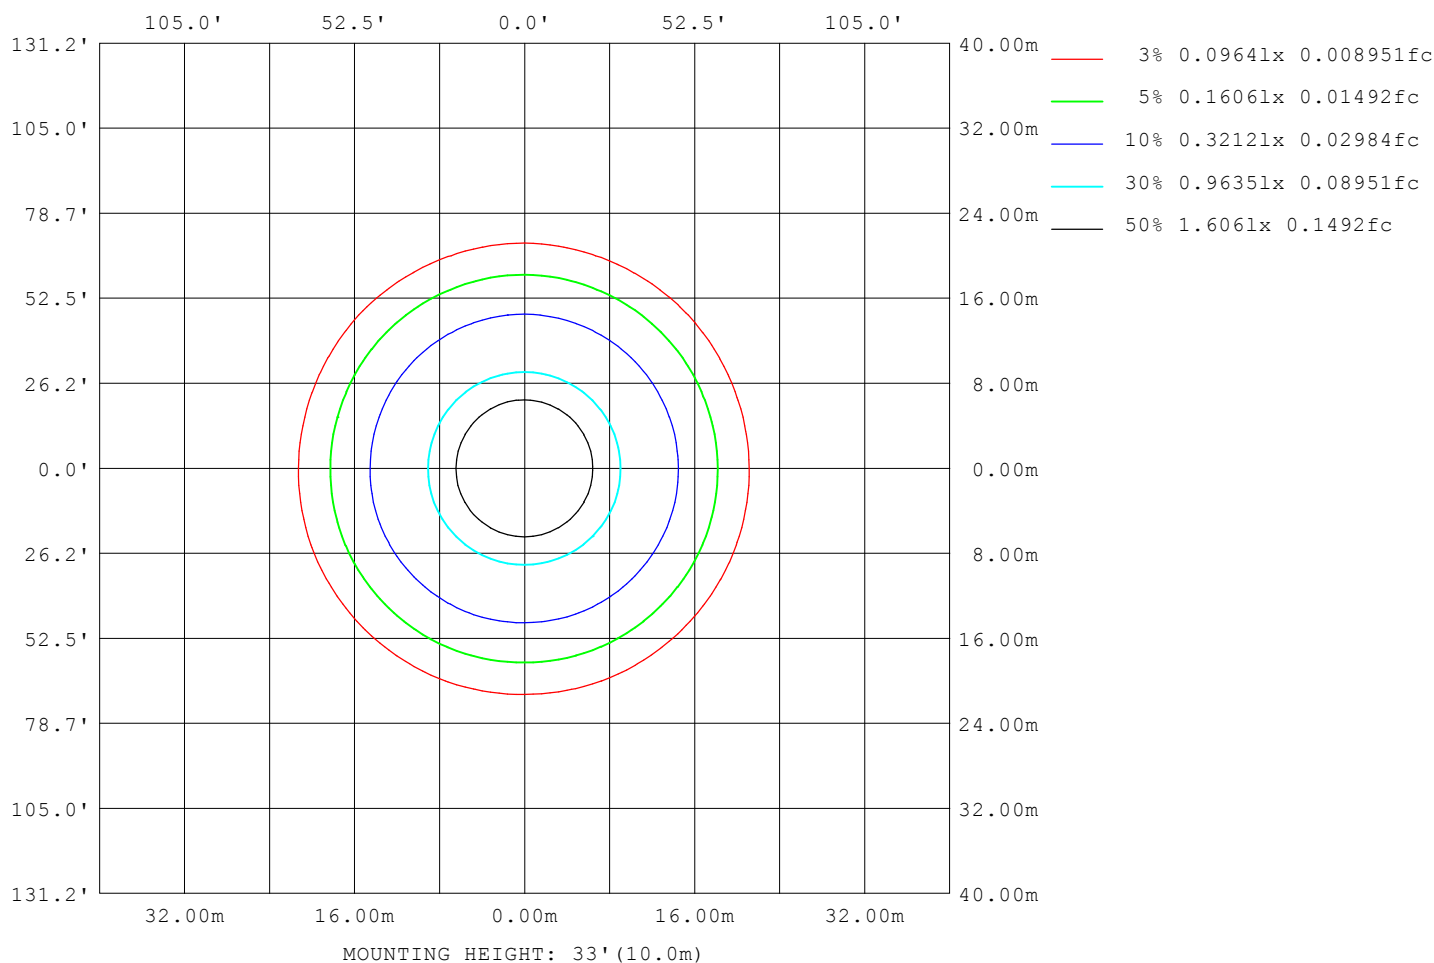

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2022-03-18

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity: 65.0%  
Test Distance: 5.749m [K=1.0000]  
Remarks:

## LED Avg.L Report

NAME: 2835 IP20	TYPE: 2835 192LED 24V	WEIGHT:
SPEC.: 202-00486-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	36291
L_0~180 (75) av	30446
L_0~180 (85) av	14184
L_90~270 (65) av	36349
L_90~270 (75) av	30601
L_90~270 (85) av	17703
L_45 (65) av	36359
L_45 (75) av	30575
L_45 (85) av	17976

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2022-03-18

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity: 65.0%  
Test Distance: 5.749m [K=1.0000]  
Remarks:

### Planar Illuminance Curve

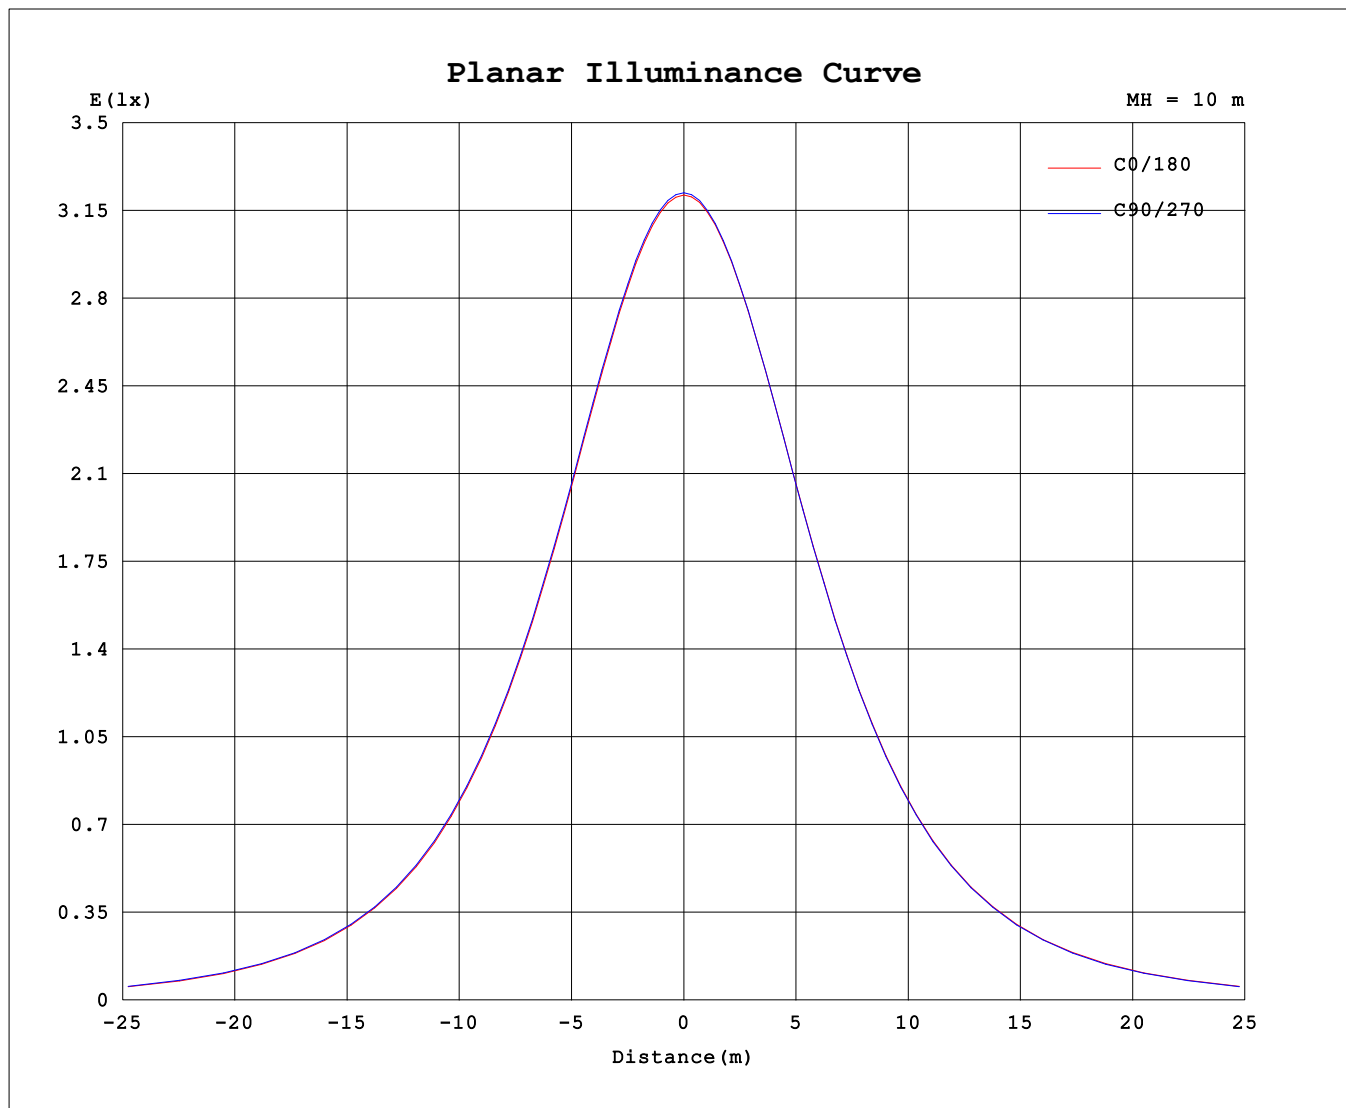

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-03-18

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
 Humidity: 65.0%  
 Test Distance: 5.749m [K=1.0000]  
 Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: 2835 IP20	TYPE: 2835 192LED 24V	WEIGHT:
SPEC.: 202-00486-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	322	322	322	322	322	322	322	322	322	322	322	322	322	322	322	322			
5	321	321	321	321	321	321	321	321	321	321	321	321	321	321	321	321			
10	317	317	317	317	317	318	318	318	317	317	317	317	317	317	317	317			
15	312	312	312	313	313	313	313	313	313	313	313	312	312	312	312	312			
20	302	303	302	303	303	303	304	304	303	303	303	303	302	302	302	302			
25	294	294	294	294	294	295	295	295	295	295	295	294	294	293	293	293			
30	278	278	278	279	279	280	280	280	279	279	279	278	278	277	277	277			
35	265	266	266	267	267	268	268	268	267	267	267	266	266	265	265	265			
40	244	245	245	245	245	247	247	247	246	246	246	245	245	243	243	243			
45	228	229	229	230	229	231	231	231	230	230	230	229	229	227	227	227			
50	201	202	202	203	203	204	205	205	204	203	203	202	202	200	200	200			
55	182	183	183	184	183	185	185	185	184	183	183	182	182	181	181	180			
60	150	151	151	152	152	154	154	154	153	152	152	150	150	149	149	148			
65	127	128	129	130	130	132	131	132	130	129	129	128	128	126	126	126			
70	91.5	93.0	93.1	94.6	94.3	96.3	96.2	96.2	94.4	93.2	93.5	92.1	92.1	90.0	90.1	89.8			
75	67.6	69.0	69.4	70.6	70.6	72.4	72.3	72.1	70.3	69.2	69.4	68.0	68.0	66.0	66.0	65.8			
80	33.6	34.8	35.2	36.3	36.4	37.9	37.8	37.6	34.8	34.8	34.9	33.7	33.7	31.9	31.9	31.8			
85	15.3	16.2	16.6	17.4	17.3	18.5	18.5	18.2	12.2	16.1	16.2	15.2	15.1	13.8	13.9	14.0			
90	0.35	1.06	1.18	1.29	1.19	1.42	1.43	1.30	0.30	1.01	1.14	0.97	0.88	0.78	0.85	0.86			
95	0.50	0.51	0.55	0.55	0.54	0.54	0.54	0.48	0.42	0.43	0.49	0.50	0.50	0.51	0.52	0.47			
100	0.84	0.81	0.81	0.81	0.81	0.79	0.79	0.78	0.68	0.68	0.68	0.71	0.72	0.72	0.71	0.70			
105	1.11	1.06	1.06	1.05	1.04	1.03	1.03	1.02	0.90	0.88	0.89	0.90	0.90	0.91	0.92	0.91			
110	1.52	1.45	1.45	1.44	1.43	1.42	1.42	1.41	1.27	1.22	1.23	1.24	1.25	1.26	1.26	1.26			
115	1.80	1.71	1.70	1.69	1.69	1.68	1.67	1.68	1.53	1.46	1.46	1.47	1.48	1.49	1.49	1.49			
120	2.20	2.09	2.07	2.06	2.05	2.05	2.05	2.06	1.91	1.83	1.80	1.81	1.82	1.83	1.83	1.85			
125	2.45	2.33	2.30	2.29	2.28	2.28	2.29	2.31	2.15	2.07	2.02	2.03	2.03	2.05	2.05	2.08			
130	2.79	2.68	2.62	2.60	2.60	2.62	2.62	2.66	2.47	2.40	2.35	2.33	2.33	2.35	2.36	2.41			
135	2.99	2.89	2.81	2.79	2.79	2.82	2.83	2.87	2.67	2.60	2.55	2.52	2.51	2.54	2.55	2.62			
140	3.24	3.17	3.09	3.05	3.05	3.10	3.11	3.15	2.94	2.87	2.82	2.79	2.76	2.78	2.81	2.90			
145	3.40	3.33	3.25	3.21	3.20	3.27	3.28	3.31	3.09	3.03	2.99	2.96	2.91	2.94	2.98	3.06			
150	3.60	3.55	3.48	3.42	3.44	3.51	3.51	3.52	3.31	3.25	3.21	3.20	3.12	3.16	3.21	3.28			
155	3.72	3.68	3.62	3.57	3.60	3.66	3.64	3.65	3.44	3.39	3.35	3.35	3.28	3.30	3.36	3.43			
160	3.88	3.86	3.81	3.77	3.85	3.85	3.82	3.83	3.65	3.61	3.57	3.57	3.55	3.53	3.58	3.65			
165	4.00	3.99	3.94	3.90	4.01	3.97	3.94	3.96	3.80	3.76	3.73	3.73	3.73	3.69	3.74	3.81			
170	4.17	4.16	4.15	4.12	4.20	4.16	4.14	4.16	4.04	4.02	4.00	4.00	4.01	3.96	4.00	4.07			
175	4.30	4.29	4.29	4.28	4.34	4.30	4.29	4.31	4.22	4.20	4.18	4.19	4.21	4.16	4.20	4.25			
180	4.46	4.45	4.44	4.45	4.50	4.46	4.46	4.48	4.45	4.45	4.44	4.46	4.49	4.46	4.46	4.48			

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:

Test Date:2022-03-18

□ Range: 0 - 180DEG

□ Interval: 2.0DEG

Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450

Humidity:65.0%

Test Distance:5.749m [K=1.0000]

Remarks: