


## LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: 2835 IP20	TYPE: 2835 192LED 24V	WEIGHT:
SPEC.: 202-00124-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 128.22 lm/W			
MODEL	2700K	I <sub>max</sub> (cd)	288.4	S/MH(C0/180)	1.27
NOMINAL POWER(W)	7.2	LOR(%)	100.0	S/MH(C90/270)	1.26
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	848.34	□ UP,DN(C0-180)	0.7,49.9
NOMINAL FLUX(lm)	8.83687	CIE CLASS	DIRECT	□ UP,DN(C180-360)	0.6,48.8
LAMPS INSIDE	96	□ up (%)	1.3	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	24	□ down (%)	98.7	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

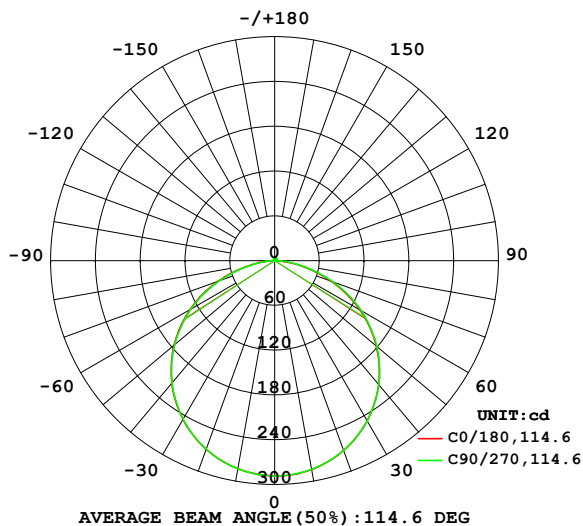

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

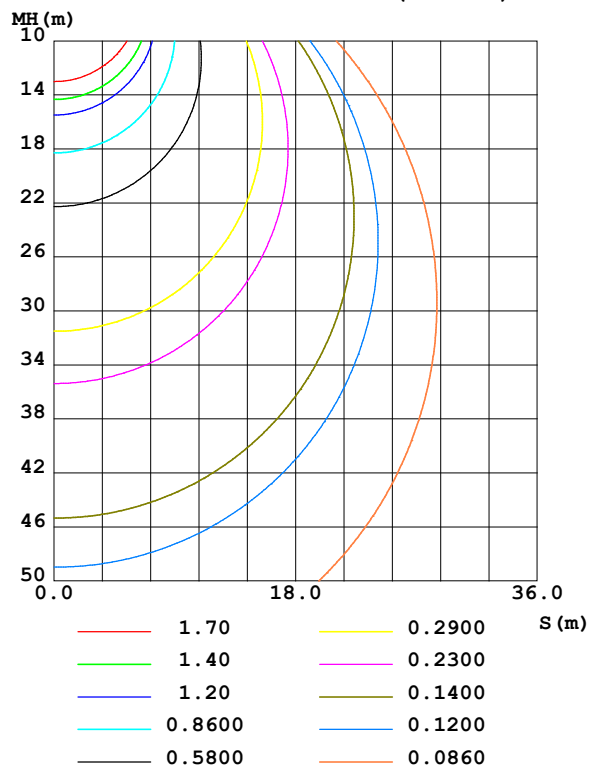

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-03-18

□ Range: 0 - 180DEG  
□ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:

## ZONAL FLUX DIAGRAM

### ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	284.2	284.3	284.1	283.9	283.3	283.1	283.2	283.5	0- 10	27.31	27.31	3.22,3.22
20	270.6	270.9	270.5	270.1	268.9	268.5	268.6	269.2	10- 20	78.43	105.7	12.5,12.5
30	248.0	248.4	248.0	247.5	245.7	245.2	245.3	246.1	20- 30	119.5	225.3	26.6,26.6
40	216.8	217.5	217.1	216.6	214.5	213.8	213.8	214.5	30- 40	145.2	370.5	43.7,43.7
50	177.8	178.7	178.7	178.4	175.9	175.0	174.8	175.3	40- 50	152.0	522.5	61.6,61.6
60	131.9	133.2	133.6	133.6	130.8	129.8	129.2	129.2	50- 60	138.3	660.8	77.9,77.9
70	80.49	82.19	83.31	83.67	80.61	79.42	78.40	77.89	60- 70	105.3	766.0	90.3,90.3
80	29.32	31.13	32.69	33.29	30.40	29.35	28.14	27.20	70- 80	58.04	824.1	97.1,97.1
90	0.2848	0.8410	1.087	1.193	0.2505	0.7975	0.6807	0.5790	80- 90	13.16	837.2	98.7,98.7
100	0.7168	0.6894	0.6862	0.6744	0.5963	0.6024	0.6276	0.6207	90-100	0.5717	837.8	98.8,98.8
110	1.305	1.236	1.228	1.226	1.121	1.083	1.101	1.094	100-110	0.9507	838.8	98.9,98.9
120	1.899	1.781	1.772	1.784	1.676	1.590	1.602	1.600	110-120	1.423	840.2	99,99
130	2.430	2.276	2.259	2.293	2.179	2.068	2.051	2.068	120-130	1.751	841.9	99.2,99.2
140	2.862	2.709	2.663	2.735	2.591	2.489	2.431	2.477	130-140	1.865	843.8	99.5,99.5
150	3.196	3.083	3.029	3.096	2.929	2.843	2.761	2.847	140-150	1.755	845.6	99.7,99.7
160	3.470	3.385	3.409	3.374	3.237	3.174	3.151	3.187	150-160	1.447	847.0	99.8,99.8
170	3.727	3.694	3.739	3.674	3.602	3.552	3.571	3.558	160-170	0.9760	848.0	100,100
180	3.980	3.971	4.015	3.980	3.980	3.971	4.015	3.980	170-180	0.3592	848.3	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 462.16 lm

%lum = 54.5%

%lamp = 54.5%

Conical surface Flux(120deg): 660.77 lm

%lum = 77.9%


%lamp = 77.9%

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-03-18

□ Range: 0 - 180DEG  
□ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:

LUMINANCE LIMITATION CURVES

NAME: 2835 IP20	TYPE: 2835 192LED 24V	WEIGHT:
SPEC.: 202-00124-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

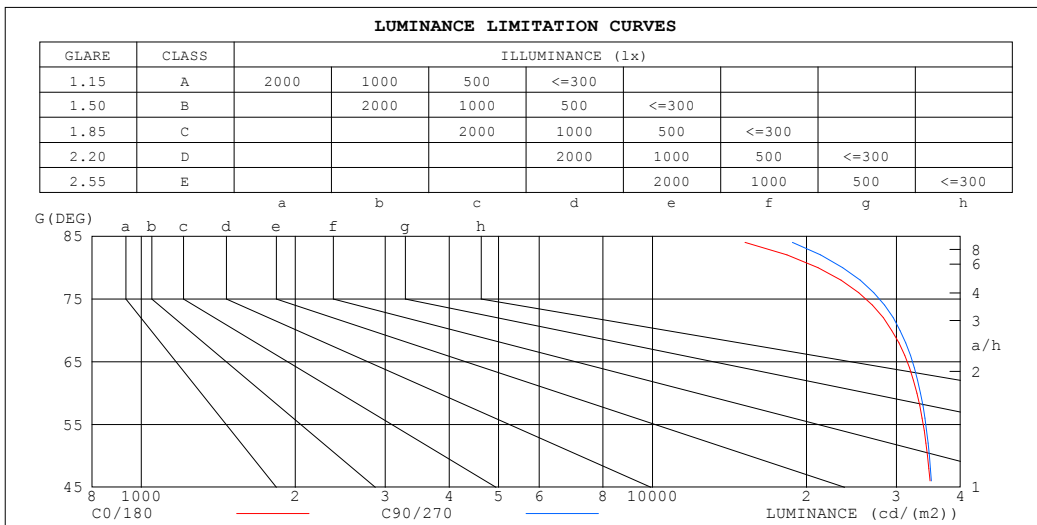

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	18190	22504
80	21060	23553
75	28686	30298
70	29351	30477
65	33013	33754
60	32901	33443
55	34832	35207
50	34503	34788
45	35641	35854


C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2022-03-18

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity: 65.0%  
Test Distance: 5.749m [K=1.0000]  
Remarks:

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: 2835 IP20	TYPE: 2835 192LED 24V	WEIGHT:
SPEC.: 202-00124-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

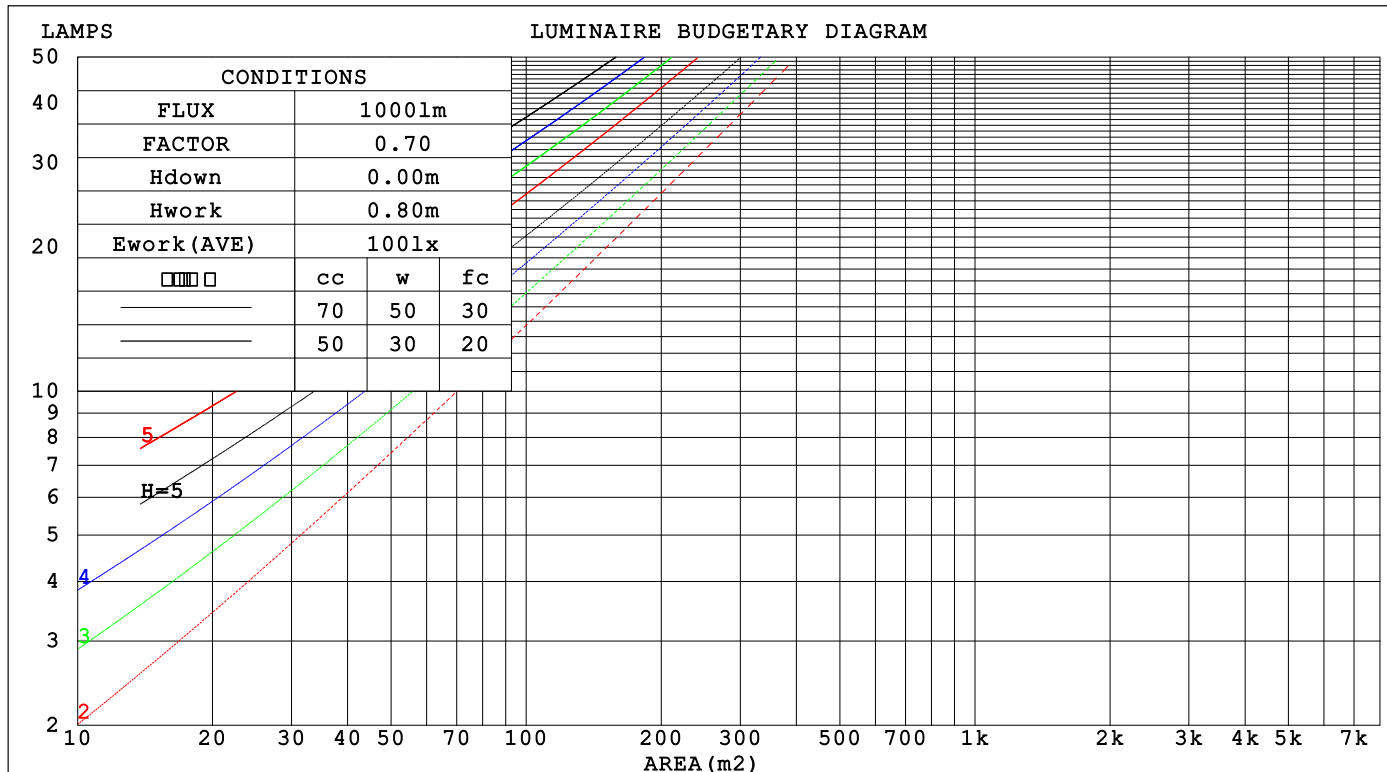

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-03-18

□ Range: 0 - 180DEG  
□ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:

### WEC AND CCEC

NAME: 2835 IP20	TYPE: 2835 192LED 24V	WEIGHT:
SPEC.: 202-00124-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)					
0.0						
1.0	.307 .174 .055	.299 .171 .054	.285 .164 .052	.272 .157 .050	.261 .151 .049	
2.0	.290 .159 .049	.284 .156 .048	.271 .151 .047	.260 .146 .046	.249 .141 .044	
3.0	.269 .143 .043	.263 .141 .042	.252 .137 .042	.242 .133 .041	.233 .129 .040	
4.0	.249 .129 .038	.244 .128 .038	.234 .124 .037	.225 .121 .036	.216 .118 .036	
5.0	.230 .117 .034	.226 .116 .034	.217 .113 .033	.209 .110 .033	.201 .108 .032	
6.0	.214 .107 .031	.209 .106 .030	.202 .103 .030	.194 .101 .030	.188 .099 .029	
7.0	.199 .098 .028	.195 .097 .028	.188 .095 .027	.182 .093 .027	.175 .091 .027	
8.0	.186 .091 .026	.182 .090 .025	.176 .088 .025	.170 .086 .025	.165 .085 .025	
9.0	.174 .084 .024	.171 .083 .023	.165 .082 .023	.160 .080 .023	.155 .079 .023	
10.0	.164 .078 .022	.161 .078 .022	.156 .076 .021	.151 .075 .021	.146 .074 .021	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)					
0.0	.200 .200 .200	.171 .171 .171	.117 .117 .117	.067 .067 .067	.021 .021 .021	
1.0	.190 .166 .145	.163 .143 .124	.111 .098 .086	.064 .057 .050	.021 .018 .016	
2.0	.182 .142 .108	.156 .122 .094	.107 .085 .065	.062 .049 .038	.020 .016 .012	
3.0	.175 .124 .085	.150 .107 .073	.103 .075 .051	.059 .044 .030	.019 .014 .010	
4.0	.167 .111 .069	.143 .096 .060	.099 .067 .042	.057 .039 .025	.018 .013 .008	
5.0	.160 .101 .057	.137 .087 .050	.094 .061 .035	.055 .036 .021	.018 .012 .007	
6.0	.153 .092 .049	.131 .080 .043	.090 .056 .030	.052 .033 .018	.017 .011 .006	
7.0	.146 .086 .044	.125 .074 .038	.087 .052 .027	.050 .031 .016	.016 .010 .005	
8.0	.139 .080 .039	.120 .069 .034	.083 .049 .024	.048 .029 .014	.016 .009 .005	
9.0	.133 .075 .036	.115 .065 .031	.080 .046 .022	.046 .027 .013	.015 .009 .004	
10.0	.128 .071 .033	.110 .061 .029	.076 .043 .020	.044 .026 .012	.014 .008 .004	

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-03-18

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:

### UGR(Unified Glare Rating) Table

NAME: 2835 IP20						TYPE: 2835 192LED 24V		WEIGHT:			
SPEC.: 202-00124-00						DIM.:		SERIAL No.:			
MFR.:						SUR.: 0.01*0.5		Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H		25.7	27.2	26.0	27.5	27.7	25.8	27.3	26.1	27.5	27.7
3H		27.2	28.6	27.5	28.9	29.1	27.3	28.7	27.6	29.0	29.2
4H		27.8	29.1	28.1	29.4	29.6	27.9	29.2	28.2	29.5	29.8
6H		28.1	29.3	28.4	29.6	29.9	28.3	29.5	28.6	29.8	30.1
8H		28.2	29.4	28.5	29.7	30.0	28.4	29.6	28.7	29.9	30.2
12H		28.2	29.3	28.5	29.6	30.0	28.4	29.6	28.8	29.9	30.2
4H 2H		26.3	27.7	26.7	27.9	28.2	26.4	27.7	26.7	28.0	28.3
3H		28.0	29.2	28.4	29.5	29.8	28.1	29.2	28.5	29.6	29.9
4H		28.7	29.7	29.1	30.1	30.4	28.8	29.8	29.2	30.2	30.6
6H		29.1	30.0	29.5	30.4	30.8	29.3	30.2	29.7	30.6	31.0
8H		29.2	30.1	29.6	30.5	30.9	29.4	30.3	29.9	30.7	31.1
12H		29.2	30.0	29.7	30.5	30.9	29.5	30.3	29.9	30.7	31.1
8H 4H		28.9	29.8	29.3	30.2	30.6	29.0	29.9	29.5	30.3	30.7
6H		29.5	30.2	29.9	30.6	31.1	29.6	30.4	30.1	30.8	31.2
8H		29.6	30.3	30.1	30.7	31.2	29.8	30.5	30.3	30.9	31.4
12H		29.7	30.3	30.2	30.7	31.2	30.0	30.5	30.5	31.0	31.5
12H 4H		28.9	29.7	29.4	30.1	30.6	29.0	29.8	29.5	30.2	30.7
6H		29.5	30.2	30.0	30.6	31.1	29.7	30.3	30.2	30.8	31.2
8H		29.7	30.3	30.2	30.7	31.2	29.9	30.5	30.4	30.9	31.4
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H		+ 0.2 / - 0.2					+ 0.1 / - 0.2				
1.5H		+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H		+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 848.3 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.6)  
Area: 0.008 m2

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-03-18

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:

### UTILIZATION FACTORS TABLE

NAME: 2835 IP20	TYPE: 2835 192LED 24V	WEIGHT:
SPEC.: 202-00124-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT)    k(RI) x RCR = 5									
k = 0.60	57	45	38	56	45	38	55	44	38	31
0.80	67	55	48	66	55	48	64	54	47	40
1.00	75	64	57	74	64	57	72	65	56	49
1.25	83	72	65	81	71	64	78	70	64	56
1.50	88	78	71	86	77	70	83	75	69	61
2.00	95	86	80	93	85	79	89	82	77	69
2.50	99	91	85	96	89	84	92	86	82	73
3.00	102	95	90	100	93	88	95	90	86	77
4.00	106	100	96	103	98	94	99	95	91	82
5.00	108	104	100	106	102	98	101	98	95	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004										
Suspended										
SHRNOM = 1.25										

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2022-03-18

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity: 65.0%  
Test Distance: 5.749m [K=1.0000]  
Remarks:

### ISOCANDELA DIAGRAM

NAME: 2835 IP20	TYPE: 2835 192LED 24V	WEIGHT:
SPEC.: 202-00124-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

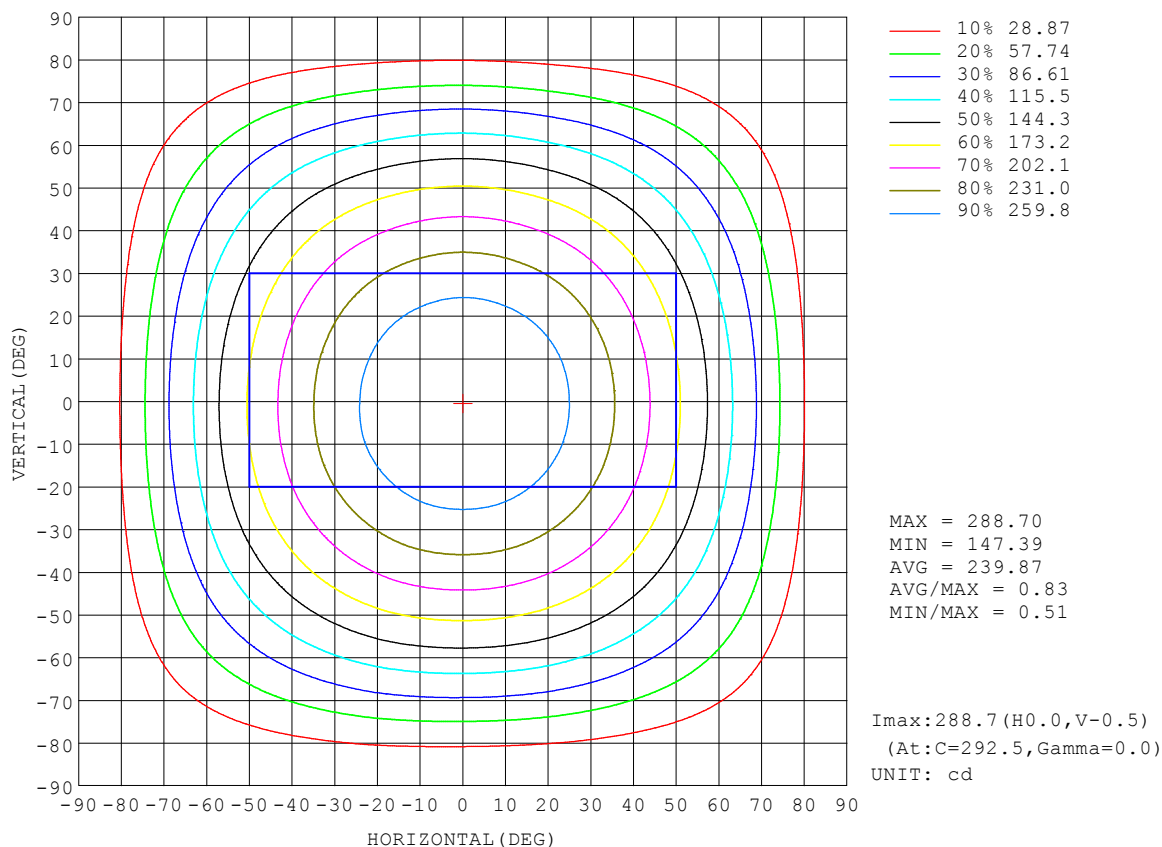


C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2022-03-18

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity: 65.0%  
Test Distance: 5.749m [K=1.0000]  
Remarks:

**AAI Figure**

NAME: 2835 IP20	TYPE: 2835 192LED 24V	WEIGHT:
SPEC.: 202-00124-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

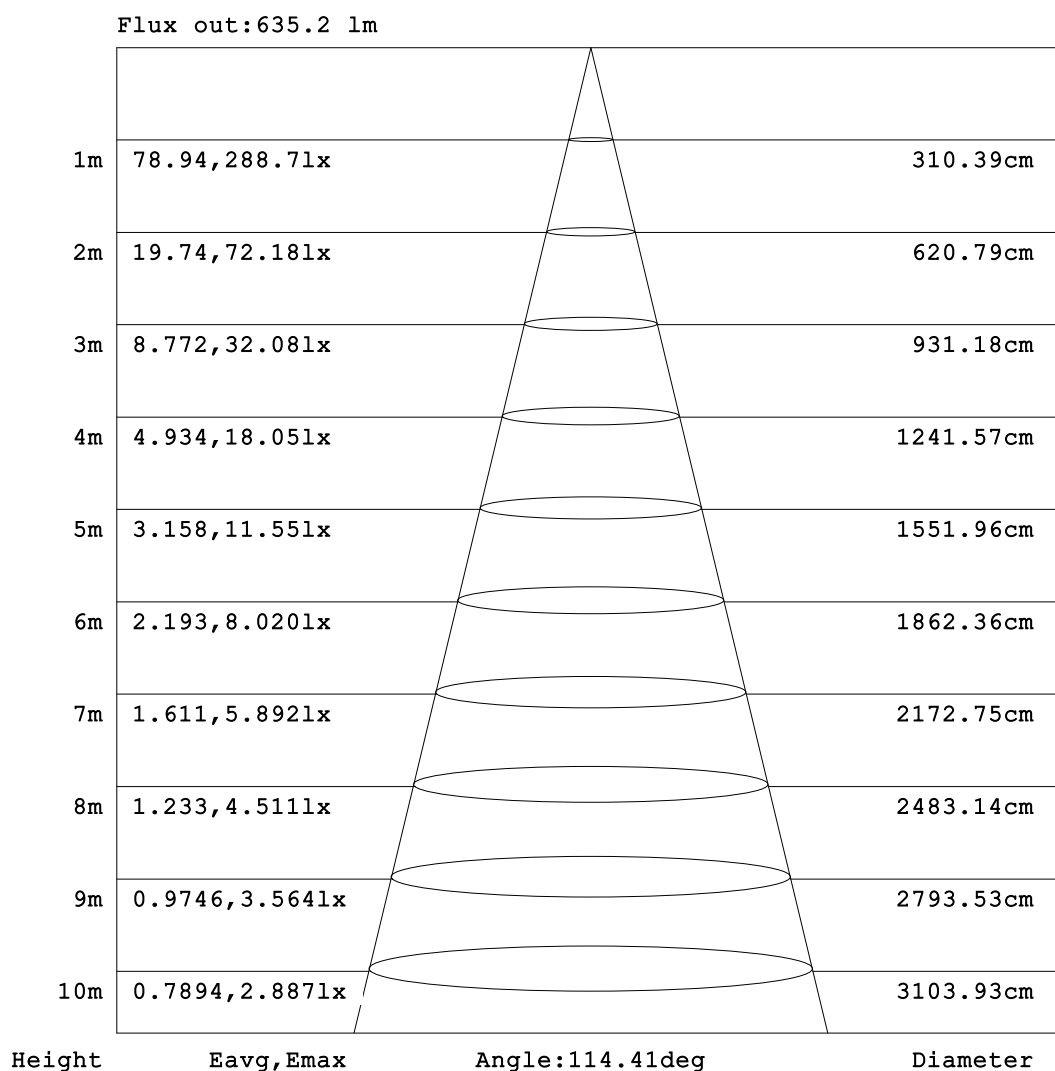


**Note:**The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-03-18

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
 Humidity:65.0%  
 Test Distance:5.749m [K=1.0000]  
 Remarks:

### ISOLUX DIAGRAM

NAME: 2835 IP20	TYPE: 2835 192LED 24V	WEIGHT:
SPEC.: 202-00124-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

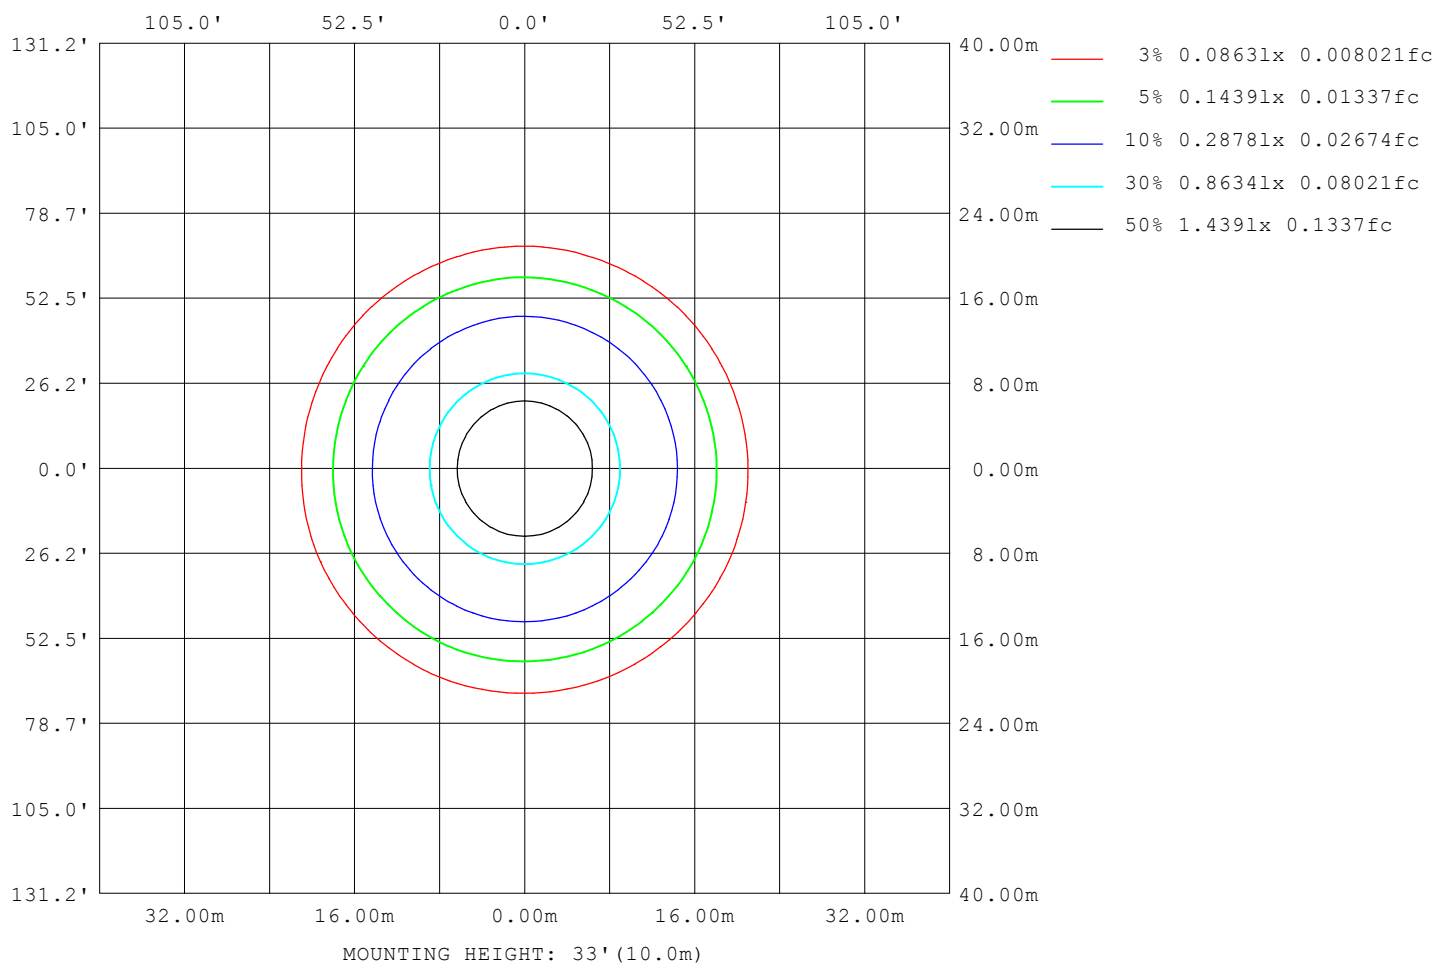

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-03-18

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
 Humidity: 65.0%  
 Test Distance: 5.749m [K=1.0000]  
 Remarks:

## LED Avg.L Report

NAME: 2835 IP20	TYPE: 2835 192LED 24V	WEIGHT:
SPEC.: 202-00124-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	31488
L_0~180 (75) av	26354
L_0~180 (85) av	13307
L_90~270 (65) av	31536
L_90~270 (75) av	26575
L_90~270 (85) av	15137
L_45 (65) av	31538
L_45 (75) av	26503
L_45 (85) av	14826

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-03-18

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
 Humidity: 65.0%  
 Test Distance: 5.749m [K=1.0000]  
 Remarks:

### Planar Illuminance Curve

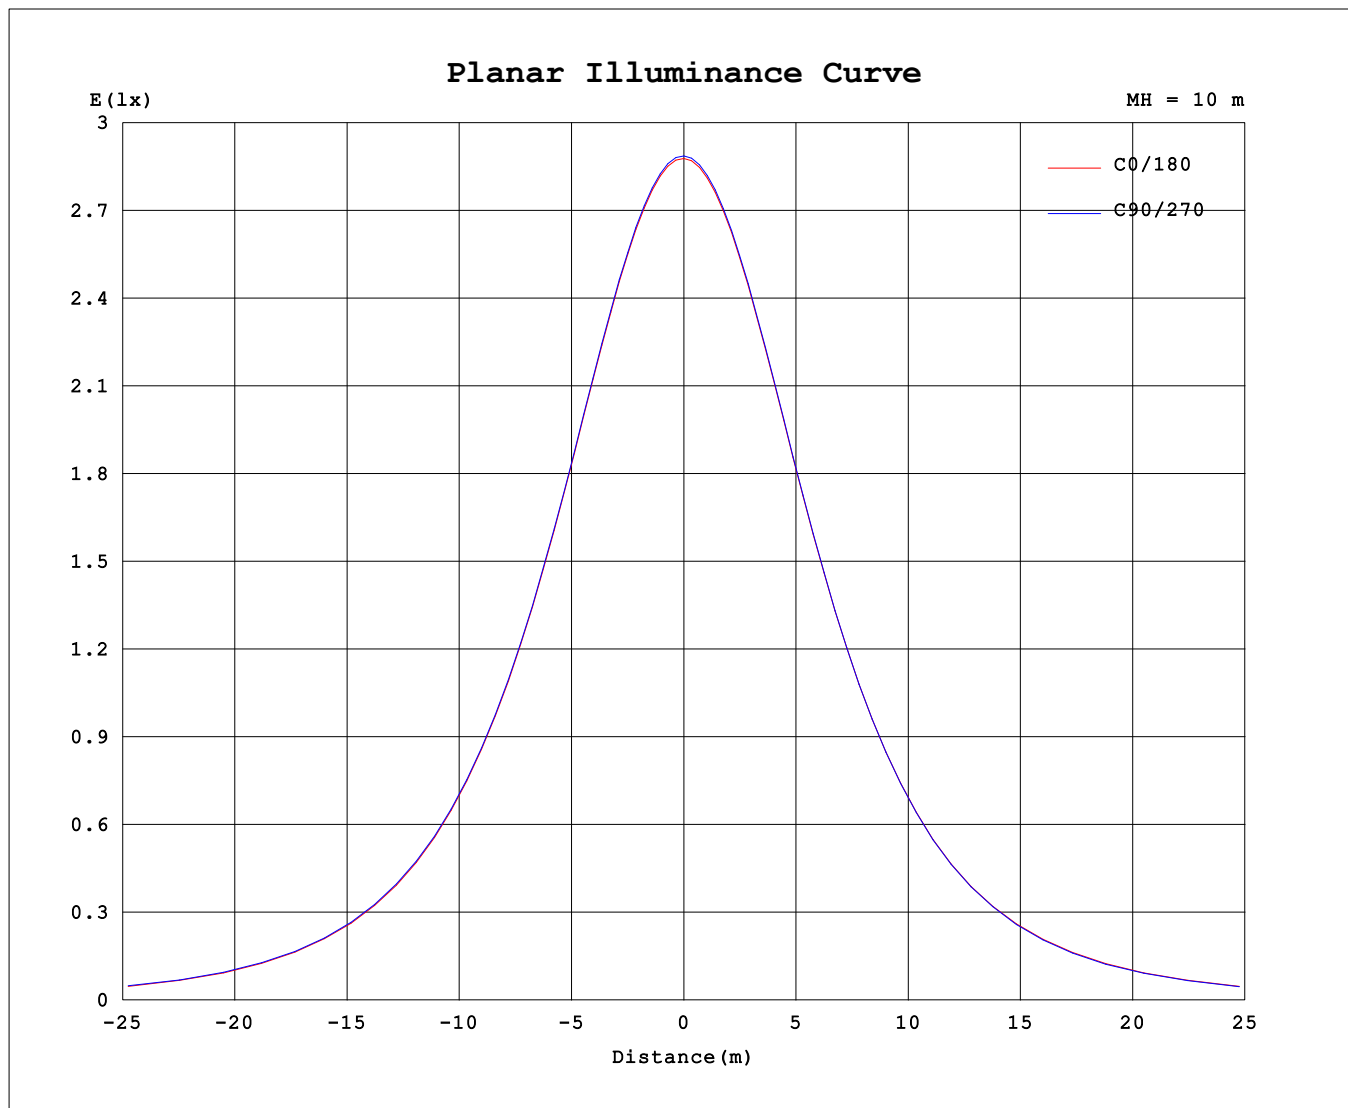

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-03-18

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
 Humidity: 65.0%  
 Test Distance: 5.749m [K=1.0000]  
 Remarks:

### LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: 2835 IP20	TYPE: 2835 192LED 24V	WEIGHT:
SPEC.: 202-00124-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	288	288	288	288	288	288	288	288	288	288	288	288	288	288	288	288			
5	288	288	288	288	288	288	288	288	287	287	287	287	287	287	288	288			
10	284	284	284	284	284	284	284	284	283	283	283	283	283	283	283	284			
15	280	280	280	280	280	280	279	279	279	278	278	278	278	278	279	279			
20	271	271	271	271	271	271	270	270	269	268	268	268	269	269	269	270			
25	263	263	263	263	263	263	262	262	261	260	260	260	260	260	261	262			
30	248	249	248	249	248	248	247	247	246	245	245	245	245	245	246	247			
35	236	237	237	237	237	237	236	235	234	233	234	233	234	233	234	235			
40	217	218	217	218	217	218	217	216	214	214	214	213	214	213	215	215			
45	202	203	203	203	203	203	202	201	200	199	199	199	199	199	200	200			
50	178	179	179	179	179	179	178	178	176	175	175	174	175	174	175	176			
55	160	161	161	162	161	162	161	160	159	157	158	157	157	156	158	158			
60	132	133	133	134	134	135	134	133	131	130	130	129	129	128	129	130			
65	112	113	113	114	114	115	114	113	111	110	110	109	109	108	109	110			
70	80.5	82.0	82.2	83.3	83.3	84.7	83.7	82.8	80.6	79.2	79.4	78.4	78.4	77.0	77.9	78.4			
75	59.5	60.9	61.3	62.4	62.7	63.9	63.2	62.2	60.0	58.7	58.8	57.9	57.7	56.2	56.9	57.4			
80	29.3	30.6	31.1	32.3	32.7	33.9	33.3	32.4	30.4	29.3	29.4	28.5	28.1	26.8	27.2	27.5			
85	12.7	13.8	14.3	15.3	15.7	16.7	16.2	15.4	13.4	13.0	13.1	12.4	12.1	11.0	11.2	11.4			
90	0.28	0.66	0.84	1.01	1.09	1.33	1.19	0.92	0.25	0.63	0.80	0.74	0.68	0.61	0.58	0.46			
95	0.42	0.41	0.47	0.48	0.47	0.47	0.47	0.41	0.36	0.37	0.44	0.48	0.46	0.47	0.45	0.38			
100	0.72	0.69	0.69	0.69	0.69	0.68	0.67	0.68	0.60	0.59	0.60	0.62	0.63	0.63	0.62	0.61			
105	0.94	0.90	0.90	0.89	0.89	0.88	0.88	0.89	0.79	0.77	0.78	0.80	0.80	0.81	0.80	0.78			
110	1.31	1.24	1.24	1.23	1.23	1.22	1.23	1.23	1.12	1.07	1.08	1.09	1.10	1.10	1.09	1.08			
115	1.55	1.47	1.46	1.45	1.45	1.44	1.45	1.46	1.35	1.29	1.29	1.30	1.30	1.30	1.30	1.29			
120	1.90	1.80	1.78	1.78	1.77	1.77	1.78	1.80	1.68	1.61	1.59	1.60	1.60	1.60	1.60	1.60			
125	2.13	2.02	1.99	1.98	1.98	1.98	1.99	2.02	1.89	1.82	1.78	1.79	1.79	1.80	1.79	1.81			
130	2.43	2.33	2.28	2.26	2.26	2.28	2.29	2.34	2.18	2.11	2.07	2.05	2.05	2.06	2.07	2.11			
135	2.62	2.52	2.45	2.43	2.43	2.46	2.47	2.53	2.35	2.30	2.25	2.22	2.21	2.23	2.23	2.30			
140	2.86	2.78	2.71	2.67	2.66	2.71	2.73	2.78	2.59	2.54	2.49	2.47	2.43	2.45	2.48	2.55			
145	3.01	2.94	2.87	2.81	2.81	2.87	2.89	2.92	2.73	2.68	2.64	2.61	2.57	2.59	2.63	2.70			
150	3.20	3.15	3.08	3.02	3.03	3.10	3.10	3.12	2.93	2.88	2.84	2.83	2.76	2.80	2.85	2.91			
155	3.31	3.26	3.21	3.16	3.19	3.23	3.21	3.23	3.05	3.01	2.97	2.97	2.91	2.93	2.99	3.05			
160	3.47	3.44	3.39	3.34	3.41	3.40	3.37	3.40	3.24	3.20	3.17	3.18	3.15	3.14	3.19	3.24			
165	3.57	3.55	3.51	3.47	3.56	3.51	3.49	3.50	3.38	3.34	3.31	3.32	3.32	3.27	3.32	3.39			
170	3.73	3.71	3.69	3.67	3.74	3.70	3.67	3.70	3.60	3.58	3.55	3.56	3.57	3.52	3.56	3.62			
175	3.84	3.83	3.82	3.82	3.87	3.83	3.81	3.83	3.76	3.74	3.73	3.74	3.75	3.70	3.73	3.78			
180	3.98	3.97	3.97	3.98	4.02	3.97	3.98	4.00	3.98	3.97	3.97	3.98	4.02	3.98	3.98	4.00			

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-03-18

□ Range: 0 - 180DEG  
□ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks: