


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: 2835 IP67	TYPE: 2835 210LED 12V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 95.05 lm/W
MODEL	3000K RA90 12MM 14.4W	I _{max} (cd)	186.5	S/MH(C0/180)	1.29	
NOMINAL POWER(W)	7.2	LOR(%)	100.0	S/MH(C90/270)	1.33	
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	676.32	□ UP,DN(C0-180)	5.6,44.1	
NOMINAL FLUX(lm)	6.44112	CIE CLASS	DIRECT	□ UP,DN(C180-360)	3.0,47.3	
LAMPS INSIDE	105	□ up (%)	8.6	CIBSE SHR NOM	1.50	
TEST VOLTAGE(V)	24	□ down (%)	91.4	CIBSE SHR MAX	1.50	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

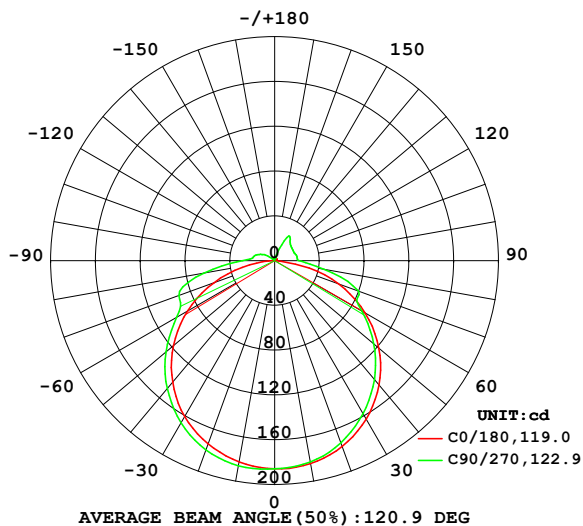

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

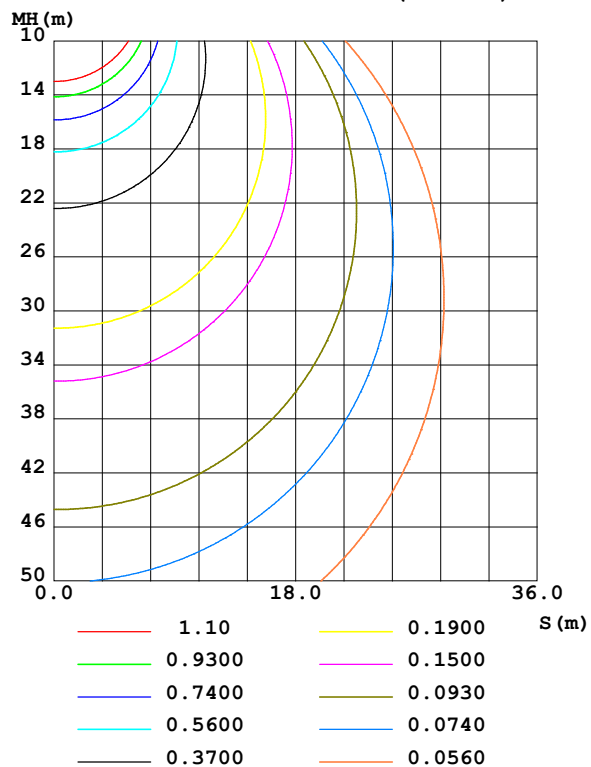

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-18

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	zone	total	%lum, lamp
10	184.1	183.2	182.6	182.3	182.5	184.6	186.1	185.7	0- 10	17.66	17.66	2.61,2.61
20	176.6	175.1	173.1	173.6	174.1	178.0	179.8	179.7	10- 20	51.07	68.73	10.2,10.2
30	163.5	161.0	157.9	159.2	160.8	165.7	167.4	167.6	20- 30	78.55	147.3	21.8,21.8
40	145.1	142.0	138.7	140.1	141.8	147.7	149.2	149.8	30- 40	96.57	243.8	36.1,36.1
50	121.5	119.0	115.6	116.9	118.0	124.4	126.6	127.2	40- 50	102.9	346.8	51.3,51.3
60	93.32	92.29	89.90	90.14	89.70	98.13	101.1	100.9	50- 60	96.82	443.6	65.6,65.6
70	60.56	65.79	79.88	65.46	57.66	72.55	91.13	76.67	60- 70	81.39	525.0	77.6,77.6
80	19.10	41.61	44.84	41.79	22.86	53.99	64.25	55.42	70- 80	62.73	587.7	86.9,86.9
90	0.2926	16.58	21.86	17.66	0.2834	21.01	28.78	22.07	80- 90	30.59	618.3	91.4,91.4
100	0.5733	16.50	20.45	16.70	0.5264	12.37	19.44	15.35	90-100	15.51	633.8	93.7,93.7
110	0.9589	15.53	19.26	15.45	0.8716	8.616	16.10	10.40	100-110	12.70	646.5	95.6,95.6
120	1.335	14.83	18.93	14.62	1.224	2.948	10.89	3.934	110-120	9.437	655.9	97,97
130	1.659	14.51	19.45	14.12	1.533	1.414	3.018	1.405	120-130	6.944	662.9	98,98
140	1.914	15.13	21.71	14.96	1.776	1.649	1.584	1.614	130-140	5.464	668.3	98.8,98.8
150	2.114	10.53	25.55	12.23	1.978	1.868	1.764	1.828	140-150	4.660	673.0	99.5,99.5
160	2.278	2.366	8.032	3.425	2.162	2.068	2.005	2.044	150-160	2.360	675.4	99.9,99.9
170	2.456	2.446	2.465	2.436	2.383	2.315	2.292	2.303	160-170	0.7132	676.1	100,100
180	2.628	2.603	2.620	2.612	2.630	2.601	2.618	2.604	170-180	0.2357	676.3	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 305.63 lm

%lum = 45.2%

%lamp = 45.2%

Conical surface Flux(120deg): 443.58 lm

%lum = 65.6%


%lamp = 65.6%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-18

° Range: 0 - 180DEG
° Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

NAME: 2835 IP67	TYPE: 2835 210LED 12V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

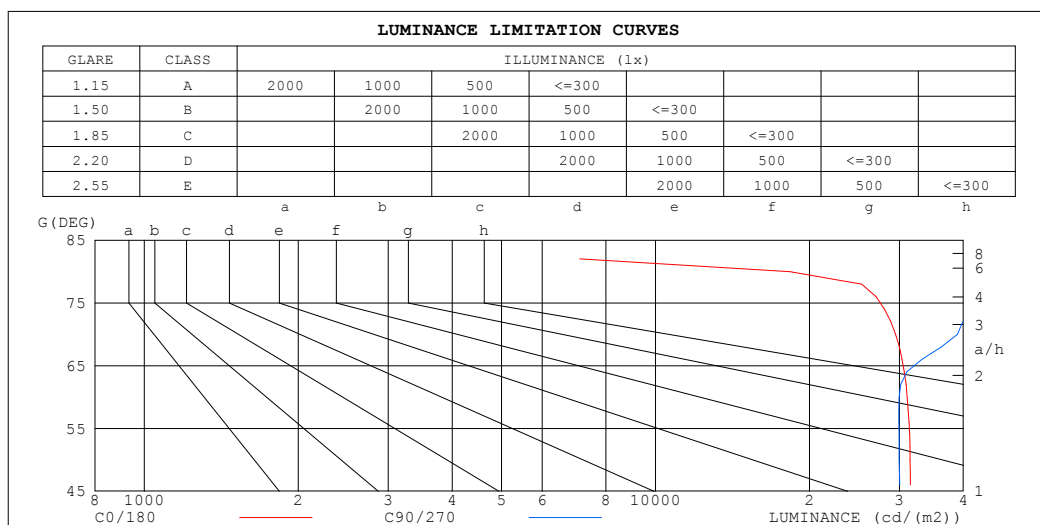

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	639	61476
80	18317	43042
75	29860	43907
70	29481	38934
65	31799	32162
60	31078	29971
55	32174	30679
50	31479	29969
45	32078	30620


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-04-18

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: 2835 IP67	TYPE: 2835 210LED 12V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.17	1.17	1.17	1.13	1.13	1.13	1.06	1.06	1.06	.00	.00	.00	.94	.94	.94	.91
1.0	.00	.95	.90	.96	.92	.88	.91	.87	.84	.85	.82	.80	.80	.78	.76	.73
2.0	.86	.78	.72	.83	.76	.71	.78	.72	.68	.74	.69	.65	.69	.65	.62	.59
3.0	.75	.66	.59	.72	.64	.58	.68	.61	.56	.64	.59	.54	.61	.56	.52	.49
4.0	.66	.57	.50	.64	.55	.49	.60	.53	.47	.57	.51	.46	.54	.48	.44	.41
5.0	.59	.49	.42	.57	.48	.42	.54	.46	.40	.51	.44	.39	.48	.42	.38	.36
6.0	.53	.43	.37	.51	.42	.36	.48	.41	.35	.46	.39	.34	.44	.38	.33	.31
7.0	.48	.38	.32	.46	.38	.32	.44	.36	.31	.42	.35	.30	.40	.34	.29	.27
8.0	.43	.35	.29	.42	.34	.28	.40	.33	.28	.38	.32	.27	.36	.31	.26	.24
9.0	.40	.31	.26	.39	.31	.25	.37	.30	.25	.35	.29	.24	.34	.28	.24	.22
10.0	.36	.28	.23	.36	.28	.23	.34	.27	.22	.33	.26	.22	.31	.25	.21	.19

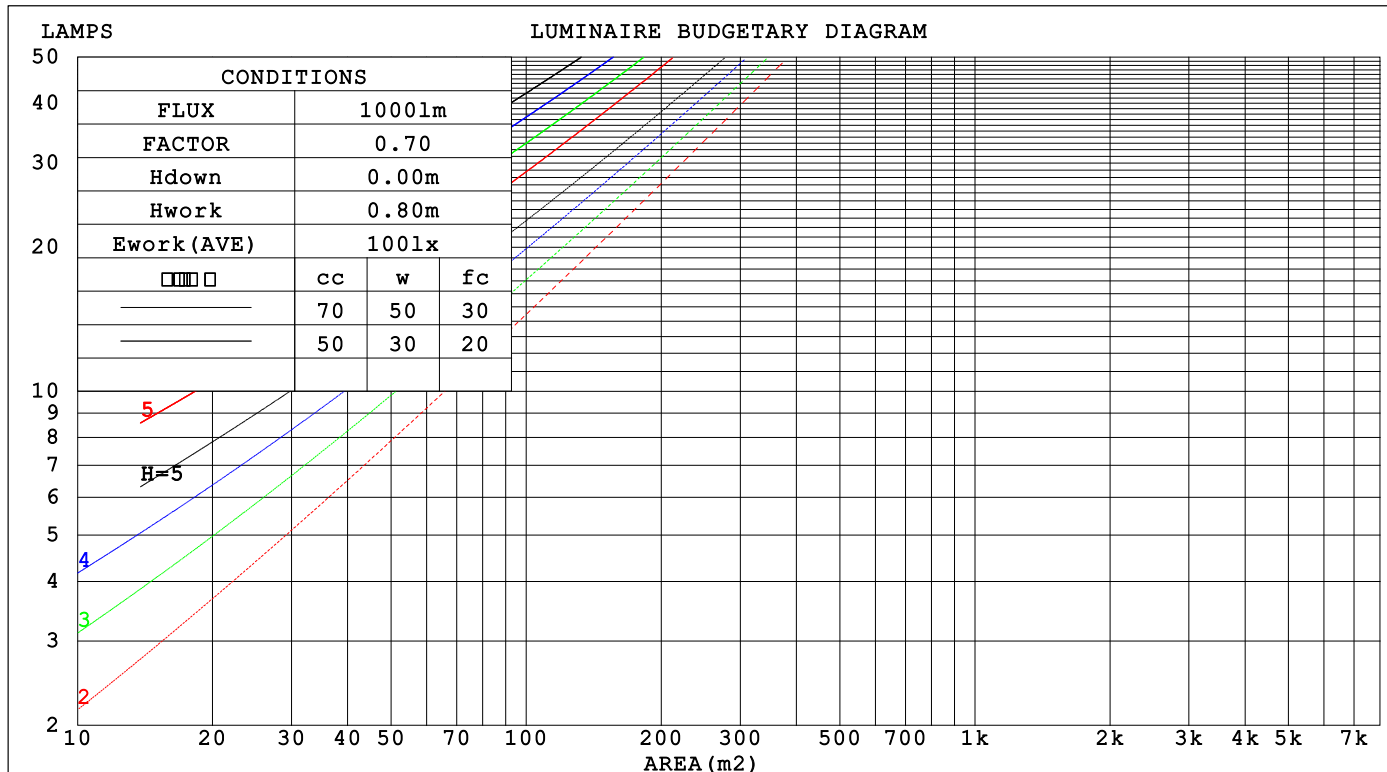

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-18

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: 2835 IP67	TYPE: 2835 210LED 12V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)					
0.0						
1.0	.352 .200 .063	.342 .195 .062	.323 .186 .059	.307 .177 .057	.291 .169 .054	
2.0	.317 .173 .053	.308 .170 .052	.291 .162 .050	.276 .155 .048	.262 .148 .047	
3.0	.286 .152 .046	.278 .149 .045	.264 .143 .043	.250 .137 .042	.237 .131 .041	
4.0	.260 .135 .040	.253 .133 .039	.240 .127 .038	.228 .122 .037	.216 .118 .036	
5.0	.238 .121 .035	.232 .119 .035	.220 .115 .034	.209 .110 .033	.199 .106 .032	
6.0	.219 .110 .031	.214 .108 .031	.203 .104 .030	.193 .100 .029	.183 .097 .029	
7.0	.203 .100 .028	.198 .099 .028	.188 .095 .027	.179 .092 .027	.170 .089 .026	
8.0	.189 .092 .026	.184 .091 .026	.175 .088 .025	.167 .085 .024	.159 .082 .024	
9.0	.176 .085 .024	.172 .084 .024	.164 .081 .023	.156 .078 .022	.149 .076 .022	
10.0	.165 .079 .022	.162 .078 .022	.154 .075 .021	.147 .073 .021	.140 .071 .020	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)					
0.0	.256 .256 .256	.219 .219 .219	.149 .149 .149	.086 .086 .086	.027 .027 .027	
1.0	.249 .222 .197	.213 .190 .170	.146 .131 .117	.084 .076 .068	.027 .024 .022	
2.0	.242 .198 .161	.207 .171 .139	.142 .118 .097	.082 .069 .057	.026 .022 .019	
3.0	.234 .181 .139	.201 .156 .120	.138 .109 .084	.080 .063 .050	.026 .021 .016	
4.0	.227 .168 .124	.194 .145 .107	.134 .101 .076	.077 .059 .045	.025 .019 .015	
5.0	.219 .158 .113	.188 .137 .098	.130 .096 .070	.075 .056 .041	.024 .018 .014	
6.0	.212 .150 .106	.182 .130 .092	.126 .091 .065	.073 .053 .039	.023 .017 .013	
7.0	.205 .143 .100	.176 .124 .087	.122 .087 .062	.071 .051 .037	.023 .017 .012	
8.0	.198 .138 .096	.170 .119 .084	.118 .084 .059	.069 .049 .035	.022 .016 .012	
9.0	.192 .133 .093	.165 .115 .081	.114 .081 .057	.067 .048 .034	.022 .016 .011	
10.0	.186 .128 .090	.160 .112 .079	.111 .078 .056	.065 .046 .033	.021 .015 .011	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-18

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME: 2835 IP67					TYPE: 2835 210LED 12V			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.:					SUR.: 0.012*0.5			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	25.6	27.1	26.0	27.4	27.8	25.4	26.9	25.8	27.2	27.6	
	3H	27.3	28.6	27.7	29.0	29.4	27.7	29.1	28.2	29.5	29.9
	4H	27.9	29.2	28.4	29.6	30.1	28.9	30.2	29.4	30.6	31.1
	6H	28.4	29.6	28.8	30.0	30.5	29.9	31.1	30.3	31.5	32.0
	8H	28.4	29.5	28.8	30.0	30.4	30.3	31.4	30.7	31.9	32.3
	12H	28.3	29.4	28.8	29.9	30.4	30.6	31.8	31.1	32.2	32.7
4H	2H	26.2	27.5	26.7	27.9	28.3	26.1	27.4	26.5	27.8	28.2
	3H	28.1	29.2	28.6	29.7	30.2	28.7	29.8	29.1	30.2	30.7
	4H	28.9	30.0	29.5	30.5	31.0	30.0	31.1	30.5	31.5	32.1
	6H	29.6	30.5	30.1	31.0	31.6	31.1	32.0	31.6	32.5	33.1
	8H	29.6	30.5	30.2	31.0	31.6	31.6	32.4	32.1	32.9	33.5
	12H	29.6	30.4	30.2	30.9	31.5	32.0	32.8	32.6	33.3	33.9
8H	4H	29.5	30.4	30.0	30.9	31.5	30.4	31.3	30.9	31.8	32.4
	6H	30.4	31.1	30.9	31.7	32.3	31.7	32.4	32.3	33.0	33.6
	8H	30.6	31.2	31.2	31.8	32.4	32.3	32.9	32.9	33.5	34.1
	12H	30.7	31.3	31.3	31.9	32.5	32.9	33.5	33.5	34.0	34.7
12H	4H	29.6	30.4	30.1	30.9	31.5	30.4	31.2	31.0	31.8	32.3
	6H	30.6	31.2	31.1	31.8	32.4	31.8	32.4	32.4	33.0	33.6
	8H	30.9	31.4	31.5	32.0	32.7	32.4	33.0	33.0	33.6	34.3
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.1					
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					
2.0H	+ 0.1 / - 0.3					+ 0.1 / - 0.3					

CIE Pub.117, 676.3 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.4)
Area: 0.006 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-18

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:


```

Range: 0 - 180DEG
Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

```

ISOCANDELA DIAGRAM

NAME: 2835 IP67	TYPE: 2835 210LED 12V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

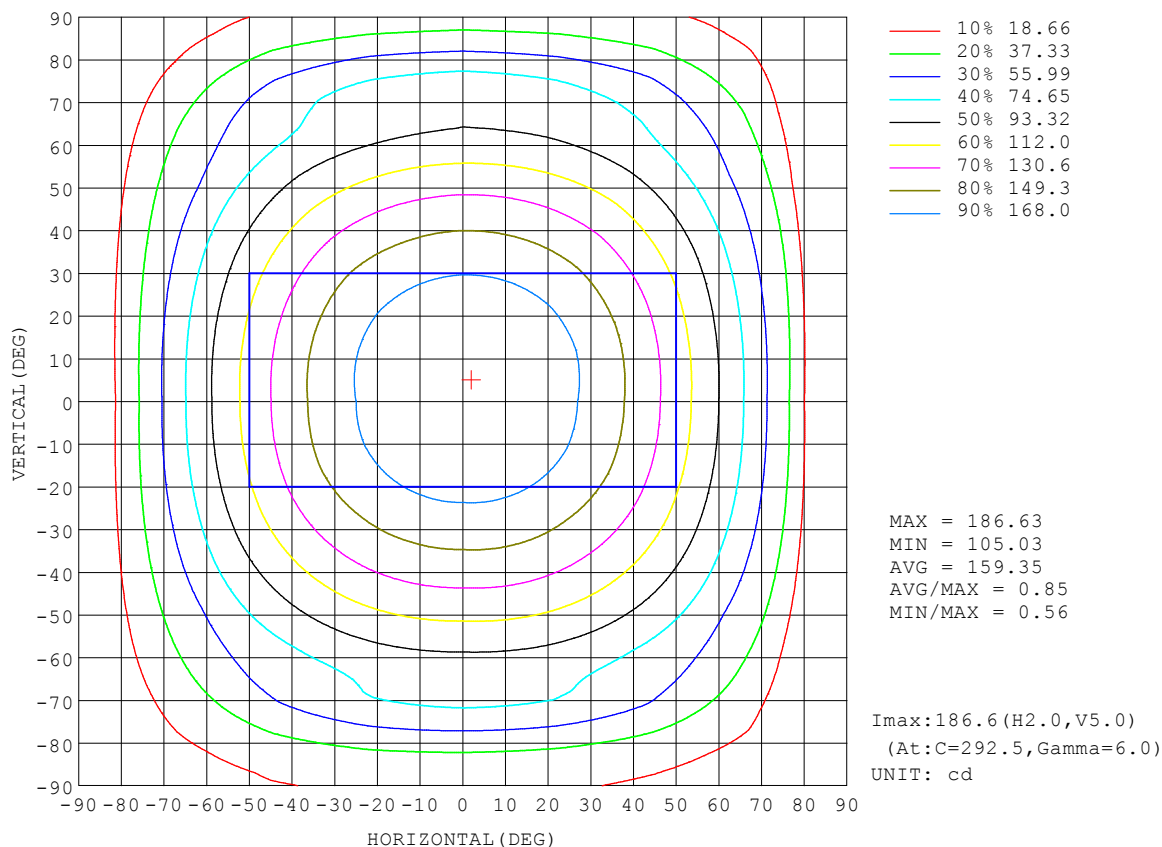


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-04-18

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

AAI Figure

NAME: 2835 IP67	TYPE: 2835 210LED 12V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

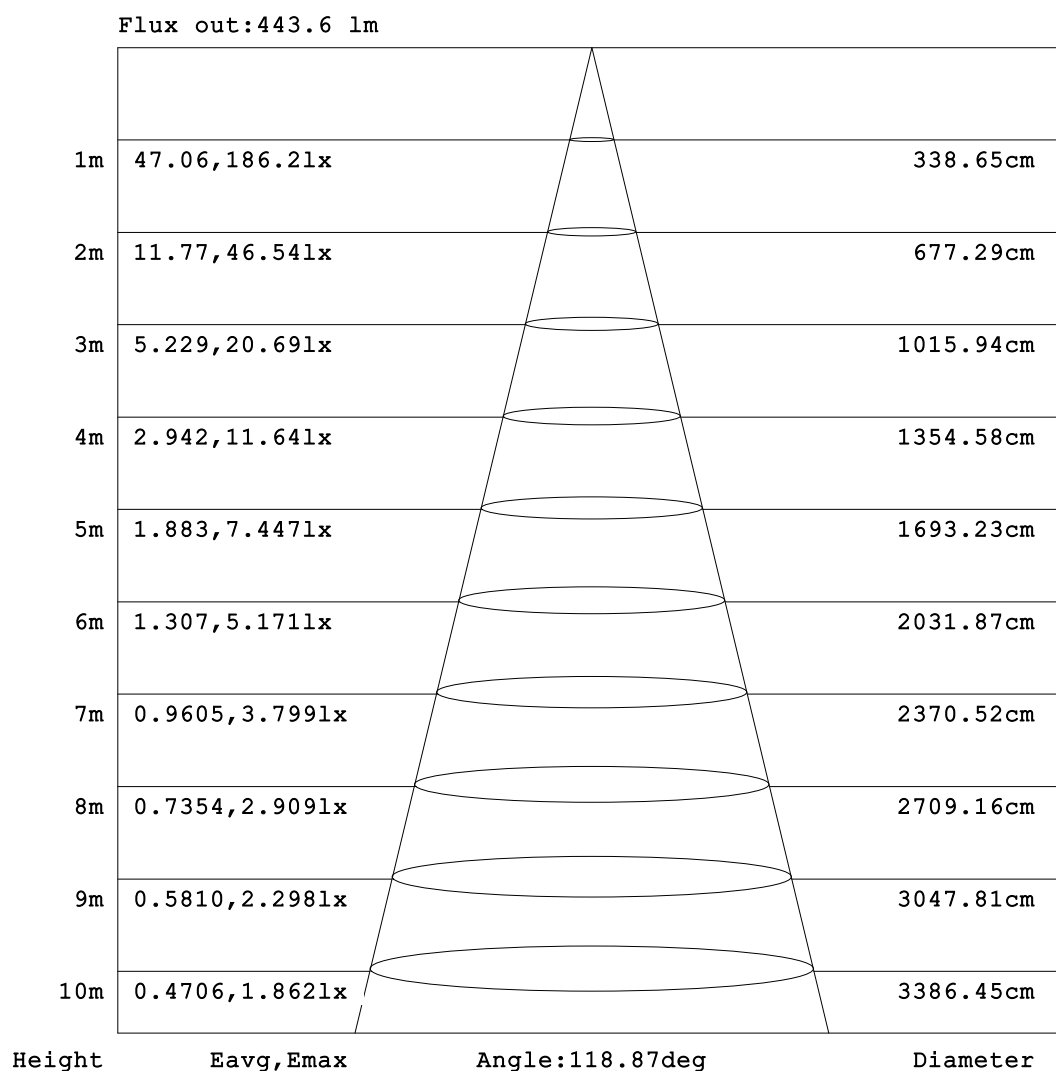


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-04-18

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity:65.0%
 Test Distance:5.749m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

NAME: 2835 IP67	TYPE: 2835 210LED 12V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

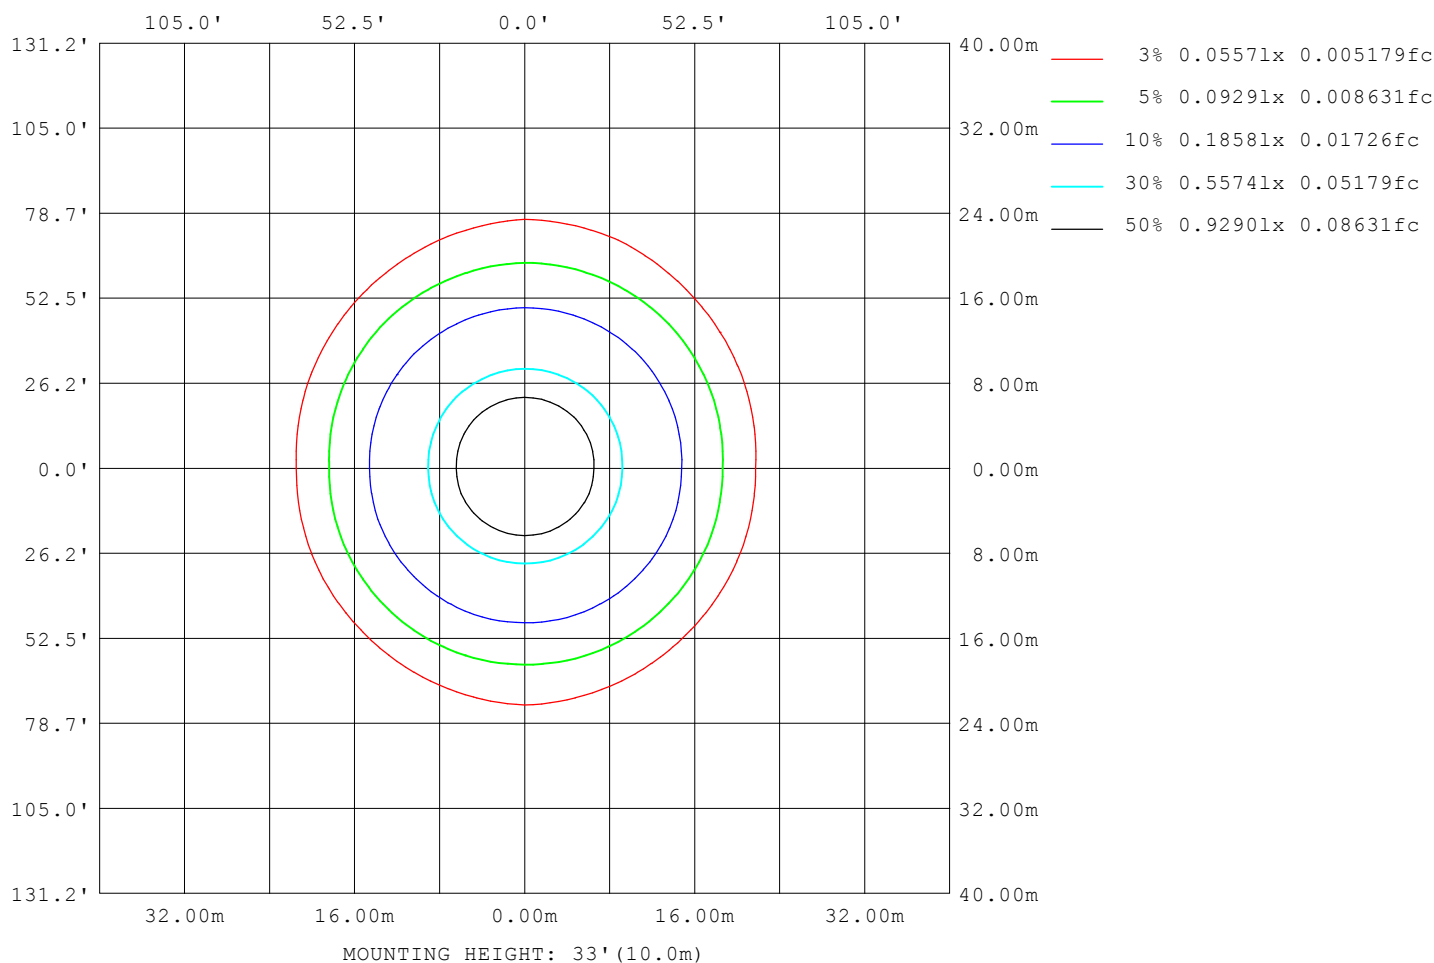

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-04-18

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

LED Avg.L Report

NAME: 2835 IP67	TYPE: 2835 210LED 12V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	29899
L_0~180 (75) av	26723
L_0~180 (85) av	7684
L_90~270 (65) av	34237
L_90~270 (75) av	47389
L_90~270 (85) av	70492
L_45 (65) av	32067
L_45 (75) av	40966
L_45 (85) av	58481

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-04-18

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

Planar Illuminance Curve

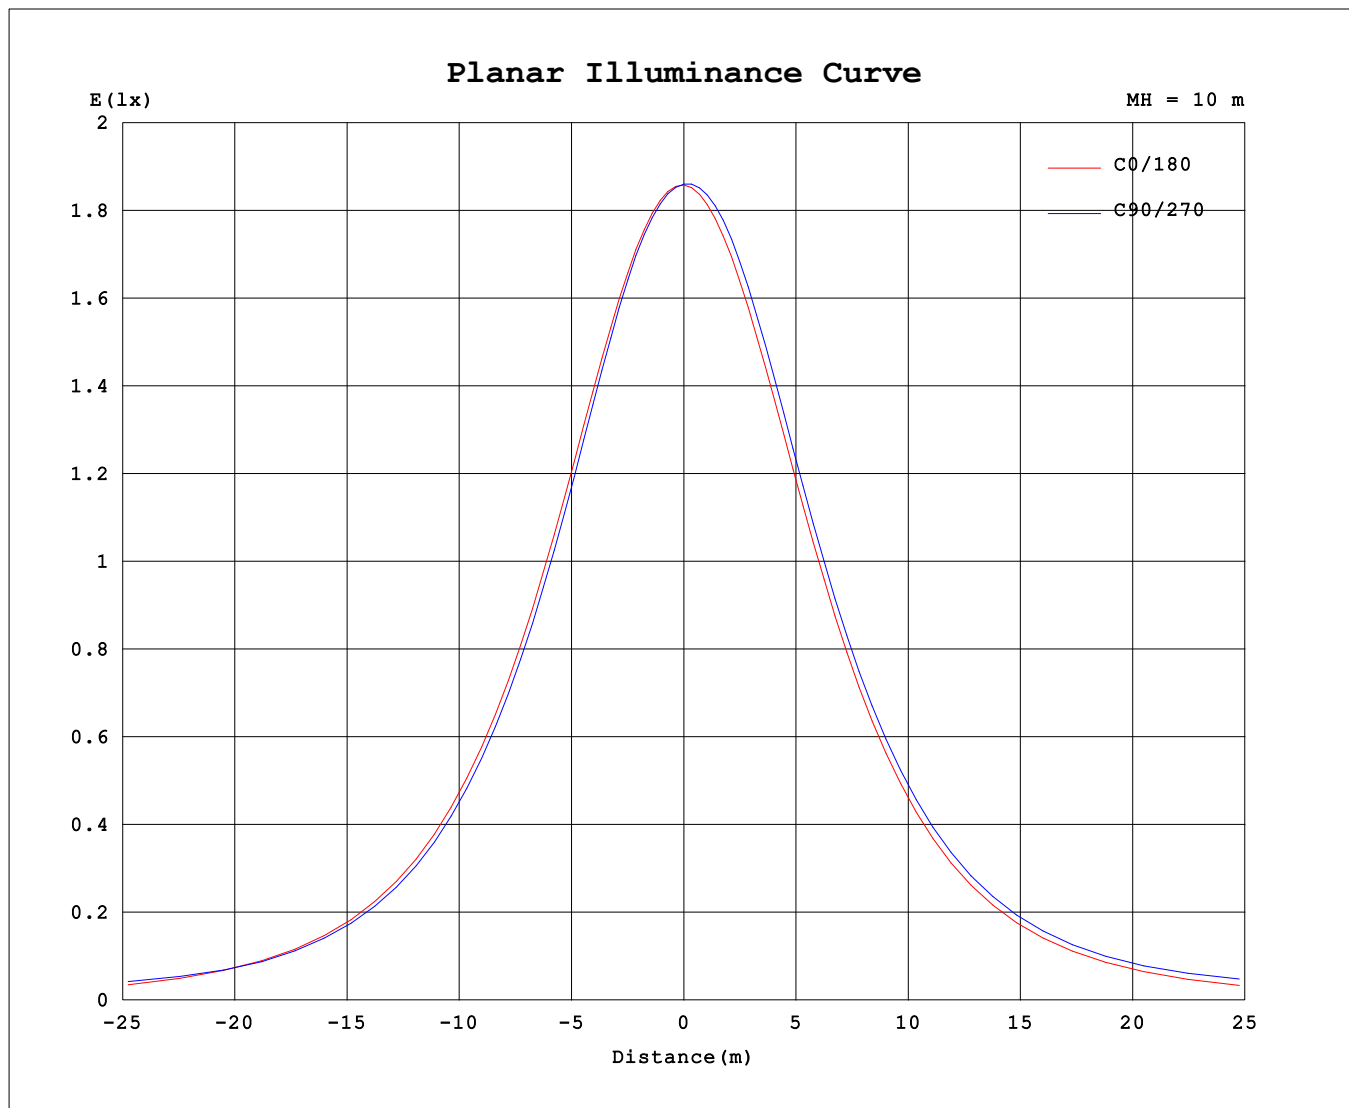

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-04-18

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: 2835 IP67	TYPE: 2835 210LED 12V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	186	186	186	186	186	186	186	186	186	186	186	186	186	186	186	186			
5	186	186	185	185	185	185	185	185	185	186	186	186	186	187	186	186			
10	184	184	183	183	183	182	182	182	183	183	185	186	186	186	186	185			
15	182	181	181	180	180	180	180	179	180	181	183	184	184	184	184	183			
20	177	176	175	174	173	173	174	174	174	176	178	179	180	180	180	179			
25	172	172	170	169	167	168	168	169	169	172	174	175	176	176	176	174			
30	164	163	161	159	158	158	159	161	161	164	166	167	167	168	168	166			
35	157	156	154	152	151	151	152	154	154	157	159	160	161	161	161	160			
40	145	145	142	140	139	139	140	142	142	145	148	148	149	150	150	148			
45	136	136	133	132	130	130	131	133	133	136	139	140	141	141	141	139			
50	122	121	119	117	116	116	117	118	118	121	124	125	127	127	127	125			
55	111	111	109	107	106	106	106	107	107	111	114	115	117	117	117	115			
60	93.3	93.5	92.3	91.3	89.9	90.1	90.1	90.3	89.7	94.3	98.1	99.6	101	101	101	97.8			
65	80.7	81.4	80.8	81.1	81.5	79.9	78.8	78.5	77.4	82.5	87.1	90.0	93.5	92.5	89.7	85.8			
70	60.6	62.0	65.8	77.1	79.9	75.7	65.5	60.1	57.7	64.0	72.5	85.2	91.1	87.6	76.7	66.9			
75	46.4	49.5	60.9	67.4	68.2	67.0	60.3	48.3	43.7	51.6	69.3	81.7	85.3	81.5	71.2	55.5			
80	19.1	34.2	41.6	44.1	44.8	44.7	41.8	33.5	22.9	38.3	54.0	61.8	64.2	61.5	55.4	40.3			
85	0.33	21.4	27.6	30.8	32.1	31.8	28.6	21.5	10.7	25.5	38.9	45.6	47.9	45.4	39.9	27.8			
90	0.29	9.37	16.6	20.4	21.9	21.2	17.7	10.5	0.28	10.6	21.0	26.9	28.8	27.0	22.1	12.5			
95	0.38	8.81	15.7	19.3	20.4	19.6	16.4	9.67	0.36	8.58	16.1	20.7	22.3	21.2	17.2	9.42			
100	0.57	9.07	16.5	19.6	20.4	19.6	16.7	9.65	0.53	5.82	12.4	18.2	19.4	18.6	15.4	7.26			
105	0.73	8.86	16.5	19.4	20.1	19.2	16.2	9.50	0.66	3.43	12.0	16.8	18.7	17.7	14.0	4.59			
110	0.96	7.95	15.5	18.5	19.3	18.2	15.5	8.50	0.87	1.20	8.62	11.1	16.1	14.9	10.4	1.54			
115	1.12	7.23	15.3	18.3	18.9	17.9	15.1	7.86	1.02	0.97	5.66	9.87	14.1	12.8	7.75	0.97			
120	1.33	6.41	14.8	18.3	18.9	17.9	14.6	7.16	1.22	1.15	2.95	6.41	10.9	9.23	3.93	1.13			
125	1.47	5.83	14.6	18.3	19.0	18.0	14.3	6.82	1.35	1.28	1.95	4.55	7.76	6.23	2.43	1.25			
130	1.66	4.71	14.5	18.5	19.5	18.4	14.1	6.13	1.53	1.45	1.41	2.79	3.02	3.35	1.40	1.42			
135	1.77	3.95	14.7	18.9	20.0	19.0	14.2	5.65	1.63	1.56	1.51	1.88	1.82	1.97	1.49	1.53			
140	1.91	2.90	15.1	20.4	21.7	20.3	15.0	5.19	1.78	1.70	1.65	1.61	1.58	1.60	1.61	1.68			
145	2.00	2.28	15.1	22.1	23.8	22.1	15.1	4.21	1.86	1.79	1.74	1.70	1.66	1.67	1.70	1.77			
150	2.11	2.11	10.5	22.0	25.5	20.4	12.2	2.57	1.98	1.91	1.87	1.83	1.76	1.78	1.83	1.90			
155	2.18	2.18	5.39	15.4	19.9	15.1	7.35	2.20	2.05	1.99	1.94	1.92	1.85	1.87	1.91	1.98			
160	2.28	2.29	2.37	5.61	8.03	6.22	3.43	2.29	2.16	2.11	2.07	2.05	2.00	2.00	2.04	2.11			
165	2.34	2.36	2.33	2.64	3.68	3.16	2.35	2.34	2.24	2.20	2.16	2.14	2.12	2.09	2.14	2.20			
170	2.46	2.46	2.45	2.42	2.47	2.45	2.44	2.45	2.38	2.35	2.32	2.30	2.29	2.27	2.30	2.36			
175	2.54	2.54	2.53	2.51	2.54	2.51	2.52	2.53	2.48	2.46	2.43	2.42	2.42	2.40	2.43	2.48			
180	2.63	2.61	2.60	2.60	2.62	2.59	2.61	2.63	2.63	2.61	2.60	2.60	2.62	2.59	2.60	2.63			

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:

Test Date:2022-04-18

□ Range: 0 - 180DEG

□ Interval: 2.0DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450

Humidity:65.0%

Test Distance:5.749m [K=1.0000]

Remarks: