


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: 2835 IP67	TYPE: 2835 210LED 12V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 105.53 lm/W
MODEL	6500K RA90 12MM 14.4W	I _{max} (cd)	204.2	S/MH(C0/180)	1.32	
NOMINAL POWER(W)	7.2	LOR(%)	100.0	S/MH(C90/270)	1.33	
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	747.10	□ UP,DN(C0-180)	4.7,45.8	
NOMINAL FLUX(lm)	7.11525	CIE CLASS	DIRECT	□ UP,DN(C180-360)	2.6,46.8	
LAMPS INSIDE	105	□ up (%)	7.4	CIBSE SHR NOM	1.50	
TEST VOLTAGE(V)	24	□ down (%)	92.6	CIBSE SHR MAX	1.55	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

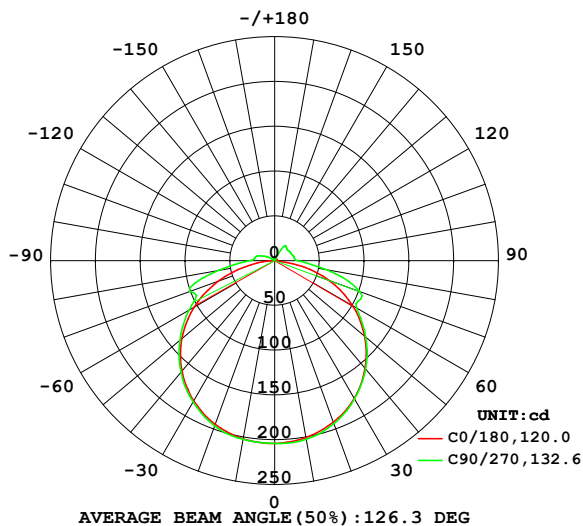

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

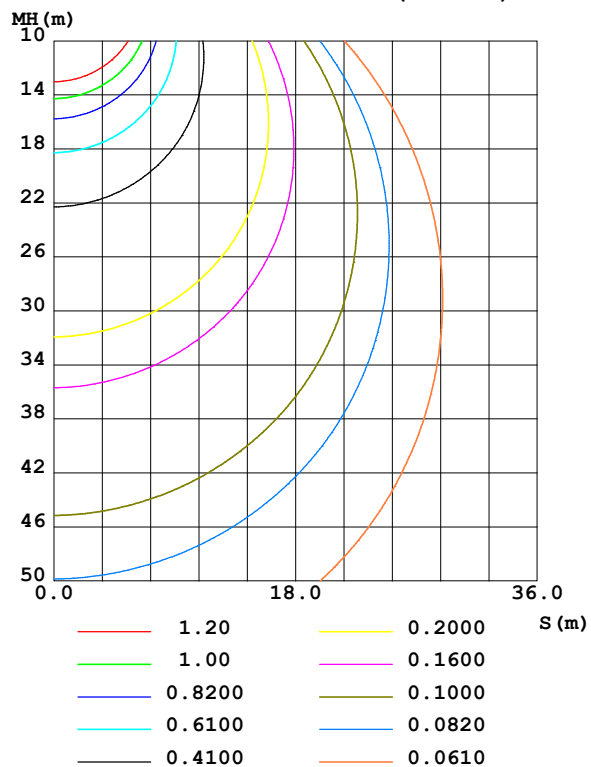

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-18

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	zone	total	%lum, lamp
10	200.6	201.9	202.7	203.1	202.1	202.4	202.6	201.5	0- 10	19.39	19.39	2.6,2.6
20	192.0	193.2	193.6	195.5	194.5	196.8	196.3	195.0	10- 20	56.26	75.65	10.1,10.1
30	177.8	178.4	178.4	181.4	180.8	184.2	182.2	181.7	20- 30	86.91	162.6	21.8,21.8
40	157.2	157.8	158.3	161.5	161.0	164.7	162.8	161.6	30- 40	107.3	269.9	36.1,36.1
50	131.2	132.0	132.9	136.3	135.3	140.9	138.4	137.1	40- 50	114.9	384.8	51.5,51.5
60	100.5	102.8	105.9	106.9	103.7	111.4	110.3	107.9	50- 60	108.6	493.4	66,66
70	64.93	81.12	101.5	84.55	66.58	79.63	100.8	78.27	60- 70	92.43	585.8	78.4,78.4
80	19.90	51.97	58.93	54.18	27.05	57.40	63.71	56.32	70- 80	72.47	658.3	88.1,88.1
90	0.3260	19.66	25.61	20.21	0.2978	21.04	28.15	21.41	80- 90	33.66	692.0	92.6,92.6
100	0.6566	17.75	22.20	18.02	0.5599	14.04	22.29	17.19	90-100	16.87	708.8	94.9,94.9
110	1.104	15.57	20.65	16.35	0.9384	7.442	15.82	8.011	100-110	13.15	722.0	96.6,96.6
120	1.530	13.69	20.01	14.53	1.319	1.332	8.228	1.374	110-120	8.941	730.9	97.8,97.8
130	1.890	12.35	18.91	12.37	1.655	1.575	1.607	1.621	120-130	6.025	736.9	98.6,98.6
140	2.161	9.773	20.30	8.827	1.933	1.832	1.802	1.854	130-140	4.731	741.7	99.3,99.3
150	2.376	2.495	13.75	2.308	2.148	2.063	1.985	2.075	140-150	3.235	744.9	99.7,99.7
160	2.542	2.498	2.499	2.476	2.360	2.279	2.244	2.301	150-160	1.220	746.1	99.9,99.9
170	2.723	2.690	2.702	2.662	2.607	2.550	2.544	2.572	160-170	0.7079	746.8	100,100
180	2.890	2.862	2.886	2.876	2.893	2.862	2.886	2.873	170-180	0.2595	747.1	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 338.83 lm

%lum = 45.4%

%lamp = 45.4%

Conical surface Flux(120deg): 493.39 lm

%lum = 66.0%


%lamp = 66.0%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-18

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

NAME: 2835 IP67	TYPE: 2835 210LED 12V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

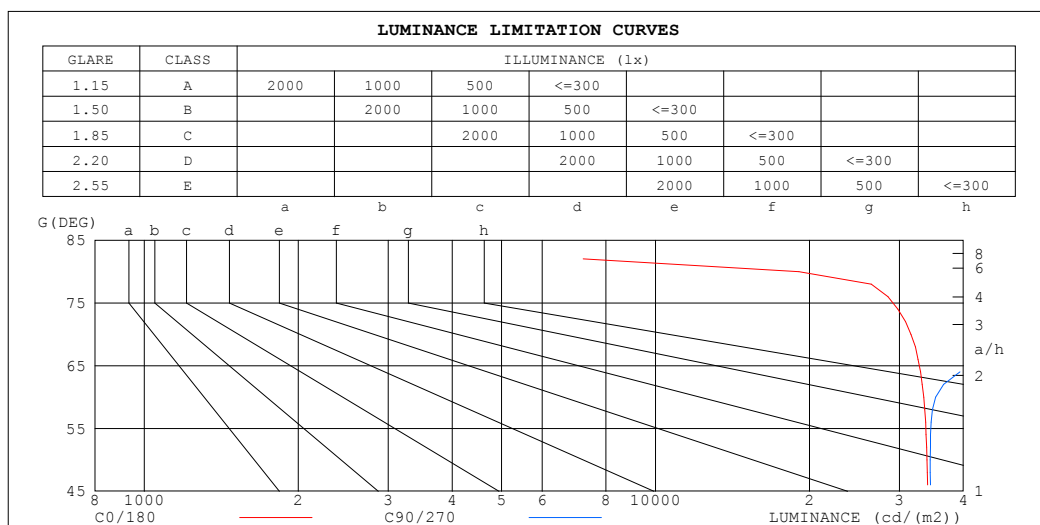

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	685	78597
80	19082	56583
75	31734	55812
70	31608	49461
65	34250	40843
60	33472	35305
55	34664	35369
50	33984	34465
45	34688	35082


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-04-18

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: 2835 IP67	TYPE: 2835 210LED 12V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

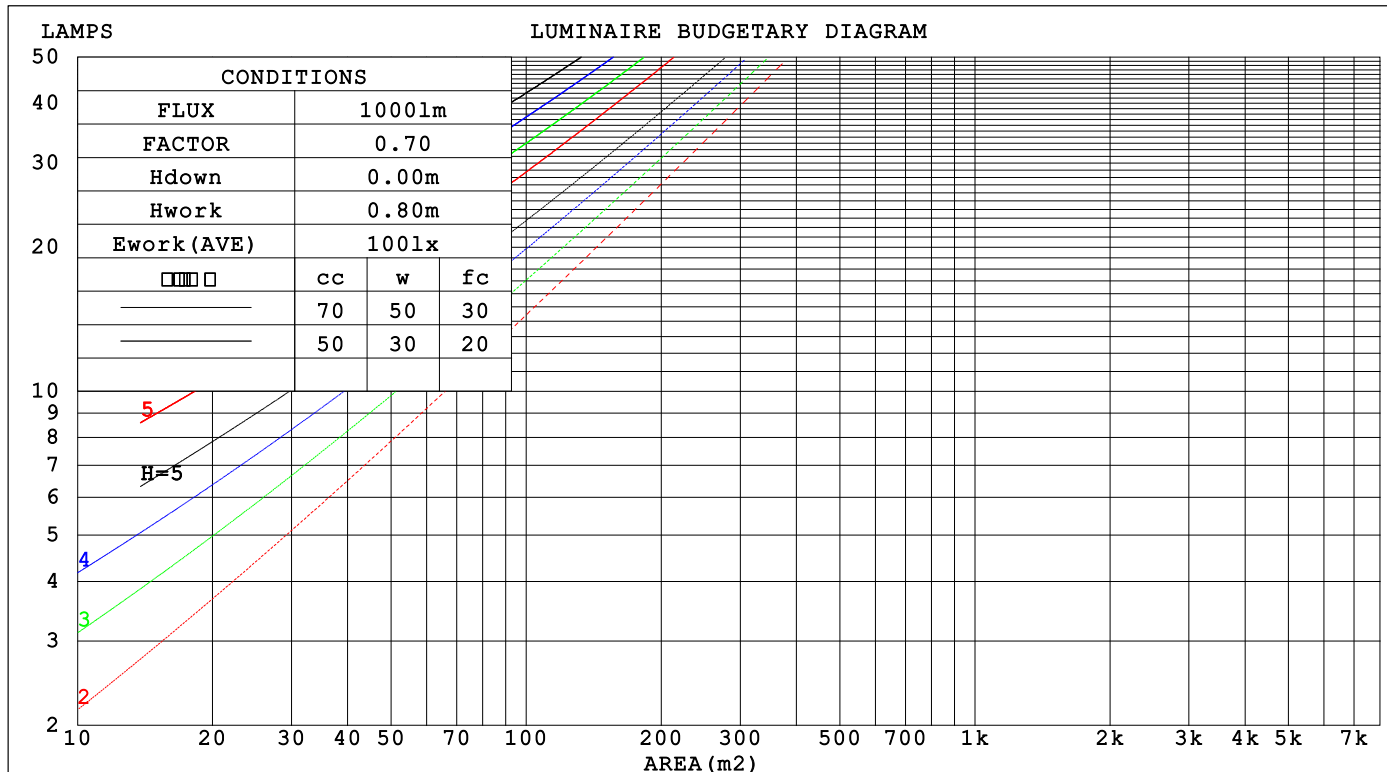

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-18

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: 2835 IP67	TYPE: 2835 210LED 12V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio					Wall Exitance Coefficients(WEC)
0.0						
1.0	.354 .201 .064	.345 .197 .062	.327 .188 .060	.311 .179 .058	.296 .171 .055	
2.0	.319 .175 .054	.311 .171 .053	.295 .164 .051	.280 .157 .049	.267 .151 .048	
3.0	.288 .154 .046	.281 .150 .045	.267 .145 .044	.254 .139 .043	.241 .134 .041	
4.0	.262 .136 .040	.255 .134 .040	.243 .129 .038	.231 .124 .037	.220 .119 .036	
5.0	.240 .122 .035	.234 .120 .035	.222 .116 .034	.212 .112 .033	.202 .108 .032	
6.0	.221 .111 .032	.215 .109 .031	.205 .105 .031	.195 .101 .030	.186 .098 .029	
7.0	.204 .101 .029	.199 .099 .028	.190 .096 .028	.181 .093 .027	.173 .090 .026	
8.0	.190 .093 .026	.185 .091 .026	.177 .088 .025	.169 .086 .025	.161 .083 .024	
9.0	.177 .086 .024	.173 .084 .024	.166 .082 .023	.158 .079 .023	.151 .077 .022	
10.0	.166 .080 .022	.163 .078 .022	.155 .076 .021	.149 .074 .021	.142 .072 .021	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio					Ceiling Cavity Exitance Coefficients(CCEC)
0.0	.247 .247 .247	.211 .211 .211	.144 .144 .144	.083 .083 .083	.026 .026 .026	
1.0	.240 .212 .188	.205 .182 .161	.141 .125 .112	.081 .073 .065	.026 .023 .021	
2.0	.233 .189 .152	.200 .163 .131	.137 .112 .092	.079 .065 .054	.025 .021 .017	
3.0	.225 .172 .129	.193 .148 .112	.133 .103 .078	.077 .060 .046	.025 .020 .015	
4.0	.218 .159 .114	.187 .137 .099	.128 .096 .070	.074 .056 .041	.024 .018 .014	
5.0	.210 .149 .104	.180 .129 .090	.124 .090 .064	.072 .053 .038	.023 .017 .012	
6.0	.203 .141 .096	.174 .122 .084	.120 .085 .059	.070 .050 .035	.022 .016 .012	
7.0	.196 .134 .091	.168 .116 .079	.116 .081 .056	.068 .048 .033	.022 .016 .011	
8.0	.189 .128 .086	.163 .111 .075	.113 .078 .053	.065 .046 .032	.021 .015 .011	
9.0	.183 .123 .083	.157 .107 .073	.109 .075 .052	.064 .044 .031	.021 .015 .010	
10.0	.177 .119 .081	.152 .103 .070	.106 .073 .050	.062 .043 .030	.020 .014 .010	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-18

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME: 2835 IP67						TYPE: 2835 210LED 12V		WEIGHT:			
SPEC.:						DIM.:		SERIAL No.:			
MFR.:						SUR.: 0.012*0.5		Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	25.5	27.0	25.9	27.4	27.7	25.7	27.2	26.1	27.5	27.9	
	27.2	28.5	27.6	28.9	29.3	28.5	29.8	28.9	30.2	30.6	
	27.9	29.2	28.3	29.5	30.0	29.7	31.0	30.2	31.4	31.8	
	28.3	29.5	28.7	29.9	30.4	30.8	32.0	31.2	32.4	32.9	
	28.3	29.5	28.7	29.9	30.4	31.2	32.4	31.6	32.8	33.3	
	28.2	29.4	28.7	29.8	30.3	31.6	32.7	32.0	33.2	33.6	
4H	2H	26.2	27.5	26.7	27.9	28.3	26.4	27.7	26.8	28.1	28.5
	3H	28.1	29.3	28.6	29.7	30.2	29.4	30.5	29.8	30.9	31.4
	4H	29.0	30.1	29.5	30.5	31.0	30.8	31.9	31.3	32.3	32.8
	6H	29.7	30.6	30.2	31.1	31.6	32.0	33.0	32.5	33.5	34.0
	8H	29.7	30.6	30.2	31.1	31.6	32.5	33.4	33.0	33.9	34.4
	12H	29.7	30.5	30.2	31.0	31.6	33.0	33.8	33.5	34.3	34.9
8H	4H	29.7	30.6	30.2	31.1	31.6	31.2	32.1	31.7	32.6	33.1
	6H	30.6	31.4	31.2	31.9	32.5	32.6	33.4	33.2	33.9	34.5
	8H	30.9	31.5	31.4	32.1	32.7	33.2	33.9	33.8	34.5	35.1
	12H	31.0	31.5	31.5	32.1	32.7	33.9	34.5	34.5	35.0	35.7
12H	4H	29.8	30.6	30.4	31.2	31.7	31.2	32.0	31.7	32.5	33.1
	6H	30.9	31.5	31.4	32.1	32.7	32.7	33.4	33.3	33.9	34.5
	8H	31.2	31.8	31.8	32.3	33.0	33.4	34.0	34.0	34.6	35.2
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H		+ 0.1 / - 0.1					+ 0.1 / - 0.1				
1.5H		+ 0.1 / - 0.2					+ 0.1 / - 0.2				
2.0H		+ 0.1 / - 0.3					+ 0.1 / - 0.2				

CIE Pub.117, 747.1 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.0)
Area: 0.006 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-18

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

NAME: 2835 IP67	TYPE: 2835 210LED 12V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) k(RI) x RCR = 5									
k = 0.60	53	40	33	52	40	33	50	39	33	26
0.80	62	50	42	61	49	42	59	48	41	34
1.00	70	58	50	69	57	50	66	58	49	41
1.25	77	65	58	75	65	57	72	63	56	47
1.50	82	71	63	80	70	63	76	68	61	52
2.00	89	80	72	87	78	71	83	75	69	59
2.50	94	85	78	91	83	76	86	79	74	64
3.00	97	89	83	95	87	81	89	83	78	68
4.00	102	95	89	99	93	87	93	88	84	73
5.00	105	99	94	101	96	92	96	91	88	76
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004										
Suspended										
SHRNOM = 1.25										

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-04-18

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME: 2835 IP67	TYPE: 2835 210LED 12V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

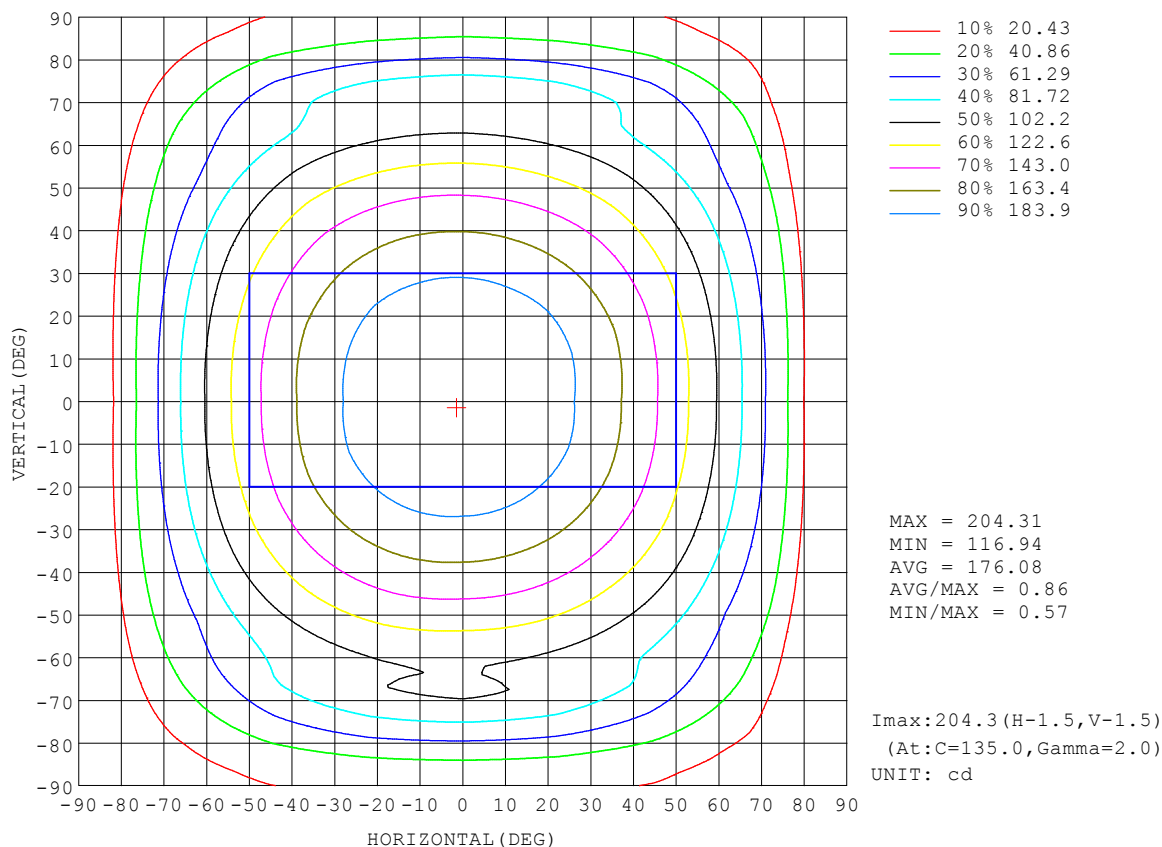


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-04-18

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

AAI Figure

NAME: 2835 IP67	TYPE: 2835 210LED 12V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

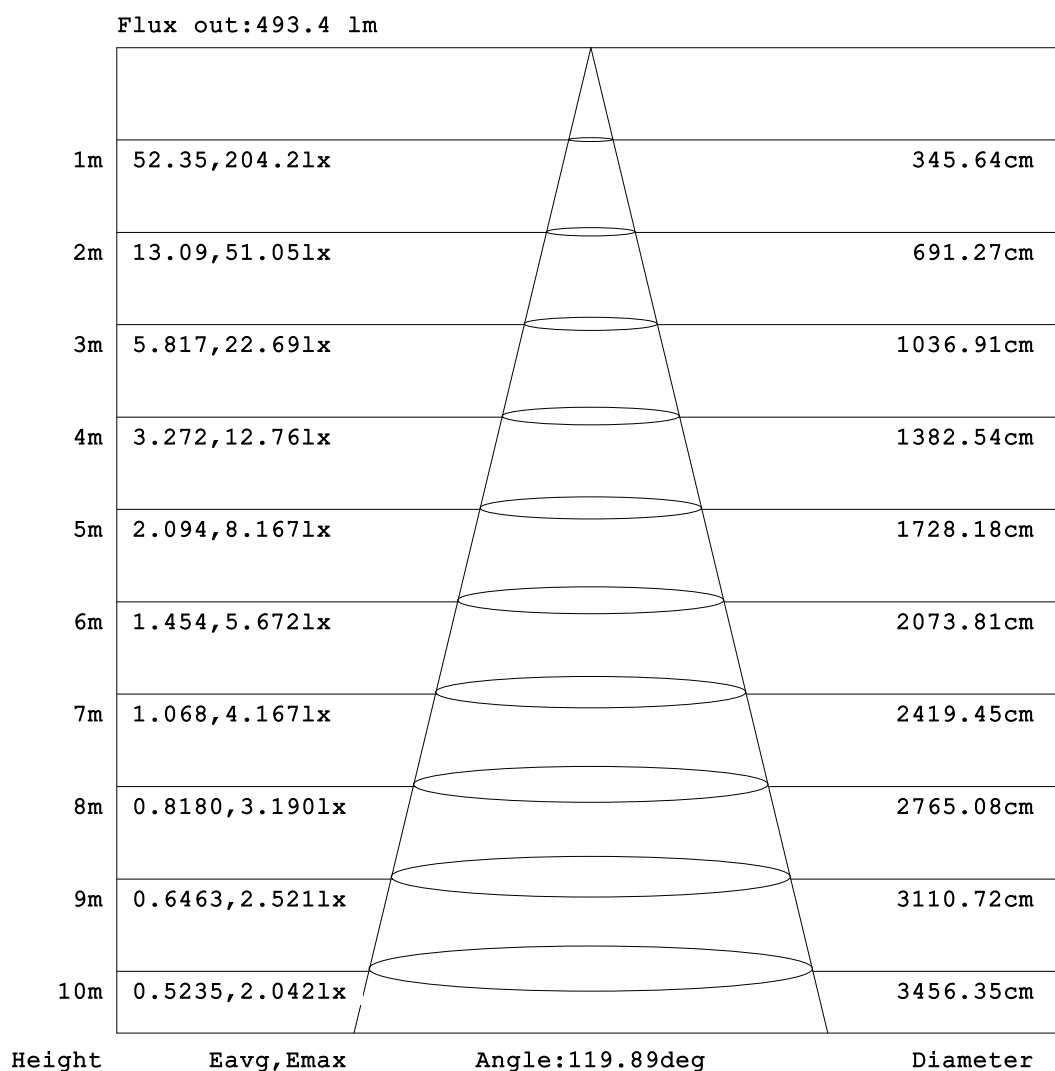


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-04-18

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity:65.0%
 Test Distance:5.749m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

NAME: 2835 IP67	TYPE: 2835 210LED 12V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

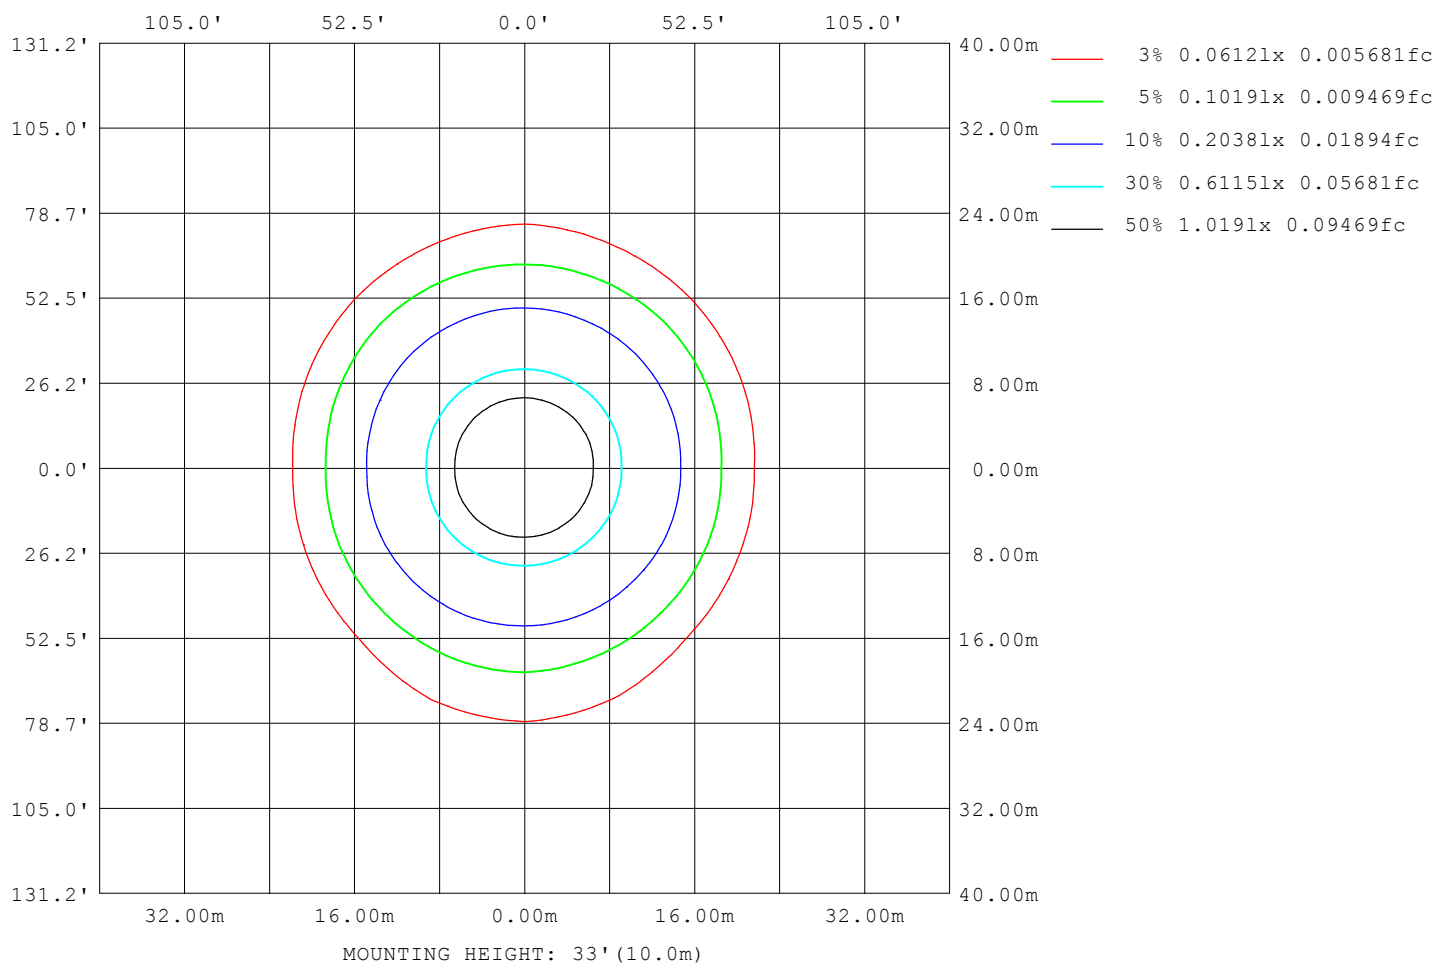

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-04-18

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

LED Avg.L Report

NAME: 2835 IP67	TYPE: 2835 210LED 12V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	33358
L_0~180 (75) av	29623
L_0~180 (85) av	9165
L_90~270 (65) av	39697
L_90~270 (75) av	55139
L_90~270 (85) av	76567
L_45 (65) av	36202
L_45 (75) av	48149
L_45 (85) av	63654

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-18

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

Planar Illuminance Curve

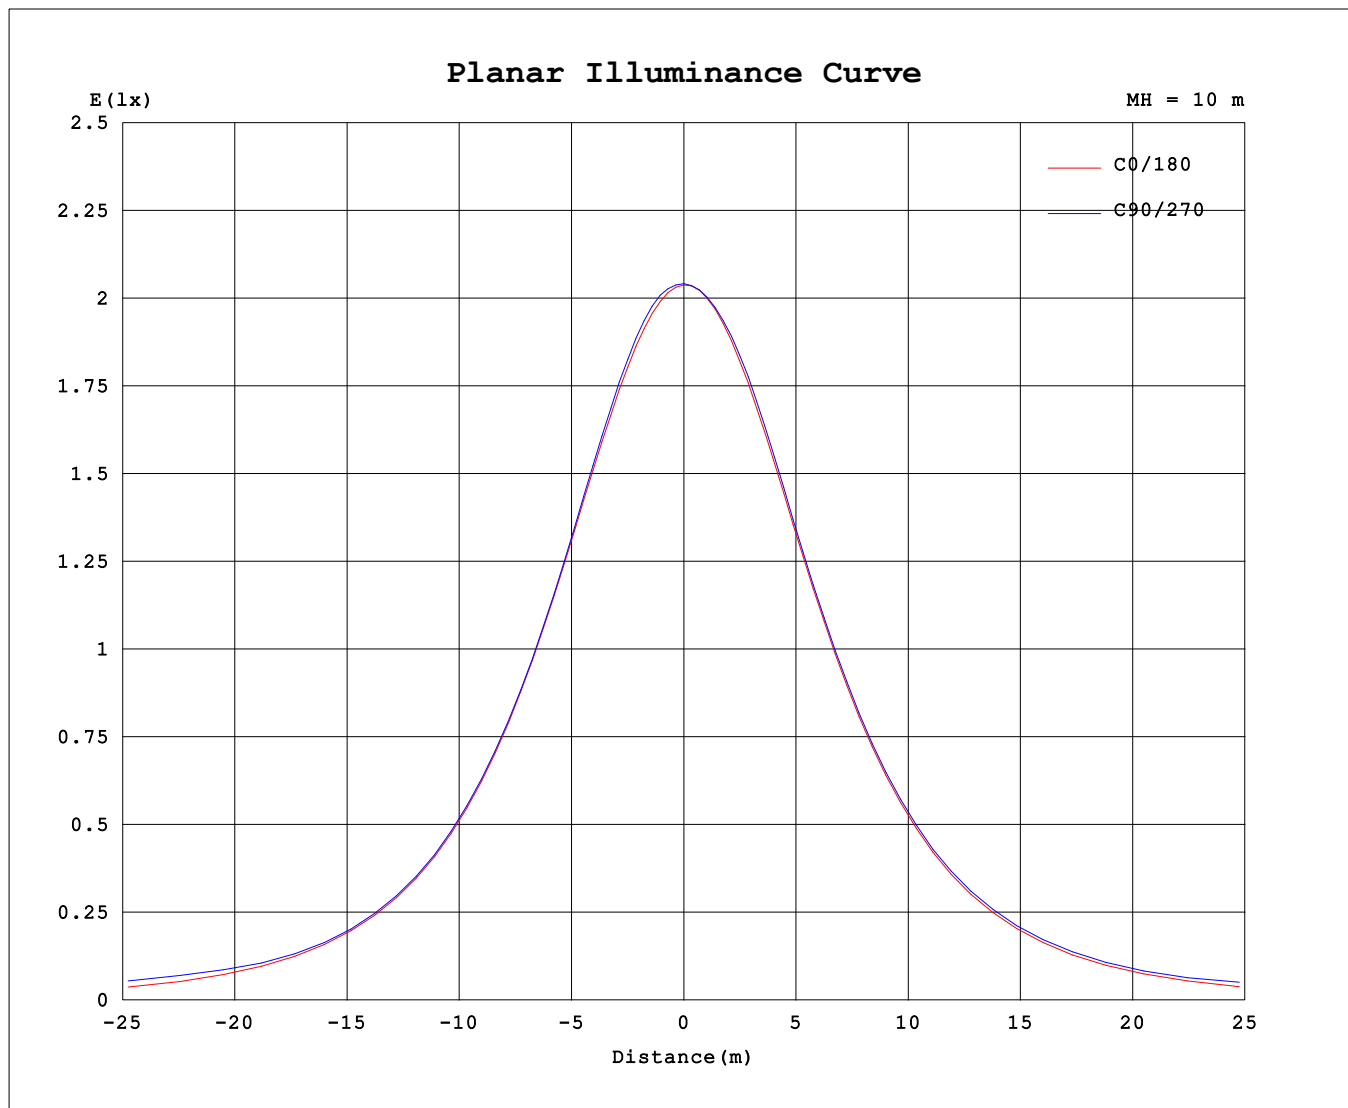

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-04-18

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: 2835 IP67	TYPE: 2835 210LED 12V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	204	204	204	204	204	204	204	204	204	204	204	204	204	204	204	204			
5	203	203	204	204	204	204	204	204	204	204	204	204	204	204	203	203			
10	201	201	202	202	203	203	203	202	202	202	202	203	203	202	201	201			
15	198	199	199	199	200	201	201	201	200	200	201	201	201	200	199	198			
20	192	193	193	193	194	195	195	196	194	195	197	197	196	196	195	193			
25	187	188	188	188	188	190	191	191	190	191	193	192	191	191	191	189			
30	178	179	178	178	178	180	181	182	181	183	184	183	182	181	182	180			
35	170	171	171	170	171	173	174	175	174	176	177	176	175	174	174	173			
40	157	158	158	158	158	160	161	162	161	164	165	164	163	162	162	161			
45	147	149	148	148	149	151	152	153	151	155	156	155	154	153	152	151			
50	131	133	132	133	133	135	136	137	135	139	141	140	138	137	137	135			
55	119	121	121	121	122	124	125	125	123	127	130	128	128	126	126	123			
60	101	102	103	104	106	107	107	106	104	108	111	111	110	109	108	105			
65	86.9	88.8	90.7	97.0	104	100	94.5	92.5	89.5	94.6	98.6	99.0	98.8	96.9	95.4	91.7			
70	64.9	68.0	81.1	97.9	101	99.5	84.5	71.0	66.6	72.9	79.6	94.4	101	93.5	78.3	71.0			
75	49.3	55.8	74.0	84.1	86.6	85.5	79.2	59.0	50.6	58.4	77.0	90.1	93.2	89.7	77.7	57.3			
80	19.9	40.1	52.0	57.9	58.9	58.9	54.2	42.5	27.1	43.0	57.4	61.7	63.7	61.4	56.3	43.4			
85	0.36	24.9	34.5	39.6	41.1	40.3	36.2	26.6	12.7	26.9	38.7	43.7	46.0	43.7	38.6	27.4			
90	0.33	11.1	19.7	24.6	25.6	24.8	20.2	12.0	0.30	11.1	21.0	26.1	28.1	26.4	21.4	12.0			
95	0.44	9.93	17.9	21.7	22.7	21.6	18.0	10.3	0.38	9.15	17.7	22.2	23.6	22.5	18.4	10.4			
100	0.66	9.46	17.7	21.2	22.2	21.3	18.0	10.1	0.56	4.98	14.0	20.8	22.3	21.2	17.2	6.26			
105	0.83	8.75	17.2	20.7	21.7	20.9	17.7	9.81	0.71	1.85	12.0	17.7	20.8	19.3	13.8	2.63			
110	1.10	6.87	15.6	19.4	20.6	19.9	16.4	8.10	0.94	0.94	7.44	11.1	15.8	13.7	8.01	0.98			
115	1.28	5.74	14.8	19.0	20.3	19.5	15.8	6.93	1.10	1.07	4.30	8.66	12.6	10.6	4.85	1.11			
120	1.53	4.37	13.7	18.5	20.0	19.1	14.5	5.30	1.32	1.27	1.33	5.41	8.23	6.10	1.37	1.32			
125	1.68	3.24	13.0	17.9	19.4	18.5	13.6	4.14	1.46	1.40	1.41	2.31	4.46	2.56	1.46	1.45			
130	1.89	2.05	12.3	17.5	18.9	17.9	12.4	2.09	1.65	1.59	1.58	1.58	1.61	1.61	1.62	1.64			
135	2.01	2.00	12.0	17.8	19.3	18.0	11.3	1.94	1.78	1.71	1.68	1.68	1.68	1.71	1.72	1.76			
140	2.16	2.13	9.77	18.6	20.3	17.7	8.83	2.09	1.93	1.87	1.83	1.82	1.80	1.83	1.85	1.92			
145	2.26	2.23	5.11	18.2	20.9	17.1	4.11	2.19	2.02	1.96	1.92	1.90	1.87	1.91	1.94	2.01			
150	2.38	2.35	2.49	8.06	13.7	6.44	2.31	2.30	2.15	2.09	2.06	2.04	1.99	2.02	2.08	2.15			
155	2.44	2.42	2.40	3.22	4.87	2.41	2.38	2.38	2.23	2.18	2.14	2.14	2.08	2.10	2.16	2.23			
160	2.54	2.53	2.50	2.46	2.50	2.50	2.48	2.48	2.36	2.32	2.28	2.28	2.24	2.24	2.30	2.37			
165	2.61	2.60	2.57	2.53	2.58	2.56	2.55	2.56	2.45	2.41	2.38	2.38	2.37	2.34	2.40	2.46			
170	2.72	2.72	2.69	2.66	2.70	2.67	2.66	2.68	2.61	2.58	2.55	2.54	2.54	2.52	2.57	2.62			
175	2.80	2.80	2.78	2.76	2.79	2.76	2.76	2.78	2.72	2.70	2.68	2.67	2.68	2.66	2.70	2.74			
180	2.89	2.87	2.86	2.86	2.89	2.86	2.88	2.90	2.89	2.87	2.86	2.87	2.89	2.86	2.87	2.90			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-18

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks: