


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: 2835 IP67	TYPE: 2835 210LED 12V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 104.73 lm/W			
MODEL	4000K RA90 12MM 14.4W	I _{max} (cd)	203.7	S/MH(C0/180)	1.31
NOMINAL POWER(W)	7.2	LOR(%)	100.0	S/MH(C90/270)	1.33
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	741.92	□ UP,DN(C0-180)	5.3,44.7
NOMINAL FLUX(lm)	7.06587	CIE CLASS	DIRECT	□ UP,DN(C180-360)	2.6,47.4
LAMPS INSIDE	105	□ up (%)	7.9	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)	24	□ down (%)	92.1	CIBSE SHR MAX	1.50

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

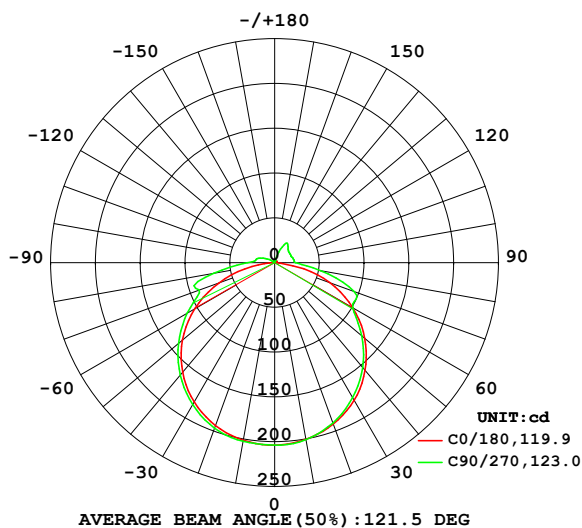

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

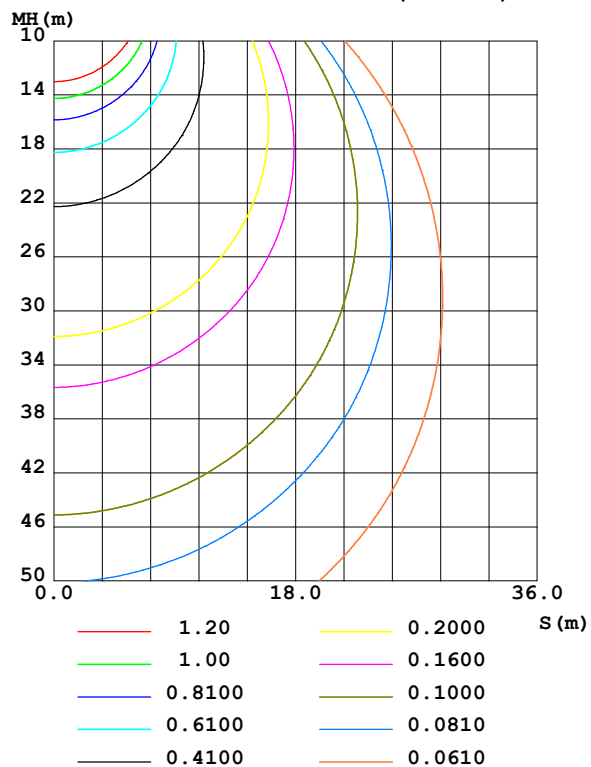

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-18

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	200.4	200.6	200.7	201.6	201.4	202.0	202.5	201.3	0- 10	19.34	19.34	2.61,2.61
20	191.7	190.8	190.5	192.6	193.5	196.4	196.5	195.0	10- 20	55.97	75.30	10.1,10.1
30	177.7	175.2	174.1	177.7	179.6	184.0	183.0	181.9	20- 30	86.26	161.6	21.8,21.8
40	157.2	154.0	153.1	157.2	159.9	165.3	164.0	162.7	30- 40	106.4	267.9	36.1,36.1
50	131.3	127.9	126.9	131.8	134.3	141.7	140.3	138.6	40- 50	113.7	381.7	51.4,51.4
60	100.9	98.50	100.8	102.2	102.7	113.2	112.6	109.8	50- 60	107.4	489.0	65.9,65.9
70	65.43	77.15	94.34	80.09	66.04	80.97	89.73	78.27	60- 70	90.93	580.0	78.2,78.2
80	20.76	47.50	52.04	48.91	26.09	60.67	69.14	60.60	70- 80	70.05	650.0	87.6,87.6
90	0.3260	18.71	23.54	18.67	0.3002	22.34	30.05	22.17	80- 90	33.48	683.5	92.1,92.1
100	0.6519	17.39	21.71	17.66	0.5599	13.23	21.30	16.06	90-100	16.48	700.0	94.3,94.3
110	1.095	15.34	20.12	16.18	0.9384	6.613	15.19	7.745	100-110	12.78	712.8	96.1,96.1
120	1.514	14.61	19.95	15.34	1.317	1.622	7.289	1.876	110-120	8.900	721.7	97.3,97.3
130	1.871	14.74	20.42	14.84	1.653	1.530	1.559	1.569	120-130	6.566	728.2	98.2,98.2
140	2.142	15.29	23.39	14.08	1.926	1.789	1.745	1.809	130-140	5.603	733.8	98.9,98.9
150	2.357	10.72	24.82	10.53	2.145	2.027	1.940	2.034	140-150	4.687	738.5	99.5,99.5
160	2.523	2.737	8.226	2.647	2.350	2.251	2.206	2.265	150-160	2.389	740.9	99.9,99.9
170	2.707	2.684	2.698	2.654	2.595	2.532	2.515	2.541	160-170	0.7511	741.7	100,100
180	2.876	2.848	2.872	2.859	2.878	2.848	2.869	2.854	170-180	0.2580	741.9	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 336.17 lm

%lum = 45.3%

%lamp = 45.3%

Conical surface Flux(120deg): 489.04 lm

%lum = 65.9%


%lamp = 65.9%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-18

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

NAME: 2835 IP67	TYPE: 2835 210LED 12V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

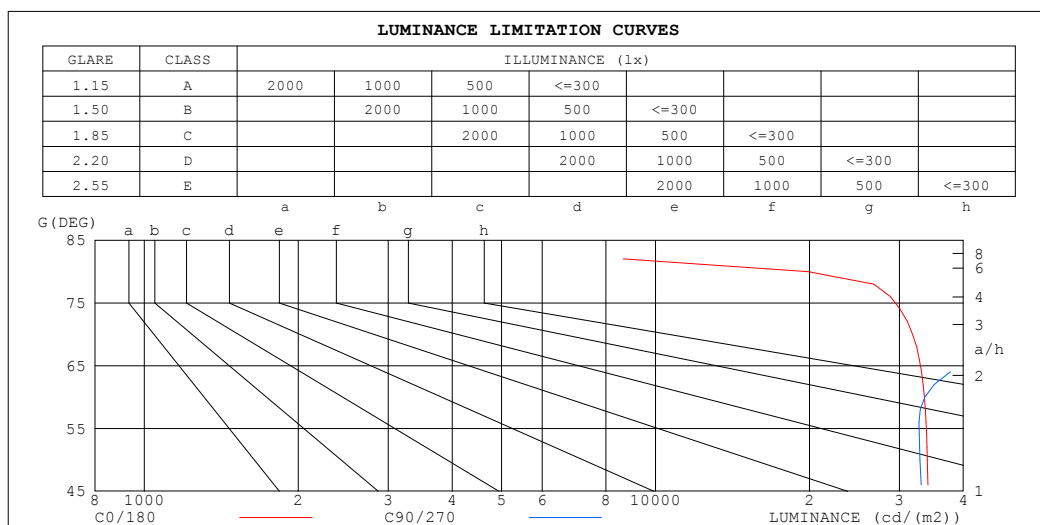

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	713	69164
80	19902	49965
75	32064	51156
70	31848	45990
65	34384	39155
60	33585	33615
55	34739	33601
50	34018	32921
45	34701	33759


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-04-18

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: 2835 IP67	TYPE: 2835 210LED 12V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.17	1.17	1.17	1.14	1.14	1.14	1.07	1.07	1.07	1.01	1.01	1.01	.95	.95	.95	.92
1.0	.00	.95	.90	.97	.92	.88	.91	.87	.84	.86	.83	.80	.81	.78	.76	.73
2.0	.86	.78	.72	.83	.76	.71	.78	.73	.68	.74	.69	.65	.70	.66	.62	.60
3.0	.75	.66	.59	.73	.64	.58	.68	.62	.56	.64	.59	.54	.61	.56	.52	.49
4.0	.66	.57	.49	.64	.55	.49	.60	.53	.47	.57	.51	.46	.54	.49	.44	.42
5.0	.59	.49	.42	.57	.48	.42	.54	.46	.40	.51	.44	.39	.48	.43	.38	.36
6.0	.53	.43	.37	.51	.42	.36	.48	.41	.35	.46	.39	.34	.44	.38	.33	.31
7.0	.47	.38	.32	.46	.38	.32	.44	.36	.31	.42	.35	.30	.40	.34	.29	.27
8.0	.43	.34	.28	.42	.34	.28	.40	.33	.27	.38	.32	.27	.37	.31	.26	.24
9.0	.40	.31	.25	.39	.31	.25	.37	.30	.25	.35	.29	.24	.34	.28	.24	.22
10.0	.36	.28	.23	.36	.28	.23	.34	.27	.22	.33	.26	.22	.31	.26	.21	.20

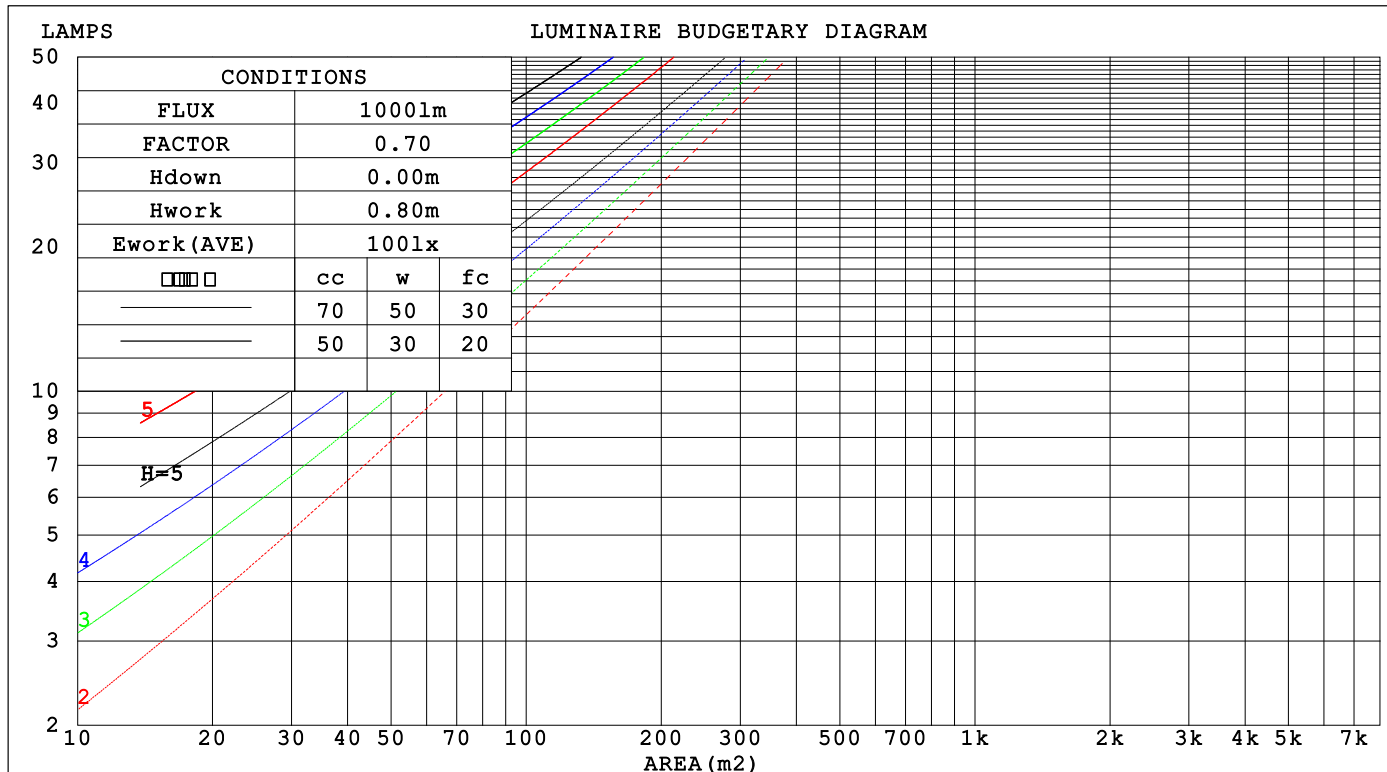

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-18

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: 2835 IP67	TYPE: 2835 210LED 12V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio					Wall Exitance Coefficients(WEC)
0.0						
1.0	.353 .201 .064	.343 .196 .062	.325 .187 .060	.309 .178 .057	.294 .170 .055	
2.0	.318 .174 .053	.309 .170 .052	.293 .163 .051	.278 .156 .049	.265 .150 .047	
3.0	.287 .153 .046	.280 .150 .045	.265 .144 .044	.252 .138 .042	.240 .133 .041	
4.0	.261 .136 .040	.255 .133 .039	.242 .128 .038	.230 .123 .037	.218 .119 .036	
5.0	.239 .122 .035	.233 .120 .035	.221 .115 .034	.211 .111 .033	.200 .107 .032	
6.0	.220 .110 .032	.215 .108 .031	.204 .105 .030	.194 .101 .030	.185 .097 .029	
7.0	.204 .101 .029	.199 .099 .028	.189 .096 .028	.180 .092 .027	.172 .089 .026	
8.0	.189 .093 .026	.185 .091 .026	.176 .088 .025	.168 .085 .025	.160 .082 .024	
9.0	.177 .086 .024	.173 .084 .024	.165 .082 .023	.157 .079 .023	.150 .076 .022	
10.0	.166 .080 .022	.162 .078 .022	.155 .076 .021	.148 .074 .021	.142 .071 .020	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio					Ceiling Cavity Exitance Coefficients(CCEC)
0.0	.250 .250 .250	.214 .214 .214	.146 .146 .146	.084 .084 .084	.027 .027 .027	
1.0	.244 .216 .191	.209 .186 .165	.143 .128 .114	.082 .074 .066	.026 .024 .021	
2.0	.237 .193 .156	.203 .166 .135	.139 .115 .094	.080 .067 .055	.026 .022 .018	
3.0	.229 .176 .133	.196 .152 .115	.135 .105 .081	.078 .061 .048	.025 .020 .016	
4.0	.221 .163 .118	.190 .141 .102	.131 .098 .072	.076 .057 .043	.024 .019 .014	
5.0	.214 .153 .108	.184 .132 .094	.126 .092 .066	.073 .054 .039	.024 .018 .013	
6.0	.206 .144 .100	.177 .125 .087	.122 .088 .062	.071 .052 .037	.023 .017 .012	
7.0	.199 .138 .095	.171 .119 .082	.118 .084 .058	.069 .049 .035	.022 .016 .011	
8.0	.193 .132 .090	.166 .115 .079	.115 .080 .056	.067 .047 .033	.022 .016 .011	
9.0	.186 .127 .087	.161 .110 .076	.111 .078 .054	.065 .046 .032	.021 .015 .011	
10.0	.181 .123 .085	.156 .107 .074	.108 .075 .052	.063 .044 .031	.020 .015 .010	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-18

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME: 2835 IP67					TYPE: 2835 210LED 12V			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.:					SUR.: 0.012*0.5			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	25.5	26.9	25.8	27.3	27.7	25.4	26.9	25.8	27.3	27.6	
	27.1	28.5	27.5	28.9	29.3	28.1	29.5	28.5	29.8	30.3	
	27.8	29.1	28.2	29.5	29.9	29.3	30.6	29.8	31.0	31.4	
	28.3	29.5	28.7	29.9	30.4	30.3	31.5	30.7	31.9	32.4	
	28.3	29.4	28.7	29.9	30.3	30.6	31.8	31.1	32.3	32.7	
	28.2	29.4	28.7	29.8	30.3	31.0	32.1	31.5	32.6	33.1	
4H	2H	26.1	27.4	26.5	27.8	28.2	26.1	27.4	26.6	27.8	28.2
	3H	28.0	29.2	28.5	29.6	30.1	29.0	30.2	29.5	30.6	31.1
	4H	28.9	29.9	29.4	30.4	30.9	30.4	31.4	30.9	31.9	32.4
	6H	29.5	30.5	30.1	31.0	31.5	31.5	32.4	32.0	32.9	33.5
	8H	29.6	30.5	30.1	31.0	31.5	31.9	32.8	32.5	33.3	33.9
	12H	29.6	30.4	30.1	30.9	31.5	32.4	33.2	32.9	33.7	34.3
8H	4H	29.5	30.4	30.1	30.9	31.5	30.8	31.6	31.3	32.1	32.7
	6H	30.4	31.2	31.0	31.7	32.3	32.1	32.8	32.6	33.4	34.0
	8H	30.7	31.3	31.2	31.9	32.5	32.7	33.3	33.2	33.9	34.5
	12H	30.8	31.3	31.4	31.9	32.6	33.3	33.8	33.9	34.4	35.1
12H	4H	29.6	30.4	30.2	31.0	31.5	30.8	31.6	31.3	32.1	32.7
	6H	30.6	31.3	31.2	31.9	32.5	32.2	32.8	32.8	33.4	34.0
	8H	31.0	31.5	31.6	32.1	32.8	32.8	33.4	33.4	34.0	34.6
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.1					
1.5H	+ 0.1 / - 0.3					+ 0.1 / - 0.2					
2.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2					

CIE Pub.117, 741.9 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.0)
Area: 0.006 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-18

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

NAME: 2835 IP67	TYPE: 2835 210LED 12V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) k(RI) x RCR = 5									
k = 0.60	53	40	33	52	40	33	50	39	33	26
0.80	62	50	42	61	49	42	59	48	41	34
1.00	70	58	50	69	57	50	66	58	49	41
1.25	77	66	58	75	65	57	72	63	56	47
1.50	82	71	63	80	70	63	76	67	61	52
2.00	89	80	72	87	78	71	82	75	69	59
2.50	94	85	78	91	83	76	86	79	74	63
3.00	97	89	83	94	87	81	89	83	78	67
4.00	102	95	89	99	92	87	93	88	84	72
5.00	104	99	94	101	96	91	95	91	87	76
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004										
Suspended										
SHRNOM = 1.25										

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-04-18

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME: 2835 IP67	TYPE: 2835 210LED 12V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

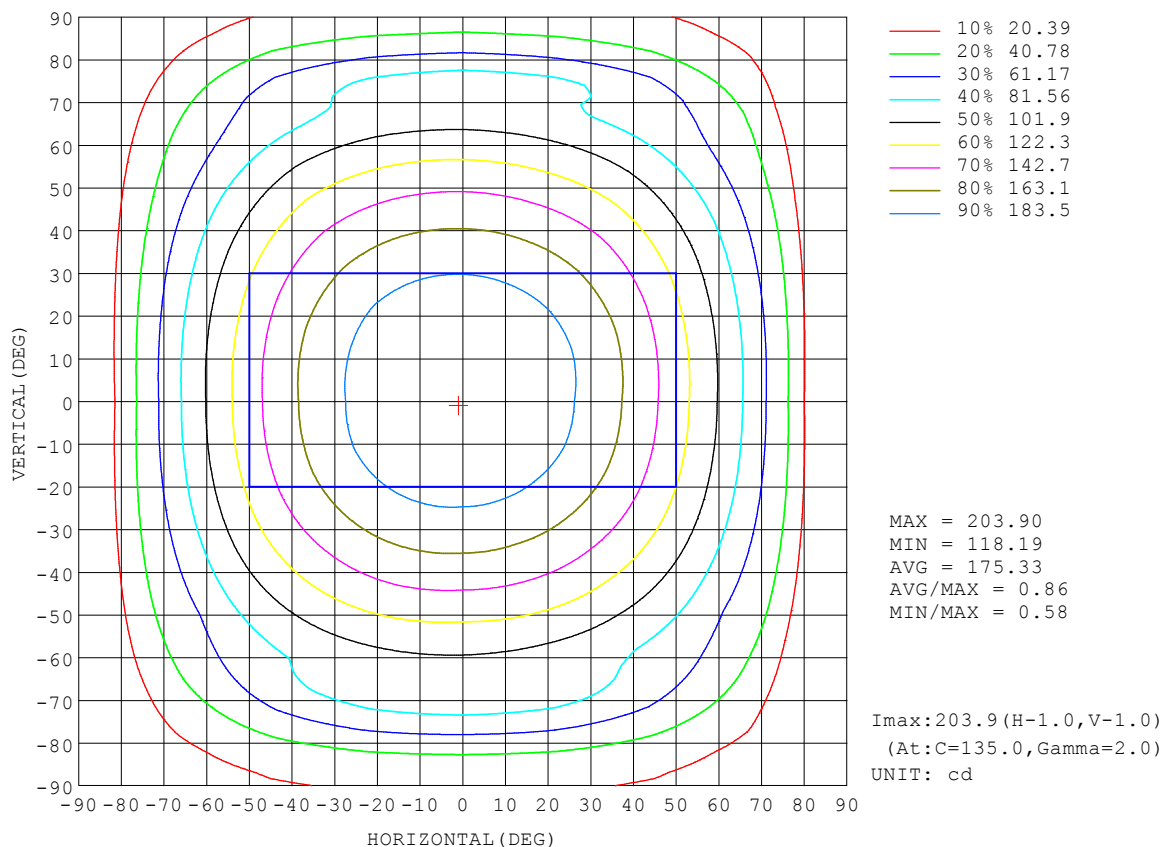


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-04-18

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

AAI Figure

NAME: 2835 IP67	TYPE: 2835 210LED 12V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

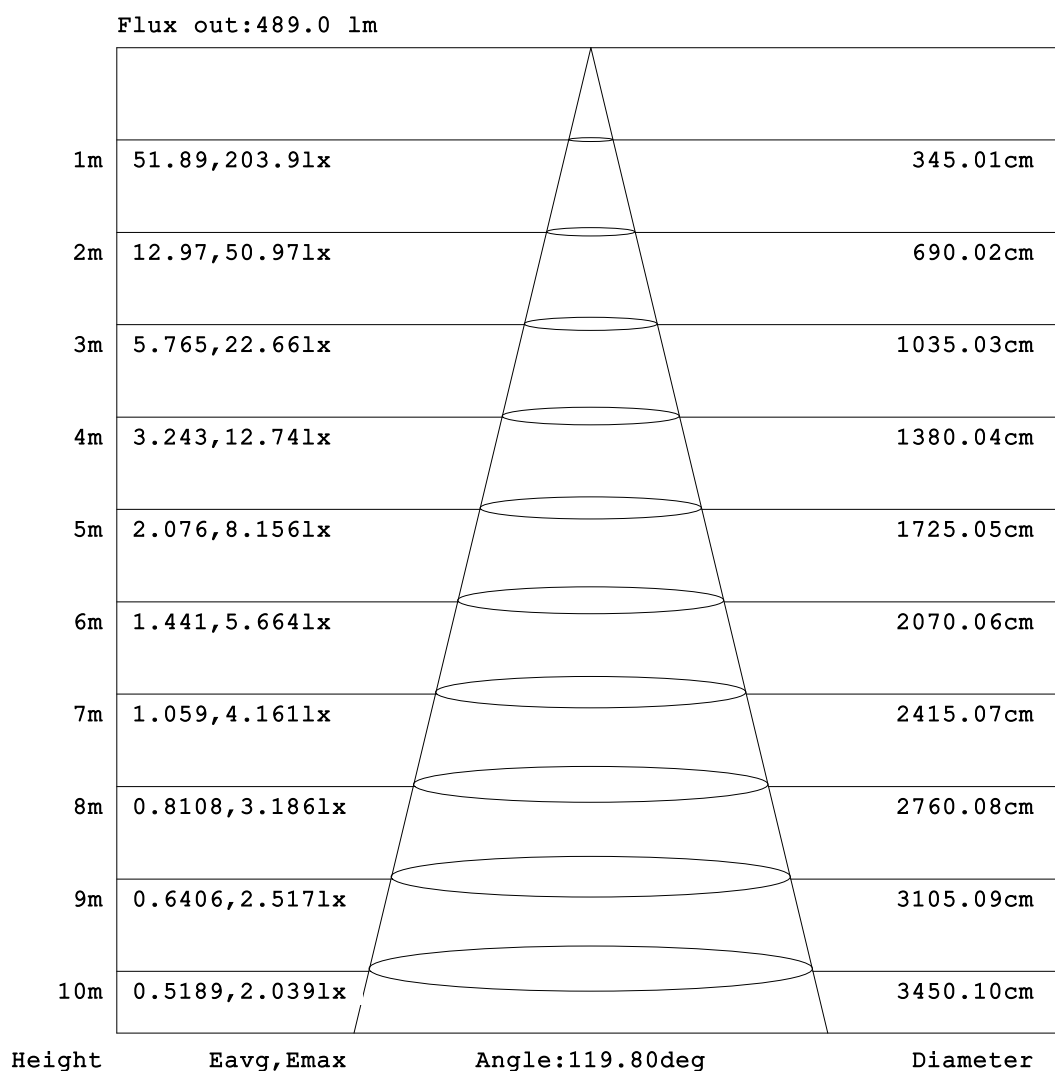


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-04-18

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity:65.0%
 Test Distance:5.749m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

NAME: 2835 IP67	TYPE: 2835 210LED 12V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

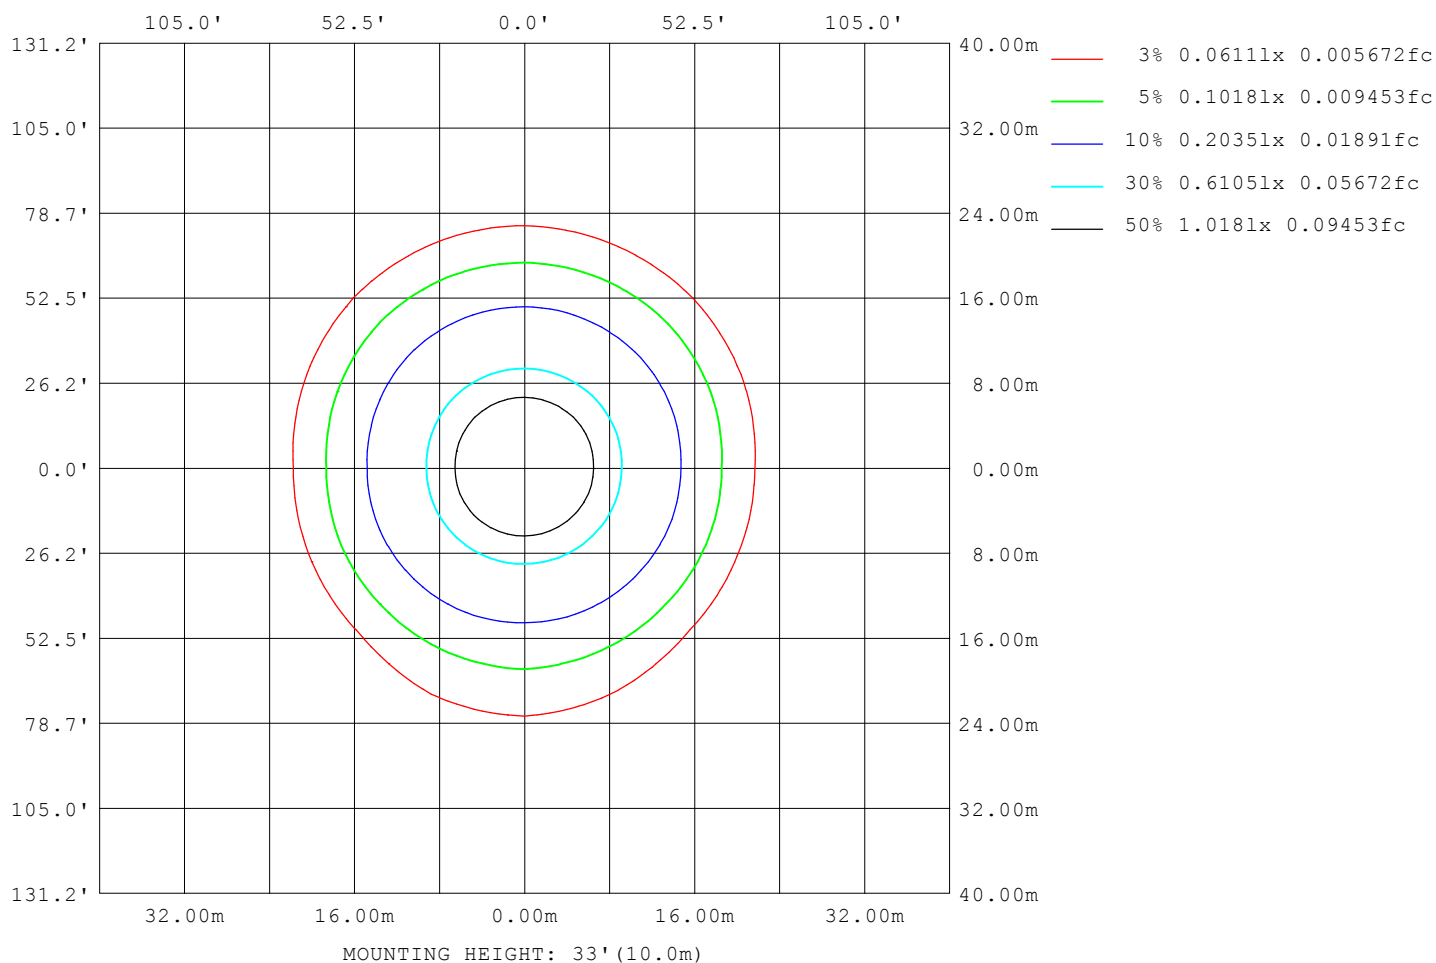

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-04-18

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

LED Avg.L Report

NAME: 2835 IP67	TYPE: 2835 210LED 12V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	33274
L_0~180 (75) av	29698
L_0~180 (85) av	8474
L_90~270 (65) av	38951
L_90~270 (75) av	53790
L_90~270 (85) av	75973
L_45 (65) av	35822
L_45 (75) av	45301
L_45 (85) av	63759

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-04-18

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

Planar Illuminance Curve

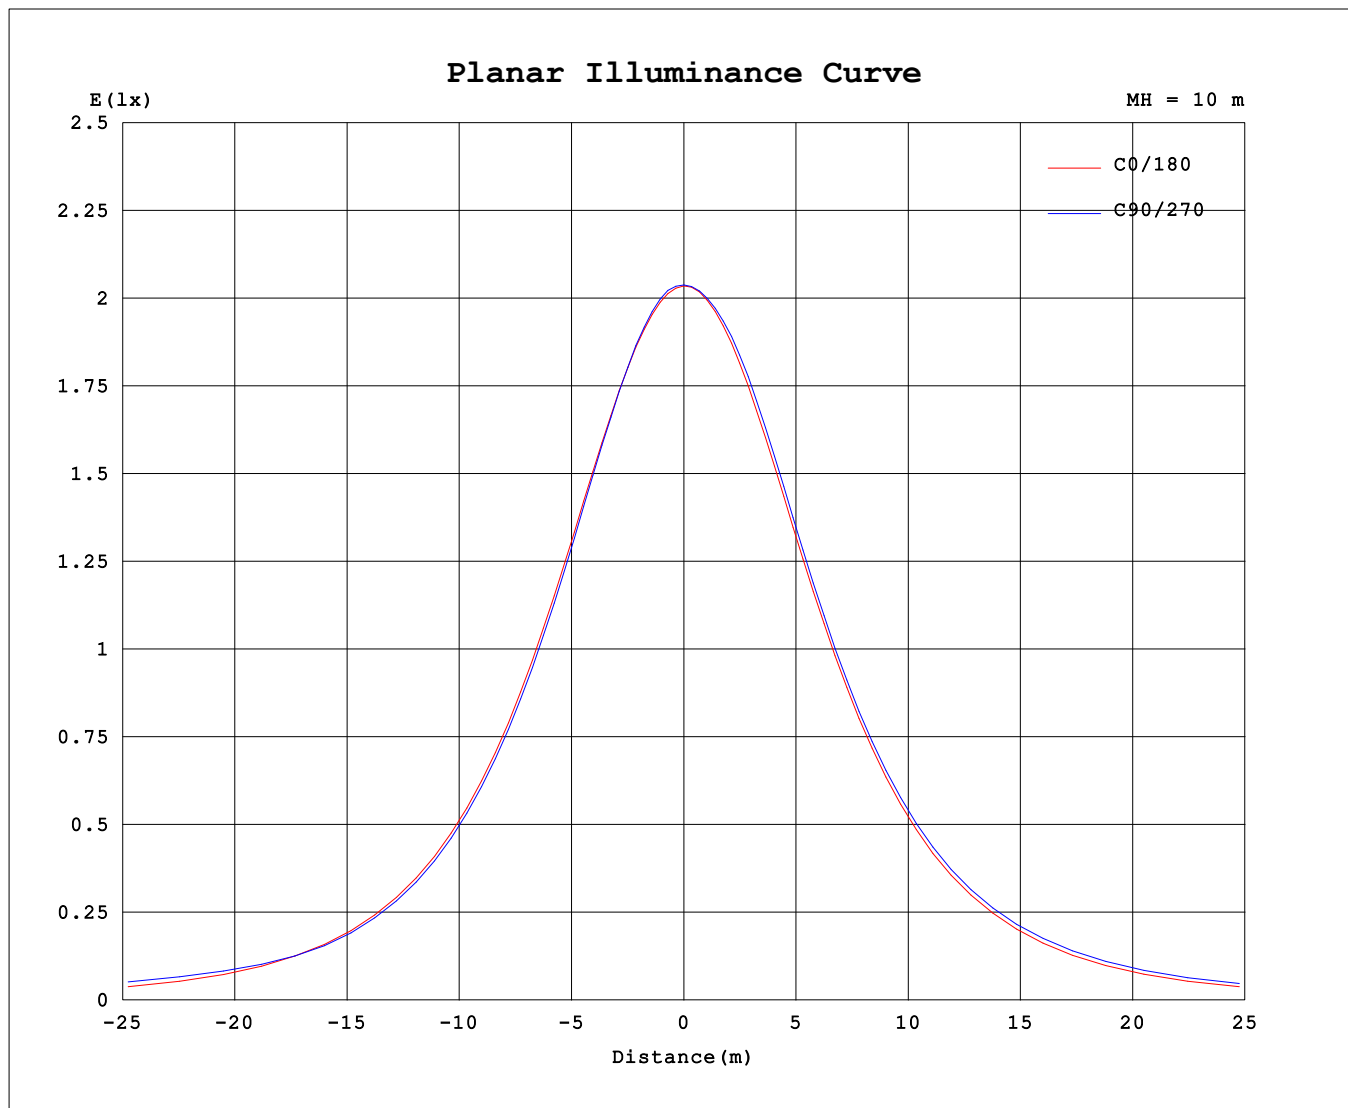

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-04-18

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: 2835 IP67	TYPE: 2835 210LED 12V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	204	204	204	204	204	204	204	204	204	204	204	204	204	204	204	204			
5	203	203	203	204	204	204	204	204	204	203	203	204	203	203	203	203			
10	200	201	201	201	201	201	202	202	201	201	202	202	202	202	201	201			
15	198	198	197	197	197	198	199	199	199	199	200	201	201	201	199	198			
20	192	192	191	190	190	191	193	194	193	194	196	197	196	196	195	193			
25	187	186	185	185	185	186	187	189	189	190	192	192	192	191	191	188			
30	178	177	175	174	174	176	178	179	180	182	184	184	183	182	182	180			
35	170	169	167	166	166	168	170	172	172	175	177	177	176	175	175	173			
40	157	156	154	153	153	155	157	159	160	163	165	165	164	163	163	161			
45	147	146	144	143	143	146	148	150	150	154	156	156	155	154	154	151			
50	131	130	128	127	127	130	132	134	134	139	142	141	140	139	139	136			
55	120	119	116	116	116	118	120	122	122	127	131	131	130	128	128	124			
60	101	100	98.5	99.1	101	101	102	103	103	109	113	113	113	111	110	106			
65	87.3	86.8	87.0	93.1	99.2	95.7	90.0	89.6	88.7	95.5	101	101	101	99.1	97.5	93.4			
70	65.4	66.2	77.2	91.7	94.3	93.2	80.1	68.4	66.0	74.2	81.0	86.4	89.7	83.9	78.3	72.9			
75	49.8	53.8	71.6	77.9	79.4	78.9	74.3	56.1	50.3	59.6	71.6	88.9	93.9	88.8	70.6	58.5			
80	20.8	38.5	47.5	51.7	52.0	52.0	48.9	40.5	26.1	43.0	60.7	67.0	69.1	66.2	60.6	43.5			
85	0.37	23.7	31.7	35.0	36.2	35.4	32.4	24.7	11.8	28.6	42.2	48.1	50.2	47.6	41.5	29.4			
90	0.33	10.7	18.7	22.8	23.5	22.7	18.7	11.1	0.30	11.6	22.3	27.7	30.0	27.5	22.2	12.2			
95	0.43	9.85	17.6	21.2	22.1	21.1	17.5	10.2	0.38	8.58	17.2	21.9	23.6	22.0	17.6	9.94			
100	0.65	9.38	17.4	20.7	21.7	20.8	17.7	10.3	0.56	4.84	13.2	19.8	21.3	20.3	16.1	6.07			
105	0.82	8.87	16.7	20.3	21.3	20.5	17.3	9.77	0.71	1.69	11.3	17.2	19.7	18.3	13.3	2.43			
110	1.09	7.69	15.3	18.9	20.1	19.4	16.2	8.85	0.94	0.92	6.61	10.6	15.2	13.4	7.74	0.96			
115	1.27	6.91	15.0	18.7	19.9	19.3	15.8	8.08	1.10	1.04	3.37	7.61	12.1	10.1	4.28	1.08			
120	1.51	6.02	14.6	18.7	19.9	19.2	15.3	7.08	1.32	1.24	1.62	4.05	7.29	5.14	1.88	1.28			
125	1.67	5.39	14.4	18.7	19.9	19.1	15.0	6.39	1.46	1.38	1.36	2.58	3.54	2.98	1.40	1.41			
130	1.87	4.44	14.7	19.2	20.4	19.6	14.8	5.34	1.65	1.56	1.53	1.61	1.56	1.66	1.57	1.61			
135	1.99	3.90	14.9	20.0	21.3	20.0	14.5	4.82	1.77	1.68	1.63	1.62	1.62	1.65	1.67	1.72			
140	2.14	2.97	15.3	22.1	23.4	21.3	14.1	3.90	1.93	1.84	1.79	1.76	1.75	1.78	1.81	1.88			
145	2.24	2.51	14.4	23.4	25.1	22.5	13.0	3.18	2.02	1.94	1.88	1.85	1.82	1.86	1.90	1.98			
150	2.36	2.34	10.7	20.9	24.8	19.8	10.5	2.44	2.15	2.07	2.03	2.00	1.94	1.98	2.03	2.12			
155	2.42	2.41	6.20	16.0	19.6	14.9	5.57	2.38	2.22	2.16	2.11	2.09	2.04	2.07	2.12	2.20			
160	2.52	2.52	2.74	5.67	8.23	4.66	2.65	2.48	2.35	2.30	2.25	2.24	2.21	2.21	2.26	2.34			
165	2.59	2.59	2.56	2.87	3.33	2.58	2.54	2.55	2.44	2.40	2.36	2.34	2.33	2.31	2.37	2.44			
170	2.71	2.70	2.68	2.65	2.70	2.67	2.65	2.67	2.60	2.56	2.53	2.51	2.52	2.50	2.54	2.60			
175	2.79	2.79	2.77	2.75	2.78	2.75	2.75	2.76	2.71	2.68	2.66	2.65	2.66	2.64	2.67	2.72			
180	2.88	2.85	2.85	2.85	2.87	2.84	2.86	2.88	2.88	2.86	2.85	2.85	2.87	2.84	2.85	2.88			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-18

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks: