


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: 2835 IP20	TYPE: 2835 240LED 24V	WEIGHT:
SPEC.: 202-10017-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 115.38 lm/W			
MODEL	2700K	I <sub>max</sub> (cd)	367.5	S/MH(C0/180)	1.27
NOMINAL POWER(W)	9.6	LOR(%)	100.0	S/MH(C90/270)	1.28
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	1082.0	□ UP,DN(C0-180)	0.7,48.7
NOMINAL FLUX(lm)	4.5085	CIE CLASS	DIRECT	□ UP,DN(C180-360)	0.6,50.1
LAMPS INSIDE	240	□ up (%)	1.3	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	24	□ down (%)	98.7	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

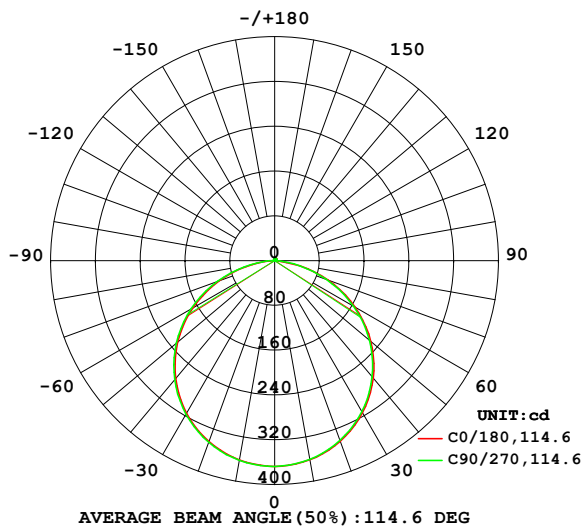

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

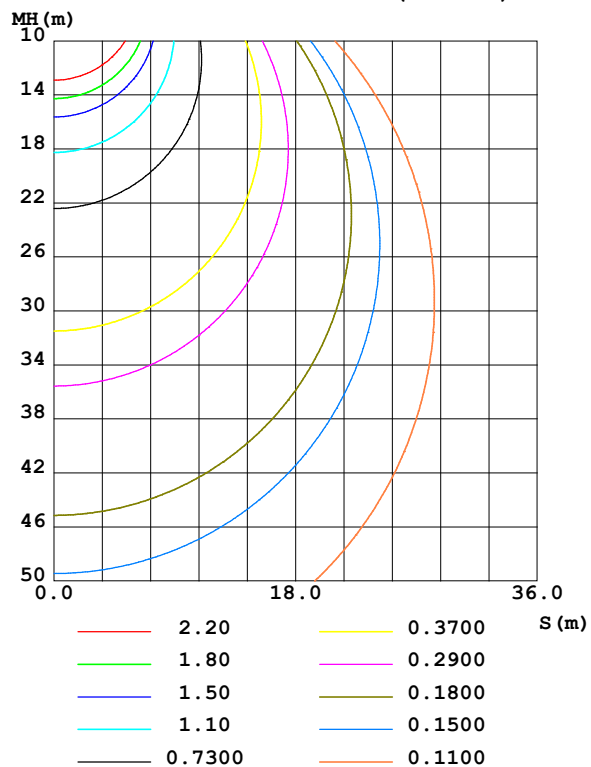

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-03-25

□ Range: 0 - 180DEG  
 □ Interval: 2.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
 Humidity:65.0%  
 Test Distance:5.749m [K=1.0000]  
 Remarks:

## ZONAL FLUX DIAGRAM

### ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	zone	total	%lum, lamp
10	361.3	360.6	360.5	360.9	361.6	362.3	362.3	361.9	0- 10	34.79	34.79	3.22,3.22
20	343.3	341.9	341.6	342.5	343.8	345.1	345.2	344.5	10- 20	99.91	134.7	12.4,12.4
30	314.0	311.9	311.6	312.9	314.7	316.7	316.8	315.8	20- 30	152.2	286.9	26.5,26.5
40	274.0	271.3	271.0	272.8	275.2	277.7	277.9	276.4	30- 40	185.0	471.9	43.6,43.6
50	224.2	221.1	221.0	223.3	226.1	229.1	229.3	227.3	40- 50	193.5	665.4	61.5,61.5
60	165.9	162.4	162.7	165.5	168.6	172.1	172.3	169.7	50- 60	176.1	841.5	77.8,77.8
70	101.1	97.54	98.23	101.4	104.6	108.4	108.6	105.5	60- 70	134.2	975.8	90.2,90.2
80	21.63	34.35	35.68	38.50	40.60	44.03	44.41	41.57	70- 80	74.45	1050	97.1,97.1
90	0.3595	1.249	1.948	2.747	0.3385	3.097	3.933	3.283	80- 90	17.76	1068	98.7,98.7
100	0.8761	0.9319	0.9577	0.9216	0.7225	0.6952	0.7187	0.7325	90-100	1.013	1069	98.8,98.8
110	1.636	1.617	1.628	1.596	1.368	1.269	1.285	1.315	100-110	1.189	1070	98.9,98.9
120	2.379	2.300	2.294	2.278	2.045	1.875	1.910	1.930	110-120	1.770	1072	99.1,99.1
130	3.044	2.914	2.889	2.901	2.664	2.461	2.474	2.501	120-130	2.170	1074	99.3,99.3
140	3.571	3.420	3.376	3.424	3.172	2.989	2.928	3.004	130-140	2.307	1076	99.5,99.5
150	3.981	3.858	3.774	3.864	3.574	3.422	3.337	3.456	140-150	2.162	1079	99.7,99.7
160	4.303	4.225	4.223	4.206	3.960	3.833	3.817	3.898	150-160	1.780	1080	99.8,99.8
170	4.617	4.582	4.623	4.550	4.406	4.323	4.343	4.395	160-170	1.202	1082	100,100
180	4.892	4.865	4.944	4.929	4.884	4.860	4.937	4.924	170-180	0.4423	1082	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 588.62 lm

%lum = 54.4%

%lamp = 54.4%

Conical surface Flux(120deg): 841.55 lm

%lum = 77.8%


%lamp = 77.8%

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-03-25

□ Range: 0 - 180DEG  
□ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:

## LUMINANCE LIMITATION CURVES

NAME: 2835 IP20	TYPE: 2835 240LED 24V	WEIGHT:
SPEC.: 202-10017-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

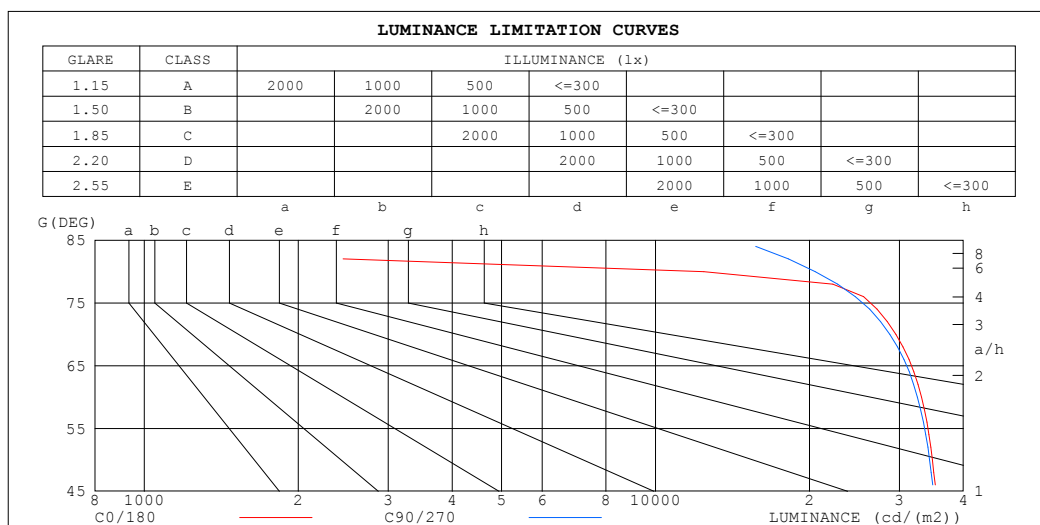

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	441	18841
80	12430	20545
75	28883	27930
70	29515	28721
65	33210	32524
60	33122	32542
55	35119	34623
50	34810	34376
45	36010	35652


C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2022-03-25

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity: 65.0%  
Test Distance: 5.749m [K=1.0000]  
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: 2835 IP20	TYPE: 2835 240LED 24V	WEIGHT:
SPEC.: 202-10017-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.99
1.0	1.04	.99	.96	1.01	.97	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.83	.78	.88	.82	.77	.84	.79	.75	.81	.77	.73	.78	.74	.71	.69
3.0	.79	.71	.64	.77	.70	.64	.74	.68	.62	.71	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.54	.69	.60	.54	.66	.59	.53	.63	.57	.52	.61	.56	.51	.49
5.0	.62	.53	.47	.61	.53	.46	.59	.51	.46	.57	.50	.45	.55	.49	.44	.42
6.0	.56	.47	.41	.55	.47	.40	.53	.46	.40	.51	.45	.39	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.48	.41	.35	.47	.40	.35	.45	.39	.35	.33
8.0	.46	.38	.32	.46	.37	.32	.44	.37	.31	.43	.36	.31	.42	.35	.31	.29
9.0	.42	.34	.29	.42	.34	.29	.41	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.31	.26	.36	.30	.25	.36	.30	.25	.24

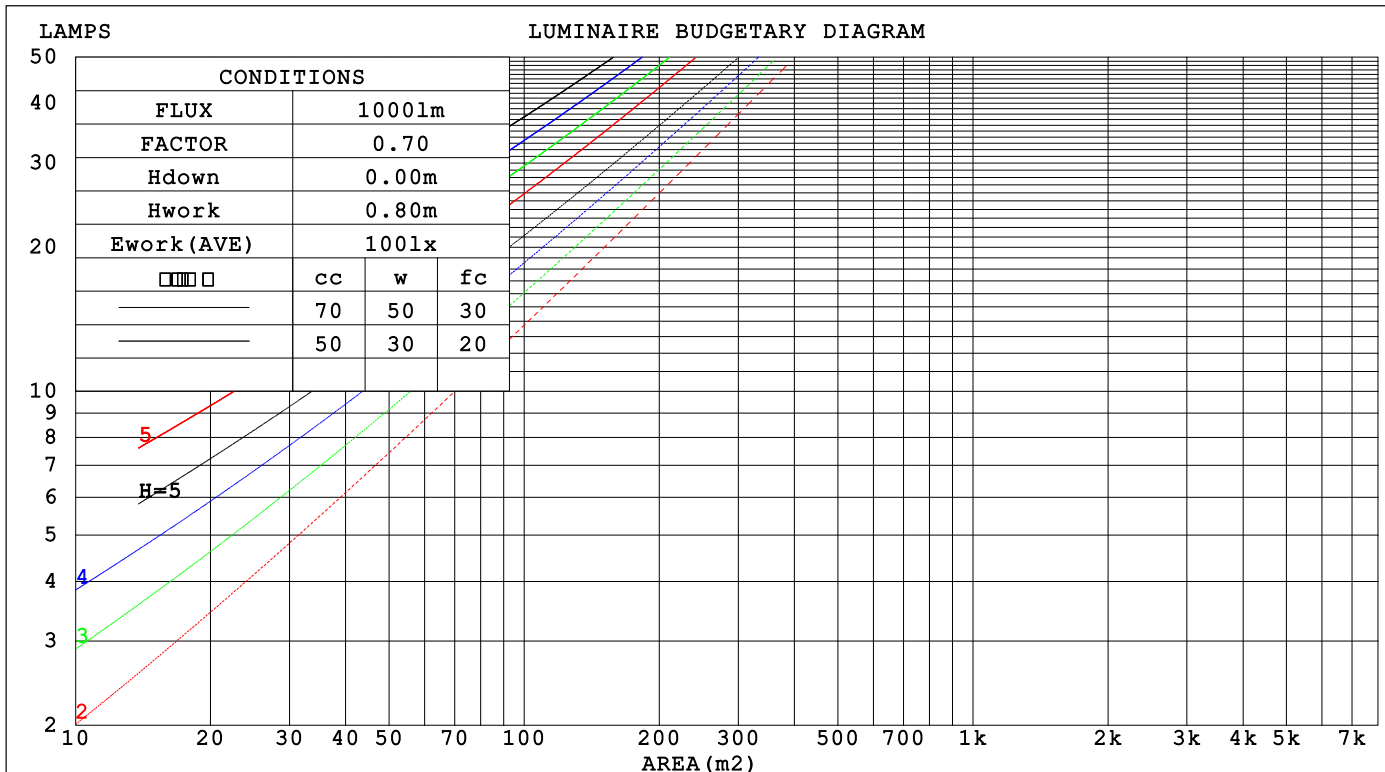

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-03-25

□ Range: 0 - 180DEG  
□ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:

### WEC AND CCEC

NAME: 2835 IP20	TYPE: 2835 240LED 24V	WEIGHT:
SPEC.: 202-10017-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)					
0.0						
1.0	.308 .175 .055	.300 .171 .054	.286 .164 .052	.274 .158 .051	.262 .152 .049	
2.0	.291 .159 .049	.284 .157 .048	.272 .151 .047	.261 .146 .046	.250 .141 .045	
3.0	.270 .144 .043	.264 .141 .043	.253 .137 .042	.243 .133 .041	.233 .129 .040	
4.0	.249 .129 .038	.244 .128 .038	.234 .124 .037	.225 .121 .036	.217 .118 .036	
5.0	.230 .117 .034	.226 .116 .034	.217 .113 .033	.209 .110 .033	.201 .108 .032	
6.0	.214 .107 .031	.210 .106 .030	.202 .103 .030	.195 .101 .030	.188 .099 .029	
7.0	.199 .098 .028	.195 .097 .028	.188 .095 .027	.182 .093 .027	.176 .091 .027	
8.0	.186 .091 .026	.182 .090 .025	.176 .088 .025	.170 .086 .025	.165 .085 .025	
9.0	.174 .084 .024	.171 .083 .023	.165 .082 .023	.160 .080 .023	.155 .079 .023	
10.0	.164 .078 .022	.161 .078 .022	.156 .076 .022	.151 .075 .021	.147 .074 .021	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)					
0.0	.200 .200 .200	.171 .171 .171	.117 .117 .117	.067 .067 .067	.021 .021 .021	
1.0	.190 .166 .144	.163 .143 .124	.111 .098 .086	.064 .057 .050	.021 .018 .016	
2.0	.182 .142 .108	.156 .122 .093	.107 .085 .065	.062 .049 .038	.020 .016 .012	
3.0	.175 .124 .084	.150 .107 .073	.103 .075 .051	.059 .044 .030	.019 .014 .010	
4.0	.167 .111 .068	.143 .096 .059	.099 .067 .042	.057 .039 .025	.018 .013 .008	
5.0	.160 .101 .057	.137 .087 .050	.094 .061 .035	.055 .036 .021	.018 .012 .007	
6.0	.152 .092 .049	.131 .080 .043	.090 .056 .030	.052 .033 .018	.017 .011 .006	
7.0	.146 .086 .043	.125 .074 .038	.087 .052 .027	.050 .031 .016	.016 .010 .005	
8.0	.139 .080 .039	.120 .069 .034	.083 .049 .024	.048 .029 .014	.016 .009 .005	
9.0	.133 .075 .035	.115 .065 .031	.079 .046 .022	.046 .027 .013	.015 .009 .004	
10.0	.127 .071 .033	.110 .061 .029	.076 .043 .020	.044 .025 .012	.014 .008 .004	

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-03-25

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:

### UGR(Unified Glare Rating) Table

NAME: 2835 IP20					TYPE: 2835 240LED 24V			WEIGHT:			
SPEC.: 202-10017-00					DIM.:			SERIAL No.:			
MFR.:					SUR.: 0.01*0.5			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.8	26.3	25.1	26.5	26.7	24.7	26.2	25.0	26.4	26.7	
	26.3	27.6	26.6	27.9	28.2	26.2	27.6	26.5	27.8	28.1	
	26.8	28.1	27.1	28.4	28.7	26.7	28.0	27.0	28.3	28.6	
	27.0	28.3	27.4	28.6	28.9	27.0	28.2	27.4	28.5	28.8	
	27.0	28.2	27.4	28.5	28.8	27.1	28.3	27.4	28.6	28.9	
	27.0	28.1	27.3	28.4	28.8	27.1	28.2	27.4	28.6	28.9	
4H 2H	25.4	26.7	25.7	27.0	27.2	25.3	26.6	25.6	26.9	27.2	
	27.0	28.2	27.4	28.5	28.8	26.9	28.1	27.3	28.4	28.7	
	27.7	28.7	28.1	29.1	29.4	27.6	28.6	28.0	29.0	29.3	
	28.0	28.9	28.4	29.3	29.7	28.0	28.9	28.4	29.3	29.7	
	28.0	28.9	28.4	29.2	29.7	28.1	28.9	28.5	29.3	29.7	
	27.9	28.7	28.4	29.2	29.6	28.1	28.9	28.6	29.3	29.8	
8H 4H	27.9	28.7	28.3	29.1	29.5	27.8	28.6	28.2	29.0	29.4	
	28.3	29.0	28.8	29.5	29.9	28.3	29.0	28.8	29.4	29.9	
	28.4	29.0	28.8	29.5	29.9	28.4	29.1	28.9	29.5	30.0	
	28.4	28.9	28.9	29.4	29.9	28.5	29.1	29.0	29.6	30.1	
12H 4H	27.8	28.6	28.3	29.1	29.5	27.8	28.6	28.2	29.0	29.4	
	28.3	29.0	28.8	29.4	29.9	28.3	29.0	28.8	29.4	29.9	
	28.4	29.0	28.9	29.4	29.9	28.5	29.0	29.0	29.5	30.0	
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H	+ 0.1 / - 0.2					+ 0.2 / - 0.2					
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					

CIE Pub.117, 1082 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 0.3)  
Area: 0.01 m2

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-03-25

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:

### UTILIZATION FACTORS TABLE

NAME: 2835 IP20	TYPE: 2835 240LED 24V	WEIGHT:
SPEC.: 202-10017-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT)    k(RI) x RCR = 5									
k = 0.60	57	45	38	56	45	38	55	44	38	31
0.80	67	55	48	66	55	48	64	54	47	40
1.00	75	64	57	74	64	57	72	65	56	49
1.25	83	72	65	81	71	64	78	70	63	56
1.50	88	78	71	86	77	70	83	75	69	61
2.00	95	86	79	93	85	79	89	82	77	69
2.50	98	91	85	96	89	84	92	86	82	73
3.00	102	95	89	100	93	88	95	90	86	77
4.00	106	100	96	103	98	94	99	95	91	82
5.00	108	104	99	106	101	98	101	98	95	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004										
Suspended										
SHRNOM = 1.25										

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2022-03-25

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity: 65.0%  
Test Distance: 5.749m [K=1.0000]  
Remarks:

# ISOCANDELA DIAGRAM

NAME: 2835 IP20	TYPE: 2835 240LED 24V	WEIGHT:
SPEC.: 202-10017-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

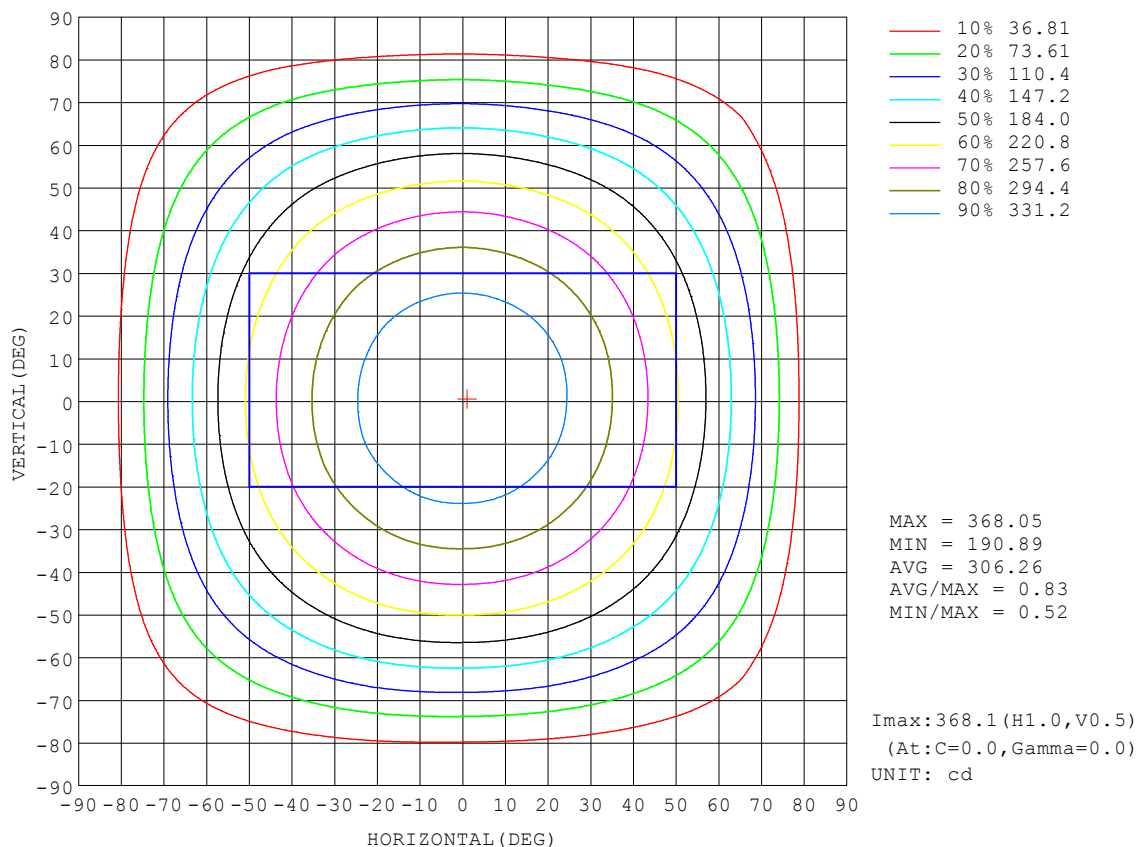


C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2022-03-25

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity: 65.0%  
Test Distance: 5.749m [K=1.0000]  
Remarks:



### AAI Figure

NAME: 2835 IP20	TYPE: 2835 240LED 24V	WEIGHT:
SPEC.: 202-10017-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

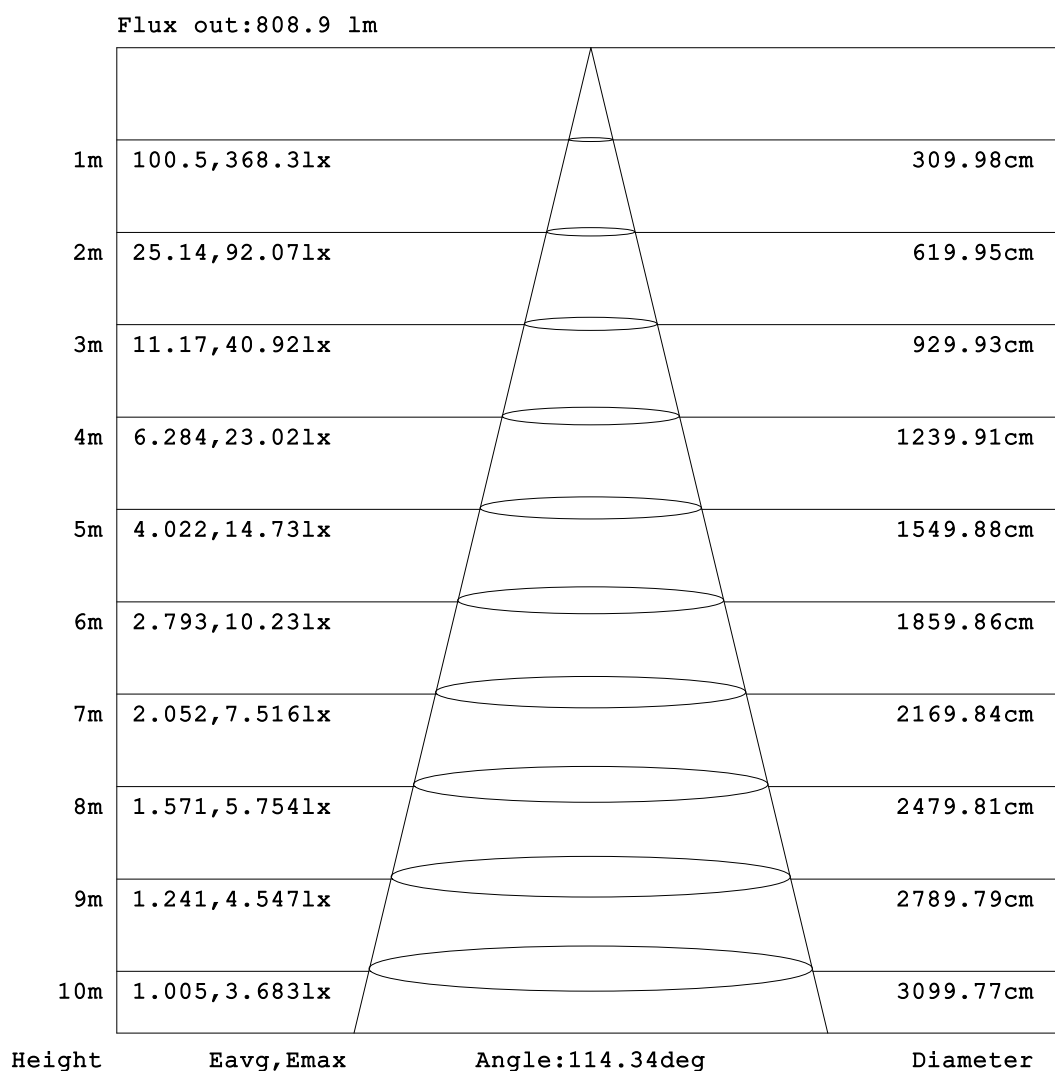


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2022-03-25

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity: 65.0%  
Test Distance: 5.749m [K=1.0000]  
Remarks:

### ISOLUX DIAGRAM

NAME: 2835 IP20	TYPE: 2835 240LED 24V	WEIGHT:
SPEC.: 202-10017-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

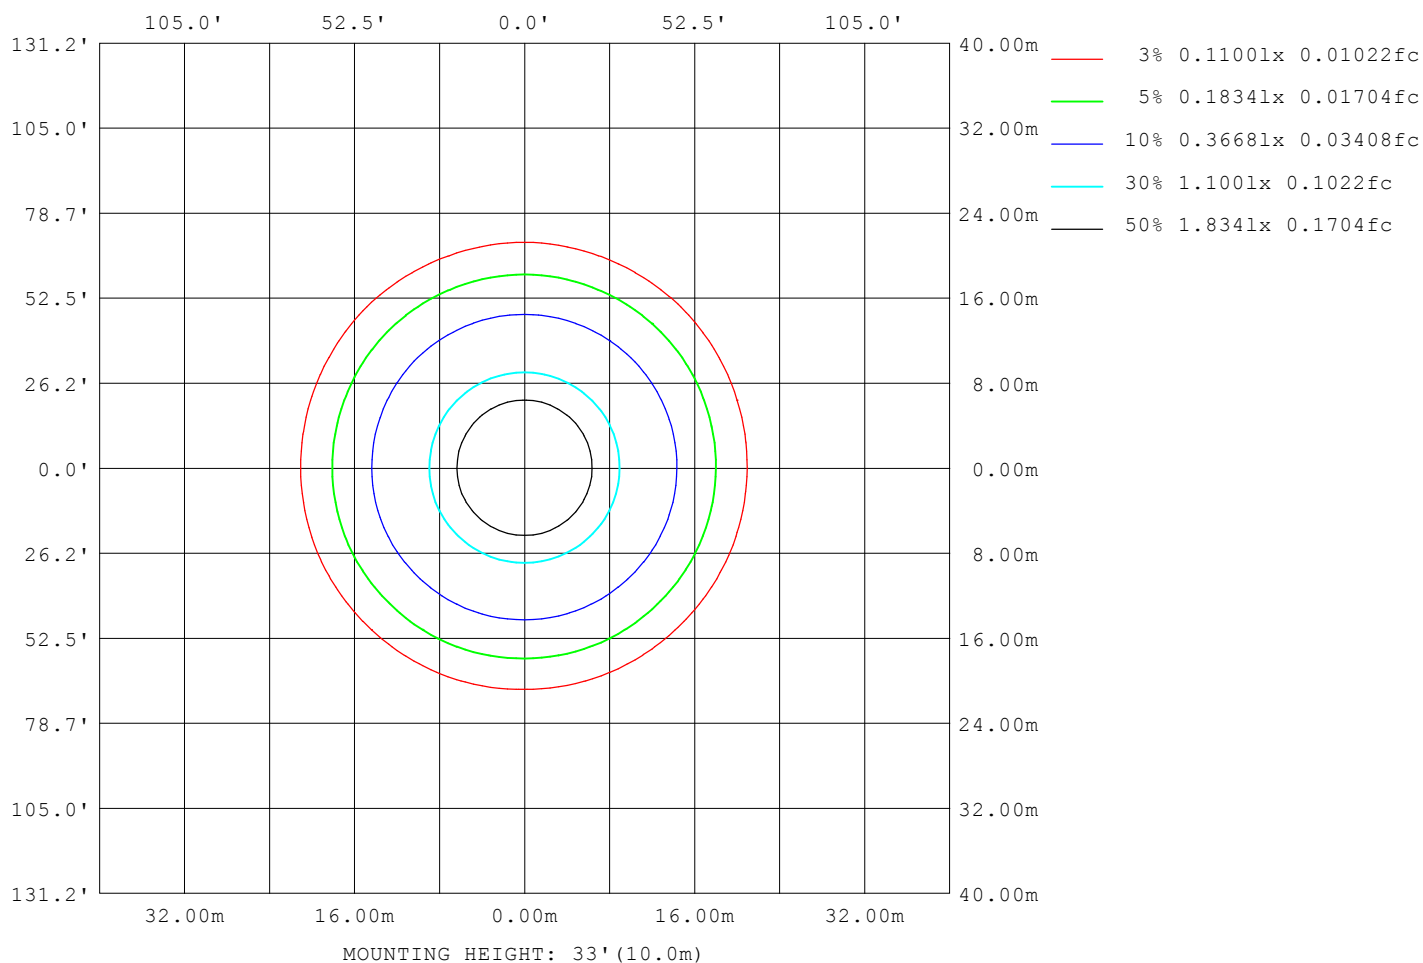

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2022-03-25

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity: 65.0%  
Test Distance: 5.749m [K=1.0000]  
Remarks:

## LED Avg.L Report

NAME: 2835 IP20	TYPE: 2835 240LED 24V	WEIGHT:
SPEC.: 202-10017-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	32096
L_0~180 (75) av	27125
L_0~180 (85) av	8382
L_90~270 (65) av	32197
L_90~270 (75) av	27354
L_90~270 (85) av	17934
L_45 (65) av	32160
L_45 (75) av	27235
L_45 (85) av	17274

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2022-03-25

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity: 65.0%  
Test Distance: 5.749m [K=1.0000]  
Remarks:

### Planar Illuminance Curve

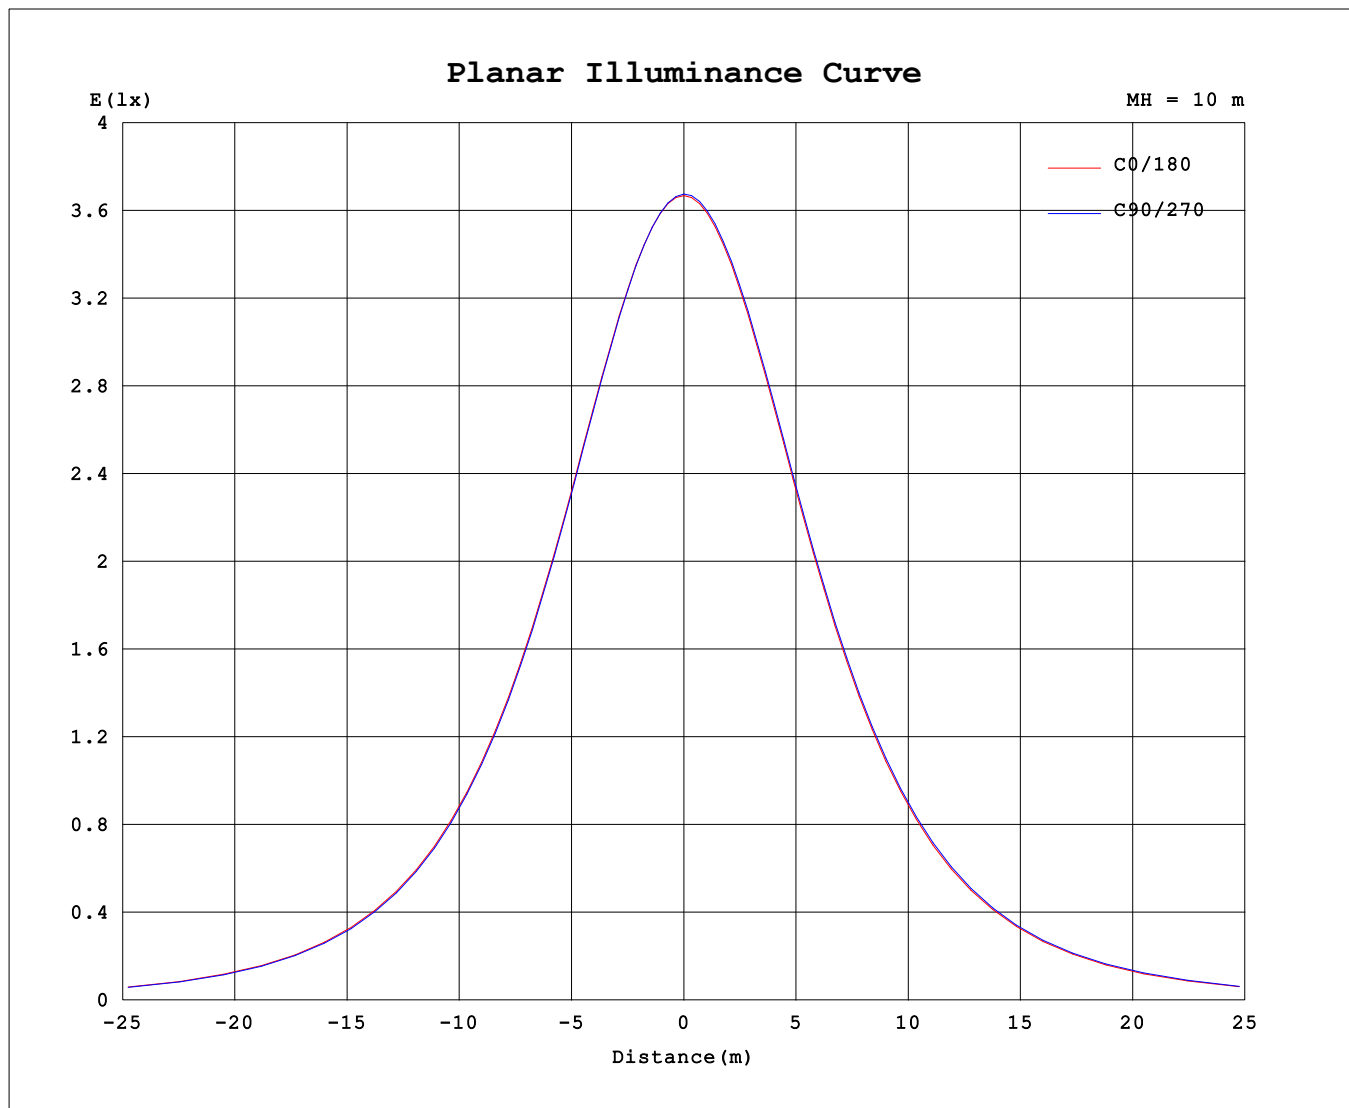

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-03-25

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
 Humidity: 65.0%  
 Test Distance: 5.749m [K=1.0000]  
 Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: 2835 IP20	TYPE: 2835 240LED 24V	WEIGHT:
SPEC.: 202-10017-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	367	367	367	367	367	367	367	367	367	367	367	367	367	367	367	367			
5	366	366	366	366	366	366	366	366	367	367	367	367	367	367	367	367			
10	361	361	361	361	360	361	361	361	362	362	362	362	362	362	362	362			
15	356	355	355	355	354	355	355	355	356	356	357	357	357	356	356	356			
20	343	343	342	342	342	342	343	343	344	344	345	345	345	345	345	344			
25	333	332	331	331	331	332	332	333	334	334	335	335	335	334	334	334			
30	314	313	312	312	312	313	313	314	315	315	317	317	317	316	316	315			
35	299	298	297	297	297	298	298	299	300	301	302	302	302	302	301	300			
40	274	273	271	271	271	272	273	274	275	276	278	278	278	277	276	275			
45	255	254	252	252	252	253	254	256	257	258	259	259	259	258	258	256			
50	224	223	221	221	221	223	223	225	226	227	229	229	229	228	227	225			
55	202	201	199	199	199	200	201	203	204	205	207	207	207	206	205	203			
60	166	165	162	163	163	165	165	168	169	170	172	172	172	170	170	167			
65	141	139	137	138	137	140	140	142	144	145	147	147	148	145	145	142			
70	101	99.8	97.5	98.3	98.2	101	101	104	105	106	108	108	109	106	105	103			
75	74.9	73.2	71.4	72.0	72.3	74.5	75.5	77.4	78.4	79.5	82.1	81.8	82.3	80.0	79.1	76.1			
80	21.6	35.9	34.3	35.2	35.7	37.8	38.5	39.7	40.6	41.9	44.0	44.1	44.4	42.6	41.6	39.0			
85	0.39	16.0	15.0	15.7	16.4	18.2	18.6	19.3	19.5	20.4	22.2	22.5	22.9	21.7	20.9	18.6			
90	0.36	1.16	1.25	1.61	1.95	2.56	2.75	2.61	0.34	2.27	3.10	3.47	3.93	3.73	3.28	2.19			
95	0.52	0.56	0.64	0.65	0.66	0.77	0.85	0.84	0.43	0.56	0.70	0.71	0.80	0.82	0.74	0.50			
100	0.88	0.90	0.93	0.95	0.96	0.94	0.92	0.87	0.72	0.70	0.70	0.71	0.72	0.73	0.73	0.74			
105	1.17	1.17	1.20	1.21	1.21	1.19	1.18	1.13	0.96	0.91	0.91	0.92	0.92	0.94	0.95	0.96			
110	1.64	1.59	1.62	1.62	1.63	1.61	1.60	1.56	1.37	1.27	1.27	1.28	1.28	1.30	1.31	1.32			
115	1.94	1.88	1.90	1.90	1.90	1.89	1.87	1.85	1.64	1.53	1.52	1.52	1.53	1.55	1.56	1.58			
120	2.38	2.29	2.30	2.30	2.29	2.29	2.28	2.27	2.04	1.92	1.88	1.89	1.91	1.92	1.93	1.96			
125	2.66	2.55	2.55	2.55	2.54	2.54	2.54	2.53	2.30	2.17	2.12	2.13	2.15	2.15	2.17	2.21			
130	3.04	2.94	2.91	2.90	2.89	2.90	2.90	2.91	2.66	2.54	2.46	2.47	2.47	2.49	2.50	2.57			
135	3.27	3.17	3.13	3.11	3.10	3.12	3.12	3.15	2.88	2.76	2.68	2.68	2.67	2.69	2.71	2.80			
140	3.57	3.48	3.42	3.39	3.38	3.42	3.42	3.46	3.17	3.05	2.99	2.96	2.93	2.97	3.00	3.12			
145	3.74	3.67	3.60	3.56	3.54	3.61	3.61	3.64	3.34	3.23	3.17	3.14	3.09	3.14	3.19	3.31			
150	3.98	3.91	3.86	3.78	3.77	3.86	3.86	3.87	3.57	3.48	3.42	3.40	3.34	3.38	3.46	3.57			
155	4.12	4.06	4.01	3.93	3.95	4.02	4.01	4.02	3.73	3.64	3.58	3.57	3.53	3.55	3.63	3.75			
160	4.30	4.27	4.22	4.15	4.22	4.24	4.21	4.22	3.96	3.89	3.83	3.84	3.82	3.80	3.90	4.01			
165	4.43	4.41	4.36	4.30	4.40	4.36	4.34	4.35	4.13	4.07	4.01	4.01	4.03	4.00	4.08	4.20			
170	4.62	4.61	4.58	4.54	4.62	4.57	4.55	4.58	4.41	4.36	4.32	4.32	4.34	4.32	4.39	4.48			
175	4.75	4.73	4.73	4.71	4.78	4.72	4.71	4.74	4.60	4.57	4.54	4.55	4.58	4.57	4.61	4.69			
180	4.89	4.86	4.87	4.87	4.94	4.91	4.93	4.95	4.88	4.87	4.86	4.88	4.94	4.91	4.92	4.96			

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-03-25

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks: