


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: 2835 IP20	TYPE: 2835 240LED 24V	WEIGHT:
SPEC.: 202-00312-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 125.74 lm/W
MODEL	3000K	I _{max} (cd)	384.8	S/MH(C0/180)	1.28	
NOMINAL POWER(W)	9.6	LOR(%)	100.0	S/MH(C90/270)	1.28	
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	1136.7	□ UP,DN(C0-180)	0.7,49.2	
NOMINAL FLUX(lm)	4.73633	CIE CLASS	DIRECT	□ UP,DN(C180-360)	0.6,49.6	
LAMPS INSIDE	240	□ up (%)	1.3	CIBSE SHR NOM	1.25	
TEST VOLTAGE(V)	24	□ down (%)	98.7	CIBSE SHR MAX	1.35	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

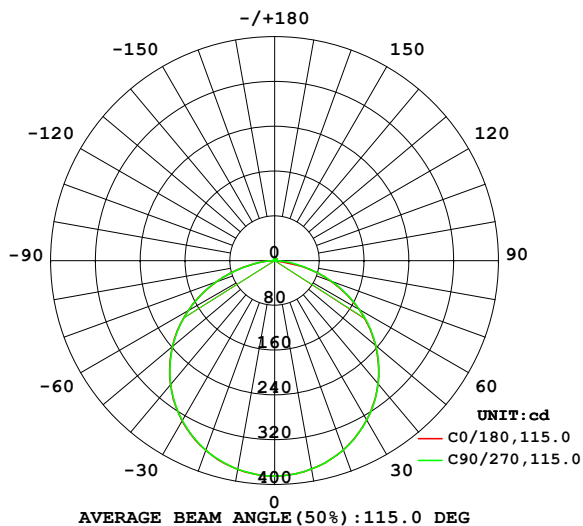

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

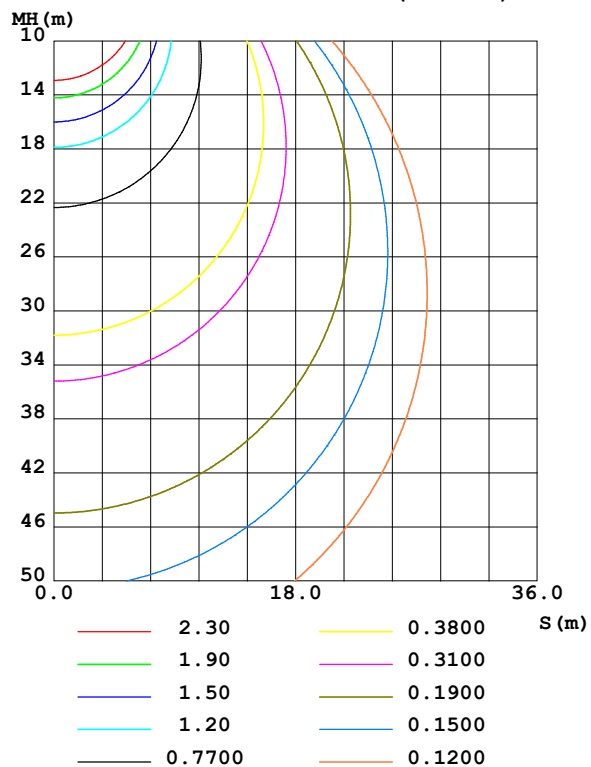

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-25

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	378.3	378.1	378.3	378.6	378.8	378.9	378.6	378.4	0- 10	36.43	36.43	3.2,3.2
20	359.5	359.2	359.6	360.2	360.5	360.7	360.1	359.7	10- 20	104.7	141.1	12.4,12.4
30	328.9	328.5	329.1	330.1	330.6	331.0	330.1	329.4	20- 30	159.6	300.7	26.5,26.5
40	287.3	286.7	287.6	289.0	289.7	290.2	289.1	288.0	30- 40	194.2	494.9	43.5,43.5
50	235.4	234.7	236.0	237.8	238.6	239.4	238.0	236.5	40- 50	203.5	698.4	61.4,61.4
60	174.3	173.8	175.5	177.7	178.5	179.5	178.0	175.9	50- 60	185.6	884.0	77.8,77.8
70	106.1	105.8	107.9	110.4	111.2	112.5	110.9	108.1	60- 70	141.8	1026	90.2,90.2
80	23.16	38.29	40.37	42.84	43.43	44.53	43.00	40.42	70- 80	78.63	1105	97.2,97.2
90	0.3760	1.269	1.552	2.208	0.3313	2.125	1.602	1.642	80- 90	17.82	1122	98.7,98.7
100	0.9114	0.9464	1.089	0.9194	0.7413	0.7404	0.7802	0.7850	90-100	0.9072	1123	98.8,98.8
110	1.697	1.657	1.654	1.625	1.411	1.338	1.370	1.403	100-110	1.238	1124	98.9,98.9
120	2.459	2.359	2.343	2.340	2.108	1.968	2.021	2.040	110-120	1.837	1126	99.1,99.1
130	3.141	2.990	2.959	2.987	2.740	2.568	2.599	2.625	120-130	2.249	1129	99.3,99.3
140	3.677	3.513	3.470	3.529	3.256	3.100	3.060	3.136	130-140	2.387	1131	99.5,99.5
150	4.091	3.965	3.884	3.988	3.675	3.545	3.474	3.594	140-150	2.236	1133	99.7,99.7
160	4.418	4.346	4.350	4.349	4.071	3.969	3.963	4.046	150-160	1.840	1135	99.9,99.9
170	4.739	4.719	4.773	4.706	4.516	4.459	4.494	4.550	160-170	1.241	1136	100,100
180	5.020	5.017	5.113	5.101	5.008	5.005	5.102	5.094	170-180	0.4565	1137	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 617.59 lm

%lum = 54.3%

%lamp = 54.3%

Conical surface Flux(120deg): 884.04 lm

%lum = 77.8%


%lamp = 77.8%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-25

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

NAME: 2835 IP20	TYPE: 2835 240LED 24V	WEIGHT:
SPEC.: 202-00312-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

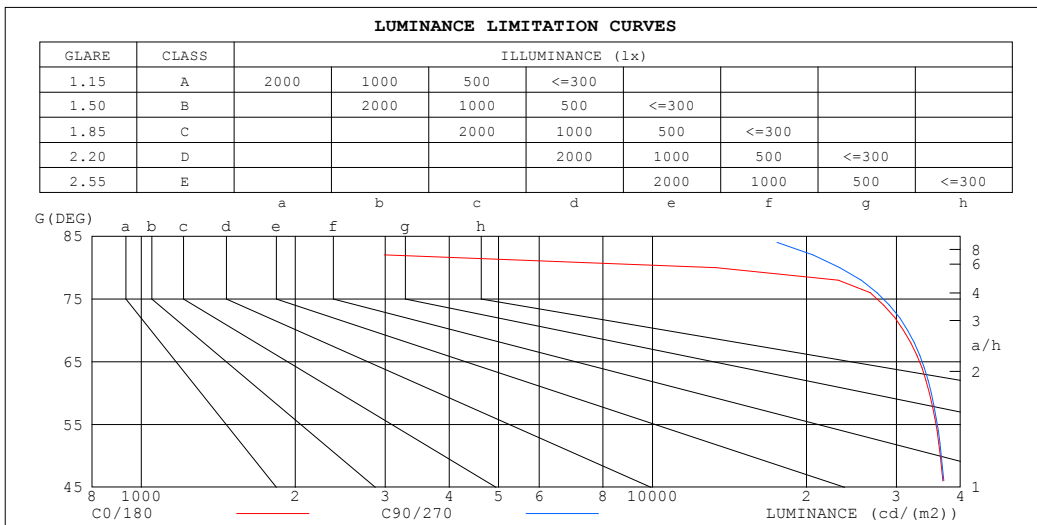

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	471	20999
80	13318	23259
75	30153	30950
70	30990	31554
65	34903	35299
60	34814	35112
55	36903	37113
50	36561	36728
45	37793	37926


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-03-25

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: 2835 IP20	TYPE: 2835 240LED 24V	WEIGHT:
SPEC.: 202-00312-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.99
1.0	1.04	.99	.96	1.01	.97	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.83	.78	.88	.82	.77	.84	.79	.75	.81	.77	.73	.78	.74	.71	.69
3.0	.79	.71	.64	.77	.70	.64	.74	.68	.62	.71	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.54	.69	.60	.54	.66	.59	.53	.63	.57	.52	.61	.56	.51	.49
5.0	.62	.53	.47	.61	.53	.46	.59	.51	.46	.57	.50	.45	.55	.49	.44	.42
6.0	.56	.47	.41	.55	.47	.40	.53	.46	.40	.51	.45	.39	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.48	.41	.35	.47	.40	.35	.45	.39	.35	.33
8.0	.46	.38	.32	.46	.37	.32	.44	.37	.31	.43	.36	.31	.41	.35	.31	.29
9.0	.42	.34	.29	.42	.34	.29	.41	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.37	.30	.26	.36	.30	.25	.35	.30	.25	.24

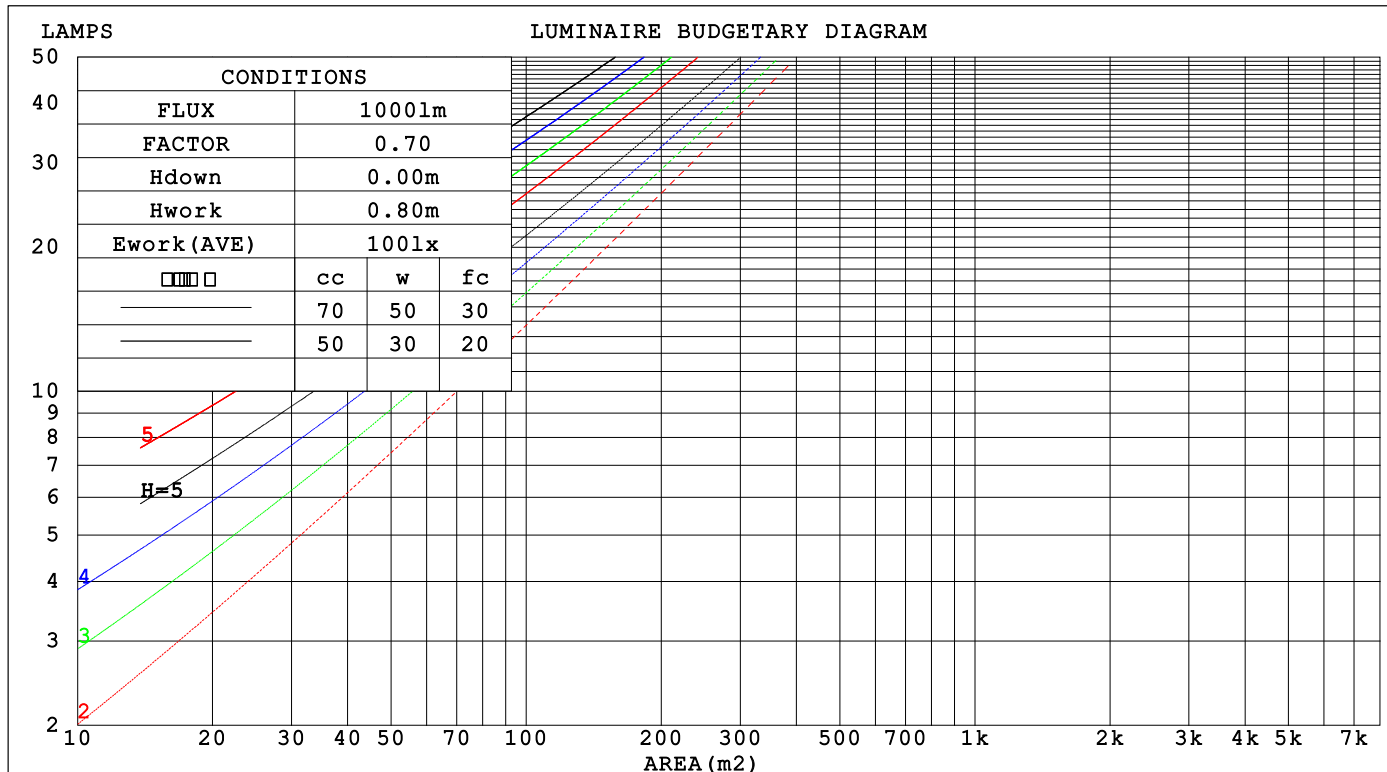

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-25

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: 2835 IP20	TYPE: 2835 240LED 24V	WEIGHT:
SPEC.: 202-00312-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)					
0.0						
1.0	.308 .175 .055	.300 .171 .054	.286 .164 .052	.273 .158 .051	.261 .152 .049	
2.0	.291 .159 .049	.284 .157 .048	.272 .151 .047	.261 .146 .046	.250 .141 .045	
3.0	.270 .144 .043	.264 .141 .043	.253 .137 .042	.243 .133 .041	.233 .129 .040	
4.0	.249 .130 .038	.244 .128 .038	.234 .124 .037	.225 .121 .036	.217 .118 .036	
5.0	.231 .117 .034	.226 .116 .034	.217 .113 .033	.209 .110 .033	.202 .108 .032	
6.0	.214 .107 .031	.210 .106 .030	.202 .104 .030	.195 .101 .030	.188 .099 .029	
7.0	.199 .098 .028	.195 .097 .028	.188 .095 .027	.182 .093 .027	.176 .091 .027	
8.0	.186 .091 .026	.183 .090 .025	.176 .088 .025	.170 .086 .025	.165 .085 .025	
9.0	.174 .084 .024	.171 .083 .023	.166 .082 .023	.160 .080 .023	.155 .079 .023	
10.0	.164 .079 .022	.161 .078 .022	.156 .076 .022	.151 .075 .021	.147 .074 .021	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)					
0.0	.200 .200 .200	.171 .171 .171	.117 .117 .117	.067 .067 .067	.021 .021 .021	
1.0	.190 .166 .144	.162 .142 .124	.111 .098 .086	.064 .057 .050	.020 .018 .016	
2.0	.182 .142 .108	.156 .122 .093	.107 .084 .065	.062 .049 .038	.020 .016 .012	
3.0	.174 .124 .084	.149 .107 .073	.103 .074 .051	.059 .043 .030	.019 .014 .010	
4.0	.167 .111 .068	.143 .096 .059	.098 .067 .042	.057 .039 .025	.018 .013 .008	
5.0	.159 .101 .057	.137 .087 .050	.094 .061 .035	.055 .036 .021	.018 .012 .007	
6.0	.152 .092 .049	.131 .080 .043	.090 .056 .030	.052 .033 .018	.017 .011 .006	
7.0	.145 .085 .043	.125 .074 .038	.086 .052 .027	.050 .031 .016	.016 .010 .005	
8.0	.139 .080 .039	.120 .069 .034	.083 .048 .024	.048 .029 .014	.016 .009 .005	
9.0	.133 .075 .035	.115 .065 .031	.079 .046 .022	.046 .027 .013	.015 .009 .004	
10.0	.127 .070 .032	.110 .061 .028	.076 .043 .020	.044 .025 .012	.014 .008 .004	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-25

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME: 2835 IP20					TYPE: 2835 240LED 24V			WEIGHT:			
SPEC.: 202-00312-00					DIM.:			SERIAL No.:			
MFR.:					SUR.: 0.01*0.5			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	2H	24.8	26.3	25.1	26.6	26.8	24.9	26.4	25.1	26.6	26.8
	3H	26.3	27.7	26.6	28.0	28.2	26.4	27.7	26.7	28.0	28.3
	4H	26.8	28.2	27.2	28.4	28.7	26.9	28.2	27.2	28.5	28.8
	6H	27.1	28.3	27.4	28.6	28.9	27.3	28.5	27.6	28.8	29.1
	8H	27.0	28.3	27.4	28.6	28.9	27.3	28.5	27.7	28.8	29.2
	12H	27.0	28.2	27.4	28.5	28.8	27.3	28.5	27.7	28.8	29.2
4H	2H	25.4	26.7	25.8	27.0	27.3	25.4	26.8	25.8	27.0	27.3
	3H	27.1	28.2	27.4	28.5	28.9	27.1	28.3	27.5	28.6	28.9
	4H	27.7	28.8	28.1	29.1	29.5	27.8	28.8	28.2	29.2	29.6
	6H	28.1	29.0	28.5	29.4	29.8	28.2	29.2	28.7	29.6	29.9
	8H	28.1	28.9	28.5	29.3	29.7	28.4	29.2	28.8	29.6	30.0
	12H	28.0	28.8	28.5	29.2	29.7	28.4	29.2	28.8	29.6	30.0
8H	4H	28.0	28.8	28.4	29.2	29.6	28.0	28.9	28.4	29.3	29.7
	6H	28.4	29.1	28.9	29.6	30.0	28.6	29.3	29.0	29.7	30.2
	8H	28.5	29.1	28.9	29.6	30.0	28.7	29.4	29.2	29.8	30.3
	12H	28.5	29.0	29.0	29.5	30.0	28.8	29.4	29.3	29.9	30.4
12H	4H	28.0	28.8	28.4	29.2	29.6	28.0	28.8	28.4	29.2	29.6
	6H	28.4	29.1	28.9	29.5	30.0	28.6	29.2	29.1	29.7	30.2
	8H	28.5	29.1	29.0	29.5	30.1	28.8	29.3	29.3	29.8	30.3
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H		+ 0.1 / - 0.2					+ 0.2 / - 0.2				
1.5H		+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H		+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 1137 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 0.4)
Area: 0.01 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-25

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:


```

Range: 0 - 180DEG
Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

```

ISOCANDELA DIAGRAM

NAME: 2835 IP20	TYPE: 2835 240LED 24V	WEIGHT:
SPEC.: 202-00312-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

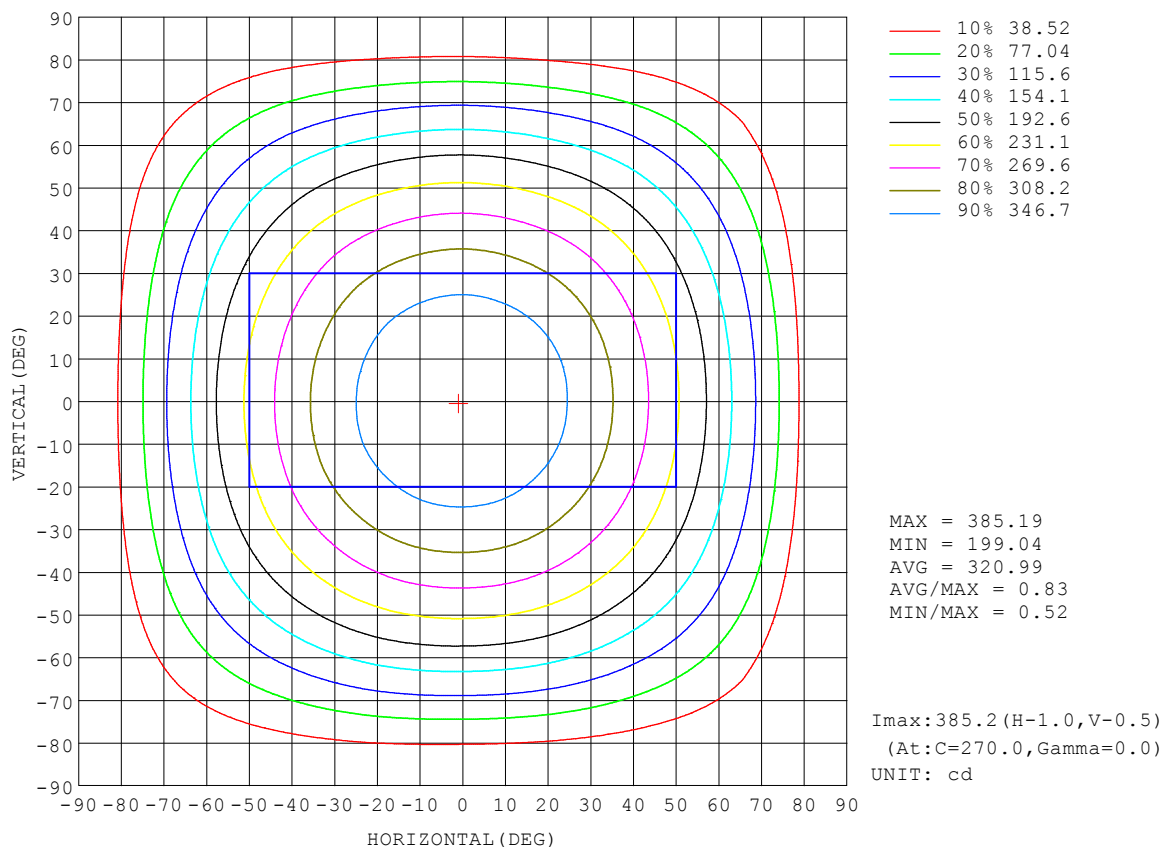


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-03-25

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

AAI Figure

NAME: 2835 IP20	TYPE: 2835 240LED 24V	WEIGHT:
SPEC.: 202-00312-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

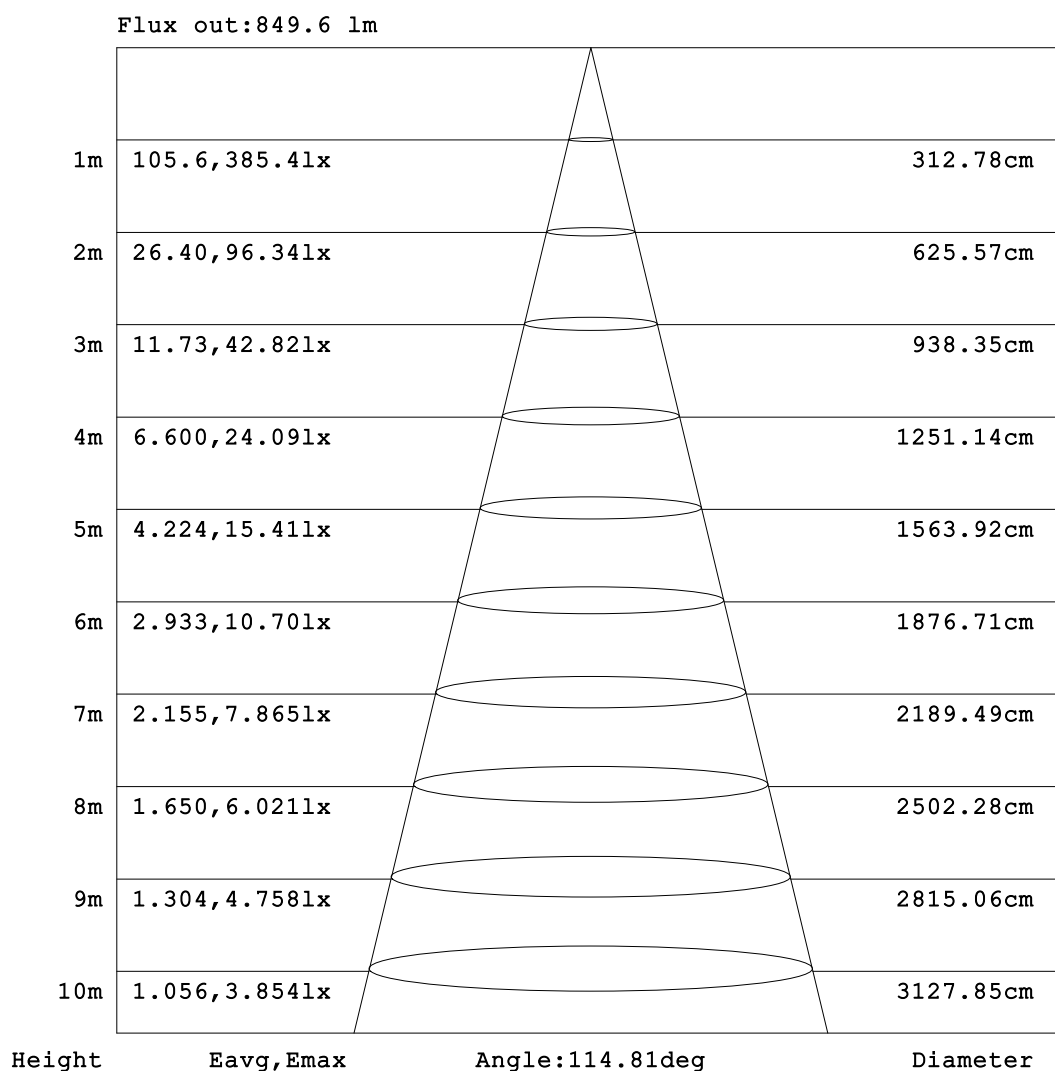


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-03-25

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity:65.0%
 Test Distance:5.749m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

NAME: 2835 IP20	TYPE: 2835 240LED 24V	WEIGHT:
SPEC.: 202-00312-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

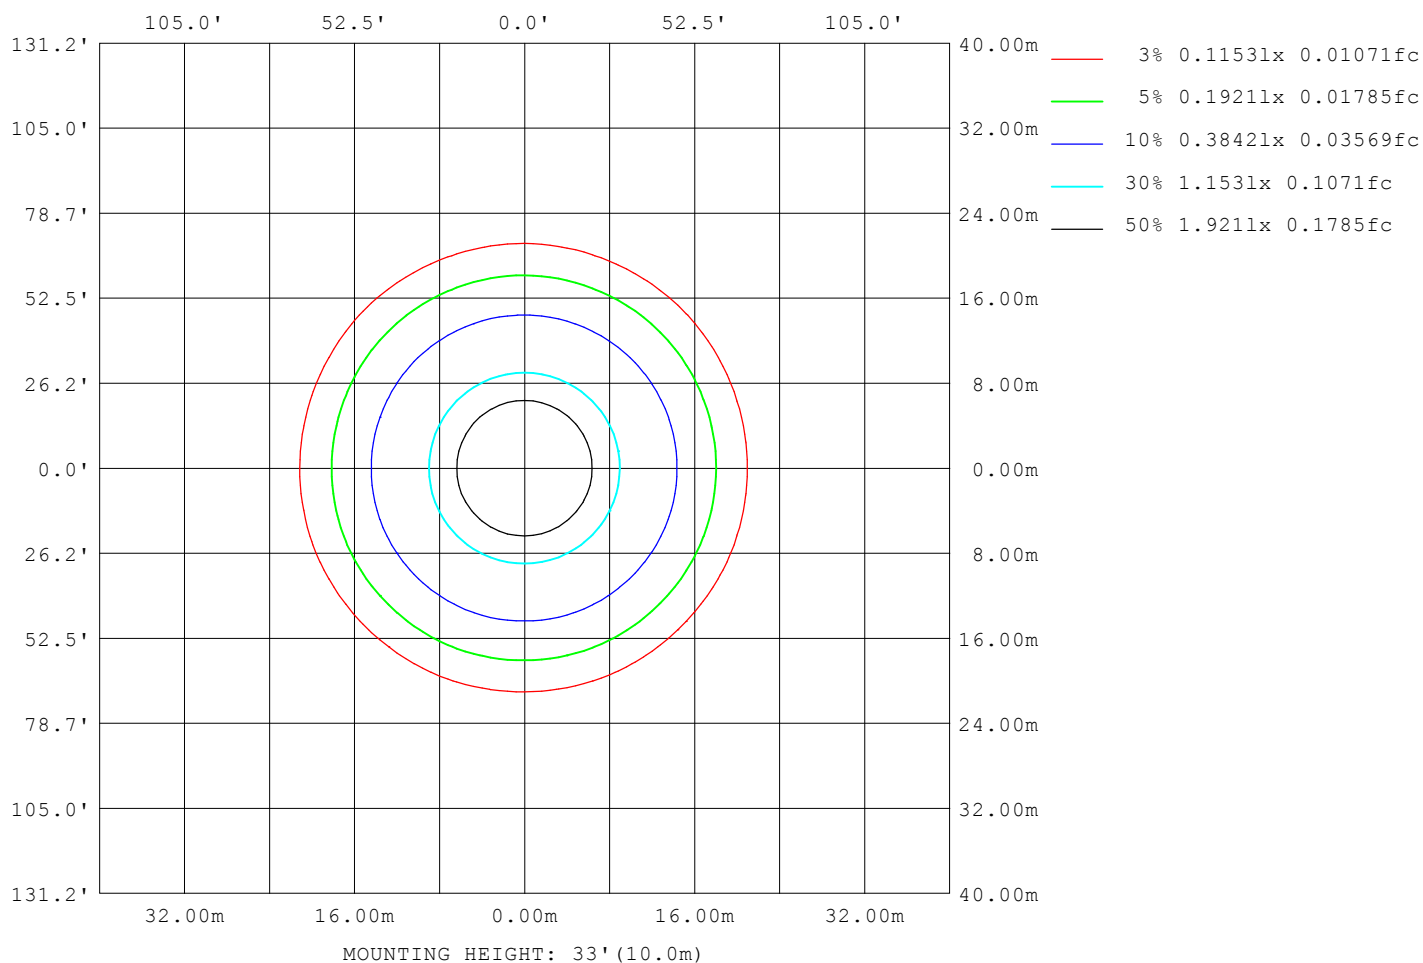

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-03-25

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

LED Avg.L Report

NAME: 2835 IP20	TYPE: 2835 240LED 24V	WEIGHT:
SPEC.: 202-00312-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	33900
L_0~180 (75) av	28596
L_0~180 (85) av	8947
L_90~270 (65) av	34019
L_90~270 (75) av	28867
L_90~270 (85) av	16933
L_45 (65) av	33998
L_45 (75) av	28779
L_45 (85) av	17018

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-03-25

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

Planar Illuminance Curve

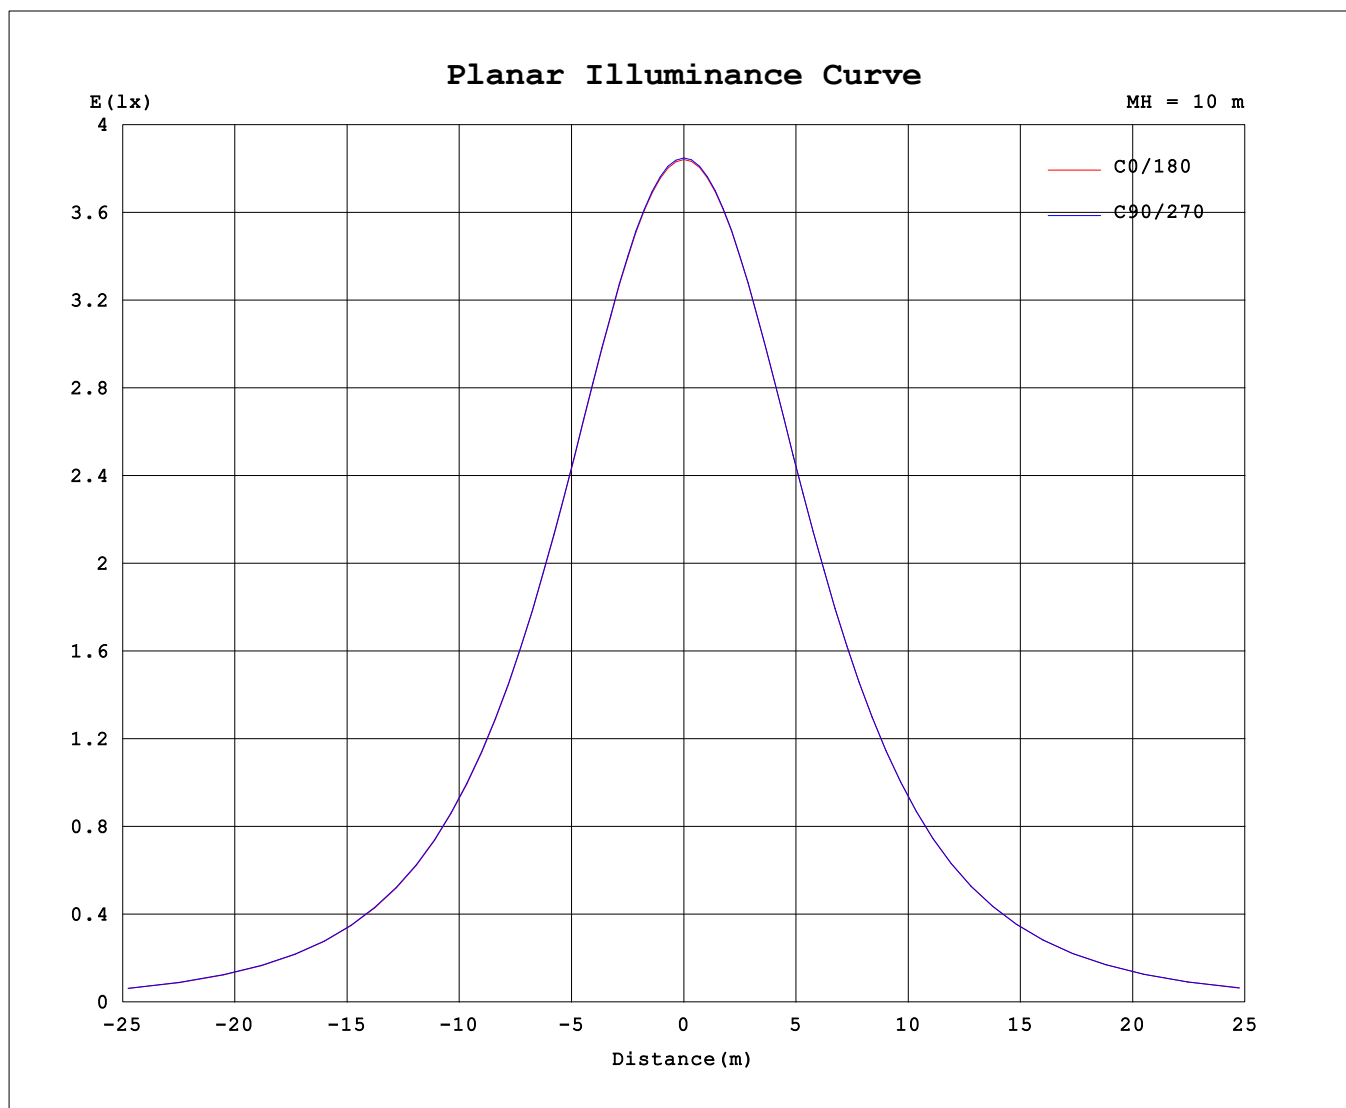

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-03-25

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: 2835 IP20	TYPE: 2835 240LED 24V	WEIGHT:
SPEC.: 202-00312-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	385	385	385	385	385	385	385	385	385	385	385	385	385	385	385	385			
5	384	384	384	384	384	384	384	384	384	384	384	384	384	384	384	384			
10	378	378	378	378	378	379	379	379	379	379	379	379	379	379	378	378			
15	372	372	372	372	372	373	373	373	373	373	373	373	373	372	372	372			
20	360	360	359	360	360	360	360	361	361	360	361	360	360	360	360	359			
25	349	349	348	349	349	350	350	350	350	350	350	350	349	349	349	349			
30	329	329	329	329	329	330	330	331	331	330	331	330	330	329	329	329			
35	314	314	313	314	314	315	315	316	315	315	316	315	315	314	314	314			
40	287	287	287	287	288	289	289	290	290	290	290	289	289	288	288	287			
45	268	268	267	268	268	270	270	270	270	270	271	270	270	268	269	268			
50	235	236	235	236	236	238	238	239	239	239	239	238	238	237	237	235			
55	212	212	211	213	213	215	215	216	216	215	216	215	215	213	213	212			
60	174	174	174	175	175	177	178	179	178	178	179	178	178	176	176	174			
65	148	148	147	149	149	151	151	153	152	152	154	152	152	150	150	148			
70	106	107	106	108	108	110	110	112	111	111	112	111	111	109	108	106			
75	78.2	78.5	77.8	79.6	80.1	82.5	82.6	83.7	83.4	83.3	84.7	83.3	83.1	80.7	80.3	78.2			
80	23.2	38.7	38.3	39.8	40.4	42.5	42.8	43.7	43.4	43.4	44.5	43.4	43.0	41.0	40.4	38.8			
85	0.41	17.2	16.8	17.8	18.3	20.1	20.4	21.1	20.7	20.7	21.6	20.7	20.3	18.9	18.5	17.3			
90	0.38	1.26	1.27	1.37	1.55	2.02	2.21	1.98	0.33	1.57	2.12	1.85	1.60	1.48	1.64	1.39			
95	0.55	0.61	0.82	0.89	0.87	0.87	0.79	0.60	0.45	0.47	0.70	0.77	0.76	0.79	0.73	0.51			
100	0.91	0.92	0.95	1.03	1.09	1.02	0.92	0.89	0.74	0.73	0.74	0.76	0.78	0.78	0.78	0.79			
105	1.22	1.20	1.22	1.22	1.22	1.20	1.19	1.16	0.99	0.95	0.96	0.98	0.99	1.01	1.02	1.02			
110	1.70	1.64	1.66	1.65	1.65	1.63	1.62	1.61	1.41	1.33	1.34	1.36	1.37	1.39	1.40	1.40			
115	2.01	1.93	1.94	1.94	1.94	1.92	1.92	1.90	1.69	1.60	1.59	1.61	1.63	1.66	1.66	1.66			
120	2.46	2.36	2.36	2.35	2.34	2.34	2.34	2.34	2.11	2.00	1.97	1.98	2.02	2.03	2.04	2.06			
125	2.75	2.63	2.62	2.60	2.60	2.60	2.61	2.62	2.37	2.26	2.22	2.23	2.26	2.27	2.28	2.32			
130	3.14	3.02	2.99	2.97	2.96	2.97	2.99	3.02	2.74	2.63	2.57	2.58	2.60	2.61	2.62	2.69			
135	3.37	3.26	3.21	3.19	3.18	3.20	3.22	3.25	2.97	2.86	2.79	2.79	2.79	2.82	2.84	2.93			
140	3.68	3.58	3.51	3.48	3.47	3.52	3.53	3.58	3.26	3.17	3.10	3.09	3.06	3.11	3.14	3.25			
145	3.85	3.77	3.70	3.66	3.65	3.71	3.73	3.76	3.43	3.34	3.28	3.27	3.22	3.27	3.33	3.45			
150	4.09	4.02	3.97	3.89	3.88	3.98	3.99	4.01	3.68	3.60	3.55	3.54	3.47	3.52	3.59	3.72			
155	4.23	4.18	4.13	4.05	4.07	4.14	4.14	4.16	3.83	3.76	3.71	3.71	3.67	3.69	3.77	3.90			
160	4.42	4.39	4.35	4.28	4.35	4.37	4.35	4.37	4.07	4.02	3.97	3.98	3.96	3.96	4.05	4.17			
165	4.54	4.53	4.49	4.43	4.54	4.50	4.48	4.50	4.24	4.20	4.15	4.16	4.18	4.15	4.23	4.36			
170	4.74	4.74	4.72	4.68	4.77	4.72	4.71	4.73	4.52	4.49	4.46	4.46	4.49	4.48	4.55	4.65			
175	4.87	4.87	4.87	4.86	4.93	4.89	4.88	4.91	4.72	4.71	4.68	4.70	4.74	4.73	4.78	4.86			
180	5.02	5.00	5.02	5.02	5.11	5.08	5.10	5.13	5.01	5.02	5.01	5.03	5.10	5.08	5.09	5.14			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-25

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks: