


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: 2835 IP20	TYPE: 2835 80LED 24V	WEIGHT:
SPEC.: 202-10017-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.008*0.5	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 118.30 lm/W
MODEL	2700K	I _{max} (cd)	94.65	S/MH (C0/180)	1.27	
NOMINAL POWER(W)	2.4	LOR (%)	100.0	S/MH (C90/270)	1.27	
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	277.92	□ UP, DN (C0-180)	0.7,49.6	
NOMINAL FLUX(lm)	6.94808	CIE CLASS	DIRECT	□ UP, DN (C180-360)	0.6,49.1	
LAMPS INSIDE	40	□ up (%)	1.3	CIBSE SHR NOM	1.25	
TEST VOLTAGE (V)	24	□ down (%)	98.7	CIBSE SHR MAX	1.35	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

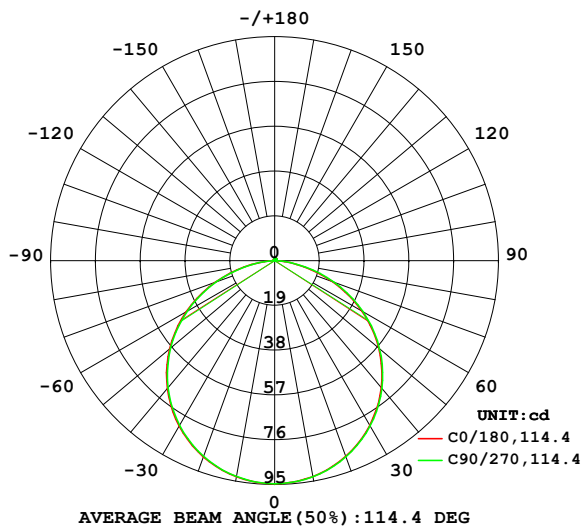

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

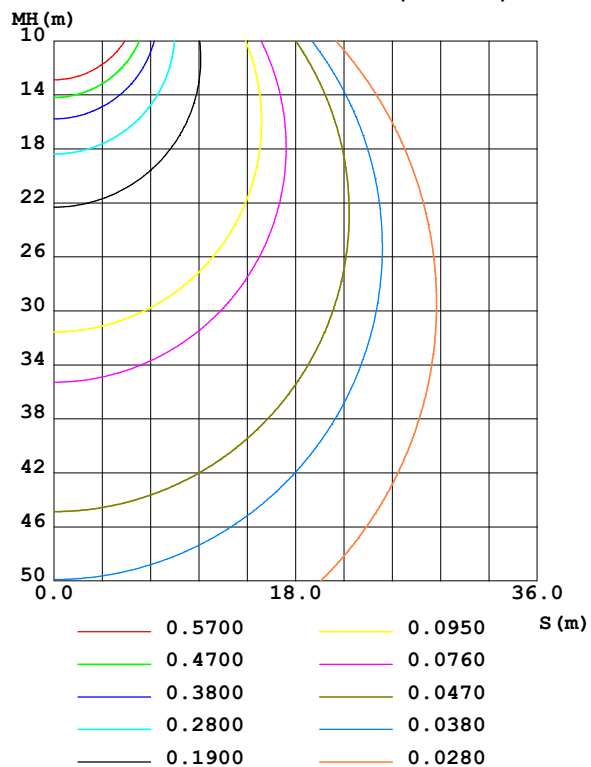

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-16

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	93.03	93.07	93.12	93.19	93.15	93.09	93.02	92.99	0- 10	8.960	8.960	3.22,3.22
20	88.34	88.45	88.52	88.62	88.57	88.45	88.30	88.26	10- 20	25.73	34.69	12.5,12.5
30	80.72	80.89	81.00	81.15	81.07	80.89	80.69	80.61	20- 30	39.19	73.87	26.6,26.6
40	70.40	70.62	70.78	70.97	70.85	70.62	70.38	70.26	30- 40	47.58	121.5	43.7,43.7
50	57.61	57.90	58.11	58.32	58.15	57.89	57.63	57.44	40- 50	49.76	171.2	61.6,61.6
60	42.66	43.03	43.30	43.53	43.27	43.01	42.71	42.45	50- 60	45.26	216.5	77.9,77.9
70	26.05	26.49	26.84	27.08	26.75	26.47	26.17	25.84	60- 70	34.46	250.9	90.3,90.3
80	9.583	9.961	10.31	10.55	10.14	9.942	9.647	9.386	70- 80	19.04	270.0	97.1,97.1
90	0.0857	0.3084	0.2157	0.3404	0.0691	0.2774	0.1377	0.2656	80- 90	4.391	274.4	98.7,98.7
100	0.2282	0.2186	0.2185	0.2114	0.1786	0.1786	0.1879	0.1833	90-100	0.1744	274.5	98.8,98.8
110	0.4185	0.3970	0.3944	0.3897	0.3499	0.3402	0.3448	0.3450	100-110	0.2986	274.8	98.9,98.9
120	0.6136	0.5754	0.5727	0.5752	0.5331	0.5020	0.5088	0.5114	110-120	0.4533	275.3	99.1,99.1
130	0.7778	0.7371	0.7343	0.7417	0.6973	0.6614	0.6562	0.6612	120-130	0.5624	275.9	99.3,99.3
140	0.9159	0.8727	0.8580	0.8844	0.8305	0.7969	0.7846	0.7920	130-140	0.5998	276.5	99.5,99.5
150	1.025	0.9940	0.9816	1.003	0.9447	0.9182	0.8915	0.9180	140-150	0.5651	277.0	99.7,99.7
160	1.113	1.094	1.108	1.101	1.049	1.030	1.020	1.030	150-160	0.4679	277.5	99.8,99.8
170	1.201	1.199	1.215	1.198	1.171	1.154	1.160	1.156	160-170	0.3167	277.8	100,100
180	1.292	1.284	1.303	1.294	1.287	1.287	1.303	1.289	170-180	0.1167	277.9	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 151.48 lm

%lum = 54.5%

%lamp = 54.5%

Conical surface Flux(120deg): 216.48 lm

%lum = 77.9%


%lamp = 77.9%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-16

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

NAME: 2835 IP20	TYPE: 2835 80LED 24V	WEIGHT:
SPEC.: 202-10017-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.008*0.5	Shielding Angle:

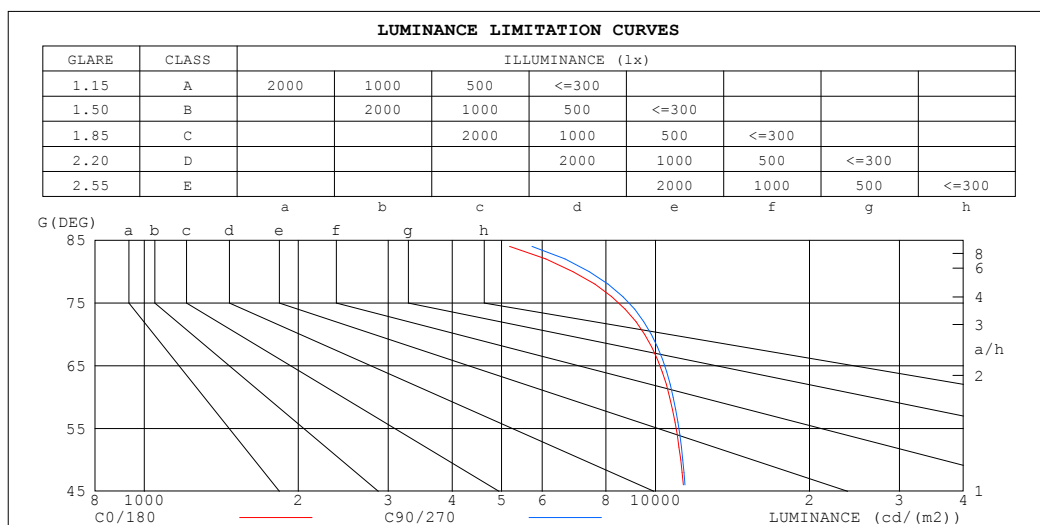

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	6216	6875
80	6895	7423
75	9291	9691
70	9516	9813
65	10692	10913
60	10660	10829
55	11298	11430
50	11197	11304
45	11584	11668


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-03-16

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: 2835 IP20	TYPE: 2835 80LED 24V	WEIGHT:
SPEC.: 202-10017-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.008*0.5	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.99
1.0	1.04	.99	.96	1.01	.97	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.83	.78	.88	.82	.77	.85	.79	.75	.81	.77	.73	.78	.74	.71	.69
3.0	.79	.71	.64	.77	.70	.64	.74	.68	.62	.71	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.54	.69	.60	.54	.66	.59	.53	.63	.57	.52	.61	.56	.51	.49
5.0	.62	.53	.47	.61	.53	.46	.59	.52	.46	.57	.50	.45	.55	.49	.45	.42
6.0	.56	.47	.41	.55	.47	.40	.53	.46	.40	.51	.45	.40	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.48	.41	.35	.47	.40	.35	.45	.39	.35	.33
8.0	.46	.38	.32	.46	.37	.32	.44	.37	.32	.43	.36	.31	.42	.36	.31	.29
9.0	.43	.34	.29	.42	.34	.29	.41	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.25	.24

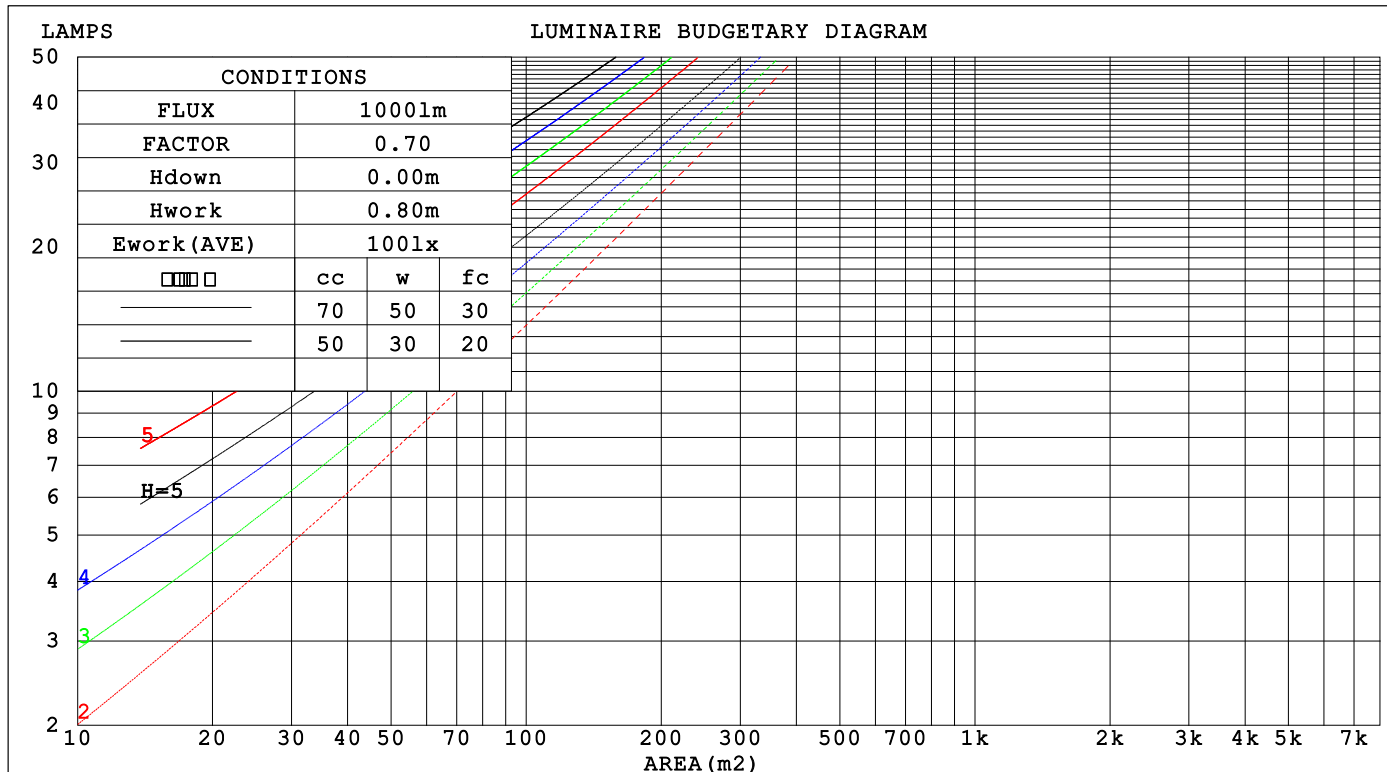

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-16

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: 2835 IP20	TYPE: 2835 80LED 24V	WEIGHT:
SPEC.: 202-10017-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.008*0.5	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio					Wall Exitance Coefficients(WEC)
0.0						
1.0	.307 .175 .055	.300 .171 .054	.286 .164 .052	.273 .157 .050	.261 .151 .049	
2.0	.290 .159 .049	.284 .156 .048	.271 .151 .047	.260 .146 .046	.250 .141 .045	
3.0	.269 .143 .043	.264 .141 .042	.253 .137 .042	.242 .133 .041	.233 .129 .040	
4.0	.249 .129 .038	.244 .128 .038	.234 .124 .037	.225 .121 .036	.216 .118 .036	
5.0	.230 .117 .034	.226 .116 .034	.217 .113 .033	.209 .110 .033	.201 .108 .032	
6.0	.214 .107 .031	.209 .106 .030	.202 .103 .030	.194 .101 .030	.188 .099 .029	
7.0	.199 .098 .028	.195 .097 .028	.188 .095 .027	.182 .093 .027	.176 .091 .027	
8.0	.186 .091 .026	.182 .090 .025	.176 .088 .025	.170 .086 .025	.165 .085 .025	
9.0	.174 .084 .024	.171 .083 .023	.165 .082 .023	.160 .080 .023	.155 .079 .023	
10.0	.164 .078 .022	.161 .078 .022	.156 .076 .022	.151 .075 .021	.146 .074 .021	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio					Ceiling Cavity Exitance Coefficients(CCEC)
0.0	.200 .200 .200	.171 .171 .171	.117 .117 .117	.067 .067 .067	.021 .021 .021	
1.0	.190 .166 .144	.163 .142 .124	.111 .098 .086	.064 .057 .050	.020 .018 .016	
2.0	.182 .142 .108	.156 .122 .093	.107 .084 .065	.062 .049 .038	.020 .016 .012	
3.0	.174 .124 .084	.149 .107 .073	.103 .074 .051	.059 .043 .030	.019 .014 .010	
4.0	.167 .111 .068	.143 .096 .059	.098 .067 .042	.057 .039 .025	.018 .013 .008	
5.0	.159 .101 .057	.137 .087 .050	.094 .061 .035	.055 .036 .021	.018 .012 .007	
6.0	.152 .092 .049	.131 .080 .043	.090 .056 .030	.052 .033 .018	.017 .011 .006	
7.0	.145 .085 .043	.125 .074 .038	.086 .052 .027	.050 .031 .016	.016 .010 .005	
8.0	.139 .080 .039	.120 .069 .034	.083 .048 .024	.048 .029 .014	.016 .009 .005	
9.0	.133 .075 .035	.115 .065 .031	.079 .046 .022	.046 .027 .013	.015 .009 .004	
10.0	.127 .070 .033	.110 .061 .028	.076 .043 .020	.044 .025 .012	.014 .008 .004	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-16

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME: 2835 IP20					TYPE: 2835 80LED 24V			WEIGHT:			
SPEC.: 202-10017-00					DIM.:			SERIAL No.:			
MFR.:					SUR.: 0.008*0.5			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	25.6	27.1	25.9	27.4	27.6	25.7	27.2	26.0	27.4	27.7	
	27.1	28.5	27.4	28.8	29.0	27.2	28.6	27.5	28.9	29.1	
	27.7	29.0	28.0	29.3	29.6	27.8	29.1	28.1	29.4	29.7	
	28.0	29.2	28.4	29.5	29.9	28.2	29.4	28.5	29.7	30.0	
	28.1	29.3	28.4	29.6	29.9	28.2	29.4	28.6	29.8	30.1	
	28.1	29.2	28.5	29.6	29.9	28.3	29.4	28.6	29.7	30.1	
4H	2H	26.3	27.6	26.6	27.9	28.1	26.3	27.6	26.6	27.9	28.2
	3H	27.9	29.1	28.3	29.4	29.7	28.0	29.2	28.4	29.5	29.8
	4H	28.6	29.6	29.0	30.0	30.3	28.7	29.7	29.1	30.1	30.4
	6H	29.0	30.0	29.4	30.3	30.7	29.2	30.1	29.6	30.5	30.9
	8H	29.1	30.0	29.6	30.4	30.8	29.3	30.2	29.7	30.6	31.0
	12H	29.2	30.0	29.6	30.4	30.8	29.4	30.1	29.8	30.6	31.0
8H	4H	28.8	29.7	29.3	30.1	30.5	28.9	29.8	29.4	30.2	30.6
	6H	29.4	30.1	29.8	30.5	31.0	29.5	30.2	30.0	30.7	31.1
	8H	29.6	30.2	30.0	30.6	31.1	29.7	30.4	30.2	30.8	31.3
	12H	29.6	30.2	30.1	30.7	31.2	29.8	30.4	30.3	30.8	31.3
12H	4H	28.8	29.6	29.3	30.0	30.5	28.9	29.7	29.4	30.1	30.6
	6H	29.4	30.1	29.9	30.5	31.0	29.6	30.2	30.0	30.6	31.1
	8H	29.6	30.2	30.1	30.6	31.1	29.8	30.3	30.3	30.8	31.3
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H	+ 0.2 / - 0.2					+ 0.1 / - 0.2					
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					

CIE Pub.117, 277.9 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -4.4)
Area: 0.008 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-16

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:


```

Range: 0 - 180DEG
Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

```

ISOCANDELA DIAGRAM

NAME: 2835 IP20	TYPE: 2835 80LED 24V	WEIGHT:
SPEC.: 202-10017-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.008*0.5	Shielding Angle:

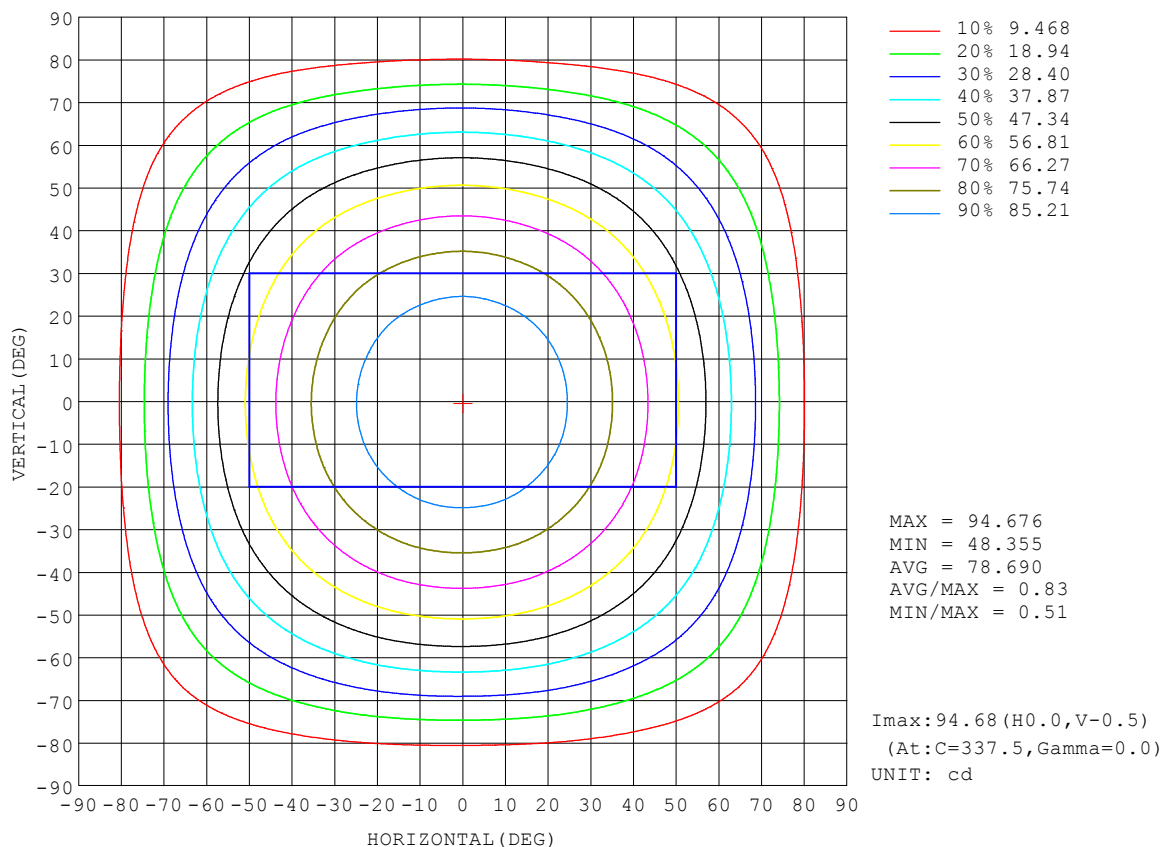


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-03-16

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

AAI Figure

NAME: 2835 IP20	TYPE: 2835 80LED 24V	WEIGHT:
SPEC.: 202-10017-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.008*0.5	Shielding Angle:

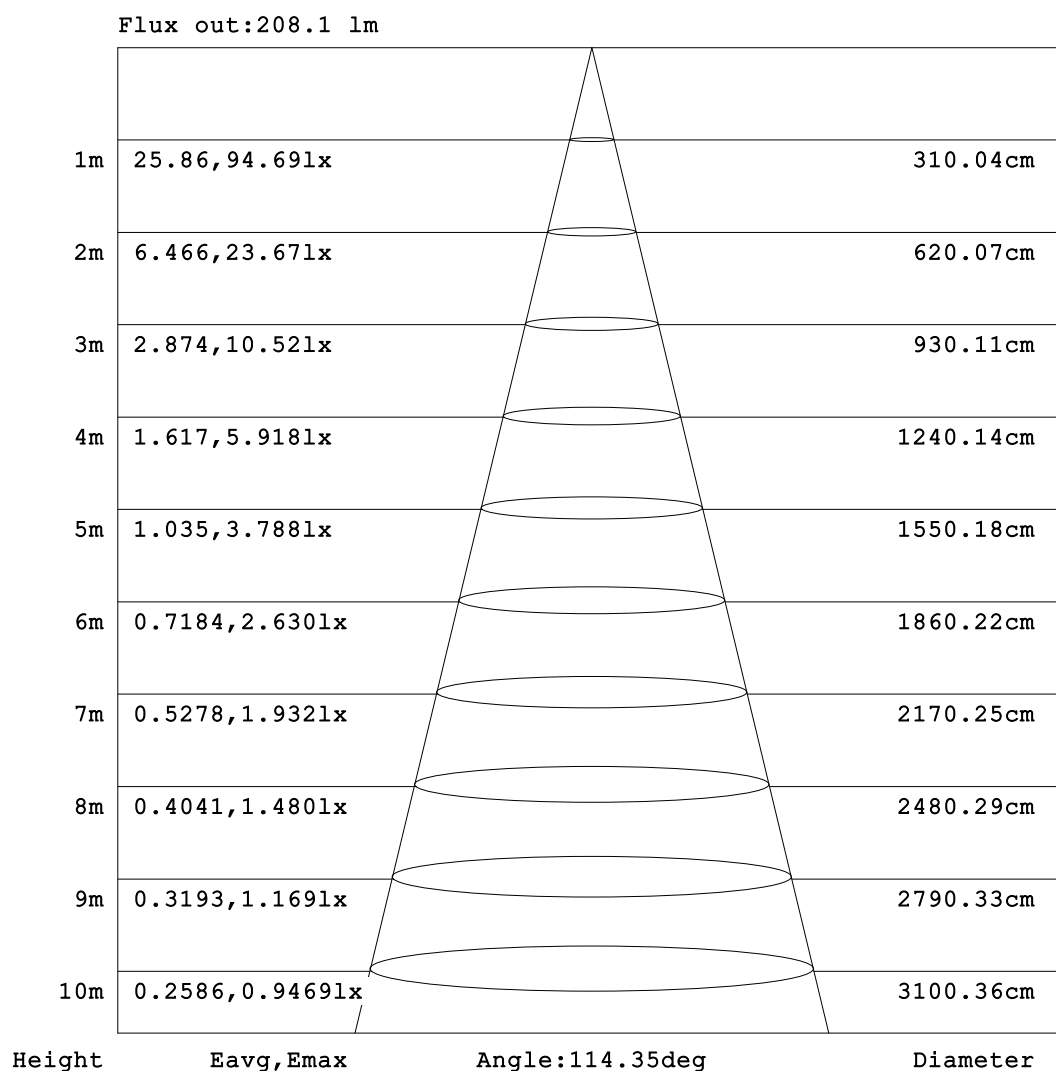


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-03-16

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity:65.0%
 Test Distance:5.749m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

NAME: 2835 IP20	TYPE: 2835 80LED 24V	WEIGHT:
SPEC.: 202-10017-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.008*0.5	Shielding Angle:

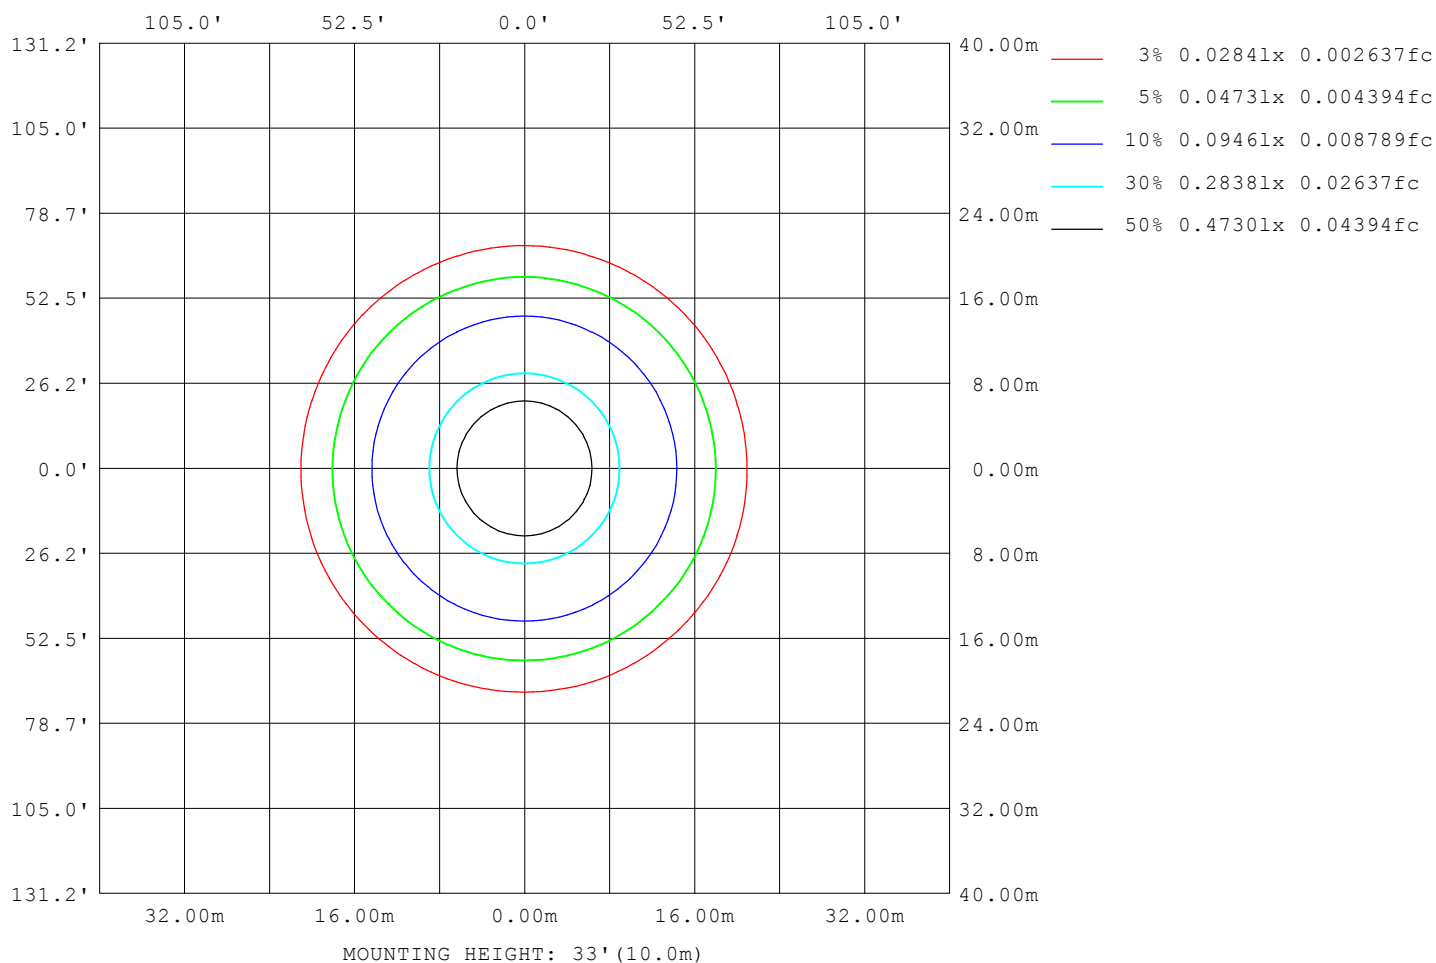

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-03-16

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

LED Avg.L Report

NAME: 2835 IP20	TYPE: 2835 80LED 24V	WEIGHT:
SPEC.: 202-10017-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.008*0.5	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	10304
L_0~180 (75) av	8653
L_0~180 (85) av	4824
L_90~270 (65) av	10328
L_90~270 (75) av	8706
L_90~270 (85) av	4884
L_45 (65) av	10322
L_45 (75) av	8688
L_45 (85) av	4985

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-03-16

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

Planar Illuminance Curve

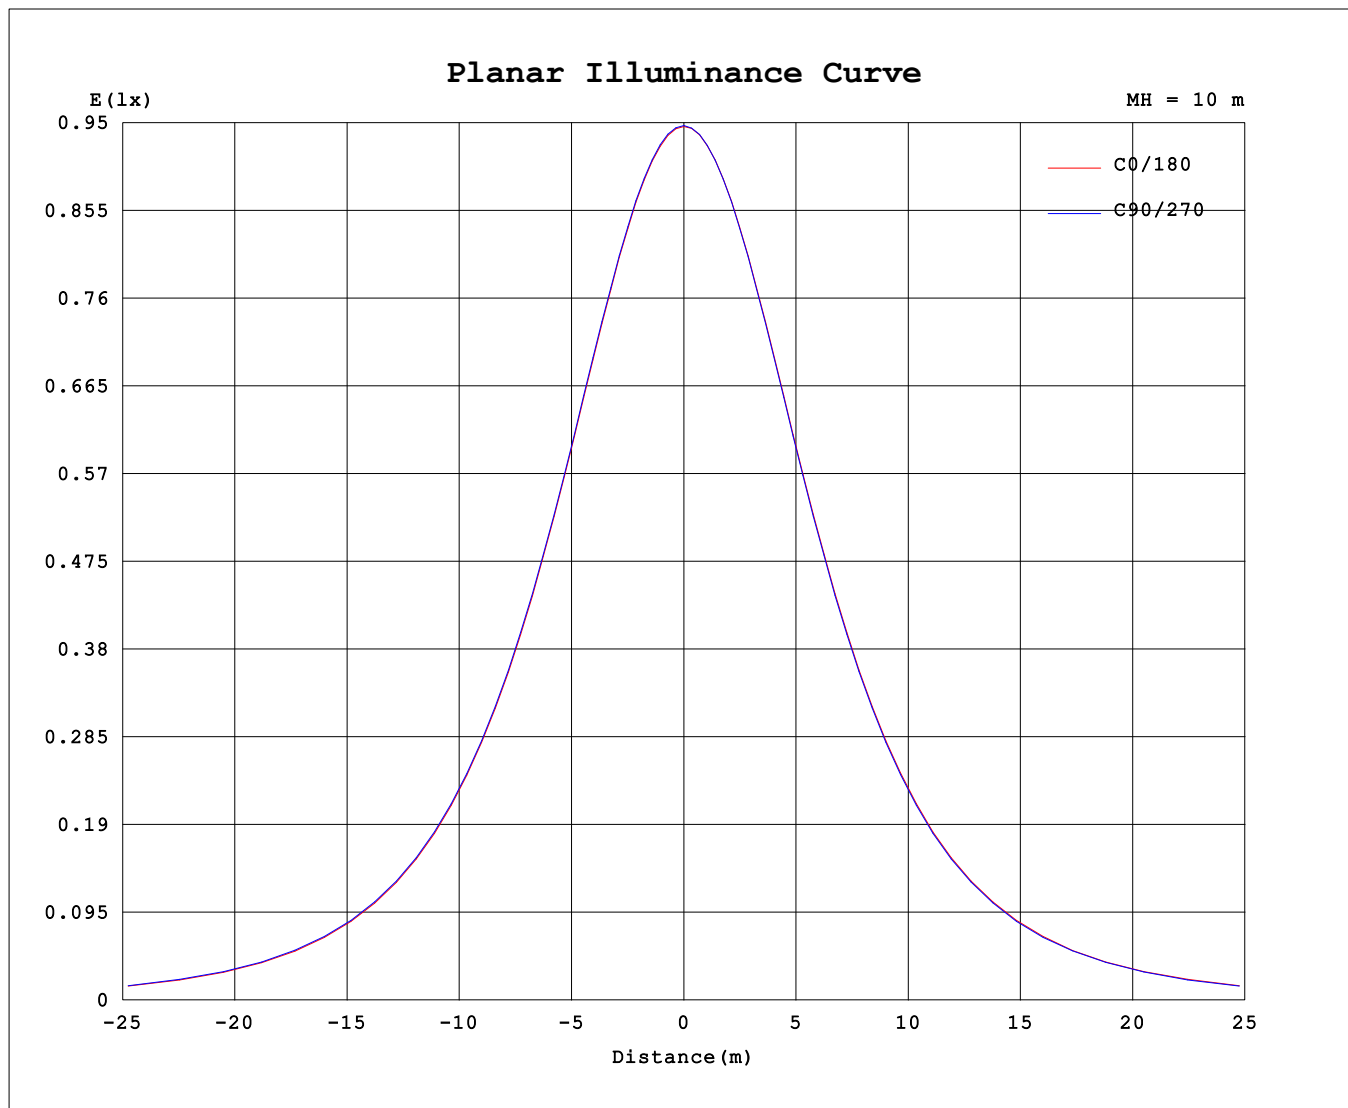

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-03-16

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: 2835 IP20	TYPE: 2835 80LED 24V	WEIGHT:
SPEC.: 202-10017-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.008*0.5	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	94.7	94.7	94.7	94.7	94.7	94.7	94.7	94.7	94.7	94.7	94.7	94.7	94.7	94.7	94.7	94.7			
5	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4			
10	93.0	93.1	93.1	93.1	93.1	93.2	93.2	93.2	93.2	93.1	93.1	93.0	93.0	93.0	93.0	93.0			
15	91.5	91.6	91.6	91.7	91.6	91.7	91.7	91.7	91.7	91.6	91.6	91.5	91.5	91.4	91.5	91.5			
20	88.3	88.5	88.5	88.5	88.5	88.6	88.6	88.6	88.6	88.5	88.4	88.3	88.3	88.2	88.3	88.3			
25	85.6	85.8	85.8	85.9	85.9	86.0	86.0	86.0	85.9	85.8	85.8	85.6	85.6	85.5	85.5	85.6			
30	80.7	80.9	80.9	81.0	81.0	81.1	81.2	81.2	81.1	80.9	80.9	80.7	80.7	80.6	80.6	80.6			
35	76.9	77.1	77.1	77.3	77.2	77.4	77.4	77.4	77.3	77.1	77.1	76.9	76.9	76.7	76.8	76.8			
40	70.4	70.6	70.6	70.8	70.8	71.0	71.0	71.0	70.9	70.6	70.6	70.4	70.4	70.2	70.3	70.3			
45	65.6	65.8	65.8	66.0	66.0	66.2	66.2	66.2	66.1	65.8	65.8	65.5	65.6	65.4	65.4	65.4			
50	57.6	57.9	57.9	58.1	58.1	58.3	58.3	58.3	58.1	57.9	57.9	57.6	57.6	57.4	57.4	57.4			
55	51.9	52.2	52.2	52.5	52.4	52.7	52.6	52.7	52.4	52.2	52.2	51.9	51.9	51.7	51.7	51.6			
60	42.7	43.0	43.0	43.3	43.3	43.6	43.5	43.5	43.3	43.0	43.0	42.7	42.7	42.4	42.5	42.4			
65	36.2	36.5	36.6	36.9	36.9	37.2	37.1	37.1	36.8	36.5	36.6	36.2	36.3	36.0	36.0	35.9			
70	26.1	26.5	26.5	26.9	26.8	27.2	27.1	27.1	26.8	26.4	26.5	26.1	26.2	25.9	25.8	25.7			
75	19.2	19.6	19.7	20.1	20.1	20.3	20.3	20.3	19.9	19.6	19.7	19.3	19.4	19.1	19.0	18.9			
80	9.58	9.93	9.96	10.3	10.3	10.6	10.5	10.6	10.1	9.85	9.94	9.62	9.65	9.37	9.39	9.28			
85	4.34	4.56	4.56	4.81	4.79	5.02	5.04	5.06	4.49	4.58	4.53	4.25	4.25	4.06	4.11	4.12			
90	0.09	0.38	0.31	0.26	0.22	0.27	0.34	0.41	0.07	0.33	0.28	0.17	0.14	0.18	0.27	0.32			
95	0.13	0.13	0.15	0.14	0.13	0.14	0.14	0.12	0.10	0.11	0.13	0.13	0.12	0.13	0.13	0.12			
100	0.23	0.21	0.22	0.21	0.22	0.22	0.21	0.21	0.18	0.18	0.18	0.19	0.19	0.19	0.18	0.18			
105	0.30	0.29	0.29	0.28	0.28	0.31	0.28	0.28	0.25	0.24	0.24	0.24	0.25	0.25	0.25	0.24			
110	0.42	0.40	0.40	0.39	0.39	0.39	0.39	0.39	0.35	0.34	0.34	0.34	0.34	0.34	0.34	0.34			
115	0.50	0.47	0.47	0.47	0.47	0.47	0.46	0.46	0.43	0.40	0.40	0.41	0.41	0.41	0.41	0.41			
120	0.61	0.58	0.58	0.58	0.57	0.57	0.58	0.58	0.53	0.51	0.50	0.50	0.51	0.51	0.51	0.51			
125	0.69	0.65	0.64	0.64	0.64	0.64	0.64	0.65	0.60	0.58	0.57	0.57	0.57	0.57	0.57	0.58			
130	0.78	0.75	0.74	0.73	0.73	0.74	0.74	0.75	0.70	0.68	0.66	0.66	0.66	0.66	0.66	0.68			
135	0.84	0.81	0.79	0.78	0.78	0.79	0.80	0.81	0.76	0.74	0.72	0.72	0.71	0.72	0.72	0.74			
140	0.92	0.89	0.87	0.86	0.86	0.88	0.88	0.89	0.83	0.81	0.80	0.79	0.78	0.78	0.79	0.82			
145	0.96	0.94	0.92	0.91	0.91	0.93	0.93	0.94	0.88	0.86	0.85	0.84	0.82	0.83	0.84	0.86			
150	1.03	1.01	0.99	0.98	0.98	1.01	1.00	1.01	0.94	0.93	0.92	0.91	0.89	0.90	0.92	0.93			
155	1.06	1.05	1.04	1.02	1.03	1.05	1.04	1.05	0.99	0.97	0.96	0.96	0.94	0.95	0.96	0.98			
160	1.11	1.11	1.09	1.08	1.11	1.11	1.10	1.10	1.05	1.04	1.03	1.03	1.02	1.02	1.03	1.05			
165	1.15	1.15	1.13	1.13	1.16	1.15	1.14	1.14	1.10	1.08	1.08	1.07	1.07	1.06	1.08	1.09			
170	1.20	1.21	1.20	1.19	1.21	1.21	1.20	1.21	1.17	1.16	1.15	1.16	1.16	1.14	1.16	1.17			
175	1.24	1.24	1.24	1.24	1.26	1.25	1.24	1.25	1.22	1.21	1.21	1.21	1.22	1.20	1.21	1.23			
180	1.29	1.28	1.28	1.29	1.30	1.30	1.29	1.30	1.29	1.29	1.29	1.29	1.30	1.29	1.29	1.30			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-16

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks: