


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: 2835 IP20	TYPE: 2835 160LED 12V	WEIGHT:
SPEC.: 202-00312-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 127.87 lm/W			
MODEL	3000K	I _{max} (cd)	192.8	S/MH(C0/180)	1.27
NOMINAL POWER(W)	4.8	LOR(%)	100.0	S/MH(C90/270)	1.23
RATED VOLTAGE(V)	12	TOTAL FLUX(lm)	569.22	□ UP,DN(C0-180)	0.7,52.5
NOMINAL FLUX(lm)	3.55762	CIE CLASS	DIRECT	□ UP,DN(C180-360)	0.7,46.2
LAMPS INSIDE	160	□ up (%)	1.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	12	□ down (%)	98.6	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

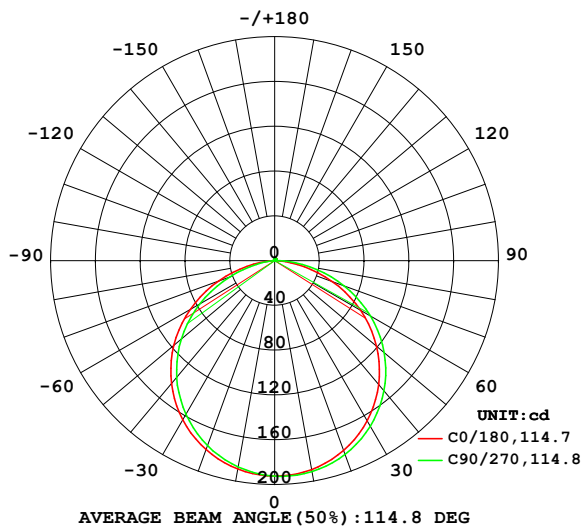

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

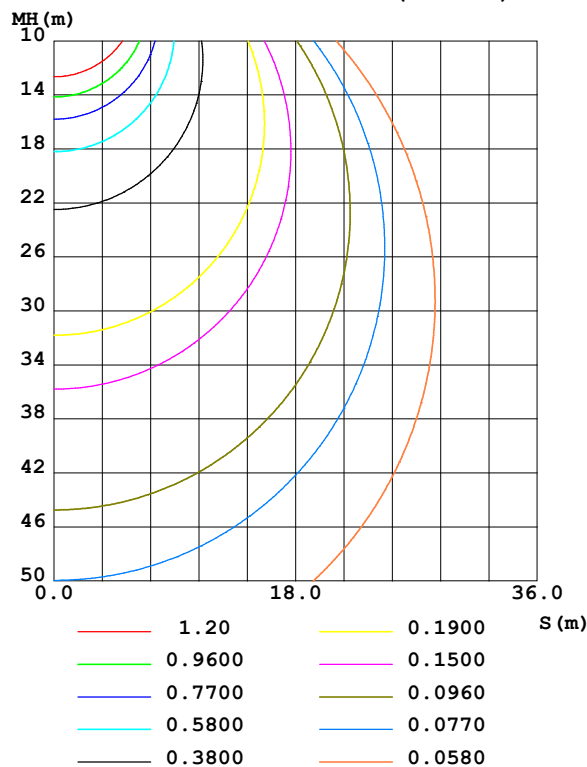

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-03-23

□ Range: 0 - 180DEG
 □ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity:65.0%
 Test Distance:5.749m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	zone	total	%lum, lamp
10	189.5	191.0	191.4	190.7	189.1	187.6	187.1	187.9	0- 10	18.22	18.22	3.2,3.2
20	180.3	183.3	184.1	182.7	179.6	176.7	175.7	177.2	10- 20	52.33	70.54	12.4,12.4
30	165.3	169.6	170.9	168.8	164.2	160.0	158.6	160.6	20- 30	79.77	150.3	26.4,26.4
40	144.7	150.2	151.8	149.2	143.3	138.0	136.2	138.8	30- 40	96.99	247.3	43.4,43.4
50	118.9	125.5	127.7	124.4	117.5	111.1	108.8	111.9	40- 50	101.6	348.9	61.3,61.3
60	88.50	96.28	98.77	95.15	87.04	79.73	77.10	80.48	50- 60	92.48	441.3	77.5,77.5
70	54.70	63.30	66.17	62.20	53.15	45.45	42.72	46.08	60- 70	70.50	511.8	89.9,89.9
80	20.81	28.91	31.84	28.00	19.15	13.49	11.38	13.75	70- 80	39.25	551.1	96.8,96.8
90	0.1864	3.531	4.706	3.116	0.1693	0.7081	0.7912	0.7221	80- 90	10.35	561.4	98.6,98.6
100	0.4520	0.3971	0.4681	0.4184	0.4028	0.4760	0.5421	0.4735	90-100	0.7574	562.2	98.8,98.8
110	0.8496	0.7392	0.7126	0.7581	0.7552	0.8019	0.8370	0.7921	100-110	0.6394	562.8	98.9,98.9
120	1.250	1.101	1.079	1.127	1.124	1.135	1.170	1.132	110-120	0.9454	563.8	99,99
130	1.600	1.436	1.419	1.471	1.458	1.446	1.462	1.436	120-130	1.165	564.9	99.2,99.2
140	1.883	1.738	1.704	1.776	1.739	1.722	1.704	1.698	130-140	1.243	566.2	99.5,99.5
150	2.107	2.002	1.963	2.035	1.965	1.955	1.906	1.933	140-150	1.170	567.4	99.7,99.7
160	2.295	2.224	2.239	2.242	2.174	2.160	2.149	2.152	150-160	0.9662	568.3	99.8,99.8
170	2.476	2.445	2.479	2.449	2.410	2.400	2.415	2.397	160-170	0.6529	569.0	100,100
180	2.653	2.650	2.683	2.663	2.650	2.647	2.683	2.663	170-180	0.2402	569.2	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 308.55 lm

%lum = 54.2%

%lamp = 54.2%

Conical surface Flux(120deg): 441.34 lm

%lum = 77.5%


%lamp = 77.5%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-23

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

NAME: 2835 IP20	TYPE: 2835 160LED 12V	WEIGHT:
SPEC.: 202-00312-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

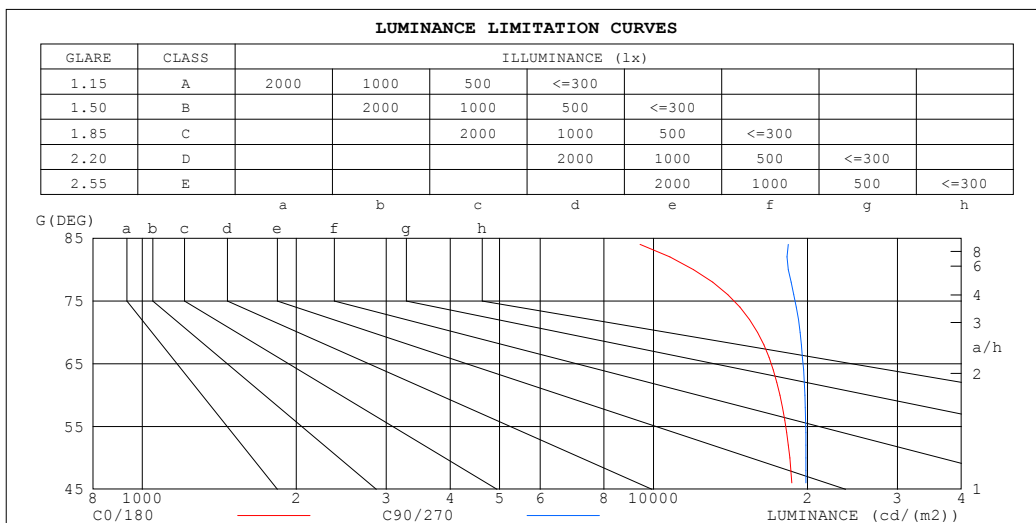

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	11284	21993
80	11970	18349
75	15725	20267
70	15970	19356
65	17781	20383
60	17676	19764
55	18659	20343
50	18469	19870
45	19052	20207


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-23

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: 2835 IP20	TYPE: 2835 160LED 12V	WEIGHT:
SPEC.: 202-00312-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.99
1.0	1.04	.99	.95	1.01	.97	.94	.97	.93	.90	.92	.90	.87	.89	.87	.85	.82
2.0	.90	.83	.77	.88	.82	.76	.84	.79	.74	.81	.76	.72	.78	.74	.71	.68
3.0	.79	.71	.64	.77	.70	.64	.74	.68	.62	.71	.66	.61	.68	.64	.60	.57
4.0	.70	.61	.54	.68	.60	.54	.66	.59	.53	.63	.57	.52	.61	.56	.51	.49
5.0	.62	.53	.47	.61	.53	.46	.59	.51	.46	.57	.50	.45	.55	.49	.44	.42
6.0	.56	.47	.41	.55	.46	.40	.53	.45	.40	.51	.45	.39	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.41	.36	.48	.41	.35	.47	.40	.35	.45	.39	.34	.32
8.0	.46	.38	.32	.46	.37	.32	.44	.37	.31	.43	.36	.31	.41	.35	.31	.29
9.0	.42	.34	.29	.42	.34	.28	.41	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.37	.30	.26	.36	.30	.25	.35	.30	.25	.23

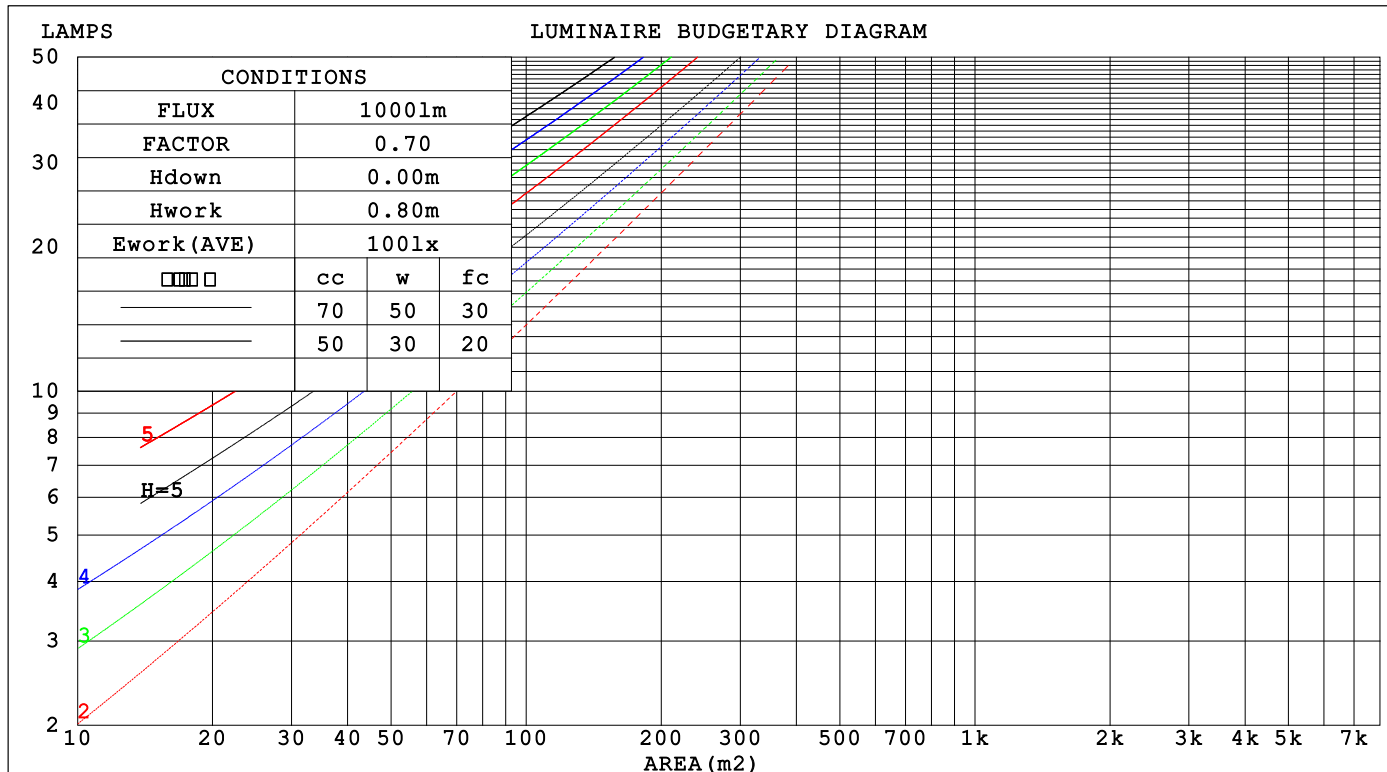

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-23

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: 2835 IP20	TYPE: 2835 160LED 12V	WEIGHT:
SPEC.: 202-00312-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)					
0.0						
1.0	.310 .176 .056	.302 .172 .055	.288 .165 .053	.275 .159 .051	.263 .153 .049	
2.0	.292 .160 .049	.285 .157 .048	.273 .152 .047	.261 .147 .046	.251 .142 .045	
3.0	.270 .144 .043	.264 .142 .043	.253 .137 .042	.243 .133 .041	.234 .129 .040	
4.0	.250 .130 .038	.244 .128 .038	.235 .124 .037	.225 .121 .037	.217 .118 .036	
5.0	.231 .118 .034	.226 .116 .034	.217 .113 .033	.209 .110 .033	.202 .108 .032	
6.0	.214 .107 .031	.210 .106 .031	.202 .104 .030	.195 .101 .030	.188 .099 .029	
7.0	.199 .098 .028	.195 .097 .028	.188 .095 .027	.182 .093 .027	.176 .091 .027	
8.0	.186 .091 .026	.183 .090 .025	.176 .088 .025	.170 .086 .025	.165 .085 .025	
9.0	.174 .084 .024	.171 .083 .023	.166 .082 .023	.160 .080 .023	.155 .079 .023	
10.0	.164 .079 .022	.161 .078 .022	.156 .076 .022	.151 .075 .021	.147 .074 .021	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)					
0.0	.201 .201 .201	.172 .172 .172	.117 .117 .117	.067 .067 .067	.022 .022 .022	
1.0	.191 .167 .145	.163 .143 .125	.112 .098 .086	.064 .057 .050	.021 .018 .016	
2.0	.183 .142 .109	.157 .123 .094	.107 .085 .065	.062 .049 .038	.020 .016 .013	
3.0	.175 .125 .085	.150 .108 .074	.103 .075 .052	.060 .044 .030	.019 .014 .010	
4.0	.168 .112 .069	.144 .096 .060	.099 .067 .042	.057 .039 .025	.018 .013 .008	
5.0	.160 .101 .058	.138 .088 .050	.095 .061 .036	.055 .036 .021	.018 .012 .007	
6.0	.153 .093 .050	.132 .081 .043	.091 .056 .031	.053 .033 .018	.017 .011 .006	
7.0	.146 .086 .044	.126 .075 .038	.087 .052 .027	.051 .031 .016	.016 .010 .005	
8.0	.140 .080 .039	.120 .070 .034	.083 .049 .024	.048 .029 .015	.016 .009 .005	
9.0	.134 .075 .036	.115 .065 .031	.080 .046 .022	.047 .027 .013	.015 .009 .004	
10.0	.128 .071 .033	.110 .062 .029	.077 .043 .021	.045 .026 .012	.014 .008 .004	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-23

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME: 2835 IP20					TYPE: 2835 160LED 12V			WEIGHT:			
SPEC.: 202-00312-00					DIM.:			SERIAL No.:			
MFR.:					SUR.: 0.01*0.5			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	25.1	26.6	25.4	26.9	27.1	25.5	27.0	25.8	27.3	27.5	
	26.7	28.1	27.0	28.3	28.6	27.3	28.7	27.6	28.9	29.2	
	27.2	28.6	27.6	28.8	29.1	28.0	29.4	28.4	29.6	29.9	
	27.6	28.9	28.0	29.2	29.5	28.6	29.9	29.0	30.2	30.5	
	27.7	28.9	28.1	29.2	29.5	28.8	30.0	29.2	30.3	30.7	
	27.7	28.9	28.1	29.2	29.5	29.0	30.1	29.4	30.5	30.8	
4H	2H	25.9	27.2	26.2	27.5	27.8	26.2	27.5	26.5	27.8	28.1
	3H	27.6	28.7	28.0	29.1	29.4	28.1	29.3	28.5	29.6	29.9
	4H	28.3	29.4	28.7	29.7	30.1	29.0	30.0	29.4	30.4	30.8
	6H	28.8	29.7	29.2	30.1	30.5	29.7	30.7	30.1	31.0	31.4
	8H	28.9	29.8	29.4	30.2	30.6	30.0	30.9	30.4	31.3	31.7
	12H	29.0	29.8	29.4	30.2	30.6	30.2	31.0	30.7	31.4	31.9
8H	4H	28.7	29.5	29.1	29.9	30.3	29.3	30.1	29.7	30.5	30.9
	6H	29.3	30.1	29.8	30.5	30.9	30.2	30.9	30.6	31.3	31.8
	8H	29.6	30.2	30.0	30.6	31.1	30.6	31.2	31.0	31.7	32.1
	12H	29.7	30.2	30.2	30.7	31.2	30.9	31.4	31.4	31.9	32.4
12H	4H	28.7	29.5	29.2	29.9	30.4	29.3	30.1	29.7	30.5	30.9
	6H	29.4	30.1	29.9	30.5	31.0	30.2	30.9	30.7	31.3	31.8
	8H	29.7	30.3	30.2	30.7	31.2	30.7	31.2	31.2	31.7	32.2
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2					
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.3					
2.0H	+ 0.2 / - 0.4					+ 0.1 / - 0.3					

CIE Pub.117, 569.2 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -2.0)
Area: 0.01 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-23

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:


```

Range: 0 - 180DEG
Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

```

ISOCANDELA DIAGRAM

NAME: 2835 IP20	TYPE: 2835 160LED 12V	WEIGHT:
SPEC.: 202-00312-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

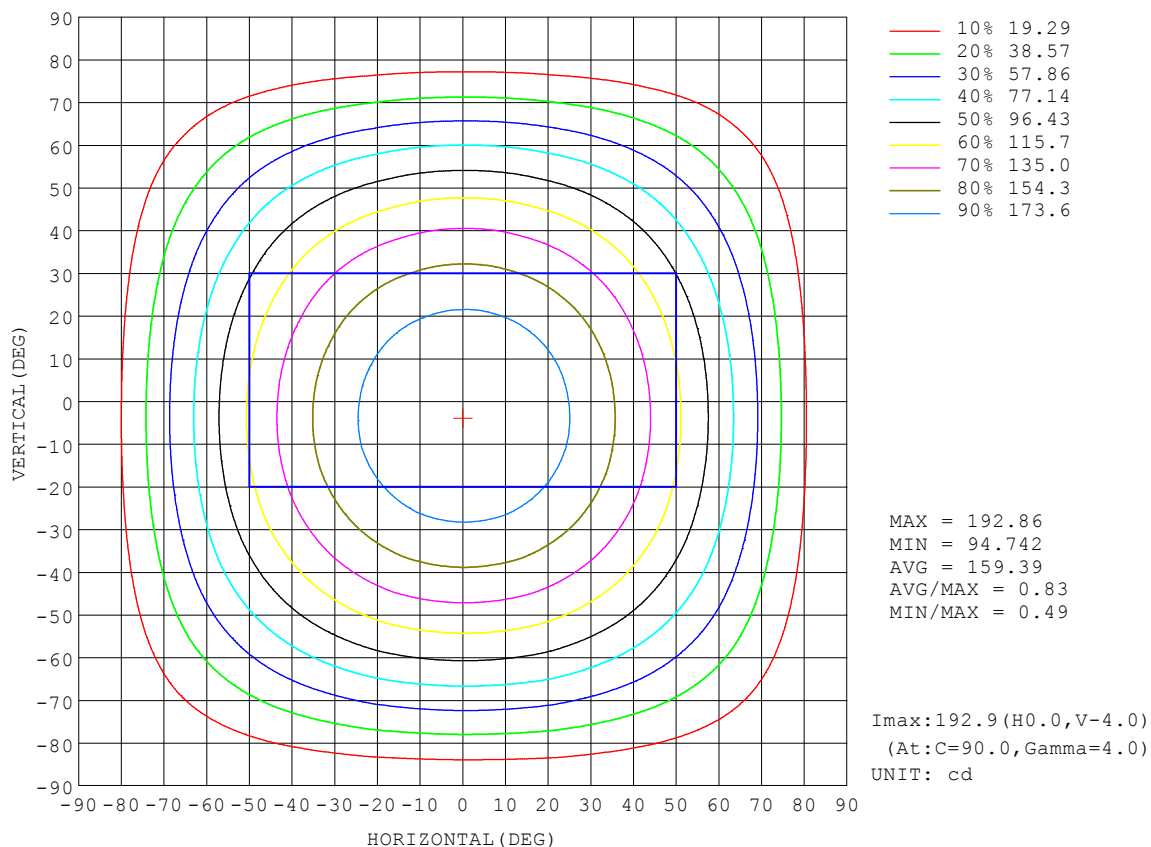


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-03-23

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

AAI Figure

NAME: 2835 IP20	TYPE: 2835 160LED 12V	WEIGHT:
SPEC.: 202-00312-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

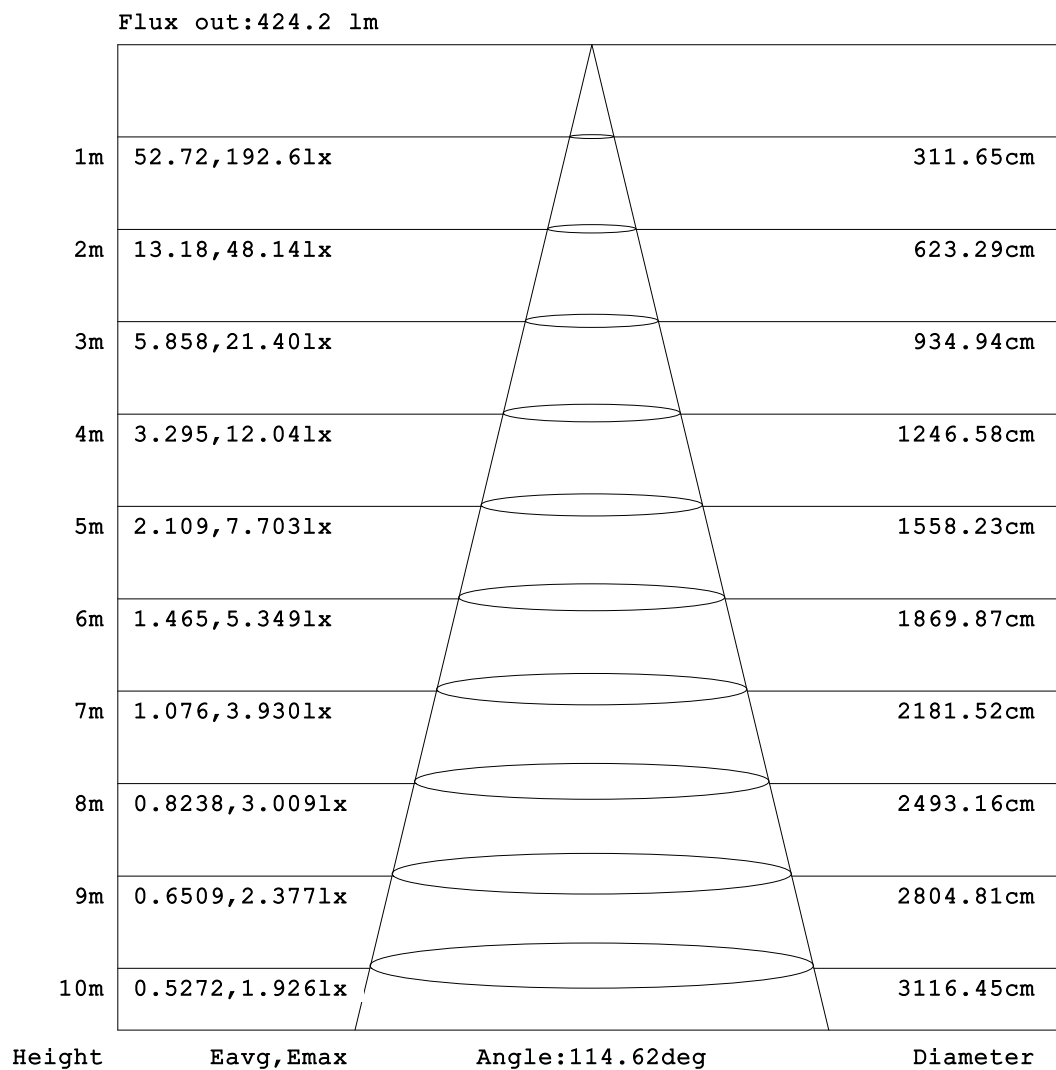


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-03-23

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity:65.0%
 Test Distance:5.749m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

NAME: 2835 IP20	TYPE: 2835 160LED 12V	WEIGHT:
SPEC.: 202-00312-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

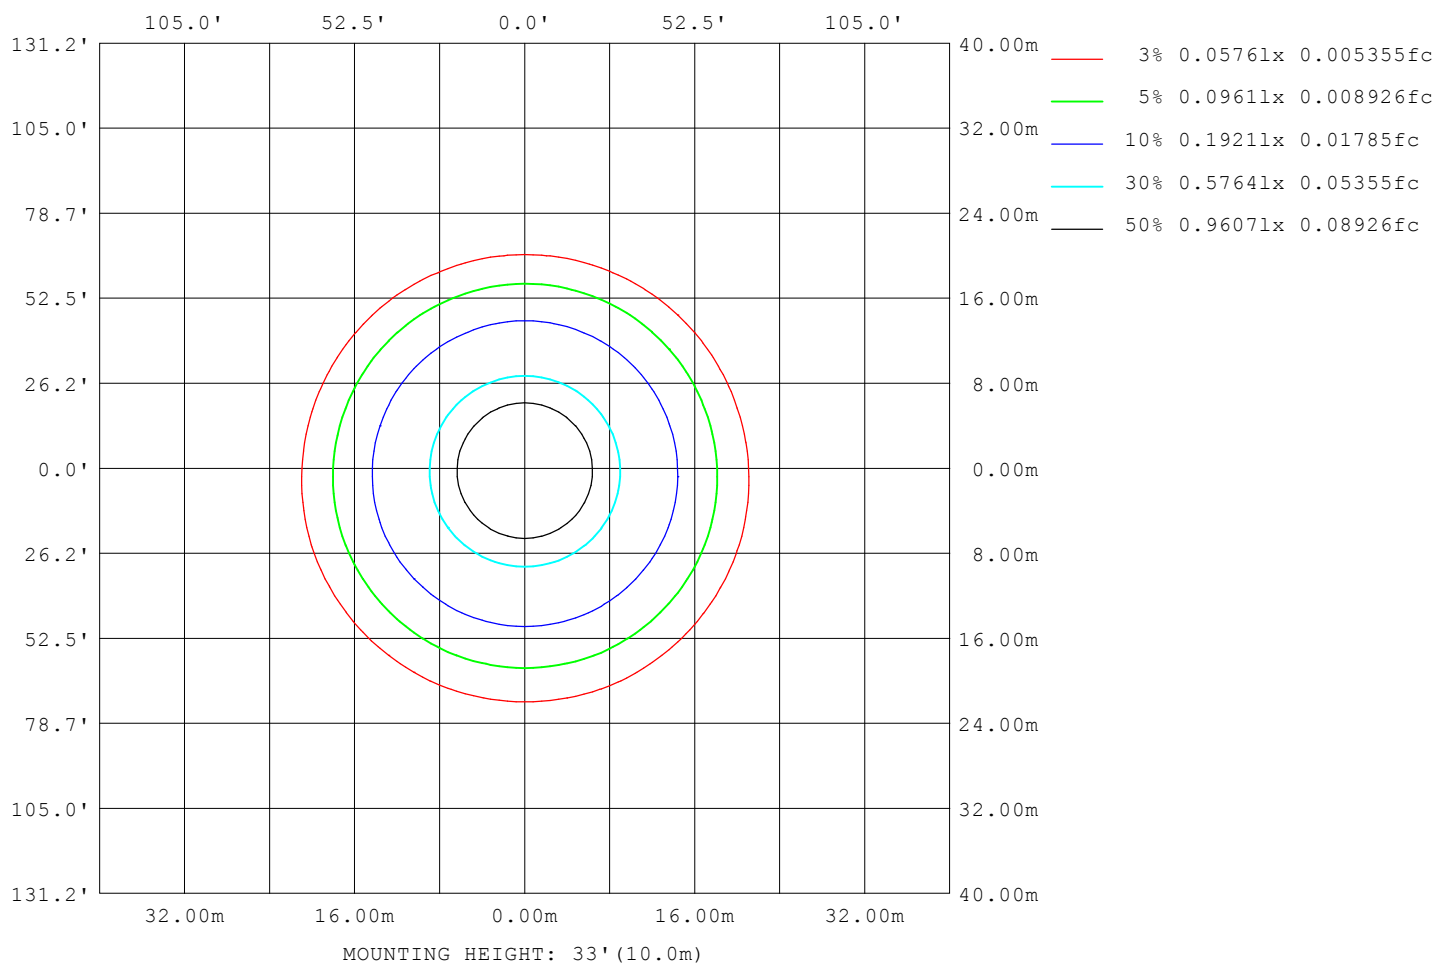

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-03-23

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

LED Avg.L Report

NAME: 2835 IP20	TYPE: 2835 160LED 12V	WEIGHT:
SPEC.: 202-00312-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	16840
L_0~180 (75) av	14099
L_0~180 (85) av	8012
L_90~270 (65) av	16905
L_90~270 (75) av	14461
L_90~270 (85) av	10775
L_45 (65) av	16879
L_45 (75) av	14333
L_45 (85) av	9774

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-03-23

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

Planar Illuminance Curve

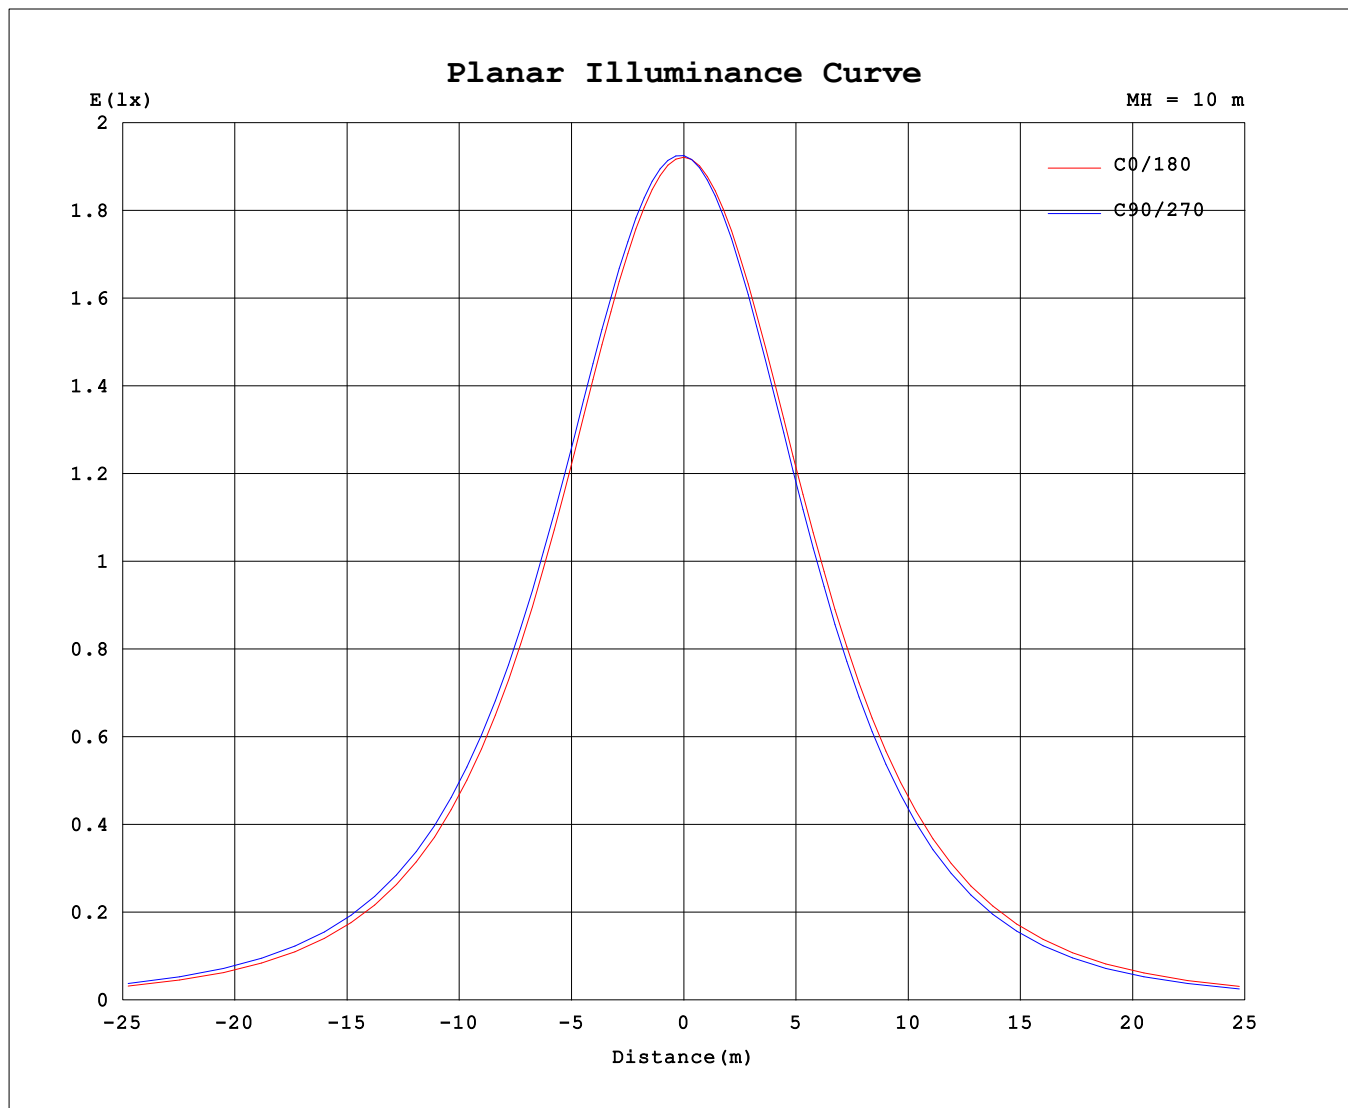

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-03-23

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: 2835 IP20	TYPE: 2835 160LED 12V	WEIGHT:
SPEC.: 202-00312-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	192	192	192	192	192	192	192	192	192	192	192	192	192	192	192	192			
5	192	192	193	193	193	193	192	192	192	191	191	191	191	191	191	192			
10	189	190	191	191	191	191	191	190	189	188	188	187	187	187	188	189			
15	187	188	189	189	189	189	188	187	186	185	184	183	183	184	184	185			
20	180	182	183	184	184	184	183	181	180	178	177	176	176	176	177	179			
25	175	177	178	179	180	179	178	176	174	172	171	170	170	170	171	173			
30	165	168	170	171	171	170	169	167	164	162	160	159	159	159	161	163			
35	158	161	162	164	164	163	162	159	157	154	152	150	150	151	153	155			
40	145	148	150	152	152	151	149	147	143	140	138	136	136	137	139	141			
45	135	139	141	143	143	142	140	137	134	130	128	126	126	126	129	131			
50	119	123	126	128	128	127	124	122	118	114	111	109	109	109	112	115			
55	107	112	114	117	117	116	113	110	106	102	99.0	96.7	96.6	97.2	99.8	103			
60	88.5	93.3	96.3	98.8	98.8	98.0	95.2	91.7	87.0	82.6	79.7	77.3	77.1	77.8	80.5	83.8			
65	75.2	80.2	83.4	86.1	86.1	85.3	82.3	78.7	73.8	69.3	66.2	63.8	63.6	64.4	67.0	70.5			
70	54.7	59.7	63.3	65.9	66.2	65.1	62.2	58.2	53.1	48.5	45.5	43.0	42.7	43.5	46.1	49.6			
75	40.8	45.8	49.4	52.1	52.4	51.4	48.4	44.4	39.2	34.7	31.8	29.4	29.2	29.8	32.4	35.7			
80	20.8	25.5	28.9	31.6	31.8	30.9	28.0	24.2	19.2	15.6	13.5	11.6	11.4	11.8	13.7	16.5			
85	9.85	13.6	16.6	19.0	19.2	18.3	15.8	12.7	8.49	6.22	4.92	3.89	3.70	3.92	4.98	6.74			
90	0.19	2.22	3.53	4.66	4.71	4.26	3.12	1.88	0.17	0.59	0.71	0.79	0.79	0.77	0.72	0.70			
95	0.26	0.34	0.63	0.90	0.88	0.72	0.47	0.33	0.24	0.29	0.51	0.66	0.70	0.67	0.52	0.29			
100	0.45	0.40	0.40	0.44	0.47	0.46	0.42	0.43	0.40	0.44	0.48	0.52	0.54	0.52	0.47	0.43			
105	0.61	0.54	0.52	0.50	0.51	0.51	0.53	0.57	0.54	0.56	0.60	0.63	0.64	0.62	0.60	0.56			
110	0.85	0.77	0.74	0.72	0.71	0.73	0.76	0.79	0.76	0.76	0.80	0.83	0.84	0.82	0.79	0.76			
115	1.01	0.91	0.88	0.86	0.86	0.87	0.90	0.94	0.90	0.90	0.94	0.96	0.98	0.95	0.93	0.89			
120	1.25	1.14	1.10	1.08	1.08	1.09	1.13	1.17	1.12	1.12	1.13	1.16	1.17	1.16	1.13	1.10			
125	1.40	1.29	1.24	1.22	1.21	1.23	1.27	1.32	1.26	1.26	1.26	1.29	1.30	1.28	1.26	1.24			
130	1.60	1.50	1.44	1.42	1.42	1.44	1.47	1.53	1.46	1.46	1.45	1.46	1.46	1.45	1.44	1.43			
135	1.72	1.63	1.56	1.54	1.54	1.57	1.60	1.66	1.57	1.57	1.56	1.56	1.56	1.56	1.55	1.56			
140	1.88	1.81	1.74	1.70	1.70	1.75	1.78	1.83	1.74	1.73	1.72	1.72	1.70	1.70	1.70	1.72			
145	1.98	1.91	1.85	1.80	1.81	1.86	1.89	1.93	1.83	1.83	1.82	1.81	1.78	1.79	1.80	1.82			
150	2.11	2.05	2.00	1.96	1.96	2.02	2.04	2.06	1.96	1.95	1.96	1.96	1.91	1.92	1.93	1.96			
155	2.18	2.14	2.10	2.05	2.07	2.12	2.12	2.15	2.05	2.04	2.03	2.04	2.00	2.00	2.02	2.04			
160	2.30	2.26	2.22	2.19	2.24	2.25	2.24	2.27	2.17	2.17	2.16	2.17	2.15	2.13	2.15	2.17			
165	2.36	2.34	2.31	2.28	2.35	2.33	2.32	2.35	2.26	2.25	2.25	2.26	2.26	2.22	2.25	2.27			
170	2.48	2.46	2.44	2.43	2.48	2.46	2.45	2.47	2.41	2.40	2.40	2.40	2.42	2.38	2.40	2.42			
175	2.55	2.54	2.54	2.54	2.57	2.55	2.55	2.57	2.51	2.50	2.50	2.51	2.53	2.49	2.51	2.53			
180	2.65	2.65	2.65	2.66	2.68	2.66	2.66	2.67	2.65	2.64	2.65	2.66	2.68	2.66	2.66	2.67			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-23

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks: