


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: 2835 IP20	TYPE: 2835 160LED 12V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 129.30 lm/W
MODEL	4000K	I _{max} (cd)	200.8	S/MH(C0/180)	1.28	
NOMINAL POWER(W)	4.8	LOR(%)	100.0	S/MH(C90/270)	1.27	
RATED VOLTAGE(V)	12	TOTAL FLUX(lm)	596.07	□ UP,DN(C0-180)	0.7,50.7	
NOMINAL FLUX(lm)	7.45085	CIE CLASS	DIRECT	□ UP,DN(C180-360)	0.6,47.9	
LAMPS INSIDE	80	□ up (%)	1.3	CIBSE SHR NOM	1.25	
TEST VOLTAGE(V)	12	□ down (%)	98.7	CIBSE SHR MAX	1.35	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

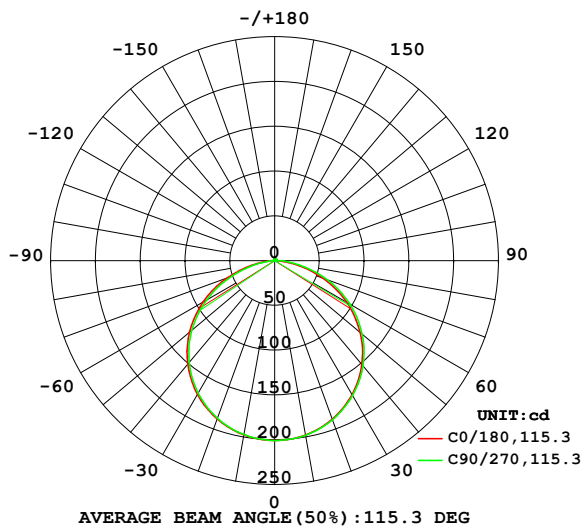

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

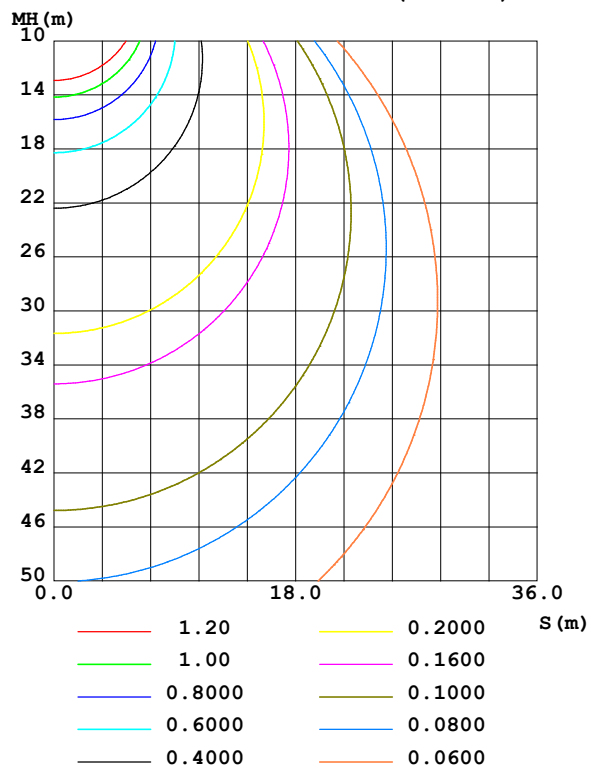

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-23

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	197.8	198.1	198.1	197.9	197.6	197.3	197.2	197.4	0- 10	19.02	19.02	3.19,3.19
20	188.4	189.0	189.0	188.7	188.1	187.4	187.2	187.6	10- 20	54.69	73.70	12.4,12.4
30	172.9	173.9	174.0	173.5	172.4	171.3	170.9	171.6	20- 30	83.49	157.2	26.4,26.4
40	151.5	153.2	153.5	152.7	151.0	149.2	148.7	149.6	30- 40	101.7	258.9	43.4,43.4
50	124.7	127.2	127.6	126.6	124.1	121.5	120.8	122.0	40- 50	106.7	365.6	61.3,61.3
60	92.80	96.26	97.10	95.73	92.08	88.72	87.64	89.18	50- 60	97.28	462.9	77.7,77.7
70	57.23	61.67	62.92	61.16	56.18	52.18	50.85	52.62	60- 70	74.09	537.0	90.1,90.1
80	21.77	26.20	27.58	25.80	20.07	17.19	15.88	17.48	70- 80	40.94	577.9	97,97
90	0.2012	2.455	2.852	2.280	0.1860	0.5865	0.4677	0.5530	80- 90	10.14	588.1	98.7,98.7
100	0.4807	0.4494	0.5611	0.4586	0.4219	0.4594	0.5254	0.4591	90-100	0.6301	588.7	98.8,98.8
110	0.8974	0.8249	0.8148	0.8339	0.7864	0.7948	0.8155	0.7919	100-110	0.6702	589.4	98.9,98.9
120	1.321	1.213	1.205	1.231	1.177	1.144	1.162	1.141	110-120	0.9946	590.4	99,99
130	1.686	1.562	1.556	1.590	1.525	1.475	1.464	1.460	120-130	1.225	591.6	99.2,99.2
140	1.984	1.872	1.849	1.908	1.820	1.763	1.723	1.740	130-140	1.305	592.9	99.5,99.5
150	2.212	2.138	2.103	2.160	2.053	2.001	1.942	1.992	140-150	1.226	594.1	99.7,99.7
160	2.405	2.355	2.376	2.363	2.272	2.231	2.213	2.225	150-160	1.011	595.1	99.8,99.8
170	2.591	2.569	2.607	2.572	2.515	2.491	2.503	2.489	160-170	0.6823	595.8	100,100
180	2.775	2.766	2.800	2.776	2.772	2.764	2.800	2.776	170-180	0.2508	596.1	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 323.25 lm

%lum = 54.2%

%lamp = 54.2%

Conical surface Flux(120deg): 462.9 lm

%lum = 77.7%


%lamp = 77.7%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-03-23

□ Range: 0 - 180DEG
 □ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity:65.0%
 Test Distance:5.749m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

NAME: 2835 IP20	TYPE: 2835 160LED 12V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

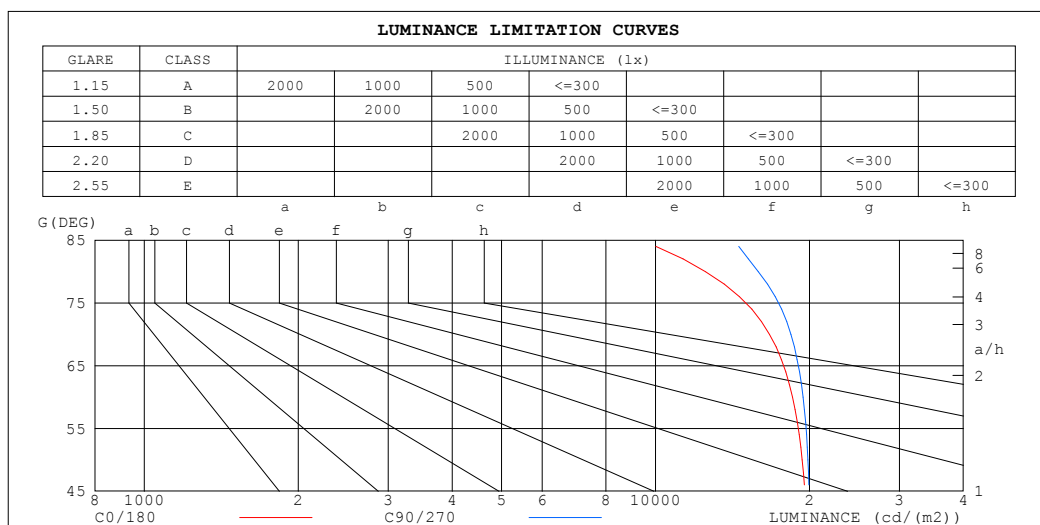

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	12005	17453
80	12521	15889
75	16428	18799
70	16708	18408
65	18641	19833
60	18533	19430
55	19579	20225
50	19363	19867
45	19971	20340


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-03-23

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: 2835 IP20	TYPE: 2835 160LED 12V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0														
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
□fc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Coefficients of Utilization(CU)														
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.99														
1.0	1.04	.99	.95	1.01	.97	.94	.97	.93	.91	.93	.90	.88	.89	.87	.85	.83														
2.0	.90	.83	.78	.88	.82	.76	.84	.79	.74	.81	.76	.73	.78	.74	.71	.69														
3.0	.79	.71	.64	.77	.70	.64	.74	.68	.62	.71	.66	.61	.68	.64	.60	.58														
4.0	.70	.61	.54	.68	.60	.54	.66	.59	.53	.63	.57	.52	.61	.56	.51	.49														
5.0	.62	.53	.47	.61	.53	.46	.59	.51	.46	.57	.50	.45	.55	.49	.44	.42														
6.0	.56	.47	.41	.55	.47	.40	.53	.45	.40	.51	.45	.39	.50	.44	.39	.37														
7.0	.51	.42	.36	.50	.42	.36	.48	.41	.35	.47	.40	.35	.45	.39	.34	.32														
8.0	.46	.38	.32	.46	.37	.32	.44	.37	.31	.43	.36	.31	.41	.35	.31	.29														
9.0	.42	.34	.29	.42	.34	.28	.41	.33	.28	.39	.33	.28	.38	.32	.28	.26														
10.0	.39	.31	.26	.39	.31	.26	.37	.30	.26	.36	.30	.25	.35	.30	.25	.23														

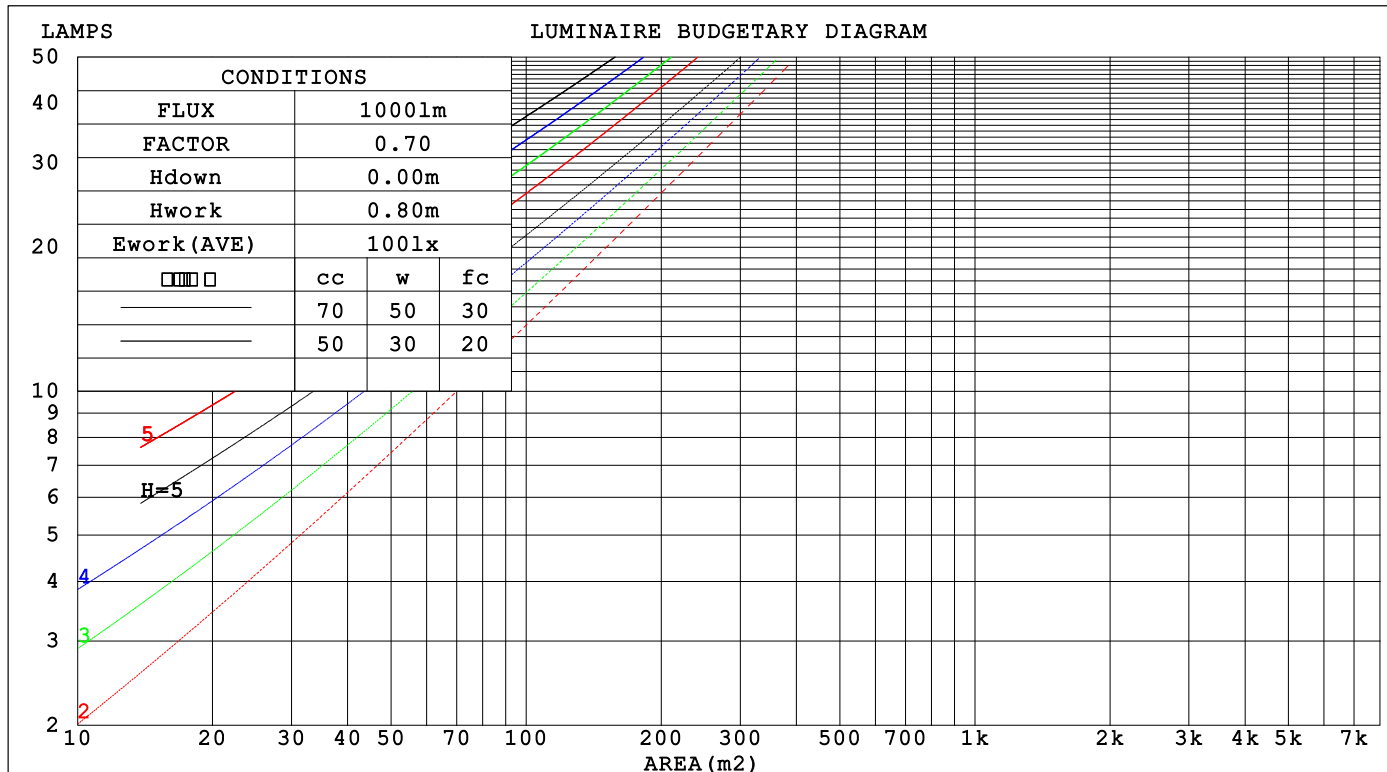

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-23

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: 2835 IP20	TYPE: 2835 160LED 12V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio					Wall Exitance Coefficients(WEC)
0.0						
1.0	.309 .176 .056	.301 .172 .055	.287 .165 .053	.274 .158 .051	.262 .152 .049	
2.0	.291 .160 .049	.285 .157 .048	.272 .151 .047	.261 .146 .046	.250 .142 .045	
3.0	.270 .144 .043	.264 .142 .043	.253 .137 .042	.243 .133 .041	.234 .129 .040	
4.0	.249 .130 .038	.244 .128 .038	.234 .124 .037	.225 .121 .037	.217 .118 .036	
5.0	.231 .118 .034	.226 .116 .034	.217 .113 .033	.209 .110 .033	.202 .108 .032	
6.0	.214 .107 .031	.210 .106 .031	.202 .104 .030	.195 .101 .030	.188 .099 .029	
7.0	.199 .098 .028	.195 .097 .028	.188 .095 .027	.182 .093 .027	.176 .091 .027	
8.0	.186 .091 .026	.183 .090 .025	.176 .088 .025	.170 .086 .025	.165 .085 .025	
9.0	.174 .084 .024	.171 .083 .023	.166 .082 .023	.160 .080 .023	.155 .079 .023	
10.0	.164 .079 .022	.161 .078 .022	.156 .076 .022	.151 .075 .021	.147 .074 .021	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio					Ceiling Cavity Exitance Coefficients(CCEC)
0.0	.201 .201 .201	.172 .172 .172	.117 .117 .117	.067 .067 .067	.022 .022 .022	
1.0	.191 .166 .145	.163 .143 .125	.112 .098 .086	.064 .057 .050	.021 .018 .016	
2.0	.183 .142 .108	.156 .122 .094	.107 .085 .065	.062 .049 .038	.020 .016 .012	
3.0	.175 .125 .085	.150 .108 .073	.103 .075 .052	.059 .044 .030	.019 .014 .010	
4.0	.167 .111 .069	.144 .096 .060	.099 .067 .042	.057 .039 .025	.018 .013 .008	
5.0	.160 .101 .058	.137 .087 .050	.095 .061 .035	.055 .036 .021	.018 .012 .007	
6.0	.153 .093 .050	.131 .080 .043	.091 .056 .031	.053 .033 .018	.017 .011 .006	
7.0	.146 .086 .044	.126 .074 .038	.087 .052 .027	.050 .031 .016	.016 .010 .005	
8.0	.140 .080 .039	.120 .070 .034	.083 .049 .024	.048 .029 .014	.016 .009 .005	
9.0	.134 .075 .036	.115 .065 .031	.080 .046 .022	.046 .027 .013	.015 .009 .004	
10.0	.128 .071 .033	.110 .062 .029	.076 .043 .020	.045 .026 .012	.014 .008 .004	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-23

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME: 2835 IP20					TYPE: 2835 160LED 12V			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.:					SUR.: 0.01*0.5			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H		25.0	26.5	25.3	26.8	27.0	25.2	26.7	25.5	26.9	27.1
3H		26.5	27.9	26.9	28.2	28.5	26.8	28.2	27.1	28.5	28.7
4H		27.1	28.4	27.4	28.7	29.0	27.5	28.8	27.8	29.1	29.4
6H		27.5	28.7	27.8	29.0	29.3	28.0	29.2	28.3	29.5	29.8
8H		27.6	28.8	27.9	29.1	29.4	28.1	29.3	28.5	29.6	30.0
12H		27.6	28.8	28.0	29.1	29.4	28.2	29.4	28.6	29.7	30.0
4H 2H		25.7	27.0	26.0	27.3	27.6	25.8	27.1	26.1	27.4	27.7
3H		27.4	28.6	27.8	28.9	29.2	27.6	28.8	28.0	29.1	29.4
4H		28.1	29.2	28.5	29.5	29.9	28.4	29.5	28.8	29.8	30.2
6H		28.6	29.5	29.0	29.9	30.3	29.0	30.0	29.5	30.4	30.8
8H		28.7	29.6	29.1	30.0	30.4	29.3	30.1	29.7	30.5	30.9
12H		28.8	29.6	29.2	30.0	30.4	29.4	30.2	29.8	30.6	31.0
8H 4H		28.4	29.3	28.8	29.7	30.1	28.7	29.6	29.1	30.0	30.4
6H		29.0	29.8	29.5	30.2	30.6	29.5	30.2	29.9	30.6	31.1
8H		29.3	29.9	29.7	30.3	30.8	29.8	30.4	30.2	30.9	31.3
12H		29.4	29.9	29.9	30.4	30.9	30.0	30.5	30.5	31.0	31.5
12H 4H		28.4	29.2	28.9	29.6	30.1	28.7	29.5	29.1	29.9	30.3
6H		29.1	29.7	29.6	30.2	30.7	29.5	30.2	30.0	30.6	31.1
8H		29.4	29.9	29.9	30.4	30.9	29.9	30.4	30.4	30.9	31.4
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H		+ 0.1 / - 0.2					+ 0.1 / - 0.2				
1.5H		+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H		+ 0.2 / - 0.4					+ 0.1 / - 0.3				

CIE Pub.117, 596.1 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.8)
Area: 0.01 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-23

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

NAME: 2835 IP20	TYPE: 2835 160LED 12V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	57	45	38	56	45	38	55	44	38	31
0.80	67	55	48	66	55	48	64	54	47	40
1.00	75	64	57	74	63	56	72	65	56	49
1.25	82	72	65	81	71	64	78	70	63	56
1.50	88	78	70	86	77	70	83	75	69	61
2.00	94	86	79	93	85	78	89	82	77	69
2.50	98	91	84	96	89	84	92	86	81	73
3.00	102	95	89	100	93	88	95	90	86	77
4.00	106	100	95	103	98	94	99	95	91	82
5.00	108	103	99	106	101	98	101	98	94	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004 Suspended $SHR_{NOM} = 1.25$										


```

Range: 0 - 180DEG
Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

```

ISOCANDELA DIAGRAM

NAME: 2835 IP20	TYPE: 2835 160LED 12V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

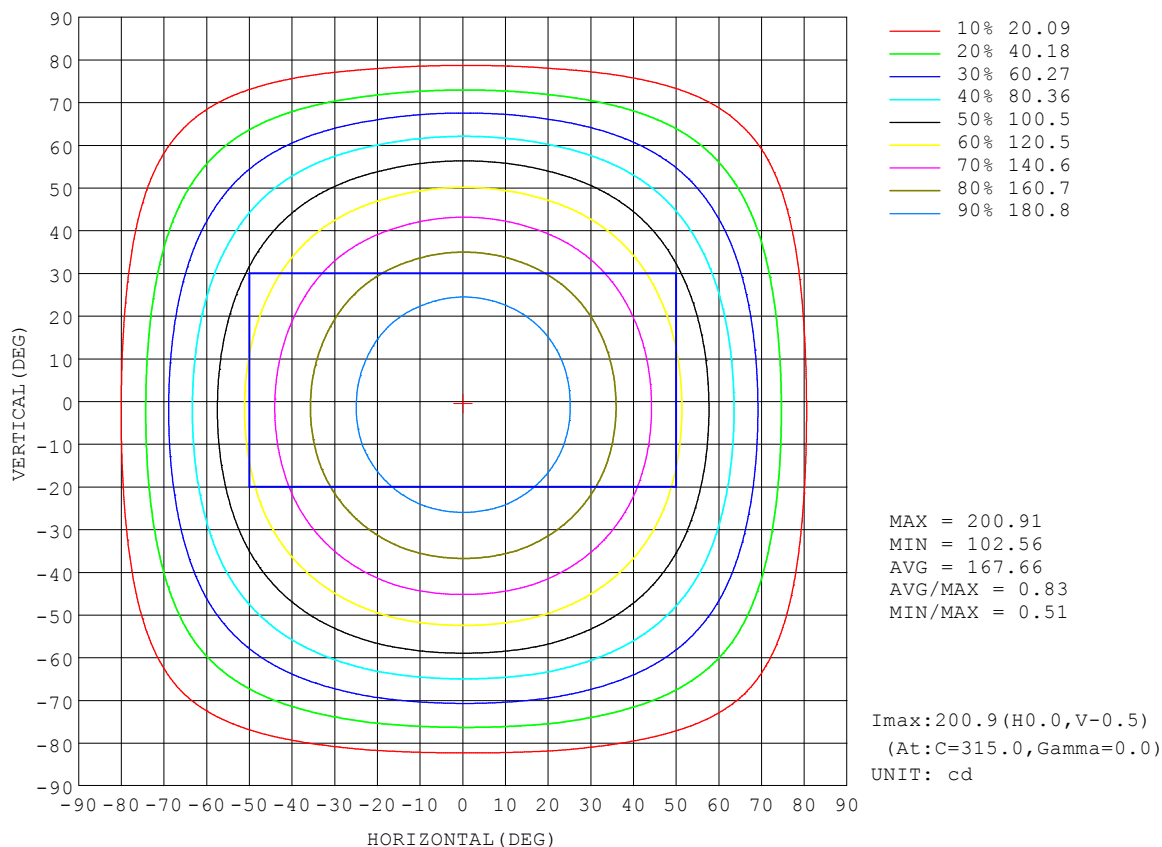


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-03-23

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

AAI Figure

NAME: 2835 IP20	TYPE: 2835 160LED 12V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

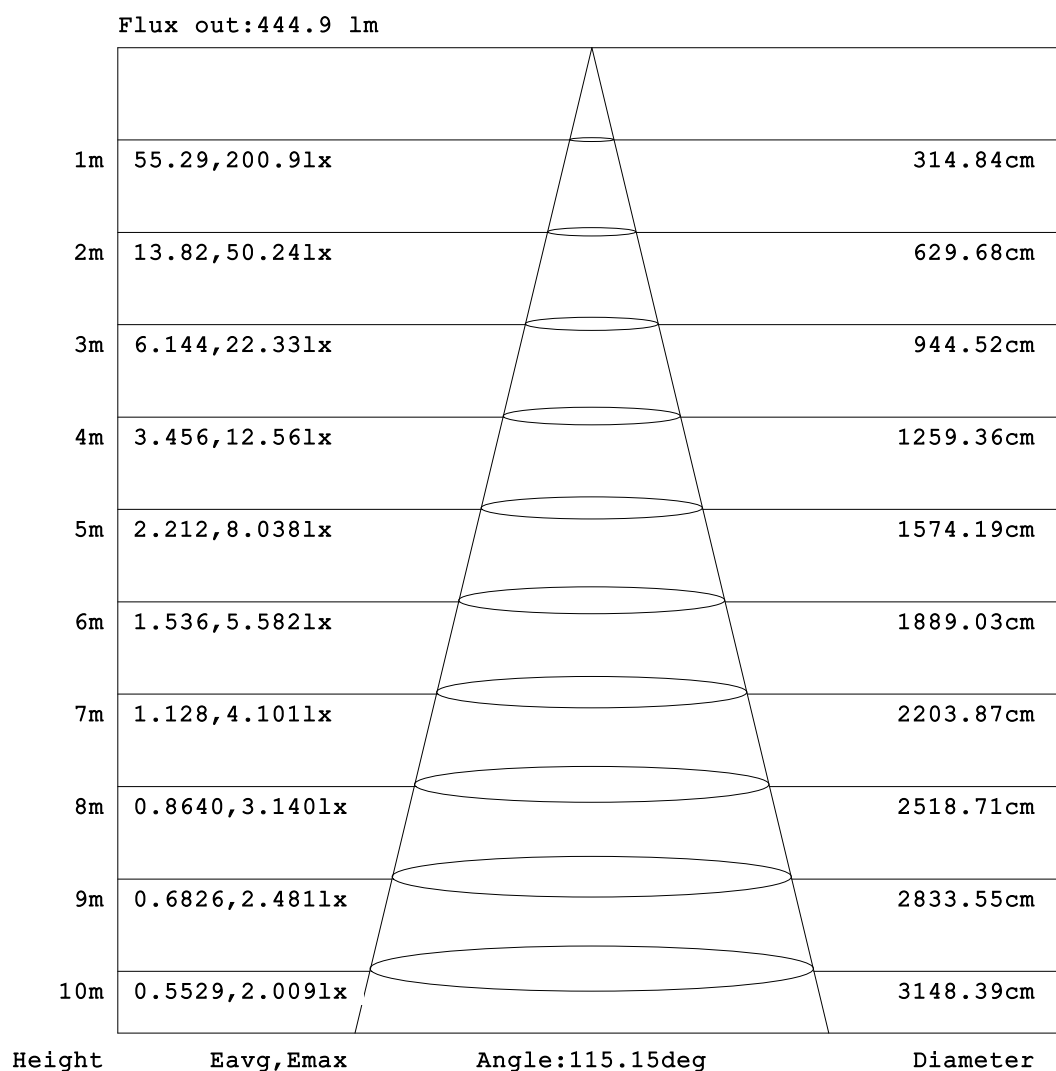


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-03-23

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity:65.0%
 Test Distance:5.749m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

NAME: 2835 IP20	TYPE: 2835 160LED 12V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

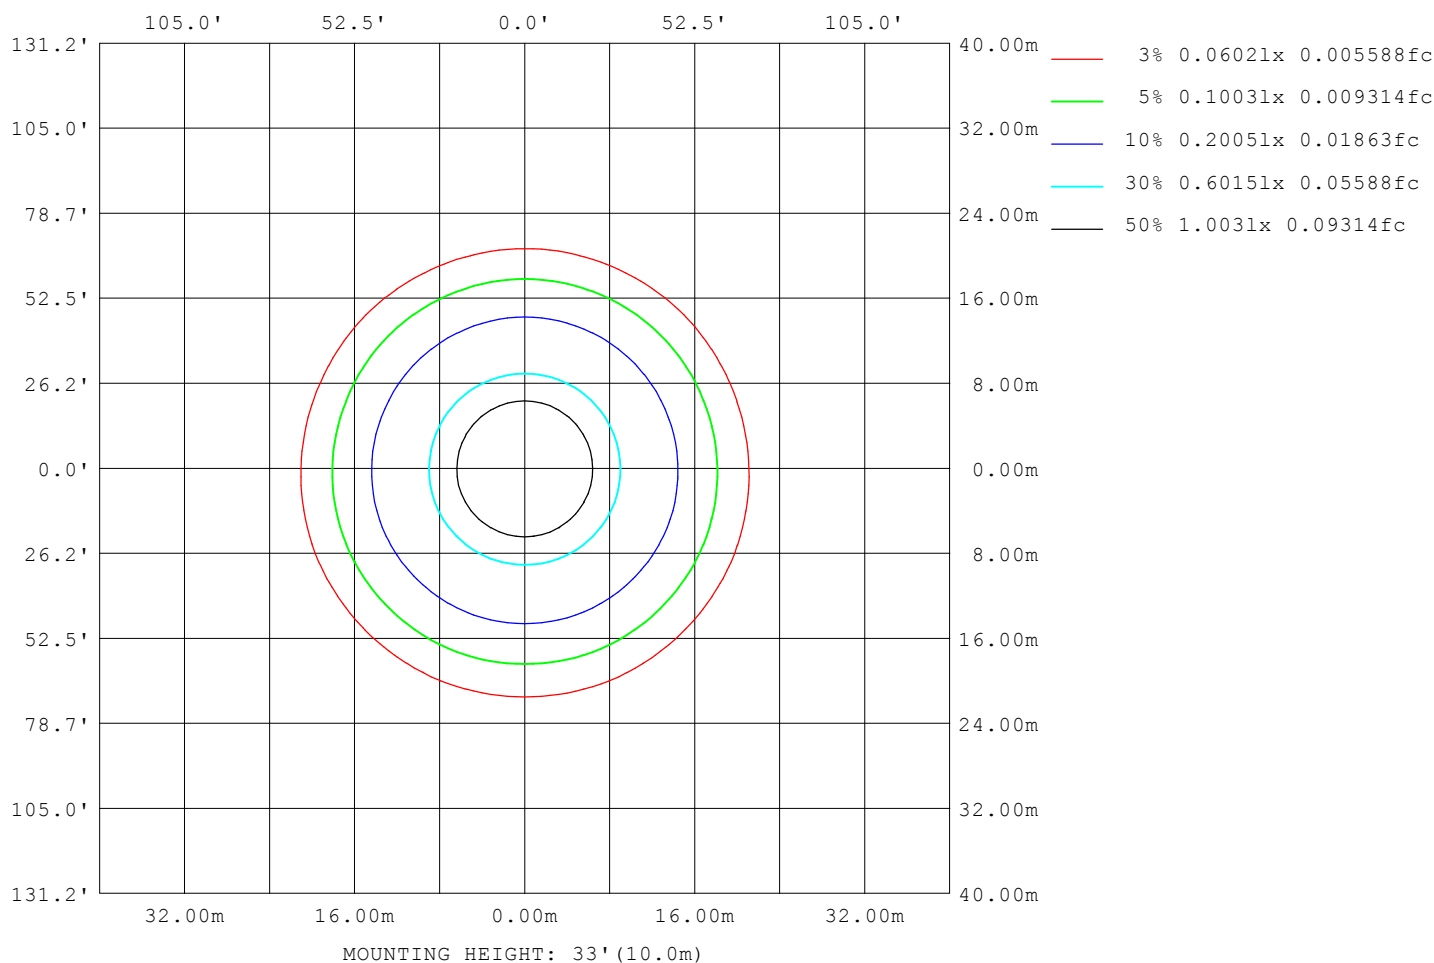

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-03-23

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

LED Avg.L Report

NAME: 2835 IP20	TYPE: 2835 160LED 12V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	17739
L_0~180 (75) av	14760
L_0~180 (85) av	8554
L_90~270 (65) av	17734
L_90~270 (75) av	14966
L_90~270 (85) av	9549
L_45 (65) av	17749
L_45 (75) av	14956
L_45 (85) av	9440

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-03-23

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

Planar Illuminance Curve

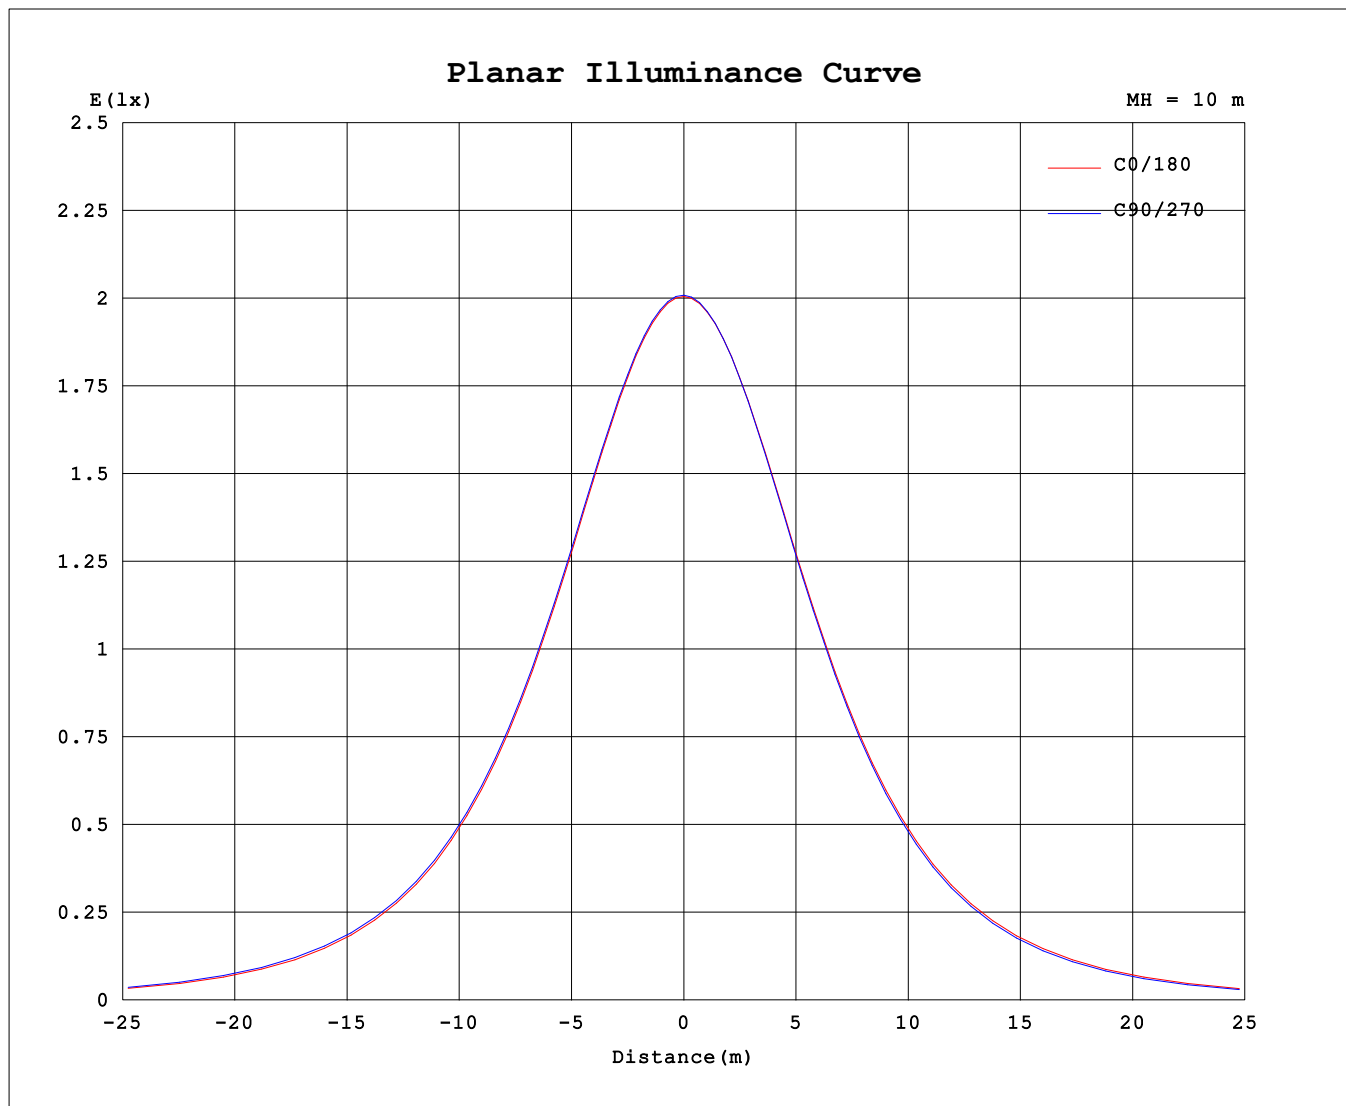

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-03-23

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: 2835 IP20	TYPE: 2835 160LED 12V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	201	201	201	201	201	201	201	201	201	201	201	201	201	201	201	201			
5	200	200	200	200	200	200	200	200	200	200	200	200	200	200	200	200			
10	198	198	198	198	198	198	198	198	198	197	197	197	197	197	197	197			
15	195	195	195	195	195	195	195	195	195	194	194	194	194	194	194	194			
20	188	189	189	189	189	189	189	189	188	188	187	187	187	187	188	188			
25	183	184	184	184	184	184	183	183	183	182	182	181	181	181	182	182			
30	173	174	174	174	174	174	174	173	172	172	171	171	171	171	172	172			
35	165	166	166	167	166	166	166	165	165	163	163	163	163	163	163	163			
40	152	153	153	154	153	153	153	152	151	150	149	148	149	149	150	150			
45	141	143	143	144	144	144	143	142	141	139	139	138	138	138	139	140			
50	125	127	127	128	128	128	127	126	124	122	122	120	121	121	122	123			
55	112	115	115	116	116	116	115	114	112	110	109	108	108	108	109	111			
60	92.8	95.3	96.3	97.5	97.1	97.1	95.7	94.5	92.1	89.7	88.7	87.4	87.6	87.8	89.2	90.5			
65	78.9	81.6	82.8	84.1	83.8	83.7	82.2	80.8	78.1	75.5	74.5	73.1	73.2	73.4	74.9	76.3			
70	57.2	60.1	61.7	63.1	62.9	62.6	61.2	59.3	56.2	53.6	52.2	50.8	50.9	51.2	52.6	54.3			
75	42.6	45.5	47.3	48.7	48.6	48.3	46.8	44.8	41.2	38.9	37.4	36.0	36.0	36.4	37.8	39.5			
80	21.8	24.6	26.2	27.7	27.6	27.3	25.8	23.7	20.1	18.3	17.2	15.9	15.9	16.1	17.5	19.0			
85	10.5	12.7	14.1	15.3	15.2	14.9	13.6	12.1	8.99	7.93	7.05	6.04	5.91	6.20	7.17	8.33			
90	0.20	1.77	2.46	2.95	2.85	2.78	2.28	1.57	0.19	0.58	0.59	0.52	0.47	0.48	0.55	0.62			
95	0.28	0.36	0.63	0.75	0.78	0.75	0.58	0.35	0.26	0.29	0.40	0.43	0.42	0.43	0.40	0.29			
100	0.48	0.45	0.45	0.50	0.56	0.51	0.46	0.47	0.42	0.44	0.46	0.49	0.53	0.49	0.46	0.44			
105	0.65	0.60	0.59	0.58	0.58	0.59	0.60	0.62	0.56	0.57	0.59	0.61	0.61	0.60	0.59	0.57			
110	0.90	0.83	0.82	0.81	0.81	0.82	0.83	0.85	0.79	0.78	0.79	0.81	0.82	0.80	0.79	0.77			
115	1.07	0.99	0.98	0.97	0.98	0.98	0.99	1.02	0.94	0.92	0.93	0.95	0.95	0.94	0.93	0.92			
120	1.32	1.23	1.21	1.21	1.20	1.21	1.23	1.25	1.18	1.15	1.14	1.15	1.16	1.15	1.14	1.14			
125	1.48	1.39	1.36	1.35	1.35	1.36	1.38	1.41	1.32	1.29	1.28	1.29	1.29	1.28	1.27	1.27			
130	1.69	1.60	1.56	1.55	1.56	1.58	1.59	1.63	1.52	1.49	1.48	1.46	1.46	1.46	1.46	1.49			
135	1.82	1.74	1.69	1.68	1.68	1.71	1.72	1.76	1.65	1.62	1.60	1.58	1.57	1.58	1.58	1.61			
140	1.98	1.92	1.87	1.85	1.85	1.89	1.91	1.94	1.82	1.79	1.76	1.75	1.72	1.73	1.74	1.78			
145	2.08	2.03	1.98	1.95	1.95	2.00	2.02	2.04	1.92	1.89	1.86	1.85	1.81	1.82	1.84	1.89			
150	2.21	2.17	2.14	2.10	2.10	2.16	2.16	2.17	2.05	2.03	2.00	1.99	1.94	1.96	1.99	2.03			
155	2.30	2.26	2.22	2.19	2.21	2.26	2.25	2.26	2.14	2.11	2.10	2.09	2.05	2.06	2.08	2.12			
160	2.41	2.39	2.35	2.33	2.38	2.38	2.36	2.38	2.27	2.25	2.23	2.23	2.21	2.19	2.23	2.26			
165	2.47	2.46	2.44	2.42	2.48	2.46	2.45	2.46	2.37	2.35	2.33	2.33	2.33	2.30	2.32	2.36			
170	2.59	2.58	2.57	2.56	2.61	2.58	2.57	2.59	2.52	2.50	2.49	2.50	2.50	2.47	2.49	2.52			
175	2.67	2.66	2.66	2.66	2.70	2.67	2.66	2.68	2.62	2.61	2.61	2.61	2.62	2.59	2.61	2.64			
180	2.77	2.77	2.77	2.77	2.80	2.78	2.78	2.79	2.77	2.77	2.76	2.77	2.80	2.78	2.78	2.79			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-23

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks: