


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: 2835 IP20	TYPE: 2835 160LED 12V	WEIGHT:
SPEC.: 202-10017-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 118.88 lm/W
MODEL	2700K	I _{max} (cd)	178.6	S/MH(C0/180)	1.27	
NOMINAL POWER(W)	4.8	LOR(%)	100.0	S/MH(C90/270)	1.26	
RATED VOLTAGE(V)	12	TOTAL FLUX(lm)	525.77	□ UP,DN(C0-180)	0.7,50.5	
NOMINAL FLUX(lm)	3.28608	CIE CLASS	DIRECT	□ UP,DN(C180-360)	0.6,48.2	
LAMPS INSIDE	160	□ up (%)	1.3	CIBSE SHR NOM	1.25	
TEST VOLTAGE(V)	12	□ down (%)	98.7	CIBSE SHR MAX	1.35	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

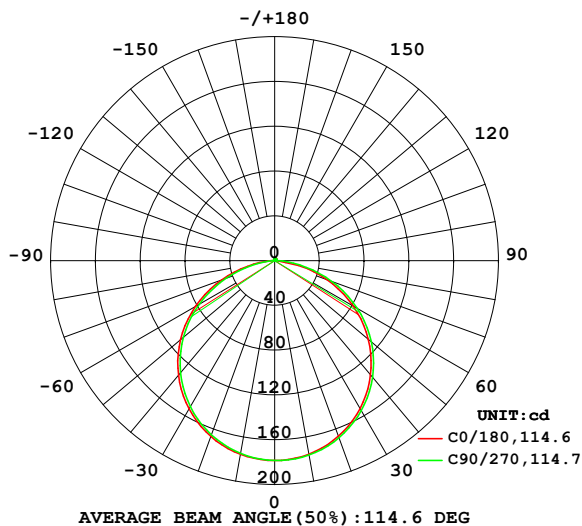

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

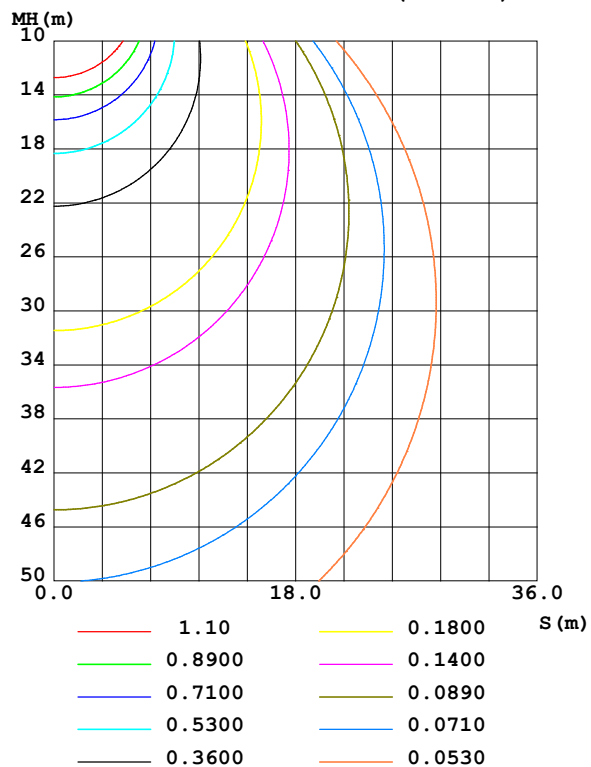

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-23

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	zone	total	%lum, lamp
10	175.6	176.1	176.3	176.2	175.7	175.2	174.9	175.0	0- 10	16.90	16.90	3.22,3.22
20	166.9	167.8	168.4	168.1	167.1	166.1	165.5	165.8	10- 20	48.56	65.46	12.5,12.5
30	152.6	154.0	154.8	154.4	152.9	151.5	150.6	151.1	20- 30	73.99	139.5	26.5,26.5
40	133.3	135.1	136.1	135.6	133.7	132.0	130.9	131.4	30- 40	89.92	229.4	43.6,43.6
50	109.2	111.4	112.7	112.0	109.8	107.7	106.4	106.9	40- 50	94.11	323.5	61.5,61.5
60	80.96	83.61	85.17	84.37	81.64	79.33	77.78	78.36	50- 60	85.66	409.1	77.8,77.8
70	49.70	52.61	54.38	53.52	50.37	47.92	46.28	46.77	60- 70	65.31	474.5	90.2,90.2
80	10.35	21.17	22.83	22.09	19.28	17.09	15.62	16.02	70- 80	36.11	510.6	97.1,97.1
90	0.1572	1.270	1.397	1.362	0.1479	0.6387	0.3070	0.5728	80- 90	8.324	518.9	98.7,98.7
100	0.4216	0.4020	0.3904	0.3934	0.3484	0.3765	0.4029	0.3845	90-100	0.4176	519.3	98.8,98.8
110	0.8007	0.7471	0.7310	0.7372	0.6822	0.6788	0.6984	0.6905	100-110	0.5796	519.9	98.9,98.9
120	1.173	1.088	1.069	1.081	1.023	0.9788	1.008	0.9917	110-120	0.8707	520.8	99,99
130	1.509	1.402	1.372	1.397	1.333	1.267	1.287	1.279	120-130	1.074	521.8	99.3,99.3
140	1.774	1.661	1.632	1.667	1.583	1.526	1.506	1.521	130-140	1.146	523.0	99.5,99.5
150	1.976	1.890	1.841	1.900	1.793	1.736	1.701	1.743	140-150	1.077	524.1	99.7,99.7
160	2.138	2.085	2.077	2.080	1.986	1.938	1.944	1.962	150-160	0.8880	525.0	99.8,99.8
170	2.305	2.276	2.294	2.260	2.206	2.172	2.192	2.197	160-170	0.5999	525.6	100,100
180	2.441	2.433	2.475	2.459	2.444	2.428	2.471	2.457	170-180	0.2209	525.8	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 286.14 lm

%lum = 54.4%

%lamp = 54.4%

Conical surface Flux(120deg): 409.15 lm

%lum = 77.8%


%lamp = 77.8%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-23

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

NAME: 2835 IP20	TYPE: 2835 160LED 12V	WEIGHT:
SPEC.: 202-10017-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

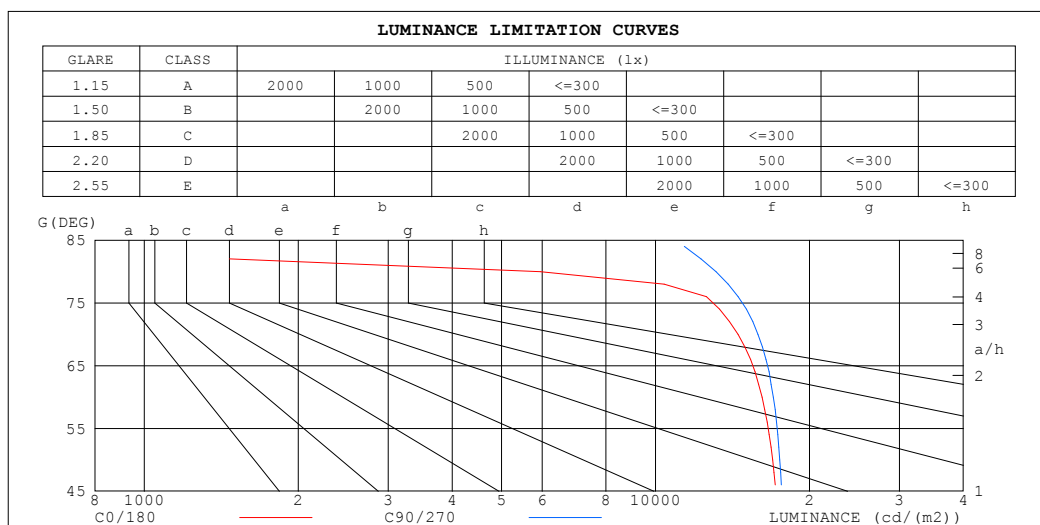

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	196	13647
80	5945	13122
75	14198	16027
70	14495	15872
65	16250	17298
60	16151	17002
55	17102	17775
50	16942	17498
45	17512	17962


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-03-23

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: 2835 IP20	TYPE: 2835 160LED 12V	WEIGHT:
SPEC.: 202-10017-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.99
1.0	1.04	.99	.96	1.01	.97	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.83	.78	.88	.82	.77	.84	.79	.75	.81	.77	.73	.78	.74	.71	.69
3.0	.79	.71	.64	.77	.70	.64	.74	.68	.62	.71	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.54	.69	.60	.54	.66	.59	.53	.63	.57	.52	.61	.56	.51	.49
5.0	.62	.53	.47	.61	.53	.46	.59	.51	.46	.57	.50	.45	.55	.49	.45	.42
6.0	.56	.47	.41	.55	.47	.40	.53	.46	.40	.51	.45	.40	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.48	.41	.35	.47	.40	.35	.45	.39	.35	.33
8.0	.46	.38	.32	.46	.37	.32	.44	.37	.31	.43	.36	.31	.42	.35	.31	.29
9.0	.43	.34	.29	.42	.34	.29	.41	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.25	.24

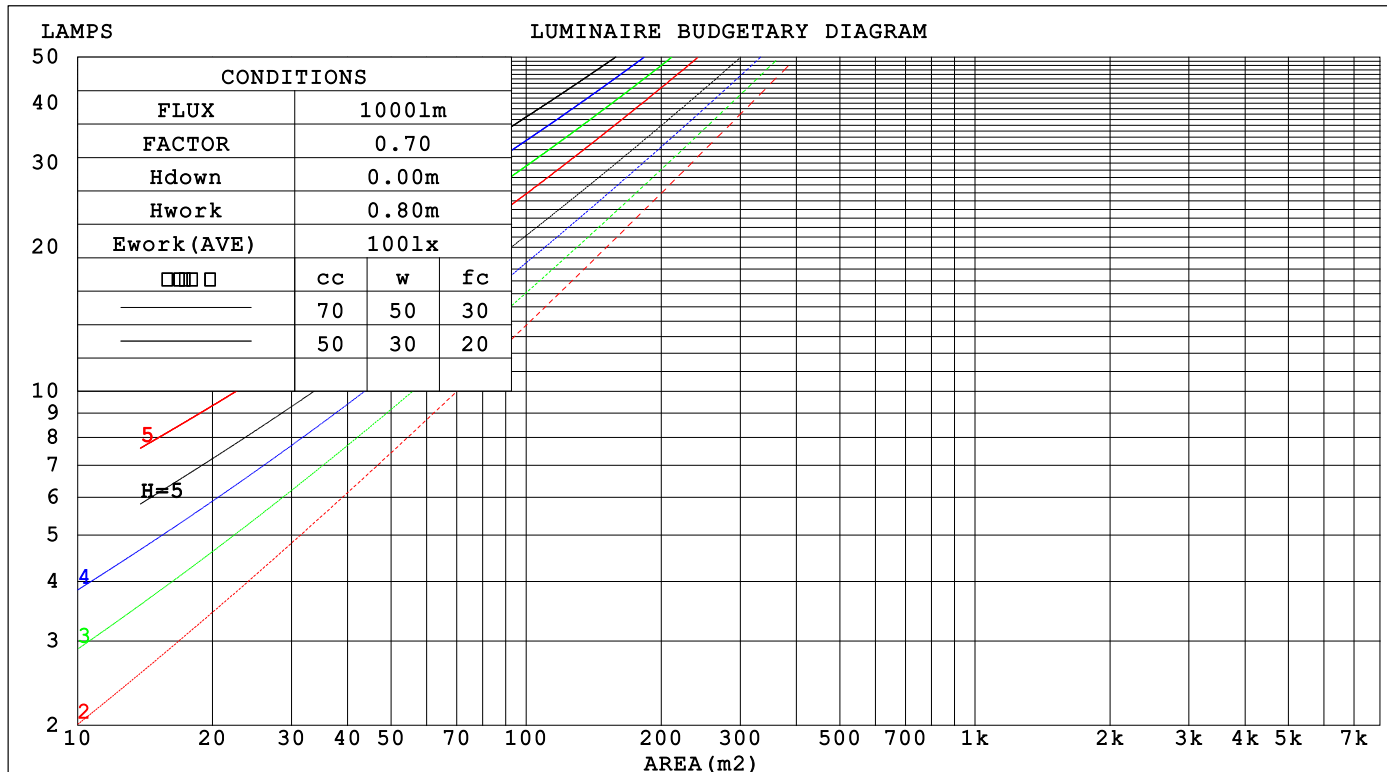

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-23

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: 2835 IP20	TYPE: 2835 160LED 12V	WEIGHT:
SPEC.: 202-10017-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio					Wall Exitance Coefficients(WEC)
0.0						
1.0	.307 .175 .055	.300 .171 .054	.286 .164 .052	.273 .157 .051	.261 .151 .049	
2.0	.291 .159 .049	.284 .156 .048	.272 .151 .047	.260 .146 .046	.250 .141 .045	
3.0	.270 .143 .043	.264 .141 .043	.253 .137 .042	.243 .133 .041	.233 .129 .040	
4.0	.249 .129 .038	.244 .128 .038	.234 .124 .037	.225 .121 .036	.217 .118 .036	
5.0	.230 .117 .034	.226 .116 .034	.217 .113 .033	.209 .110 .033	.201 .108 .032	
6.0	.214 .107 .031	.210 .106 .030	.202 .103 .030	.194 .101 .030	.188 .099 .029	
7.0	.199 .098 .028	.195 .097 .028	.188 .095 .027	.182 .093 .027	.176 .091 .027	
8.0	.186 .091 .026	.182 .090 .025	.176 .088 .025	.170 .086 .025	.165 .085 .025	
9.0	.174 .084 .024	.171 .083 .023	.165 .082 .023	.160 .080 .023	.155 .079 .023	
10.0	.164 .078 .022	.161 .078 .022	.156 .076 .022	.151 .075 .021	.146 .074 .021	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio					Ceiling Cavity Exitance Coefficients(CCEC)
0.0	.200 .200 .200	.171 .171 .171	.117 .117 .117	.067 .067 .067	.021 .021 .021	
1.0	.190 .166 .145	.163 .143 .124	.111 .098 .086	.064 .057 .050	.021 .018 .016	
2.0	.182 .142 .108	.156 .122 .094	.107 .085 .065	.062 .049 .038	.020 .016 .012	
3.0	.175 .124 .085	.150 .107 .073	.103 .075 .051	.059 .044 .030	.019 .014 .010	
4.0	.167 .111 .069	.143 .096 .060	.099 .067 .042	.057 .039 .025	.018 .013 .008	
5.0	.160 .101 .057	.137 .087 .050	.094 .061 .035	.055 .036 .021	.018 .012 .007	
6.0	.153 .092 .049	.131 .080 .043	.090 .056 .030	.052 .033 .018	.017 .011 .006	
7.0	.146 .086 .043	.125 .074 .038	.087 .052 .027	.050 .031 .016	.016 .010 .005	
8.0	.139 .080 .039	.120 .069 .034	.083 .049 .024	.048 .029 .014	.016 .009 .005	
9.0	.133 .075 .036	.115 .065 .031	.080 .046 .022	.046 .027 .013	.015 .009 .004	
10.0	.128 .071 .033	.110 .061 .029	.076 .043 .020	.044 .026 .012	.014 .008 .004	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-23

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME: 2835 IP20					TYPE: 2835 160LED 12V			WEIGHT:			
SPEC.: 202-10017-00					DIM.:			SERIAL No.:			
MFR.:					SUR.: 0.01*0.5			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	2H	24.9	26.4	25.2	26.7	26.9	25.1	26.6	25.4	26.9	27.1
	3H	26.4	27.8	26.8	28.1	28.3	26.7	28.1	27.0	28.4	28.6
	4H	27.0	28.3	27.3	28.6	28.9	27.4	28.7	27.7	29.0	29.2
	6H	27.2	28.5	27.6	28.8	29.1	27.8	29.0	28.2	29.3	29.6
	8H	27.2	28.4	27.6	28.7	29.0	27.9	29.1	28.3	29.4	29.8
	12H	27.1	28.3	27.5	28.6	29.0	28.0	29.2	28.4	29.5	29.8
4H	2H	25.6	26.9	25.9	27.2	27.5	25.7	27.1	26.1	27.3	27.6
	3H	27.3	28.4	27.6	28.7	29.1	27.5	28.7	27.9	29.0	29.3
	4H	28.0	29.0	28.4	29.4	29.7	28.3	29.3	28.7	29.7	30.0
	6H	28.3	29.2	28.7	29.6	30.0	28.8	29.8	29.3	30.1	30.5
	8H	28.3	29.2	28.7	29.6	30.0	29.0	29.9	29.4	30.3	30.7
	12H	28.3	29.1	28.7	29.5	29.9	29.1	29.9	29.6	30.3	30.8
8H	4H	28.2	29.1	28.7	29.5	29.9	28.5	29.4	28.9	29.8	30.2
	6H	28.7	29.5	29.2	29.9	30.3	29.2	29.9	29.7	30.4	30.8
	8H	28.8	29.4	29.3	29.9	30.4	29.5	30.1	30.0	30.6	31.0
	12H	28.8	29.4	29.3	29.8	30.4	29.7	30.2	30.2	30.7	31.2
12H	4H	28.2	29.0	28.7	29.5	29.9	28.5	29.3	29.0	29.7	30.2
	6H	28.8	29.4	29.3	29.9	30.4	29.3	29.9	29.7	30.3	30.8
	8H	28.9	29.5	29.4	29.9	30.4	29.6	30.1	30.0	30.6	31.1
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H		+ 0.1 / - 0.2					+ 0.1 / - 0.2				
1.5H		+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H		+ 0.2 / - 0.4					+ 0.2 / - 0.3				

CIE Pub.117, 525.8 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -2.2)
Area: 0.01 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-23

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:


```

Range: 0 - 180DEG
Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

```

ISOCANDELA DIAGRAM

NAME: 2835 IP20	TYPE: 2835 160LED 12V	WEIGHT:
SPEC.: 202-10017-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

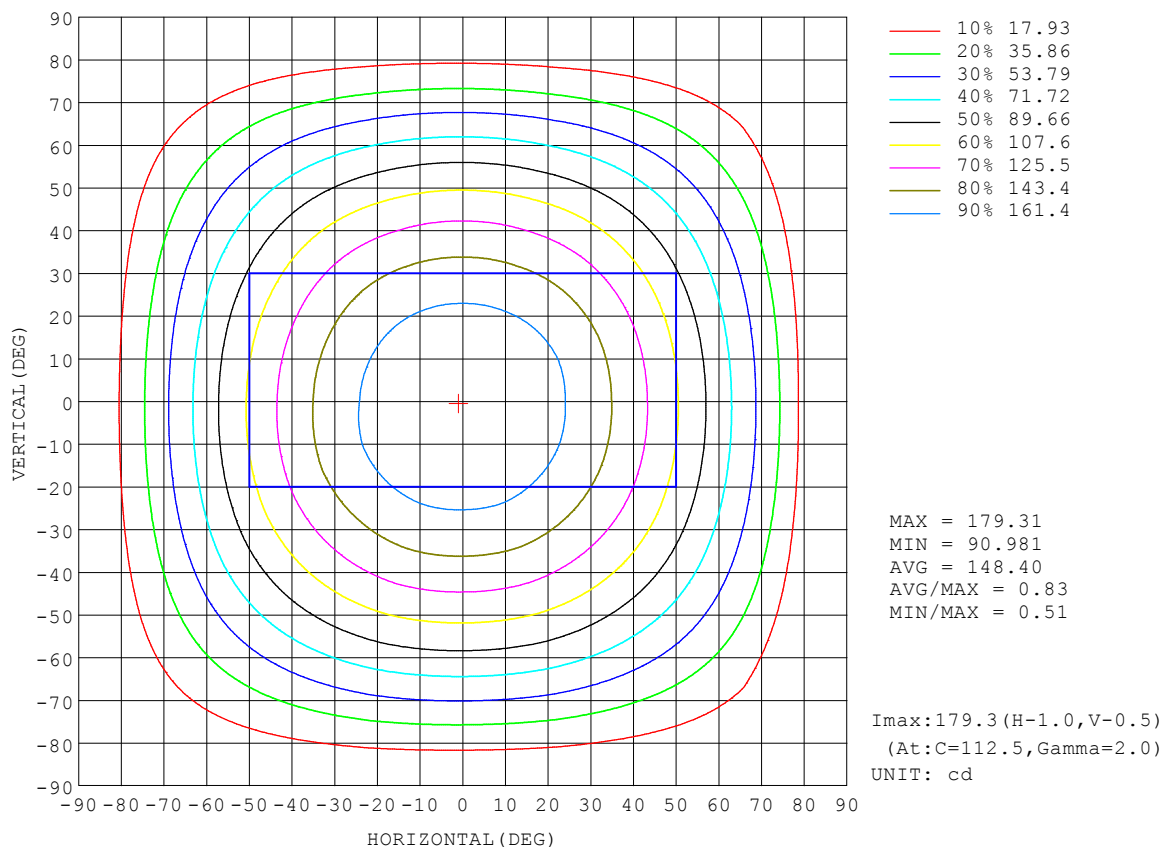


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-03-23

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

AAI Figure

NAME: 2835 IP20	TYPE: 2835 160LED 12V	WEIGHT:
SPEC.: 202-10017-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

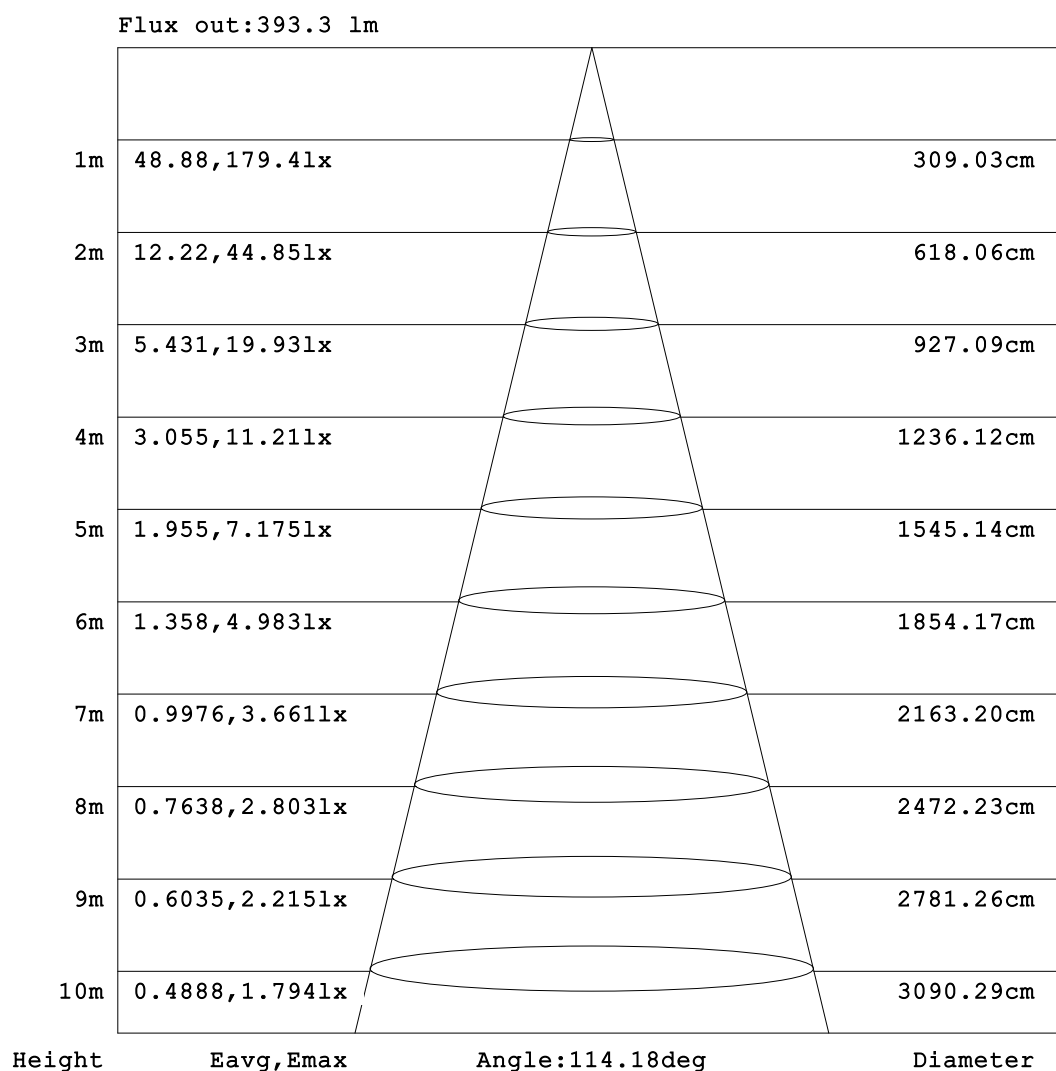


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-03-23

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

NAME: 2835 IP20	TYPE: 2835 160LED 12V	WEIGHT:
SPEC.: 202-10017-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

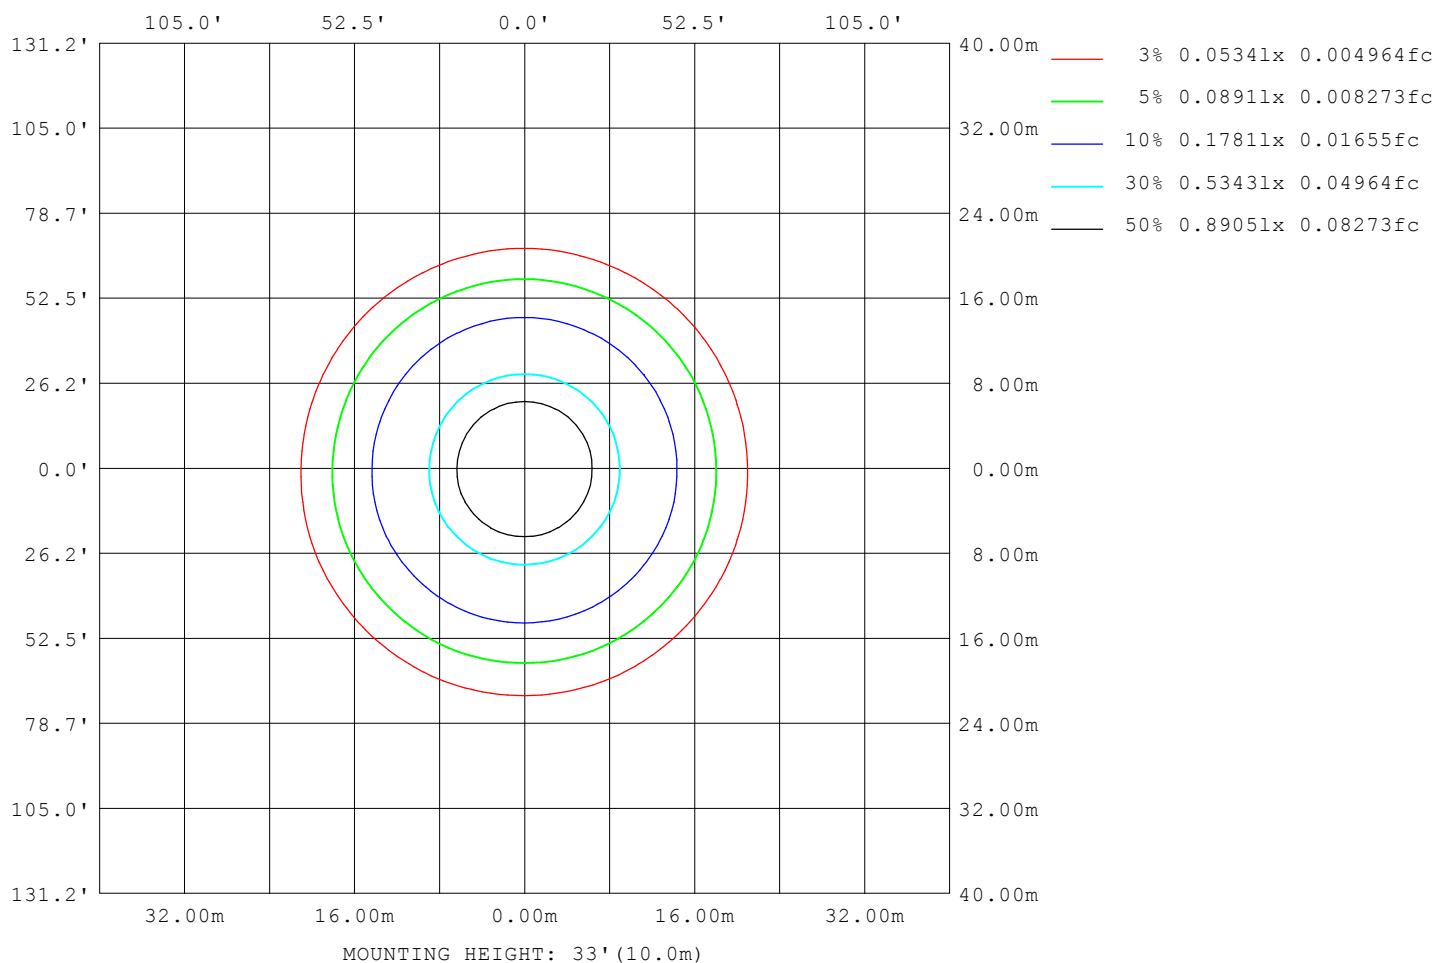

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-03-23

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

LED Avg.L Report

NAME: 2835 IP20	TYPE: 2835 160LED 12V	WEIGHT:
SPEC.: 202-10017-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	15621
L_0~180 (75) av	13180
L_0~180 (85) av	3574
L_90~270 (65) av	15672
L_90~270 (75) av	13274
L_90~270 (85) av	8102
L_45 (65) av	15652
L_45 (75) av	13211
L_45 (85) av	8036

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-03-23

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

Planar Illuminance Curve

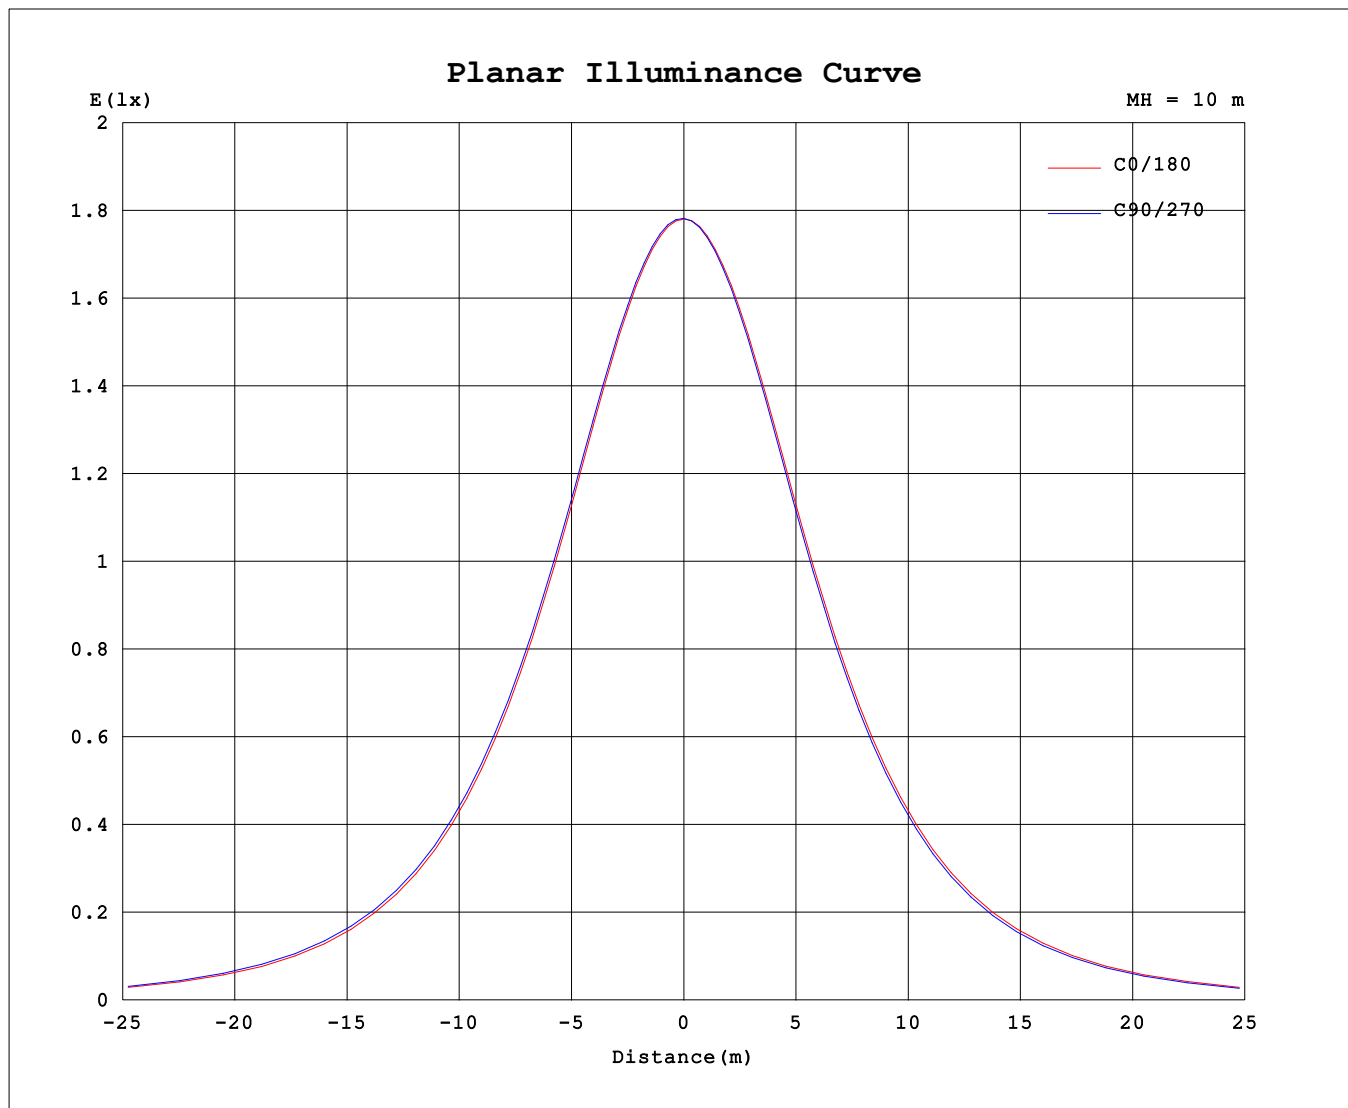

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-03-23

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: 2835 IP20	TYPE: 2835 160LED 12V	WEIGHT:
SPEC.: 202-10017-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	179	179	179	179	179	179	179	179	179	179	179	179	179	179	179	179			
5	178	178	178	178	178	178	178	178	178	178	178	178	178	178	178	178			
10	176	176	176	176	176	176	176	176	176	175	175	175	175	175	175	175			
15	173	173	173	174	174	174	174	173	173	173	172	172	172	172	172	172			
20	167	168	168	168	168	168	168	168	167	166	166	166	166	165	166	166			
25	162	163	163	163	164	164	163	163	162	161	161	160	160	160	161	161			
30	153	154	154	155	155	155	154	154	153	152	152	151	151	150	151	152			
35	146	147	147	148	148	148	147	147	146	145	144	143	143	143	144	144			
40	133	135	135	136	136	136	136	135	134	133	132	131	131	131	131	132			
45	124	126	126	127	127	128	127	126	125	123	123	122	122	121	122	123			
50	109	111	111	113	113	113	112	111	110	108	108	106	106	106	107	108			
55	98.3	100	101	102	102	103	101	101	99.0	97.5	96.8	95.5	95.4	94.9	96.0	96.8			
60	81.0	82.7	83.6	85.0	85.2	85.5	84.4	83.4	81.6	80.0	79.3	78.0	77.8	77.3	78.4	79.2			
65	68.9	70.6	71.6	73.0	73.2	73.5	72.4	71.3	69.5	67.9	67.1	65.8	65.5	65.1	66.0	67.0			
70	49.7	51.5	52.6	54.1	54.4	54.7	53.5	52.3	50.4	48.8	47.9	46.6	46.3	45.9	46.8	47.7			
75	36.8	38.6	39.7	41.2	41.6	41.8	40.7	39.5	37.6	35.9	35.1	33.8	33.5	33.0	33.9	34.8			
80	10.4	20.2	21.2	22.5	22.8	23.1	22.1	20.9	19.3	17.9	17.1	15.9	15.6	15.2	16.0	16.8			
85	0.17	9.87	10.6	11.6	11.9	12.1	11.3	10.6	8.86	8.12	7.46	6.55	6.28	6.06	6.68	7.39			
90	0.16	1.11	1.27	1.46	1.40	1.50	1.36	1.19	0.15	0.72	0.64	0.42	0.31	0.39	0.57	0.72			
95	0.24	0.24	0.36	0.30	0.29	0.30	0.30	0.29	0.21	0.27	0.30	0.28	0.27	0.29	0.33	0.26			
100	0.42	0.41	0.40	0.39	0.39	0.39	0.39	0.40	0.35	0.36	0.38	0.39	0.40	0.40	0.38	0.37			
105	0.57	0.54	0.54	0.52	0.52	0.52	0.53	0.54	0.47	0.47	0.49	0.51	0.51	0.51	0.50	0.49			
110	0.80	0.76	0.75	0.74	0.73	0.73	0.74	0.75	0.68	0.65	0.68	0.69	0.70	0.70	0.69	0.67			
115	0.95	0.89	0.88	0.87	0.86	0.86	0.87	0.88	0.82	0.79	0.79	0.81	0.82	0.82	0.81	0.80			
120	1.17	1.10	1.09	1.07	1.07	1.07	1.08	1.10	1.02	0.98	0.98	0.99	1.01	1.00	0.99	0.98			
125	1.31	1.24	1.22	1.20	1.20	1.20	1.22	1.23	1.15	1.11	1.10	1.11	1.12	1.12	1.11	1.11			
130	1.51	1.43	1.40	1.38	1.37	1.39	1.40	1.43	1.33	1.29	1.27	1.28	1.29	1.29	1.28	1.29			
135	1.63	1.55	1.51	1.49	1.48	1.50	1.51	1.54	1.44	1.40	1.38	1.38	1.38	1.38	1.38	1.41			
140	1.77	1.71	1.66	1.64	1.63	1.66	1.67	1.70	1.58	1.55	1.53	1.52	1.51	1.51	1.52	1.56			
145	1.86	1.81	1.76	1.73	1.72	1.76	1.77	1.80	1.67	1.63	1.62	1.61	1.58	1.60	1.61	1.65			
150	1.98	1.93	1.89	1.85	1.84	1.89	1.90	1.92	1.79	1.76	1.74	1.73	1.70	1.72	1.74	1.79			
155	2.05	2.01	1.97	1.93	1.94	1.98	1.98	2.00	1.87	1.83	1.82	1.82	1.79	1.80	1.83	1.87			
160	2.14	2.12	2.09	2.05	2.08	2.09	2.08	2.10	1.99	1.96	1.94	1.94	1.94	1.92	1.96	2.00			
165	2.20	2.18	2.16	2.13	2.17	2.16	2.15	2.16	2.07	2.04	2.02	2.02	2.04	2.01	2.05	2.10			
170	2.31	2.29	2.28	2.26	2.29	2.27	2.26	2.28	2.21	2.18	2.17	2.17	2.19	2.17	2.20	2.24			
175	2.37	2.36	2.35	2.34	2.38	2.36	2.35	2.36	2.30	2.29	2.28	2.28	2.30	2.29	2.31	2.34			
180	2.44	2.43	2.43	2.44	2.48	2.45	2.46	2.47	2.44	2.43	2.43	2.43	2.47	2.45	2.46	2.47			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-23

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks: