


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME:	TYPE: 2835 140LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.014*0.5	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 102.02 lm/W
MODEL	6500K RA90 9.6W	Imax (cd)	127.5	S/MH(C0/180)	1.29	
NOMINAL POWER(W)	4.8	LOR(%)	100.0	S/MH(C90/270)	1.26	
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	472.28	<input type="checkbox"/> UP,DN(C0-180)	7.0,48.3	
NOMINAL FLUX(lm)	6.74681	CIE CLASS	DIRECT	<input type="checkbox"/> UP,DN(C180-360)	2.6,42.1	
LAMPS INSIDE	70	<input type="checkbox"/> up (%)	9.6	CIBSE SHR NOM	1.50	
TEST VOLTAGE(V)	24	<input type="checkbox"/> down (%)	90.4	CIBSE SHR MAX	1.50	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

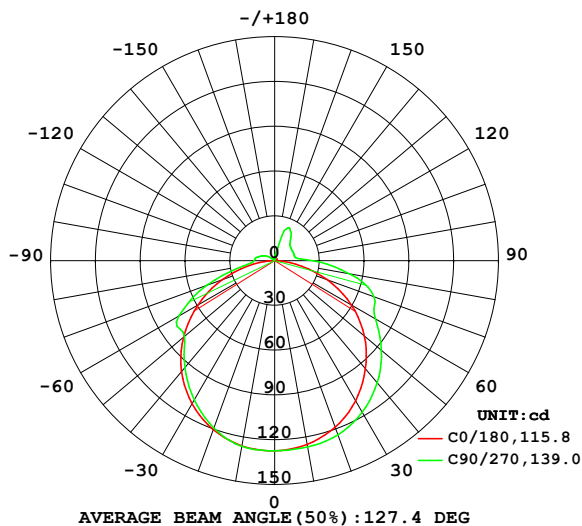

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

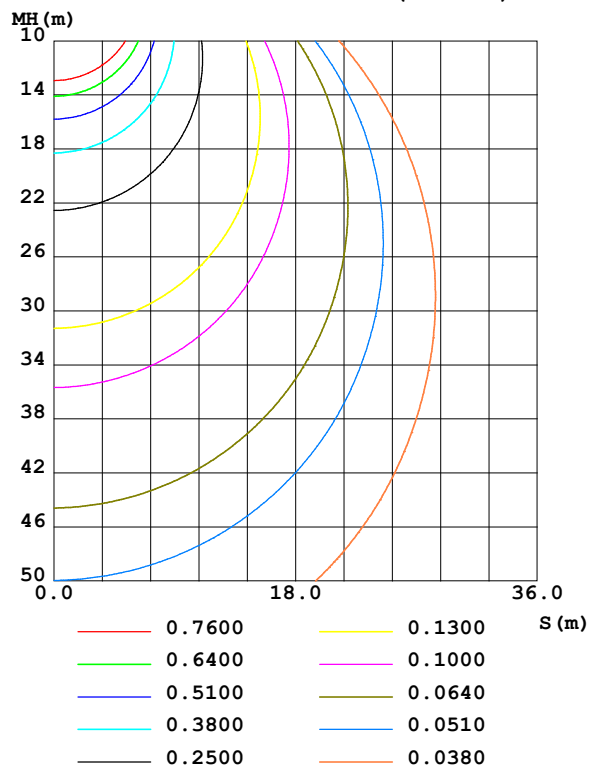

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-12-09

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	125.0	125.7	126.8	126.5	126.0	126.6	126.4	125.7	0- 10	12.10	12.10	2.56,2.56
20	118.7	121.7	124.2	123.2	120.4	121.0	119.3	119.3	10- 20	35.04	47.14	9.98,9.98
30	108.4	114.2	117.3	116.2	110.7	110.1	107.8	108.0	20- 30	53.85	101.0	21.4,21.4
40	94.66	102.7	106.9	105.2	97.06	95.65	93.57	93.35	30- 40	66.08	167.1	35.4,35.4
50	78.45	88.17	93.42	90.83	79.51	78.46	78.89	76.33	40- 50	70.39	237.5	50.3,50.3
60	59.37	71.25	78.06	73.42	59.33	64.25	74.01	64.13	50- 60	67.82	305.3	64.6,64.6
70	37.48	57.57	70.81	58.72	37.26	45.68	48.22	45.97	60- 70	58.93	364.2	77.1,77.1
80	14.46	39.21	50.85	39.66	14.80	20.94	21.69	21.25	70- 80	41.89	406.1	86,86
90	0.2467	17.24	25.30	17.21	0.2736	11.19	13.87	11.97	80- 90	21.07	427.2	90.4,90.4
100	0.3996	11.52	14.01	11.12	0.3477	9.036	12.61	9.426	90-100	11.07	438.2	92.8,92.8
110	0.6614	11.33	13.75	11.09	0.5763	4.875	9.469	5.450	100-110	8.341	446.6	94.6,94.6
120	0.9208	11.25	13.66	10.96	0.8071	0.9562	6.388	1.043	110-120	6.611	453.2	96,96
130	1.154	12.00	14.12	11.56	1.014	1.056	1.143	1.112	120-130	5.140	458.3	97,97
140	1.340	14.94	16.46	12.44	1.186	1.204	1.213	1.281	130-140	4.550	462.9	98,98
150	1.480	17.43	22.13	12.52	1.340	1.335	1.315	1.459	140-150	4.341	467.2	98.9,98.9
160	1.585	15.19	22.46	9.722	1.471	1.463	1.462	1.661	150-160	3.354	470.6	99.6,99.6
170	1.702	6.522	5.630	3.970	1.640	1.623	1.629	1.830	160-170	1.460	472.0	99.9,99.9
180	1.809	1.801	1.804	1.823	1.809	1.803	1.807	1.823	170-180	0.2379	472.3	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 209.32 lm

%lum = 44.3%

%lamp = 44.3%

Conical surface Flux(120deg): 305.28 lm

%lum = 64.6%


%lamp = 64.6%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-12-09

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

NAME:	TYPE: 2835 140LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.014*0.5	Shielding Angle:

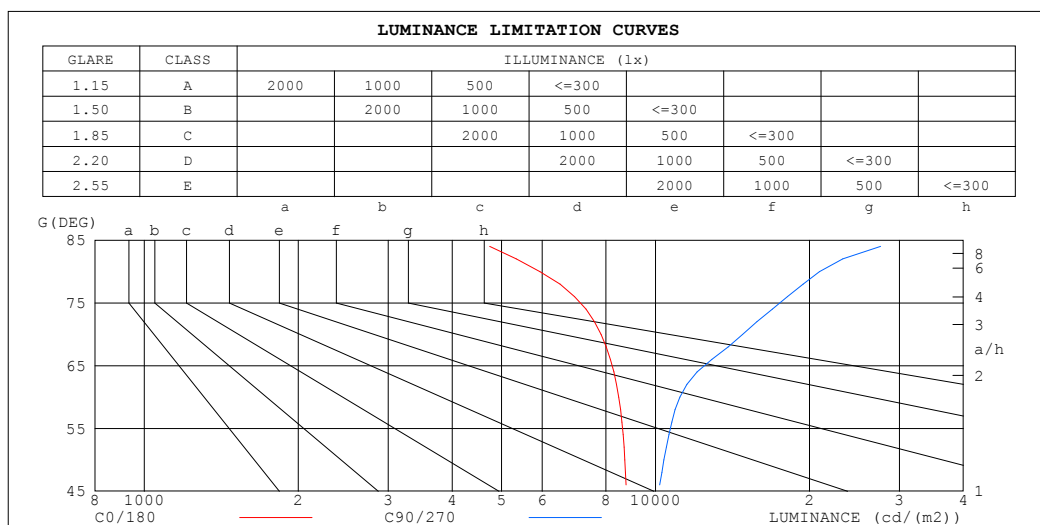

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	5679	33035
80	5944	20921
75	7784	18011
70	7820	14792
65	8596	12515
60	8474	11155
55	8857	10879
50	8709	10384
45	8930	10287


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2021-12-09

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME:	TYPE: 2835 140LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.014*0.5	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.17	1.17	1.17	1.13	1.13	1.13	1.06	1.06	1.06	.99	.99	.99	.93	.93	.93	.90
1.0	.99	.95	.90	.96	.92	.88	.90	.87	.83	.85	.82	.79	.79	.77	.75	.72
2.0	.86	.78	.72	.83	.76	.70	.78	.72	.67	.73	.68	.64	.69	.65	.61	.59
3.0	.75	.66	.59	.72	.64	.58	.68	.61	.55	.64	.58	.53	.60	.55	.51	.48
4.0	.66	.56	.49	.64	.55	.48	.60	.53	.47	.56	.50	.45	.53	.48	.43	.41
5.0	.58	.49	.42	.57	.48	.41	.53	.46	.40	.50	.44	.39	.48	.42	.37	.35
6.0	.52	.43	.36	.51	.42	.36	.48	.40	.35	.45	.39	.34	.43	.37	.33	.30
7.0	.47	.38	.32	.46	.38	.32	.44	.36	.31	.41	.35	.30	.39	.33	.29	.27
8.0	.43	.34	.28	.42	.34	.28	.40	.32	.27	.38	.31	.26	.36	.30	.26	.24
9.0	.39	.31	.25	.38	.30	.25	.37	.29	.24	.35	.28	.24	.33	.27	.23	.21
10.0	.36	.28	.23	.35	.28	.23	.34	.27	.22	.32	.26	.22	.31	.25	.21	.19

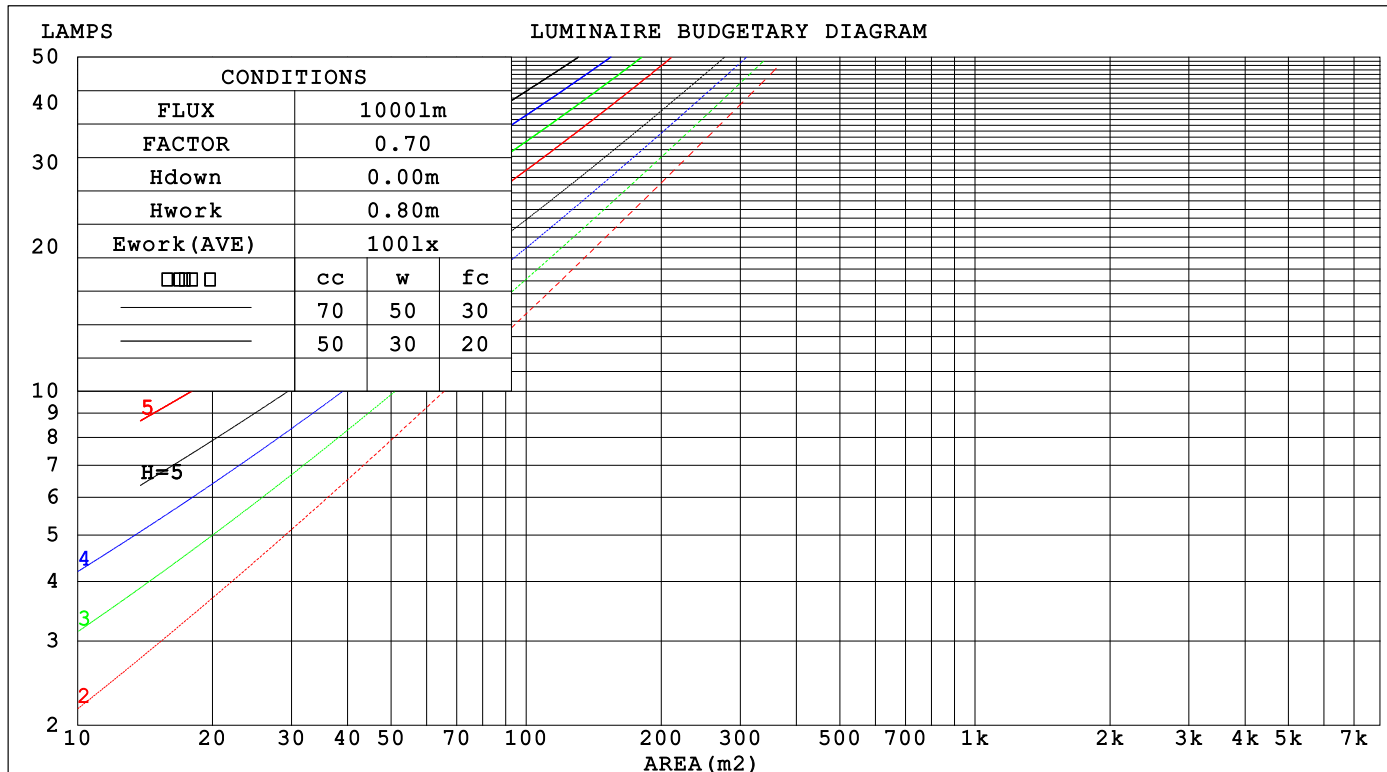

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-12-09

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

WEC AND CCEC

NAME:	TYPE: 2835 140LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.014*0.5	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)					
0.0						
1.0	.350 .199 .063	.340 .194 .062	.321 .184 .059	.304 .175 .056	.288 .167 .054	
2.0	.316 .173 .053	.307 .169 .052	.290 .161 .050	.274 .154 .048	.260 .147 .046	
3.0	.286 .152 .046	.278 .149 .045	.263 .142 .043	.249 .136 .042	.236 .130 .040	
4.0	.260 .135 .040	.253 .132 .039	.239 .127 .038	.227 .122 .037	.215 .117 .036	
5.0	.238 .121 .035	.232 .119 .035	.219 .114 .034	.208 .110 .033	.197 .105 .032	
6.0	.219 .110 .031	.214 .108 .031	.202 .104 .030	.192 .100 .029	.182 .096 .028	
7.0	.203 .100 .028	.198 .099 .028	.188 .095 .027	.178 .091 .027	.169 .088 .026	
8.0	.189 .092 .026	.184 .091 .026	.175 .087 .025	.166 .084 .024	.158 .081 .024	
9.0	.176 .085 .024	.172 .084 .024	.164 .081 .023	.156 .078 .022	.148 .075 .022	
10.0	.165 .079 .022	.161 .078 .022	.154 .075 .021	.146 .073 .021	.139 .070 .020	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)					
0.0	.263 .263 .263	.225 .225 .225	.154 .154 .154	.088 .088 .088	.028 .028 .028	
1.0	.256 .229 .205	.219 .197 .176	.150 .135 .122	.086 .078 .071	.028 .025 .023	
2.0	.249 .206 .169	.214 .177 .146	.146 .122 .102	.084 .071 .060	.027 .023 .019	
3.0	.242 .189 .146	.207 .163 .127	.142 .113 .089	.082 .066 .052	.026 .021 .017	
4.0	.234 .176 .131	.201 .152 .114	.138 .106 .080	.080 .062 .047	.026 .020 .016	
5.0	.227 .166 .121	.195 .143 .105	.134 .100 .074	.078 .059 .044	.025 .019 .015	
6.0	.219 .158 .113	.188 .137 .099	.130 .096 .070	.075 .056 .042	.024 .018 .014	
7.0	.212 .151 .108	.183 .131 .094	.126 .092 .067	.073 .054 .040	.024 .018 .013	
8.0	.206 .145 .104	.177 .126 .090	.123 .088 .064	.071 .052 .038	.023 .017 .013	
9.0	.199 .140 .100	.172 .122 .088	.119 .086 .062	.069 .051 .037	.022 .017 .012	
10.0	.194 .136 .098	.167 .118 .085	.116 .083 .061	.068 .049 .036	.022 .016 .012	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-12-09

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME:	TYPE: 2835 140LED 24V					WEIGHT:				
SPEC.:	DIM.:					SERIAL No.:				
MFR.:	SUR.: 0.014*0.5					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.5	24.0	22.9	24.3	24.7	23.5	25.0	23.9	25.4	25.8
3H	24.2	25.5	24.6	25.9	26.3	26.2	27.5	26.6	27.9	28.4
4H	24.8	26.1	25.3	26.5	27.0	27.6	28.9	28.1	29.3	29.8
6H	25.3	26.5	25.7	26.9	27.4	29.0	30.2	29.4	30.6	31.1
8H	25.4	26.5	25.8	27.0	27.5	29.6	30.8	30.1	31.2	31.7
12H	25.4	26.5	25.9	27.0	27.5	30.2	31.4	30.7	31.8	32.3
4H 2H	23.4	24.7	23.9	25.1	25.6	24.2	25.5	24.7	25.9	26.4
3H	25.4	26.5	25.8	26.9	27.4	27.1	28.2	27.6	28.7	29.2
4H	26.2	27.2	26.7	27.7	28.3	28.7	29.7	29.2	30.2	30.8
6H	26.8	27.7	27.4	28.3	28.8	30.2	31.1	30.8	31.7	32.2
8H	27.0	27.9	27.6	28.4	29.0	31.0	31.8	31.5	32.3	32.9
12H	27.1	27.9	27.7	28.5	29.1	31.7	32.5	32.3	33.0	33.7
8H 4H	27.0	27.9	27.6	28.4	29.0	29.1	29.9	29.6	30.5	31.0
6H	28.0	28.7	28.5	29.2	29.9	30.8	31.6	31.4	32.1	32.8
8H	28.3	28.9	28.9	29.5	30.2	31.7	32.4	32.3	33.0	33.6
12H	28.5	29.1	29.2	29.7	30.4	32.7	33.3	33.3	33.9	34.6
12H 4H	27.2	28.0	27.8	28.6	29.2	29.1	29.9	29.7	30.4	31.0
6H	28.3	29.0	28.9	29.5	30.2	30.9	31.6	31.5	32.2	32.8
8H	28.8	29.3	29.4	29.9	30.6	31.9	32.5	32.5	33.1	33.8
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.1				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.2				
2.0H	+ 0.2 / - 0.4					+ 0.1 / - 0.3				

CIE Pub.117, 472.3 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -2.6)
Area: 0.014 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-12-09

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:


```

Range: 0 - 180DEG
Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

```

ISOCANDELA DIAGRAM

NAME:	TYPE: 2835 140LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.014*0.5	Shielding Angle:

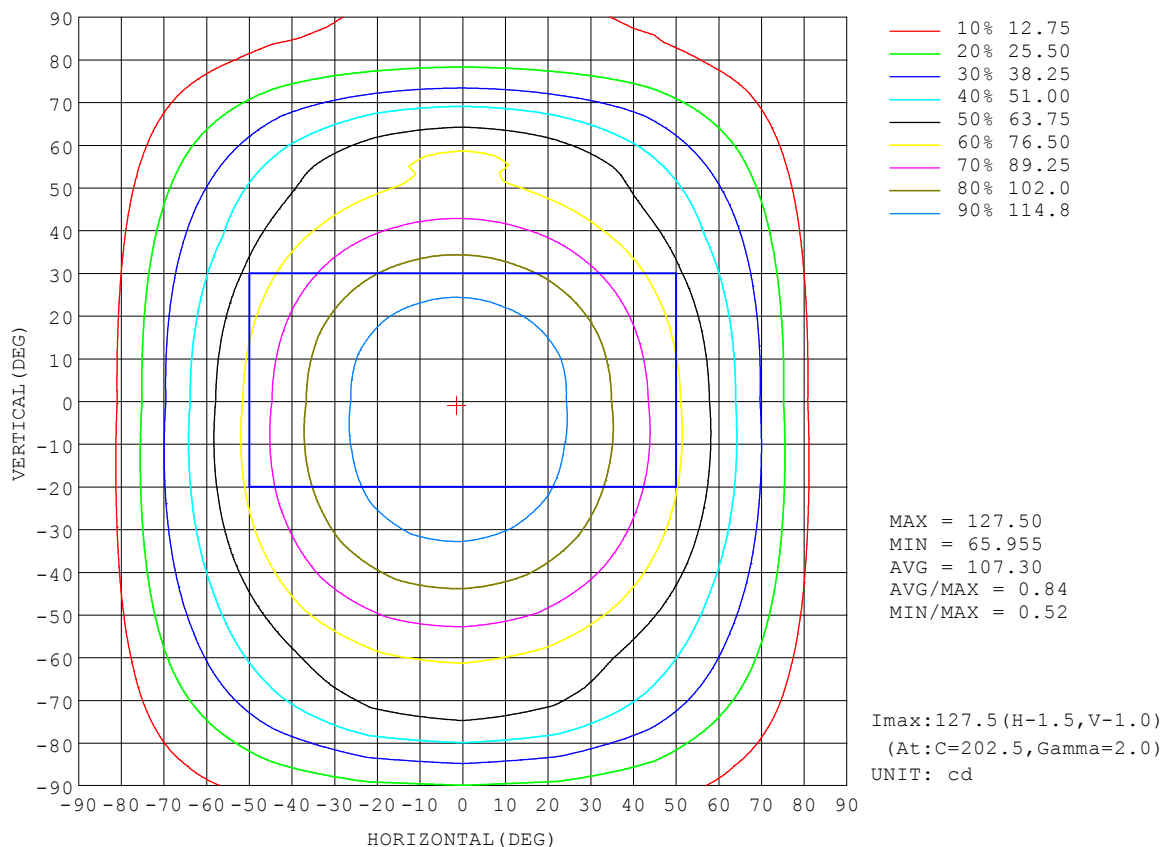


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-12-09

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity:65.0%
 Test Distance:5.749m [K=1.0000]
 Remarks:

AAI Figure

NAME:	TYPE: 2835 140LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.014*0.5	Shielding Angle:

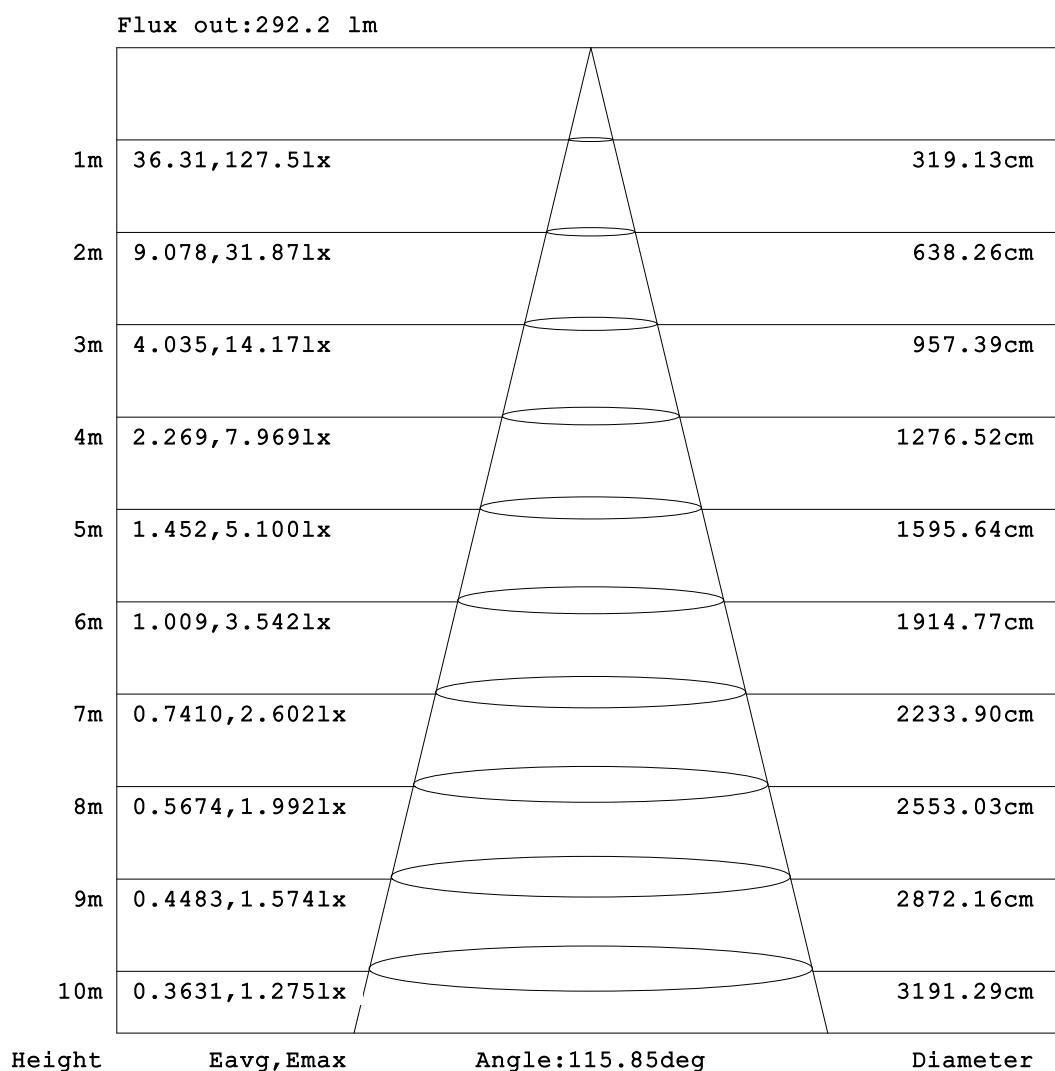


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-12-09

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

NAME:	TYPE: 2835 140LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.014*0.5	Shielding Angle:

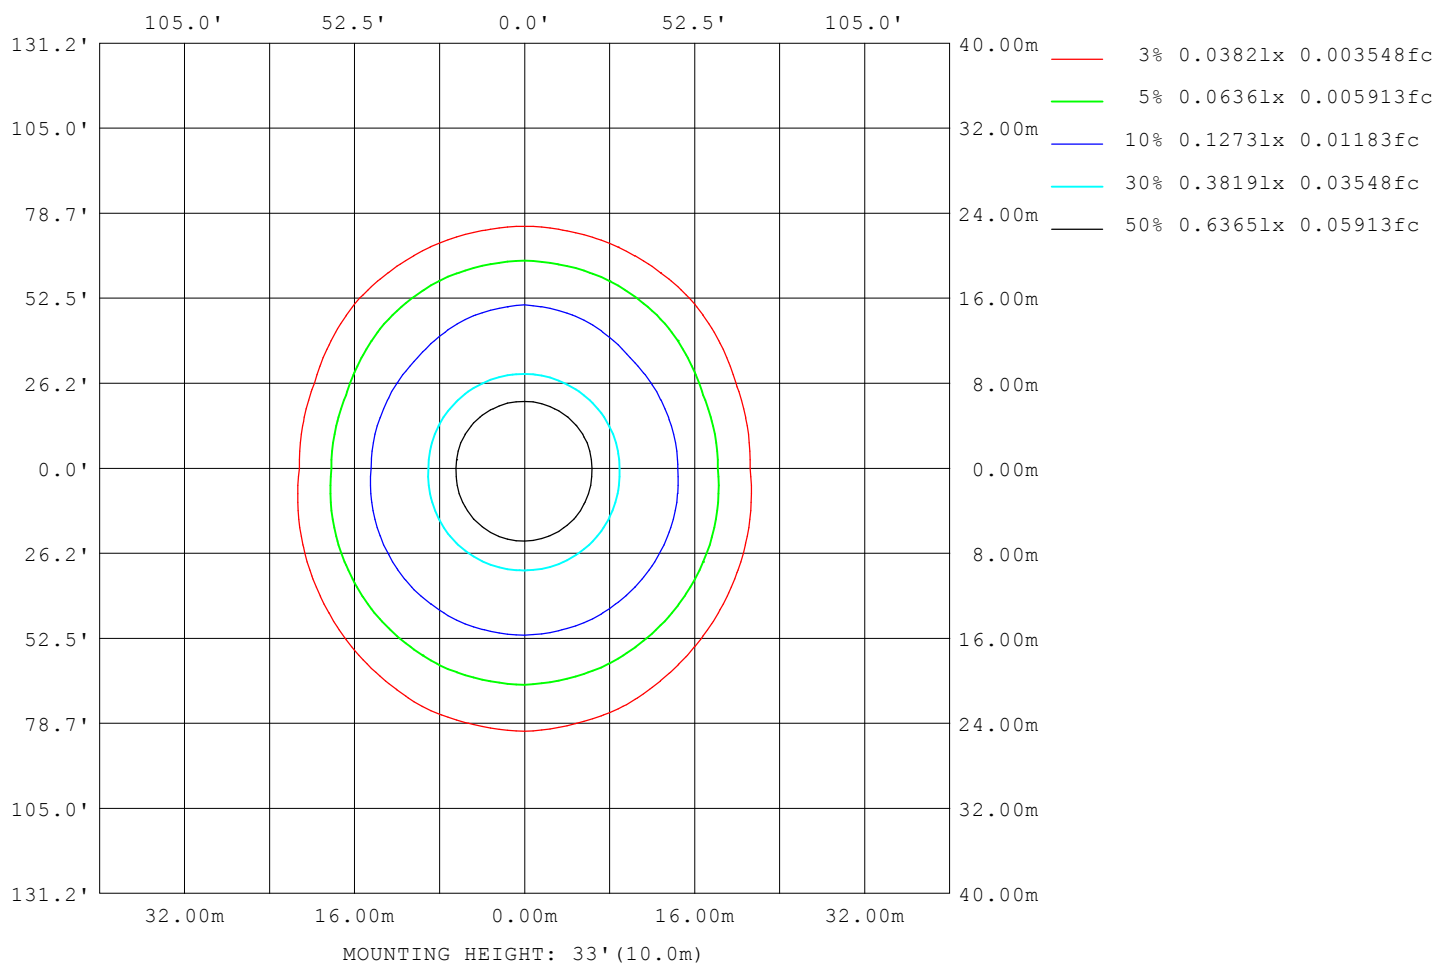

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-12-09

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

LED Avg.L Report

NAME:	TYPE: 2835 140LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.014*0.5	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	8218
L_0~180 (75) av	7137
L_0~180 (85) av	4451
L_90~270 (65) av	11446
L_90~270 (75) av	13402
L_90~270 (85) av	21703
L_45 (65) av	10267
L_45 (75) av	11495
L_45 (85) av	16770

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-12-09

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

Planar Illuminance Curve

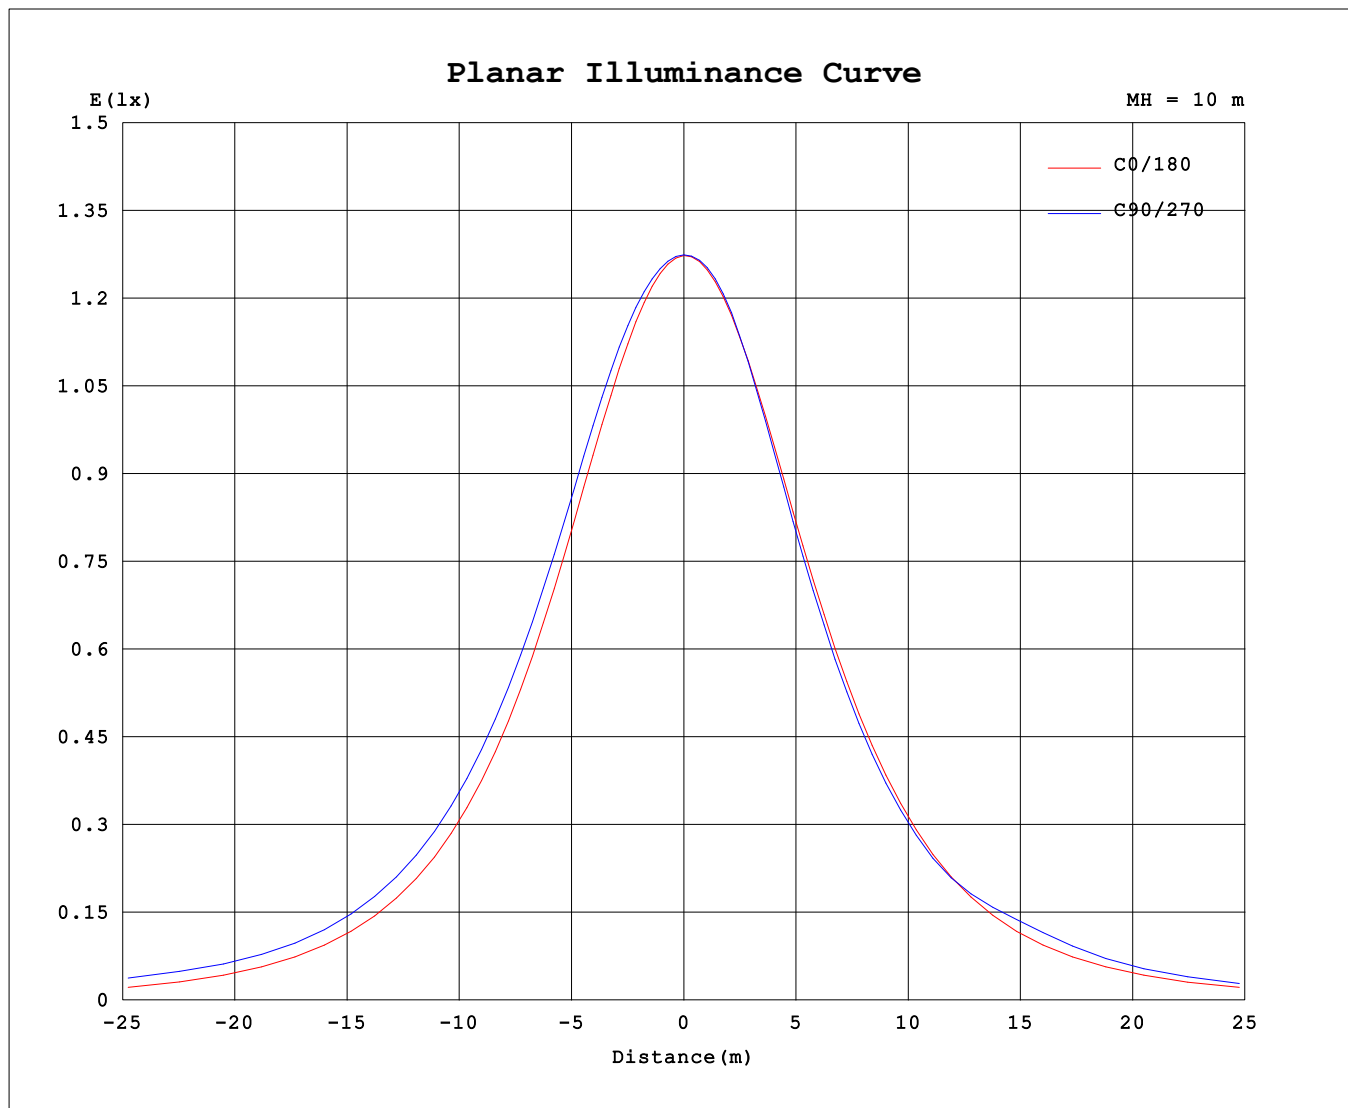

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-12-09

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:	TYPE: 2835 140LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.014*0.5	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	127	127	127	127	127	127	127	127	127	127	127	127	127	127	127	127			
5	127	127	127	127	127	127	127	127	127	127	127	127	127	127	127	127			
10	125	125	126	126	127	127	126	126	126	126	127	127	126	126	126	125			
15	123	123	124	126	126	126	126	125	124	125	125	125	124	124	124	123			
20	119	120	122	123	124	124	123	121	120	121	121	120	119	119	119	119			
25	115	117	119	121	122	122	121	118	117	118	117	116	115	115	115	116			
30	108	111	114	116	117	118	116	113	111	111	110	109	108	107	108	109			
35	103	106	110	112	114	114	112	109	106	106	105	103	102	102	102	103			
40	94.7	98.4	103	106	107	107	105	101	97.1	97.0	95.7	94.2	93.6	93.0	93.3	94.3			
45	88.5	92.7	97.2	100	102	102	99.8	95.5	90.5	90.2	89.1	87.9	87.3	86.7	86.8	87.8			
50	78.4	83.4	88.2	91.9	93.4	93.4	90.8	85.7	79.5	79.1	78.5	78.4	78.9	77.3	76.3	77.4			
55	71.2	76.6	81.6	85.7	87.3	87.2	84.2	78.3	71.7	71.1	71.2	75.3	78.3	74.5	69.5	70.1			
60	59.4	65.7	71.3	76.1	78.1	77.5	73.4	66.7	59.3	58.9	64.3	72.4	74.0	71.9	64.1	58.6			
65	50.9	57.9	64.5	71.0	74.0	72.4	66.5	58.7	50.7	51.4	59.7	63.1	64.2	62.6	59.6	51.9			
70	37.5	46.7	57.6	67.2	70.8	68.1	58.7	47.3	37.3	41.1	45.7	48.0	48.2	47.4	46.0	41.7			
75	28.2	38.9	51.5	61.6	65.2	62.3	52.2	39.5	28.1	31.7	36.0	36.1	36.5	35.8	36.0	32.3			
80	14.5	26.6	39.2	47.9	50.8	48.6	39.7	27.4	14.8	18.5	20.9	21.4	21.7	21.5	21.3	18.8			
85	6.94	17.9	29.5	37.6	40.3	38.0	29.8	18.7	6.98	10.8	14.0	15.2	15.7	15.6	14.7	11.4			
90	0.25	8.76	17.2	23.3	25.3	23.4	17.2	8.79	0.27	6.28	11.2	13.3	13.9	13.6	12.0	7.31			
95	0.26	6.96	12.6	16.5	17.8	16.4	12.3	6.74	0.23	5.48	10.6	12.8	13.4	13.1	11.3	6.37			
100	0.40	6.81	11.5	13.6	14.0	13.4	11.1	6.75	0.35	3.01	9.04	11.8	12.6	11.9	9.43	3.63			
105	0.51	6.89	11.5	13.3	13.7	13.2	11.1	6.94	0.44	1.35	7.35	10.3	11.3	10.5	7.72	1.83			
110	0.66	6.82	11.3	13.3	13.8	13.2	11.1	6.96	0.58	0.64	4.88	8.21	9.47	8.57	5.45	0.68			
115	0.77	6.84	11.2	13.2	13.7	13.2	10.9	6.94	0.67	0.71	3.27	7.05	8.38	7.36	3.64	0.75			
120	0.92	6.95	11.3	13.1	13.7	13.1	11.0	6.96	0.81	0.83	0.96	4.61	6.39	4.88	1.04	0.87			
125	1.02	7.14	11.4	13.2	13.7	13.2	11.1	7.15	0.90	0.91	0.96	2.38	4.26	2.43	1.02	0.96			
130	1.15	7.74	12.0	13.6	14.1	13.6	11.6	7.23	1.01	1.02	1.06	1.10	1.14	1.12	1.11	1.09			
135	1.23	7.62	12.9	14.2	14.6	13.8	11.7	7.11	1.09	1.09	1.11	1.15	1.15	1.17	1.18	1.17			
140	1.34	7.88	14.9	16.2	16.5	15.6	12.4	6.51	1.19	1.19	1.20	1.21	1.21	1.23	1.28	1.29			
145	1.40	7.73	16.6	18.3	18.4	16.8	12.9	6.54	1.25	1.25	1.26	1.27	1.25	1.27	1.35	1.38			
150	1.48	8.05	17.4	21.4	22.1	17.8	12.5	6.34	1.34	1.33	1.33	1.35	1.31	1.34	1.46	1.50			
155	1.52	7.79	17.3	22.9	23.7	16.9	11.1	6.00	1.38	1.38	1.38	1.40	1.37	1.39	1.54	1.58			
160	1.59	6.26	15.2	21.1	22.5	12.2	9.72	4.87	1.47	1.46	1.46	1.47	1.46	1.46	1.66	1.69			
165	1.63	4.78	12.1	17.6	17.2	9.93	7.49	3.72	1.53	1.52	1.52	1.52	1.53	1.52	1.74	1.75			
170	1.70	2.85	6.52	9.54	5.63	5.37	3.97	2.64	1.64	1.63	1.62	1.62	1.63	1.62	1.83	1.83			
175	1.76	1.78	3.33	4.68	3.04	2.98	2.78	2.22	1.71	1.70	1.70	1.70	1.70	1.70	1.86	1.85			
180	1.81	1.80	1.80	1.80	1.80	1.80	1.82	1.83	1.81	1.81	1.80	1.80	1.81	1.80	1.82	1.84			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-12-09

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks: