


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME:	TYPE: 2835 140LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 87.82 lm/W
MODEL	2700K RA90 9.6W	Imax (cd)	118.2	S/MH(C0/180)	1.26	
NOMINAL POWER(W)	4.8	LOR(%)	100.0	S/MH(C90/270)	1.19	
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	418.32	<input type="checkbox"/> UP,DN(C0-180)	5.6,50.6	
NOMINAL FLUX(lm)	5.97594	CIE CLASS	DIRECT	<input type="checkbox"/> UP,DN(C180-360)	3.0,40.8	
LAMPS INSIDE	70	<input type="checkbox"/> up (%)	8.6	CIBSE SHR NOM	1.25	
TEST VOLTAGE(V)	24	<input type="checkbox"/> down (%)	91.4	CIBSE SHR MAX	1.35	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

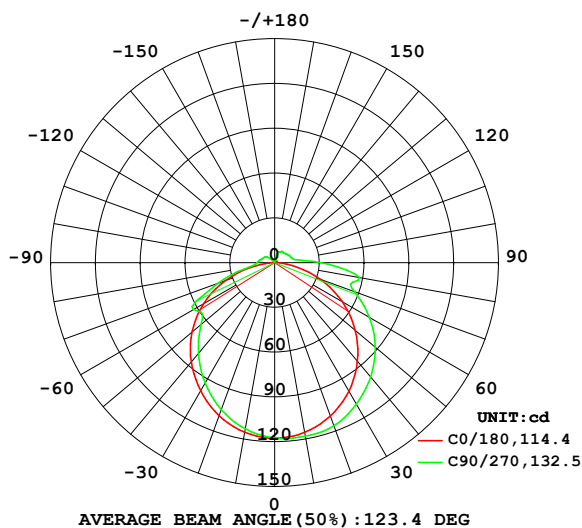

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

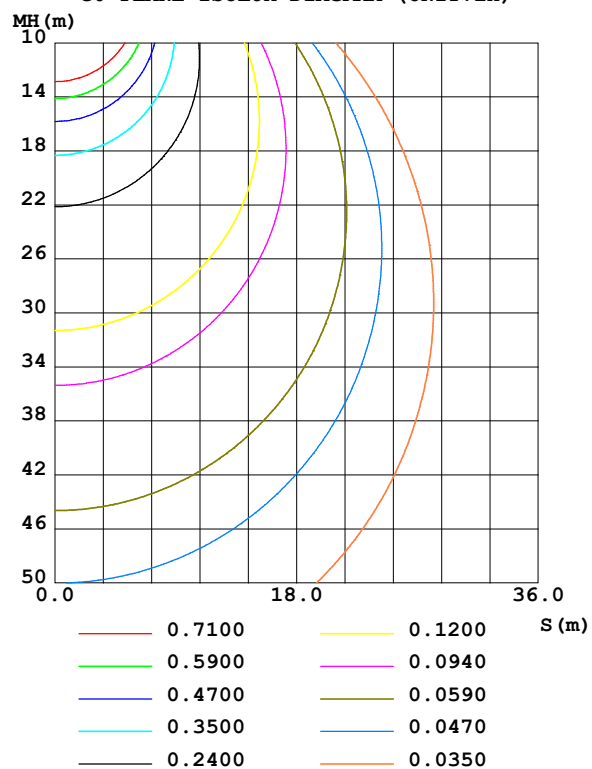

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-12-09

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	115.5	117.1	118.1	117.2	115.4	113.8	113.1	113.7	0- 10	11.12	11.12	2.66,2.66
20	109.3	113.7	116.3	113.8	109.1	106.3	104.8	105.9	10- 20	31.94	43.06	10.3,10.3
30	99.47	106.6	109.4	106.8	99.19	95.27	93.20	94.68	20- 30	48.70	91.76	21.9,21.9
40	86.29	95.53	100.1	96.01	86.92	81.46	79.36	80.55	30- 40	59.30	151.1	36.1,36.1
50	70.47	82.01	87.97	83.02	72.23	65.59	64.45	64.32	40- 50	62.79	213.9	51.1,51.1
60	52.27	66.40	73.33	68.25	54.85	49.36	62.97	49.04	50- 60	59.55	273.4	65.4,65.4
70	32.22	49.10	57.03	51.36	34.83	40.48	40.75	37.69	60- 70	51.57	325.0	77.7,77.7
80	12.05	38.73	57.81	40.39	13.63	17.06	17.12	16.46	70- 80	35.86	360.8	86.3,86.3
90	0.5575	19.09	30.81	20.92	0.2803	9.937	12.04	10.77	80- 90	21.61	382.4	91.4,91.4
100	0.3637	10.86	13.23	10.69	0.2975	8.130	10.43	8.926	90-100	10.91	393.4	94,94
110	0.6015	9.636	11.44	9.271	0.5045	5.140	8.761	6.231	100-110	7.546	400.9	95.8,95.8
120	0.8251	8.265	10.49	7.888	0.7209	2.855	7.574	3.874	110-120	5.770	406.7	97.2,97.2
130	1.025	7.269	9.510	6.943	0.9112	1.284	5.608	1.552	120-130	4.313	411.0	98.2,98.2
140	1.187	6.373	9.159	5.899	1.075	1.120	1.515	1.137	130-140	2.928	413.9	98.9,98.9
150	1.318	5.121	8.782	5.812	1.218	1.245	1.231	1.261	140-150	2.082	416.0	99.4,99.4
160	1.422	4.356	7.793	5.381	1.346	1.357	1.365	1.378	150-160	1.451	417.4	99.8,99.8
170	1.544	1.934	3.048	2.163	1.496	1.500	1.510	1.520	160-170	0.7109	418.2	100,100
180	1.648	1.647	1.657	1.665	1.651	1.649	1.654	1.665	170-180	0.1612	418.3	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 188.79 lm

%lum = 45.1%

%lamp = 45.1%

Conical surface Flux(120deg): 273.4 lm

%lum = 65.4%


%lamp = 65.4%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-12-09

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

NAME:	TYPE: 2835 140LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

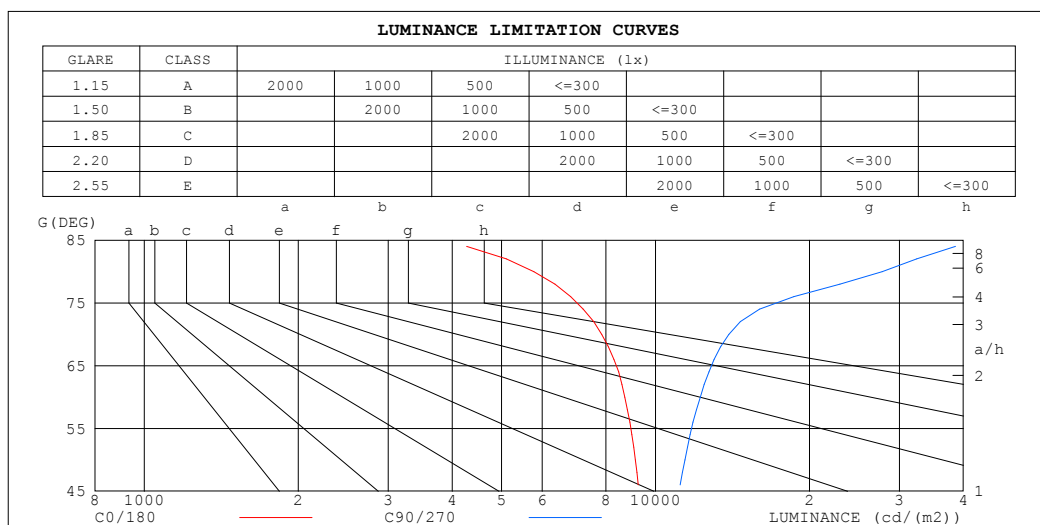

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	5119	46281
80	5780	27754
75	7690	17019
70	7849	13902
65	8781	13190
60	8709	12227
55	9209	11975
50	9134	11409
45	9460	11270


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-12-09

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME:	TYPE: 2835 140LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.17	1.17	1.17	1.13	1.13	1.13	1.06	1.06	1.06	.00	.00	.00	.94	.94	.94	.91
1.0	.99	.95	.90	.96	.92	.88	.90	.87	.83	.85	.82	.79	.80	.78	.75	.73
2.0	.86	.78	.72	.83	.76	.70	.78	.72	.67	.73	.69	.65	.69	.65	.62	.59
3.0	.75	.66	.59	.72	.64	.58	.68	.61	.56	.64	.58	.54	.61	.56	.52	.49
4.0	.66	.57	.49	.64	.55	.49	.60	.53	.47	.57	.51	.45	.54	.48	.44	.41
5.0	.59	.49	.42	.57	.48	.42	.54	.46	.40	.51	.44	.39	.48	.42	.38	.36
6.0	.53	.43	.37	.51	.42	.36	.48	.41	.35	.46	.39	.34	.44	.38	.33	.31
7.0	.48	.39	.32	.46	.38	.32	.44	.36	.31	.42	.35	.30	.40	.34	.29	.27
8.0	.43	.35	.29	.42	.34	.28	.40	.33	.28	.38	.32	.27	.36	.31	.26	.24
9.0	.40	.31	.26	.39	.31	.25	.37	.30	.25	.35	.29	.24	.34	.28	.24	.22
10.0	.37	.28	.23	.36	.28	.23	.34	.27	.22	.33	.26	.22	.31	.25	.21	.20

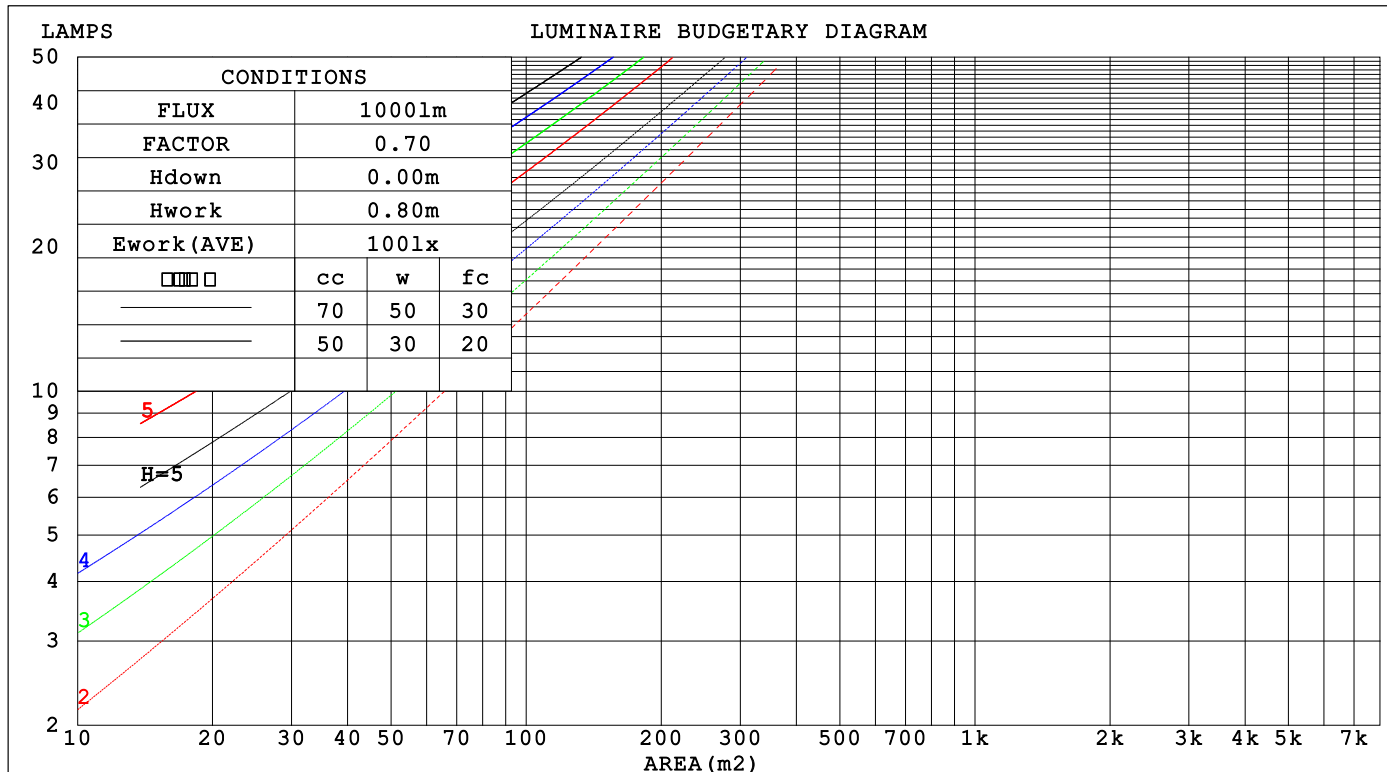

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-12-09

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

WEC AND CCEC

NAME:	TYPE: 2835 140LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)					
0.0						
1.0	.355 .202 .064	.345 .197 .063	.327 .188 .060	.310 .179 .057	.295 .171 .055	
2.0	.317 .174 .053	.309 .170 .052	.292 .163 .050	.277 .155 .049	.263 .149 .047	
3.0	.287 .153 .046	.279 .149 .045	.264 .143 .043	.250 .137 .042	.238 .132 .041	
4.0	.261 .135 .040	.254 .133 .039	.240 .127 .038	.228 .122 .037	.216 .118 .036	
5.0	.238 .121 .035	.232 .119 .035	.220 .115 .034	.209 .110 .033	.199 .106 .032	
6.0	.219 .110 .031	.214 .108 .031	.203 .104 .030	.193 .100 .029	.183 .097 .029	
7.0	.203 .100 .028	.198 .099 .028	.188 .095 .027	.179 .092 .027	.170 .089 .026	
8.0	.189 .092 .026	.184 .091 .026	.175 .088 .025	.167 .085 .024	.159 .082 .024	
9.0	.176 .085 .024	.172 .084 .024	.164 .081 .023	.156 .078 .022	.149 .076 .022	
10.0	.165 .079 .022	.161 .078 .022	.154 .075 .021	.147 .073 .021	.140 .071 .020	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)					
0.0	.256 .256 .256	.219 .219 .219	.149 .149 .149	.086 .086 .086	.027 .027 .027	
1.0	.249 .222 .197	.213 .190 .169	.146 .131 .117	.084 .076 .068	.027 .024 .022	
2.0	.242 .198 .161	.207 .171 .139	.142 .118 .097	.082 .069 .057	.026 .022 .019	
3.0	.234 .181 .139	.201 .156 .120	.138 .109 .084	.080 .063 .050	.026 .021 .016	
4.0	.227 .168 .124	.194 .145 .107	.134 .101 .076	.077 .059 .045	.025 .019 .015	
5.0	.219 .158 .113	.188 .137 .098	.130 .096 .070	.075 .056 .041	.024 .018 .014	
6.0	.212 .150 .106	.182 .130 .092	.125 .091 .065	.073 .053 .039	.023 .017 .013	
7.0	.205 .143 .100	.176 .124 .087	.122 .087 .062	.071 .051 .037	.023 .017 .012	
8.0	.198 .138 .096	.170 .119 .084	.118 .084 .059	.069 .049 .035	.022 .016 .012	
9.0	.192 .133 .093	.165 .115 .081	.114 .081 .057	.067 .048 .034	.022 .016 .011	
10.0	.186 .128 .090	.160 .112 .079	.111 .078 .056	.065 .046 .033	.021 .015 .011	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-12-09

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME:	TYPE: 2835 140LED 24V					WEIGHT:				
SPEC.:	DIM.:					SERIAL No.:				
MFR.:	SUR.: 0.012*0.5					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.3	24.7	23.6	25.1	25.5	24.5	26.0	24.9	26.3	26.7
3H	24.8	26.1	25.2	26.5	26.9	26.7	28.1	27.1	28.4	28.9
4H	25.4	26.7	25.8	27.1	27.5	27.9	29.2	28.4	29.6	30.1
6H	25.8	27.0	26.2	27.4	27.9	29.9	31.1	30.3	31.5	32.0
8H	25.9	27.0	26.3	27.5	27.9	30.9	32.0	31.3	32.5	33.0
12H	25.9	27.0	26.4	27.5	28.0	31.8	32.9	32.3	33.4	33.9
4H 2H	24.2	25.5	24.6	25.9	26.3	25.1	26.4	25.5	26.8	27.2
3H	26.0	27.1	26.4	27.5	28.0	27.5	28.7	28.0	29.1	29.6
4H	26.7	27.7	27.2	28.2	28.7	29.0	30.0	29.5	30.5	31.0
6H	27.3	28.2	27.8	28.7	29.3	31.2	32.1	31.7	32.6	33.2
8H	27.5	28.3	28.0	28.9	29.4	32.3	33.2	32.9	33.7	34.3
12H	27.6	28.4	28.2	28.9	29.5	33.4	34.2	33.9	34.7	35.3
8H 4H	27.5	28.4	28.0	28.9	29.4	29.4	30.2	29.9	30.7	31.3
6H	28.5	29.2	29.0	29.7	30.3	31.9	32.6	32.5	33.2	33.8
8H	28.9	29.5	29.5	30.1	30.7	33.2	33.9	33.8	34.5	35.1
12H	29.2	29.7	29.8	30.3	31.0	34.5	35.1	35.1	35.7	36.3
12H 4H	27.8	28.6	28.4	29.2	29.7	29.4	30.2	30.0	30.7	31.3
6H	29.0	29.7	29.6	30.2	30.9	32.0	32.7	32.6	33.3	33.9
8H	29.6	30.1	30.2	30.7	31.4	33.5	34.0	34.1	34.6	35.3
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.1				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.5					+ 0.2 / - 0.3				

CIE Pub.117, 418.3 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -3.0)
Area: 0.012 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-12-09

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:


```

Range: 0 - 180DEG
Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

```

ISOCANDELA DIAGRAM

NAME:	TYPE: 2835 140LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

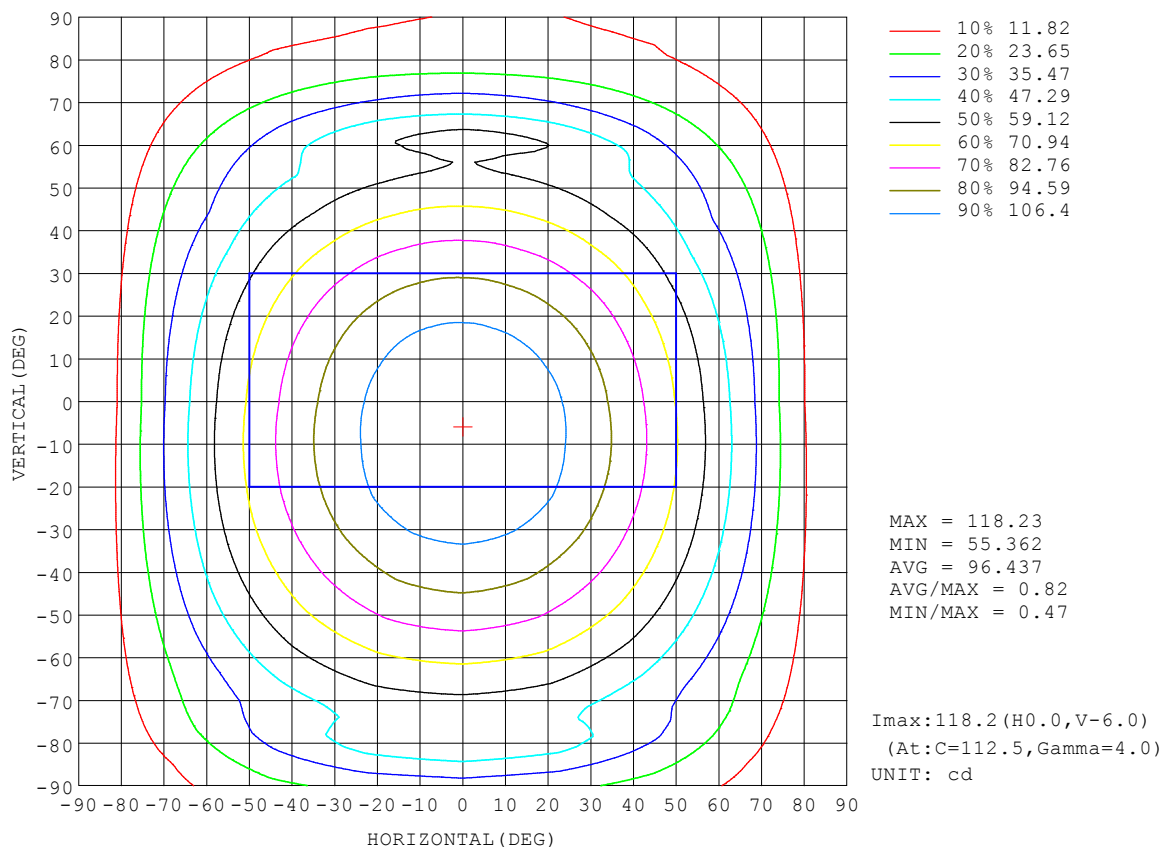


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-12-09

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity:65.0%
 Test Distance:5.749m [K=1.0000]
 Remarks:

AAI Figure

NAME:	TYPE: 2835 140LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

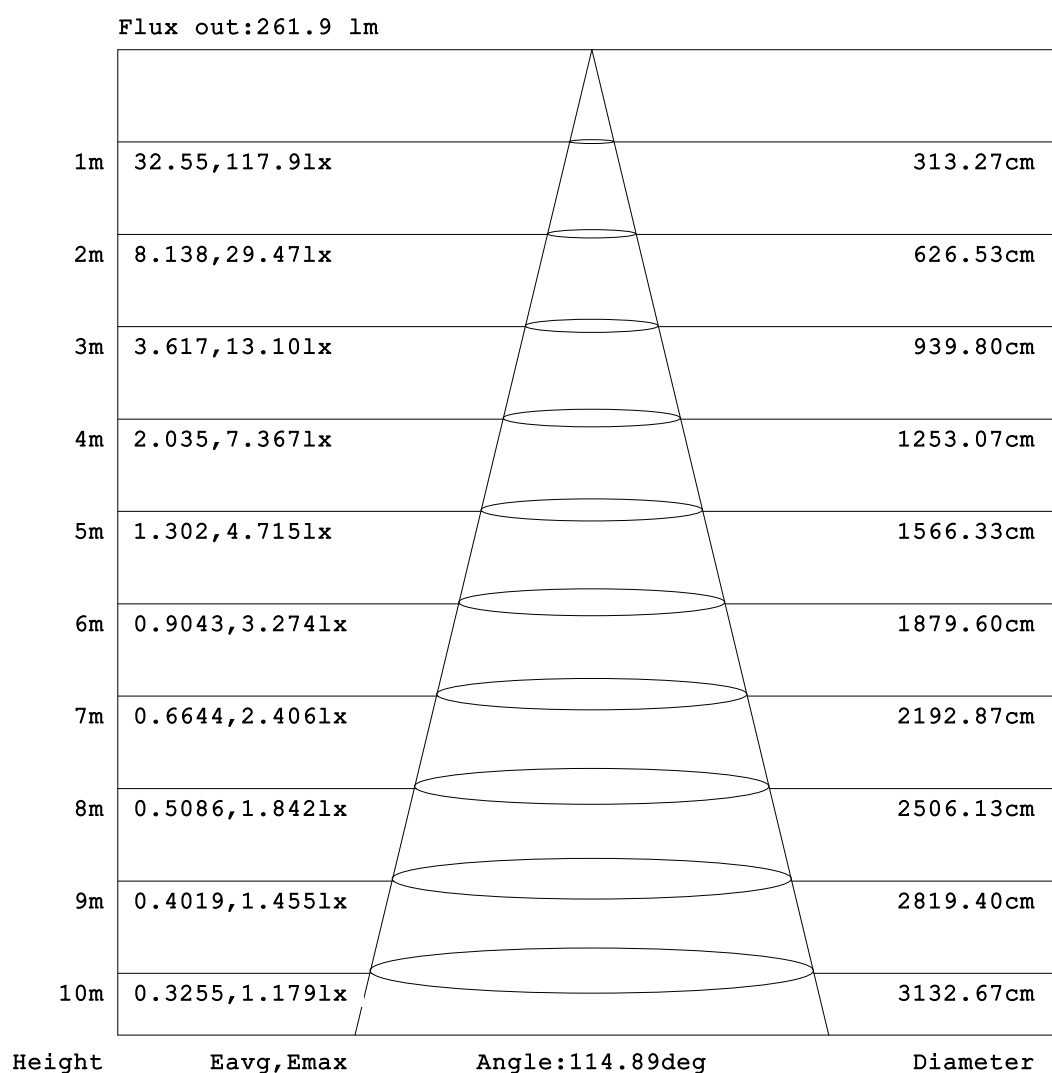


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-12-09

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

NAME:	TYPE: 2835 140LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

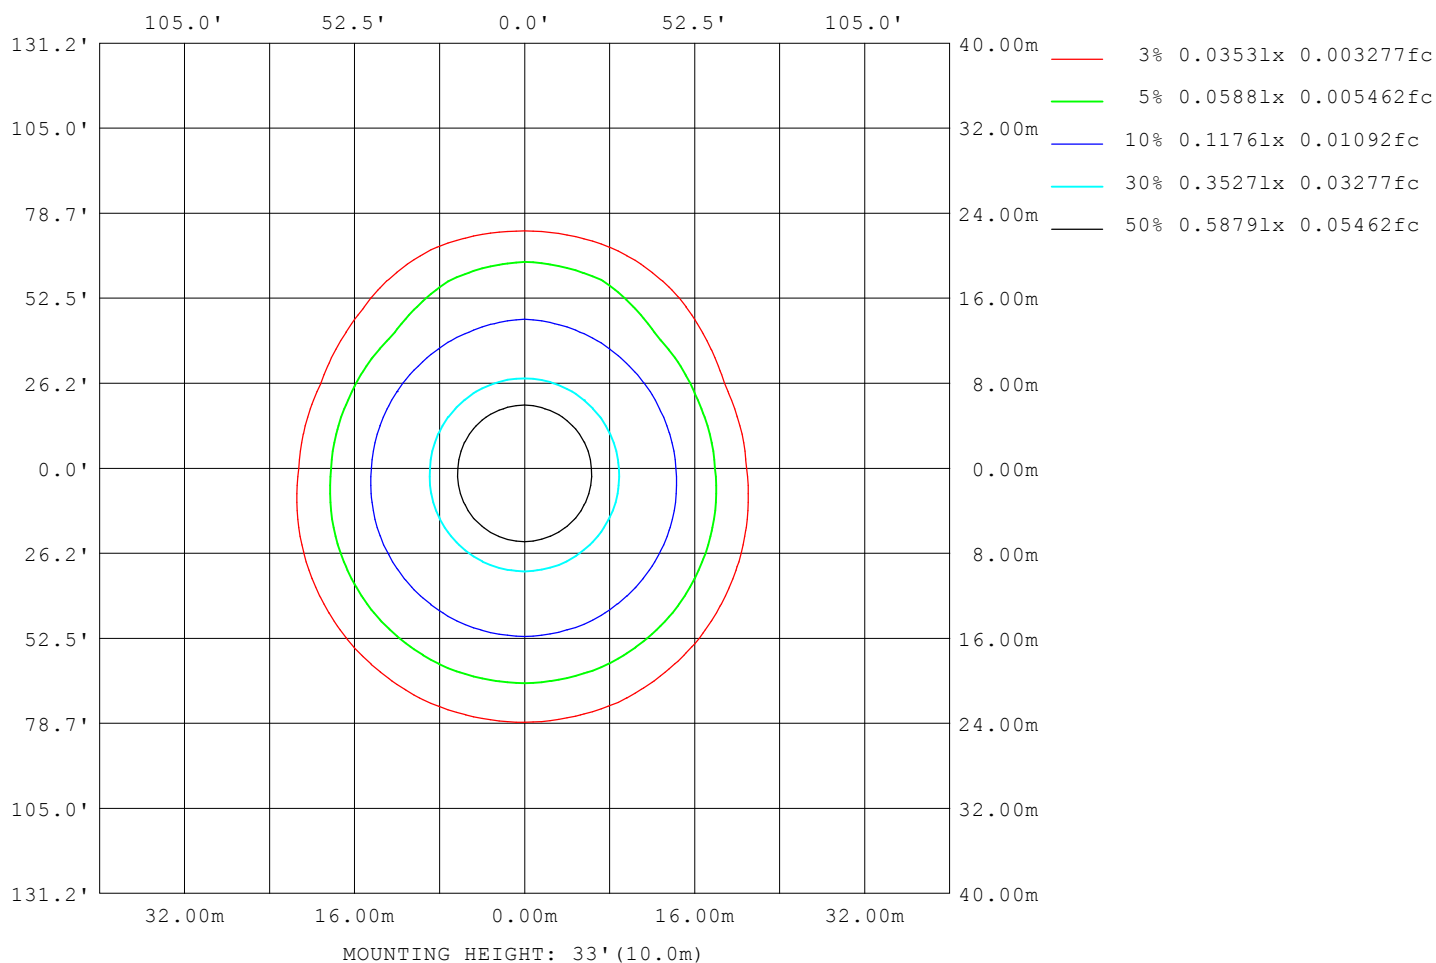

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-12-09

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

LED Avg.L Report

NAME:	TYPE: 2835 140LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	8653
L_0~180 (75) av	7400
L_0~180 (85) av	4322
L_90~270 (65) av	11838
L_90~270 (75) av	13089
L_90~270 (85) av	27938
L_45 (65) av	10422
L_45 (75) av	10963
L_45 (85) av	20614

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-12-09

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

Planar Illuminance Curve

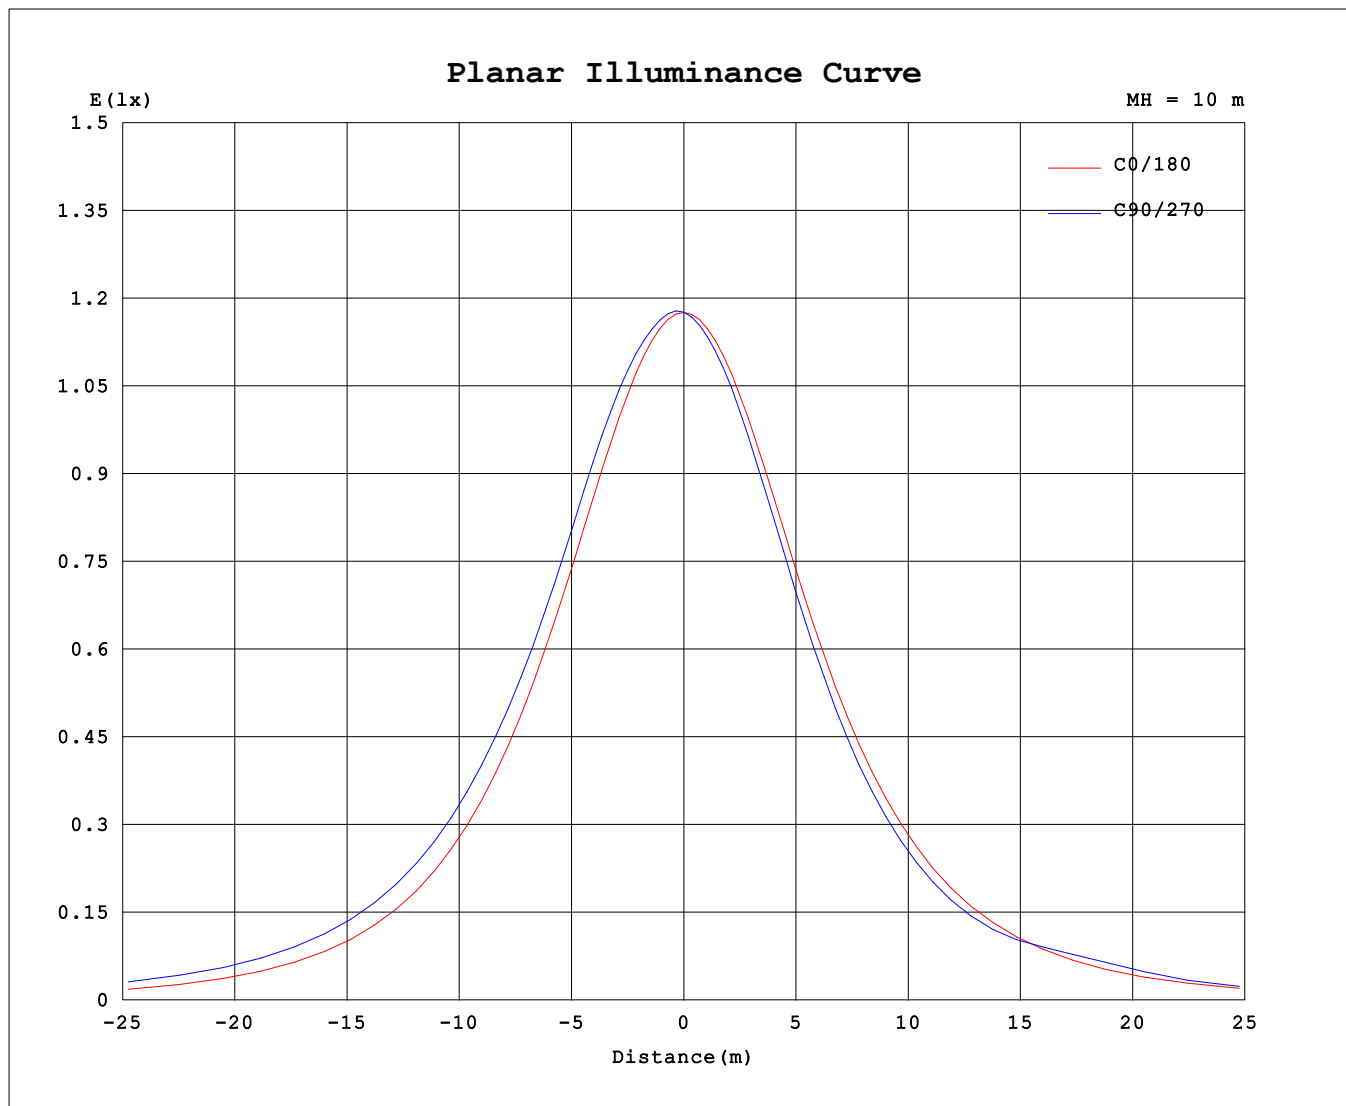

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2021-12-09

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:	TYPE: 2835 140LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	118	118	118	118	118	118	118	118	118	118	118	118	118	118	118	118			
5	117	118	118	118	118	118	118	118	117	117	117	116	116	116	116	117			
10	115	116	117	118	118	118	117	116	115	114	114	113	113	113	114	114			
15	113	115	116	117	118	117	116	115	113	112	111	111	110	110	111	112			
20	109	111	114	116	116	116	114	111	109	107	106	105	105	105	106	107			
25	106	108	111	113	114	114	111	108	106	104	102	101	101	101	102	104			
30	99.5	103	107	109	109	109	107	103	99.2	97.0	95.3	93.8	93.2	93.3	94.7	96.9			
35	94.6	98.6	103	105	106	105	103	98.6	94.5	92.1	90.0	88.5	87.8	87.9	89.4	91.7			
40	86.3	91.2	95.5	98.7	100	99.2	96.0	91.8	86.9	84.0	81.5	79.9	79.4	79.4	80.5	82.9			
45	80.3	85.7	90.4	94.2	95.6	94.7	91.0	86.7	81.4	78.2	75.3	73.9	73.4	73.3	74.2	76.6			
50	70.5	76.6	82.0	86.6	88.0	87.1	83.0	78.3	72.2	68.6	65.6	64.6	64.5	64.1	64.3	66.6			
55	63.4	70.1	76.0	80.9	82.4	81.5	77.4	72.1	65.6	61.8	58.9	58.6	59.7	58.5	57.7	59.4			
60	52.3	59.5	66.4	71.7	73.3	72.4	68.3	62.1	54.9	51.1	49.4	57.3	63.0	58.6	49.0	48.4			
65	44.5	52.2	59.6	65.2	66.9	66.1	61.8	55.1	47.2	43.7	46.4	57.1	58.4	57.4	47.1	41.2			
70	32.2	40.7	49.1	55.2	57.0	56.2	51.4	43.9	34.8	33.3	40.5	39.4	40.8	38.8	37.7	32.2			
75	23.9	33.0	42.4	49.8	52.8	50.6	44.5	36.1	26.2	28.7	29.1	30.3	30.6	29.5	27.7	26.7			
80	12.0	23.0	38.7	52.6	57.8	53.1	40.4	25.5	13.6	15.5	17.1	17.1	17.1	16.7	16.5	14.3			
85	5.35	18.2	32.5	44.2	48.4	45.0	35.0	20.9	6.34	9.07	12.0	12.9	13.5	13.2	12.3	8.98			
90	0.56	8.67	19.1	27.2	30.8	28.1	20.9	9.60	0.28	5.67	9.94	11.4	12.0	11.9	10.8	6.69			
95	0.24	6.59	12.6	18.7	20.8	19.3	13.5	6.78	0.20	4.84	9.28	10.7	11.3	11.2	10.1	6.06			
100	0.36	6.08	10.9	12.8	13.2	12.7	10.7	5.91	0.30	3.27	8.13	9.89	10.4	10.3	8.93	4.43			
105	0.46	5.78	10.3	11.9	12.1	11.5	9.99	5.66	0.37	2.13	6.99	8.94	9.58	9.35	7.76	3.08			
110	0.60	5.02	9.64	11.1	11.4	10.8	9.27	5.09	0.50	1.02	5.14	7.72	8.76	8.40	6.23	1.52			
115	0.70	4.50	8.97	10.7	11.1	10.5	8.60	4.61	0.59	0.73	4.19	6.97	8.33	7.80	5.28	0.96			
120	0.83	3.87	8.26	10.1	10.5	9.94	7.89	4.05	0.72	0.76	2.86	5.95	7.57	6.80	3.87	0.81			
125	0.91	3.44	7.83	9.68	10.1	9.52	7.48	3.75	0.80	0.83	2.25	4.97	7.05	6.05	3.08	0.87			
130	1.02	2.98	7.27	9.02	9.51	8.93	6.94	3.07	0.91	0.94	1.28	3.72	5.61	4.59	1.55	0.97			
135	1.09	2.59	6.94	8.75	9.25	8.45	6.42	3.01	0.98	1.00	1.04	2.57	3.98	2.98	1.16	1.04			
140	1.19	2.32	6.37	8.60	9.16	8.45	5.90	2.98	1.08	1.09	1.12	1.21	1.52	1.30	1.14	1.12			
145	1.24	2.17	5.87	8.39	9.16	8.08	5.67	3.05	1.13	1.15	1.17	1.19	1.22	1.20	1.19	1.19			
150	1.32	2.26	5.12	7.66	8.78	7.26	5.81	3.08	1.22	1.23	1.25	1.26	1.23	1.25	1.26	1.26			
155	1.36	2.16	5.01	7.36	8.01	7.27	6.07	2.80	1.27	1.28	1.29	1.31	1.28	1.29	1.31	1.31			
160	1.42	1.85	4.36	6.83	7.79	7.15	5.38	2.28	1.35	1.35	1.36	1.37	1.36	1.36	1.38	1.38			
165	1.47	1.68	3.23	5.55	6.59	5.87	3.98	1.92	1.40	1.40	1.41	1.42	1.43	1.41	1.43	1.44			
170	1.54	1.55	1.93	2.65	3.05	2.87	2.16	1.62	1.50	1.50	1.50	1.50	1.51	1.50	1.52	1.53			
175	1.60	1.59	1.62	1.75	1.86	1.82	1.67	1.61	1.56	1.56	1.56	1.56	1.57	1.56	1.58	1.59			
180	1.65	1.65	1.65	1.65	1.66	1.65	1.67	1.68	1.65	1.65	1.65	1.65	1.65	1.65	1.67	1.68			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-12-09

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks: