


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: 2835 IP20	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.: 202-00491-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.008*0.5	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 164.41 lm/W
MODEL	6500K	I <sub>max</sub> (cd)	269.0	S/MH(C0/180)	1.29	
NOMINAL POWER(W)	4.8	LOR(%)	100.0	S/MH(C90/270)	1.33	
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	815.92	□ UP,DN(C0-180)	0.7,47.3	
NOMINAL FLUX(lm)	10.1989	CIE CLASS	DIRECT	□ UP,DN(C180-360)	0.7,51.3	
LAMPS INSIDE	80	□ up (%)	1.4	CIBSE SHR NOM	1.25	
TEST VOLTAGE(V)	24	□ down (%)	98.6	CIBSE SHR MAX	1.35	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

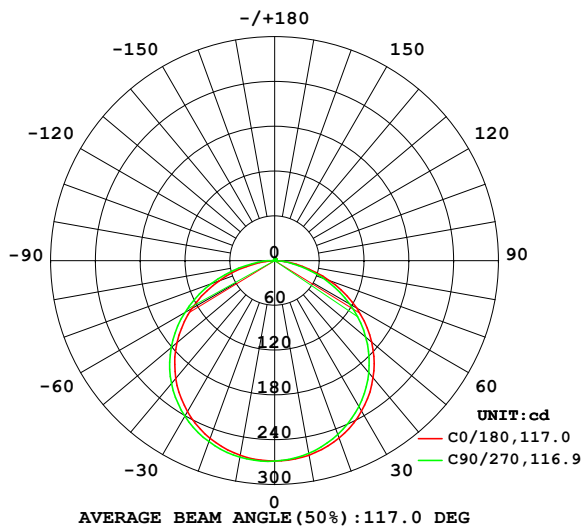

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

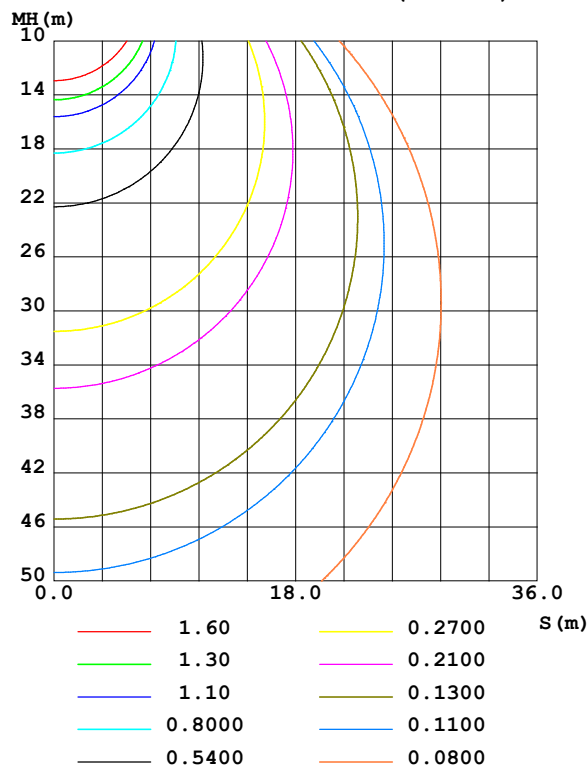

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-03-17

□ Range: 0 - 180DEG  
 □ Interval: 2.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
 Humidity:65.0%  
 Test Distance:5.749m [K=1.0000]  
 Remarks:

## ZONAL FLUX DIAGRAM

### ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	264.6	262.9	262.1	262.9	264.9	266.5	267.4	266.6	0- 10	25.45	25.45	3.12,3.12
20	252.8	249.5	247.8	249.3	253.3	256.4	258.1	256.8	10- 20	73.38	98.84	12.1,12.1
30	233.0	228.1	225.7	228.0	233.7	238.2	240.7	238.8	20- 30	112.6	211.4	25.9,25.9
40	205.3	199.3	196.2	199.2	206.2	211.9	215.0	212.7	30- 40	137.9	349.3	42.8,42.8
50	169.8	162.9	159.4	162.9	170.9	177.2	181.1	178.4	40- 50	145.7	495.1	60.7,60.7
60	126.8	119.6	116.2	119.8	128.2	134.7	139.0	136.2	50- 60	133.8	628.8	77.1,77.1
70	77.90	71.50	68.89	71.88	79.31	85.53	90.07	87.34	60- 70	102.6	731.4	89.6,89.6
80	29.24	25.54	25.21	26.32	29.71	35.31	39.65	37.28	70- 80	57.52	788.9	96.7,96.7
90	0.3069	1.279	1.240	1.225	0.2574	3.889	7.163	5.388	80- 90	15.49	804.4	98.6,98.6
100	0.7161	0.7606	0.8126	0.7769	0.5886	0.5380	1.306	0.5542	90-100	1.385	805.8	98.8,98.8
110	1.285	1.298	1.347	1.309	1.084	0.9734	0.9443	0.9609	100-110	0.9635	806.8	98.9,98.9
120	1.849	1.822	1.863	1.837	1.612	1.447	1.415	1.436	110-120	1.385	808.2	99,99
130	2.335	2.274	2.303	2.303	2.084	1.908	1.850	1.883	120-130	1.689	809.8	99.3,99.3
140	2.719	2.654	2.655	2.695	2.470	2.308	2.219	2.273	130-140	1.785	811.6	99.5,99.5
150	3.014	2.968	2.950	3.002	2.777	2.648	2.542	2.623	140-150	1.667	813.3	99.7,99.7
160	3.243	3.225	3.266	3.228	3.067	2.967	2.915	2.953	150-160	1.367	814.7	99.8,99.8
170	3.483	3.477	3.535	3.473	3.382	3.321	3.322	3.312	160-170	0.9179	815.6	100,100
180	3.729	3.708	3.751	3.718	3.726	3.711	3.751	3.718	170-180	0.3365	815.9	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 437.09 lm

%lum = 53.6%

%lamp = 53.6%

Conical surface Flux(120deg): 628.83 lm

%lum = 77.1%


%lamp = 77.1%

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-03-17

□ Range: 0 - 180DEG  
□ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:

## LUMINANCE LIMITATION CURVES

NAME: 2835 IP20	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.: 202-00491-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.008*0.5	Shielding Angle:

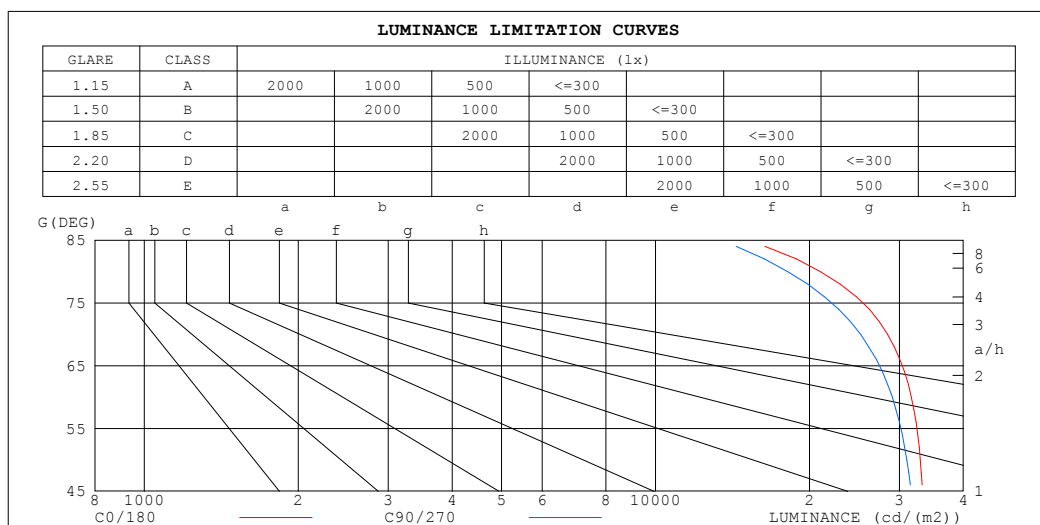

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	19642	17255
80	21025	18150
75	27882	24282
70	28434	25185
65	31847	28835
60	31660	29056
55	33380	31133
50	32969	31005
45	33896	32235


C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2022-03-17

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity: 65.0%  
Test Distance: 5.749m [K=1.0000]  
Remarks:

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: 2835 IP20	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.: 202-00491-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.008*0.5	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

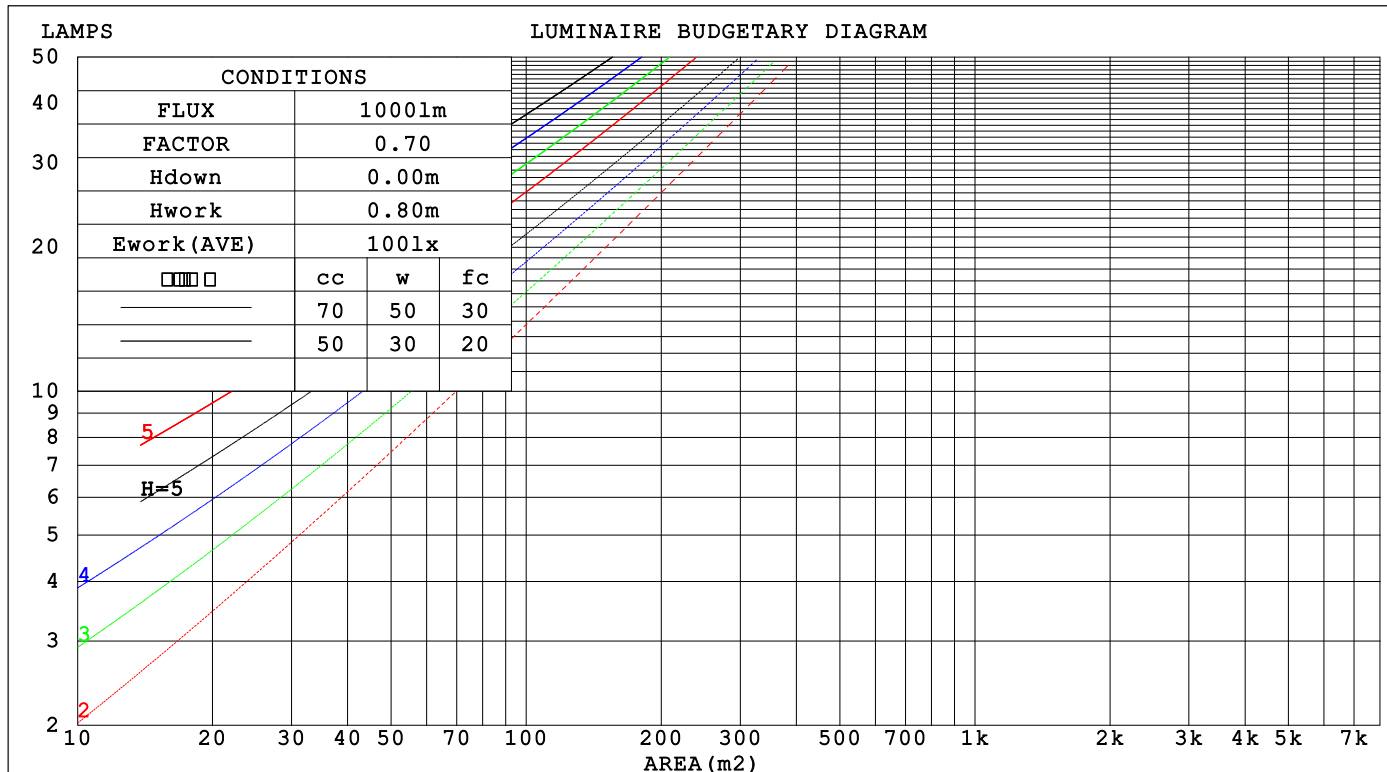

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-03-17

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:

### WEC AND CCEC

NAME: 2835 IP20	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.: 202-00491-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.008*0.5	Shielding Angle:

□cc	80%	70%	50%	30%	10%	0
□w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
□fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)					
0.0						
1.0	.312 .178 .056	.305 .174 .055	.291 .167 .053	.278 .160 .051	.266 .154 .050	
2.0	.294 .161 .049	.287 .158 .049	.275 .153 .047	.263 .148 .046	.253 .143 .045	
3.0	.272 .145 .043	.266 .143 .043	.255 .138 .042	.245 .134 .041	.235 .130 .040	
4.0	.251 .130 .038	.246 .129 .038	.236 .125 .037	.227 .122 .037	.218 .119 .036	
5.0	.232 .118 .034	.227 .117 .034	.218 .114 .033	.210 .111 .033	.203 .108 .033	
6.0	.215 .108 .031	.211 .106 .031	.203 .104 .030	.196 .102 .030	.189 .099 .030	
7.0	.200 .099 .028	.196 .098 .028	.189 .096 .028	.183 .094 .027	.176 .092 .027	
8.0	.187 .091 .026	.183 .090 .026	.177 .088 .025	.171 .087 .025	.165 .085 .025	
9.0	.175 .085 .024	.172 .084 .024	.166 .082 .023	.161 .081 .023	.156 .079 .023	
10.0	.164 .079 .022	.162 .078 .022	.156 .077 .022	.152 .075 .021	.147 .074 .021	

□cc	80%	70%	50%	30%	10%	0
□w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
□fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)					
0.0	.201 .201 .201	.172 .172 .172	.117 .117 .117	.067 .067 .067	.022 .022 .022	
1.0	.191 .167 .145	.164 .143 .125	.112 .099 .086	.064 .057 .050	.021 .018 .016	
2.0	.183 .143 .109	.157 .123 .094	.108 .085 .066	.062 .049 .038	.020 .016 .013	
3.0	.176 .125 .085	.151 .108 .074	.103 .075 .052	.060 .044 .030	.019 .014 .010	
4.0	.168 .112 .069	.144 .097 .060	.099 .067 .042	.057 .040 .025	.018 .013 .008	
5.0	.161 .102 .058	.138 .088 .050	.095 .061 .036	.055 .036 .021	.018 .012 .007	
6.0	.154 .093 .050	.132 .081 .044	.091 .057 .031	.053 .033 .018	.017 .011 .006	
7.0	.147 .086 .044	.126 .075 .038	.087 .053 .027	.051 .031 .016	.016 .010 .005	
8.0	.140 .081 .040	.121 .070 .035	.084 .049 .025	.049 .029 .015	.016 .010 .005	
9.0	.134 .076 .036	.116 .066 .032	.080 .046 .022	.047 .027 .013	.015 .009 .004	
10.0	.129 .072 .034	.111 .062 .029	.077 .044 .021	.045 .026 .012	.015 .008 .004	

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-03-17

□ Range: 0 - 180DEG  
□ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:

### UGR(Unified Glare Rating) Table

NAME: 2835 IP20					TYPE: 2835 160LED 24V			WEIGHT:			
SPEC.: 202-00491-00					DIM.:			SERIAL No.:			
MFR.:					SUR.: 0.008*0.5			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	25.5	27.0	25.8	27.3	27.5	25.2	26.7	25.5	27.0	27.2	
	27.0	28.4	27.4	28.7	29.0	26.6	28.0	26.9	28.3	28.5	
	27.6	28.9	27.9	29.2	29.5	27.1	28.4	27.4	28.7	29.0	
	27.9	29.2	28.3	29.5	29.8	27.4	28.6	27.7	28.9	29.3	
	28.0	29.2	28.4	29.5	29.9	27.5	28.7	27.8	29.0	29.3	
	28.1	29.2	28.4	29.5	29.9	27.5	28.6	27.9	29.0	29.3	
4H	2H	26.1	27.4	26.4	27.7	28.0	25.8	27.2	26.2	27.4	27.7
	3H	27.7	28.9	28.1	29.2	29.6	27.4	28.5	27.8	28.9	29.2
	4H	28.4	29.5	28.8	29.8	30.2	28.0	29.0	28.4	29.4	29.8
	6H	28.9	29.8	29.3	30.2	30.6	28.4	29.3	28.8	29.7	30.1
	8H	29.0	29.9	29.4	30.3	30.7	28.5	29.4	28.9	29.8	30.2
	12H	29.0	29.9	29.5	30.3	30.7	28.5	29.3	29.0	29.8	30.2
8H	4H	28.6	29.5	29.0	29.9	30.3	28.2	29.1	28.6	29.5	29.9
	6H	29.2	29.9	29.6	30.3	30.8	28.7	29.5	29.2	29.9	30.3
	8H	29.3	30.0	29.8	30.4	30.9	28.9	29.5	29.4	30.0	30.5
	12H	29.5	30.0	30.0	30.5	31.0	29.0	29.5	29.5	30.0	30.5
12H	4H	28.6	29.4	29.0	29.8	30.2	28.2	29.0	28.7	29.4	29.9
	6H	29.2	29.8	29.7	30.3	30.8	28.8	29.4	29.2	29.9	30.3
	8H	29.4	29.9	29.9	30.4	30.9	29.0	29.5	29.5	30.0	30.5
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H		+ 0.1 / - 0.2					+ 0.2 / - 0.2				
1.5H		+ 0.2 / - 0.3					+ 0.2 / - 0.4				
2.0H		+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 815.9 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.7)  
Area: 0.008 m2

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-03-17

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:

### UTILIZATION FACTORS TABLE

NAME: 2835 IP20	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.: 202-00491-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.008*0.5	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT)    k(RI) x RCR = 5									
k = 0.60	56	45	38	56	44	38	54	44	37	31
0.80	66	55	47	65	54	47	63	53	47	40
1.00	75	64	56	74	63	56	71	64	55	48
1.25	82	71	64	81	71	64	78	69	63	55
1.50	87	77	70	85	76	69	82	74	68	60
2.00	94	85	79	92	84	78	89	82	76	68
2.50	98	90	84	96	89	83	92	86	81	72
3.00	102	95	89	99	93	88	95	90	85	77
4.00	106	100	95	103	98	94	99	94	91	81
5.00	108	103	99	106	101	97	101	97	94	84
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004										
Suspended										
SHRNOM = 1.25										

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2022-03-17

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity: 65.0%  
Test Distance: 5.749m [K=1.0000]  
Remarks:

### ISOCANDELA DIAGRAM

NAME: 2835 IP20	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.: 202-00491-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.008*0.5	Shielding Angle:

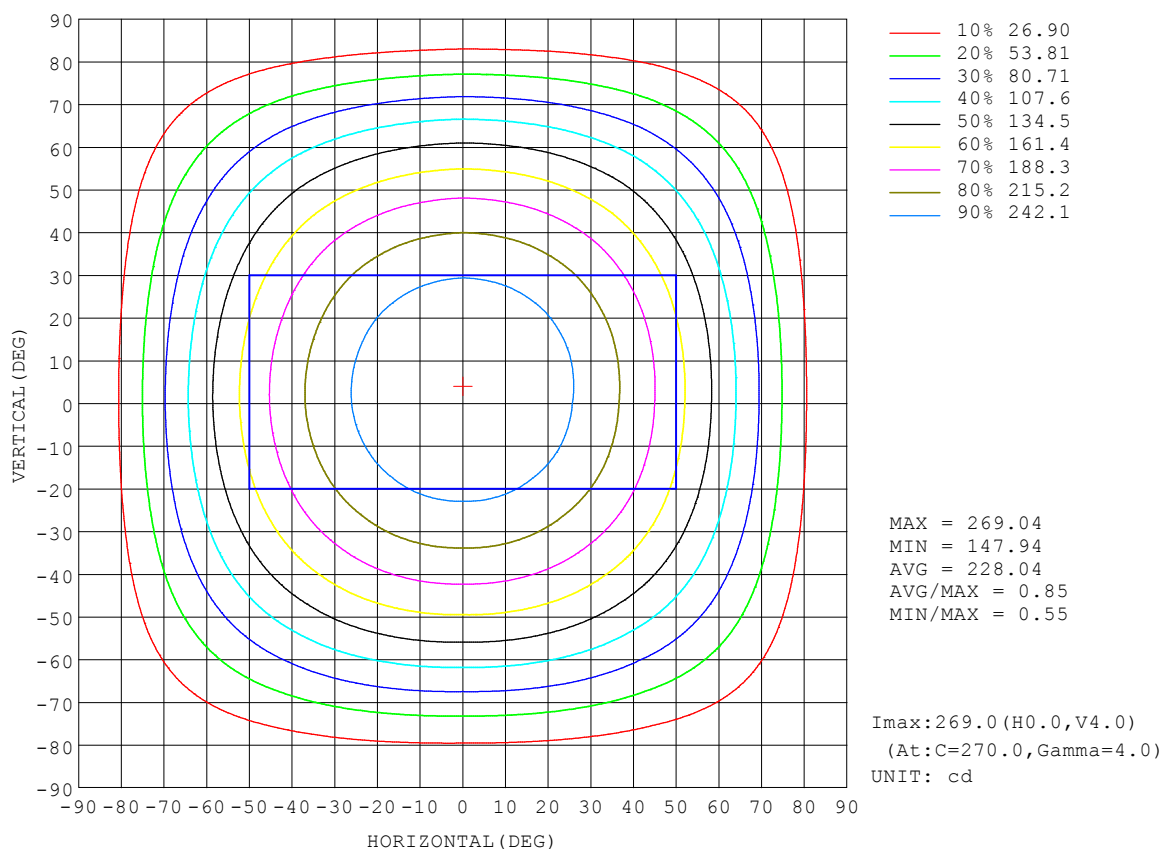


C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2022-03-17

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity: 65.0%  
Test Distance: 5.749m [K=1.0000]  
Remarks:



**AAI Figure**

NAME: 2835 IP20	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.: 202-00491-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.008*0.5	Shielding Angle:

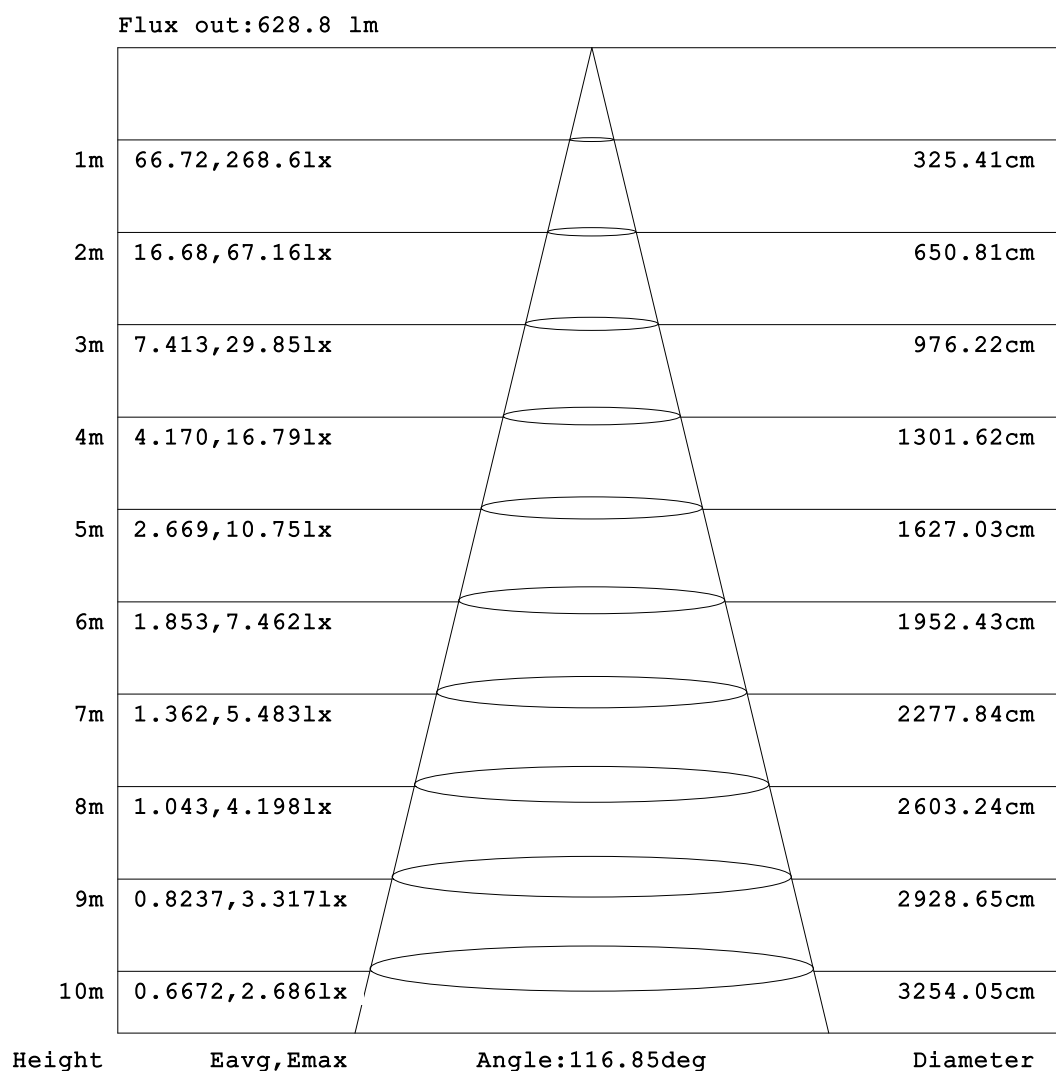


**Note:**The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-03-17

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
 Humidity:65.0%  
 Test Distance:5.749m [K=1.0000]  
 Remarks:

## ISOLUX DIAGRAM

NAME: 2835 IP20	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.: 202-00491-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.008*0.5	Shielding Angle:

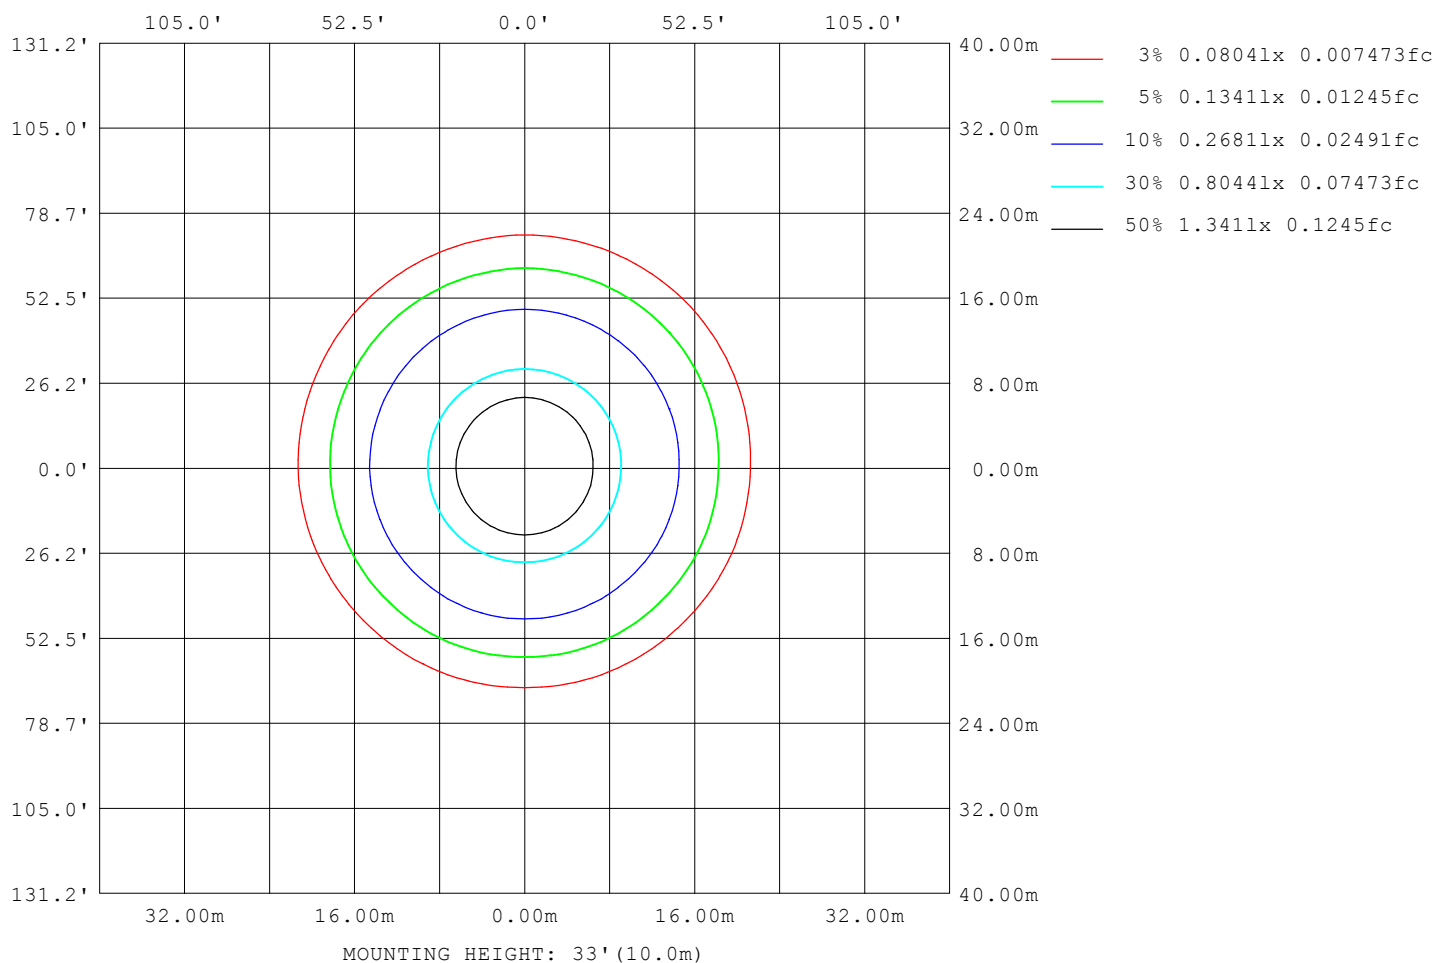

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2022-03-17

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity: 65.0%  
Test Distance: 5.749m [K=1.0000]  
Remarks:

## LED Avg.L Report

NAME: 2835 IP20	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.: 202-00491-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.008*0.5	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	30648
L_0~180 (75) av	25809
L_0~180 (85) av	14663
L_90~270 (65) av	30750
L_90~270 (75) av	26587
L_90~270 (85) av	20523
L_45 (65) av	30717
L_45 (75) av	26178
L_45 (85) av	18615

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2022-03-17

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity: 65.0%  
Test Distance: 5.749m [K=1.0000]  
Remarks:

### Planar Illuminance Curve

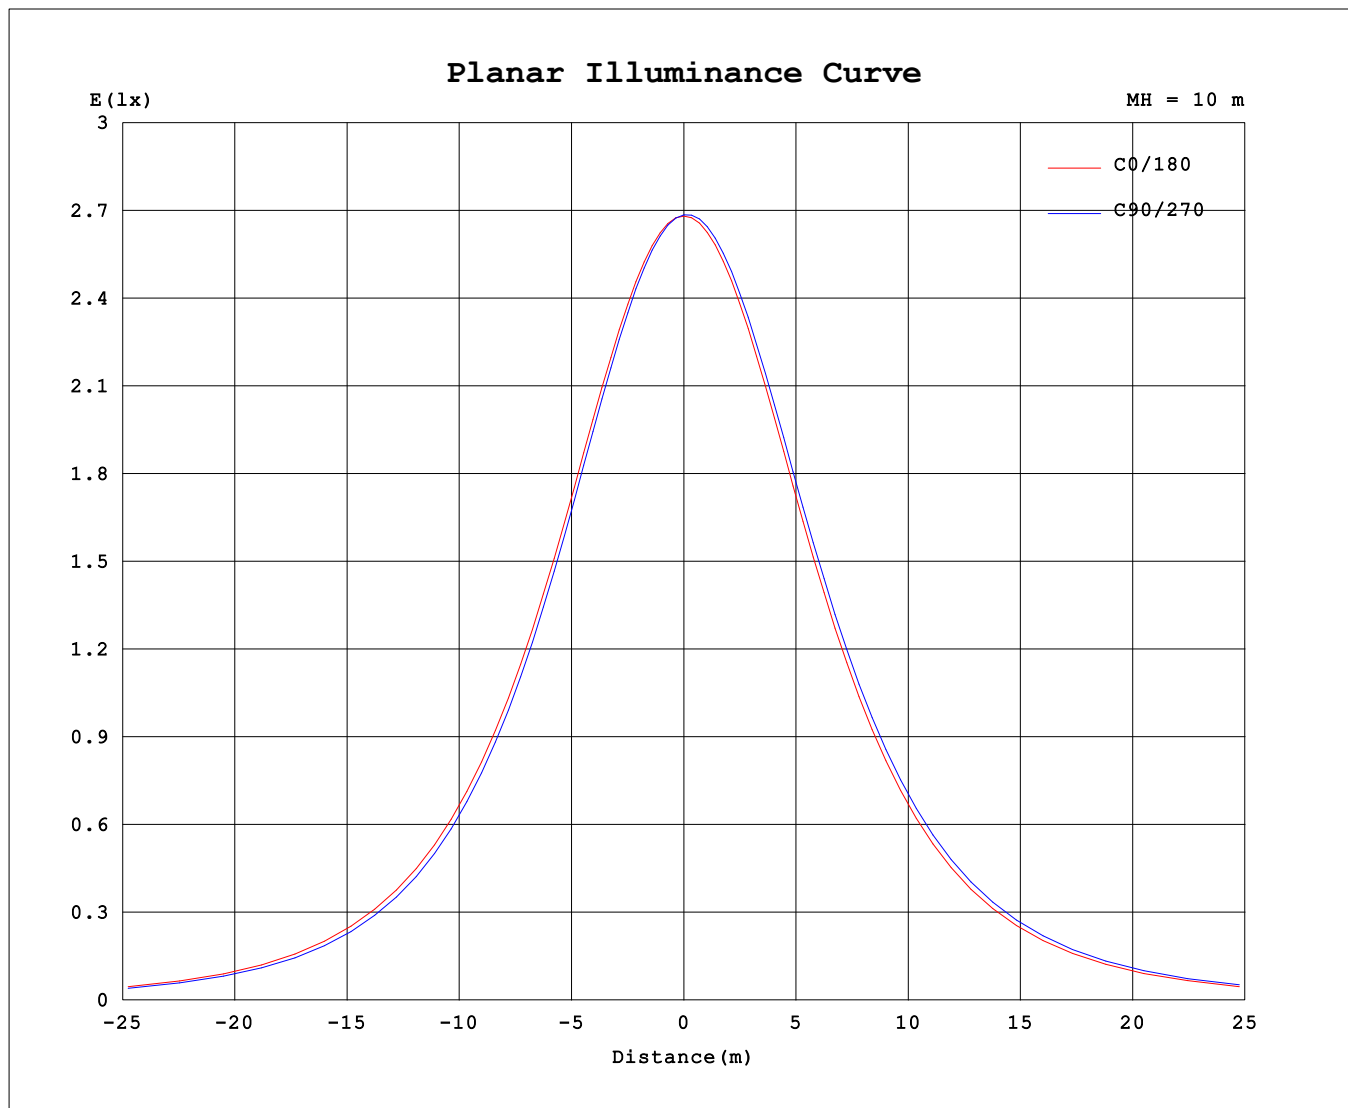

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-03-17

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
 Humidity: 65.0%  
 Test Distance: 5.749m [K=1.0000]  
 Remarks:

### LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: 2835 IP20	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.: 202-00491-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.008*0.5	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	268	268	268	268	268	268	268	268	268	268	268	268	268	268	268	268			
5	268	268	267	267	267	267	267	267	268	268	269	269	269	269	269	268			
10	265	264	263	262	262	262	263	264	265	266	267	267	267	267	267	266			
15	261	260	258	258	257	258	258	260	261	262	263	264	265	264	264	262			
20	253	251	249	248	248	248	249	251	253	255	256	257	258	258	257	255			
25	246	244	242	241	240	241	242	244	246	248	250	251	252	252	251	248			
30	233	231	228	227	226	227	228	231	234	236	238	240	241	240	239	236			
35	223	220	218	216	215	216	217	220	224	226	229	230	231	231	229	226			
40	205	203	199	197	196	197	199	202	206	209	212	214	215	214	213	209			
45	192	189	186	184	182	184	186	189	193	196	199	201	202	202	200	196			
50	170	167	163	161	159	161	163	167	171	174	177	179	181	180	178	175			
55	153	150	146	144	143	144	146	150	155	157	161	163	165	164	162	158			
60	127	124	120	118	116	118	120	124	128	131	135	137	139	138	136	132			
65	108	105	101	99.1	97.5	99.2	101	105	109	112	116	118	120	119	117	113			
70	77.9	75.2	71.5	70.1	68.9	70.3	71.9	75.2	79.3	81.7	85.5	87.9	90.1	89.3	87.3	83.0			
75	57.8	55.3	52.1	51.2	50.3	51.5	52.6	55.3	59.1	61.3	64.9	67.3	69.5	68.8	66.8	62.7			
80	29.2	27.5	25.5	25.6	25.2	26.0	26.3	27.8	29.7	32.1	35.3	37.7	39.7	39.2	37.3	33.6			
85	13.7	12.8	11.9	12.2	12.0	12.6	12.6	13.0	13.2	16.1	18.8	21.1	22.8	22.6	20.8	17.4			
90	0.31	1.16	1.28	1.38	1.24	1.27	1.23	1.04	0.26	1.94	3.89	5.93	7.16	7.04	5.39	2.99			
95	0.43	0.45	0.53	0.55	0.57	0.57	0.55	0.47	0.36	0.46	1.30	2.69	3.52	3.49	2.13	0.86			
100	0.72	0.72	0.76	0.79	0.81	0.80	0.78	0.74	0.59	0.55	0.54	0.98	1.31	1.25	0.55	0.54			
105	0.93	0.93	0.97	1.00	1.02	1.01	0.98	0.93	0.78	0.72	0.70	0.69	0.72	0.68	0.69	0.71			
110	1.29	1.26	1.30	1.32	1.35	1.34	1.31	1.26	1.08	1.00	0.97	0.95	0.94	0.94	0.96	0.99			
115	1.51	1.48	1.51	1.54	1.56	1.55	1.53	1.48	1.30	1.20	1.17	1.14	1.14	1.13	1.15	1.19			
120	1.85	1.80	1.82	1.84	1.86	1.86	1.84	1.81	1.61	1.51	1.45	1.42	1.41	1.41	1.44	1.49			
125	2.05	2.00	2.01	2.03	2.05	2.05	2.03	2.01	1.81	1.71	1.63	1.61	1.59	1.60	1.62	1.68			
130	2.34	2.28	2.27	2.29	2.30	2.32	2.30	2.30	2.08	1.99	1.91	1.86	1.85	1.85	1.88	1.96			
135	2.50	2.45	2.43	2.44	2.46	2.48	2.47	2.47	2.25	2.16	2.07	2.02	2.00	2.01	2.04	2.13			
140	2.72	2.68	2.65	2.64	2.66	2.70	2.70	2.69	2.47	2.38	2.31	2.26	2.22	2.23	2.27	2.37			
145	2.85	2.82	2.79	2.76	2.77	2.83	2.83	2.82	2.60	2.52	2.45	2.40	2.35	2.37	2.42	2.51			
150	3.01	3.00	2.97	2.93	2.95	3.02	3.00	2.99	2.78	2.70	2.65	2.61	2.54	2.56	2.62	2.71			
155	3.11	3.10	3.08	3.05	3.09	3.13	3.10	3.09	2.89	2.83	2.77	2.75	2.69	2.70	2.76	2.83			
160	3.24	3.24	3.23	3.20	3.27	3.26	3.23	3.23	3.07	3.01	2.97	2.95	2.92	2.90	2.95	3.03			
165	3.34	3.34	3.32	3.30	3.39	3.35	3.33	3.33	3.19	3.14	3.10	3.09	3.08	3.04	3.09	3.16			
170	3.48	3.48	3.48	3.47	3.53	3.50	3.47	3.49	3.38	3.35	3.32	3.31	3.32	3.27	3.31	3.37			
175	3.59	3.59	3.58	3.59	3.64	3.61	3.59	3.60	3.52	3.50	3.49	3.48	3.50	3.45	3.48	3.52			
180	3.73	3.71	3.71	3.72	3.75	3.71	3.72	3.74	3.73	3.72	3.71	3.72	3.75	3.72	3.72	3.74			

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:

Test Date:2022-03-17

□ Range: 0 - 180DEG

□ Interval: 2.0DEG

Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450

Humidity:65.0%

Test Distance:5.749m [K=1.0000]

Remarks: