


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: 2835 IP20	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.: 202-00487-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.008*0.5	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 130.82 lm/W
MODEL	6500K	Imax (cd)	203.8	S/MH(C0/180)	1.28	
NOMINAL POWER(W)	4.8	LOR(%)	100.0	S/MH(C90/270)	1.25	
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	607.49	□ UP,DN(C0-180)	0.7,51.4	
NOMINAL FLUX(lm)	7.59364	CIE CLASS	DIRECT	□ UP,DN(C180-360)	0.6,47.3	
LAMPS INSIDE	80	□ up (%)	1.4	CIBSE SHR NOM	1.25	
TEST VOLTAGE(V)	24	□ down (%)	98.6	CIBSE SHR MAX	1.35	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

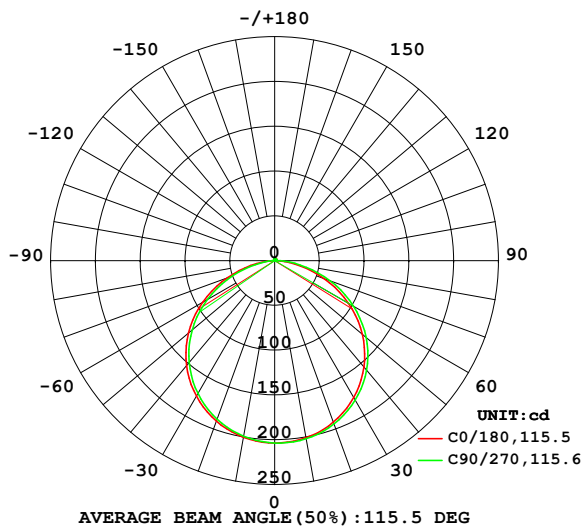

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

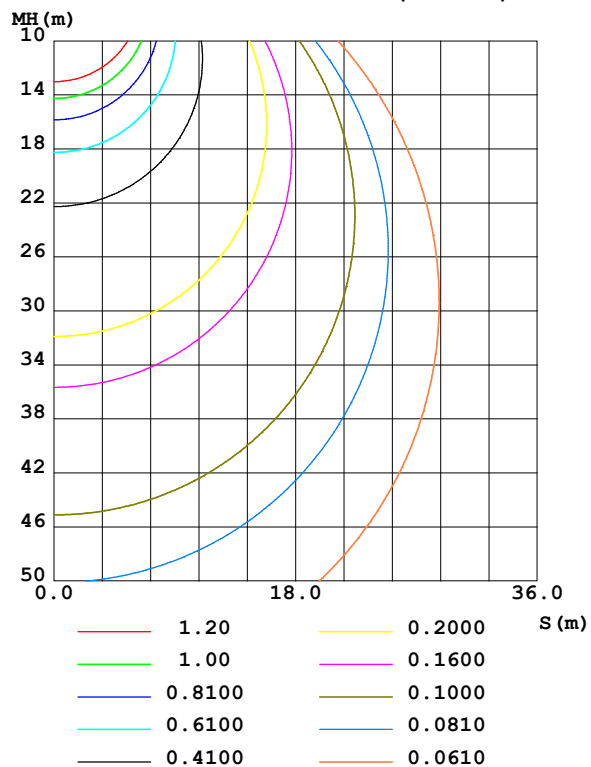

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-03-17

□ Range: 0 - 180DEG
 □ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity:65.0%
 Test Distance:5.749m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	200.9	201.7	202.0	201.4	200.2	199.4	199.1	199.7	0- 10	19.29	19.29	3.18,3.18
20	191.8	193.6	194.1	192.9	190.6	188.9	188.3	189.5	10- 20	55.53	74.82	12.3,12.3
30	176.5	179.0	179.9	178.3	174.8	172.2	171.4	173.1	20- 30	84.91	159.7	26.3,26.3
40	155.1	158.4	159.6	157.6	153.0	149.7	148.6	150.9	30- 40	103.6	263.3	43.3,43.3
50	127.9	131.9	133.4	131.1	125.6	121.5	120.2	122.9	40- 50	108.8	372.2	61.3,61.3
60	95.22	99.84	101.7	99.27	92.77	88.13	86.74	89.69	50- 60	99.16	471.3	77.6,77.6
70	58.66	63.61	65.85	63.38	56.17	51.30	50.03	52.91	60- 70	75.33	546.6	90,90
80	23.22	27.08	29.31	27.33	20.36	17.47	16.51	18.74	70- 80	41.68	588.3	96.8,96.8
90	0.2071	2.722	3.911	3.349	0.1859	0.4957	0.4647	0.5383	80- 90	10.93	599.3	98.6,98.6
100	0.4947	0.4399	0.6898	0.5926	0.4384	0.4687	0.4993	0.4687	90-100	0.7422	600.0	98.8,98.8
110	0.9089	0.8174	0.8050	0.8341	0.8074	0.8182	0.8510	0.8111	100-110	0.6850	600.7	98.9,98.9
120	1.340	1.210	1.195	1.236	1.205	1.180	1.207	1.172	110-120	1.011	601.7	99,99
130	1.714	1.571	1.551	1.600	1.564	1.527	1.521	1.501	120-130	1.247	602.9	99.3,99.3
140	2.011	1.871	1.851	1.916	1.859	1.821	1.789	1.791	130-140	1.329	604.3	99.5,99.5
150	2.242	2.142	2.107	2.173	2.095	2.066	2.010	2.043	140-150	1.248	605.5	99.7,99.7
160	2.433	2.368	2.383	2.384	2.314	2.290	2.269	2.276	150-160	1.027	606.5	99.8,99.8
170	2.621	2.596	2.635	2.598	2.559	2.539	2.557	2.535	160-170	0.6927	607.2	100,100
180	2.811	2.805	2.844	2.817	2.811	2.805	2.842	2.820	170-180	0.2545	607.5	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 328.94 lm

%lum = 54.1%

%lamp = 54.1%

Conical surface Flux(120deg): 471.31 lm

%lum = 77.6%


%lamp = 77.6%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-17

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

NAME: 2835 IP20	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.: 202-00487-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.008*0.5	Shielding Angle:

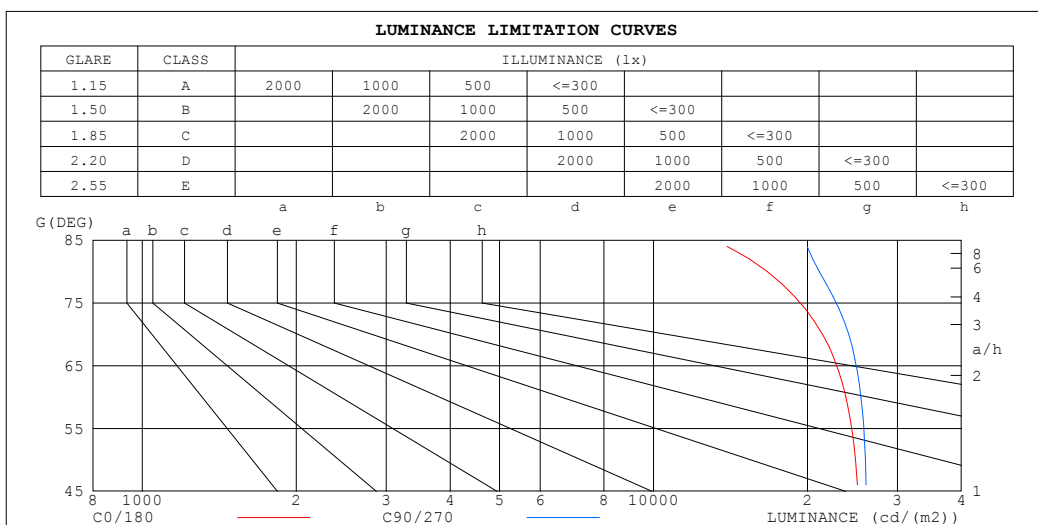

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	16707	23953
80	16695	21115
75	21108	24581
70	21417	24090
65	23912	25989
60	23780	25457
55	25122	26447
50	24839	25961
45	25592	26510


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-03-17

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: 2835 IP20	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.: 202-00487-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.008*0.5	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.99
1.0	1.04	.99	.95	1.01	.97	.94	.97	.93	.90	.93	.90	.87	.89	.87	.85	.82
2.0	.90	.83	.77	.88	.82	.76	.84	.79	.74	.81	.76	.73	.78	.74	.71	.68
3.0	.79	.71	.64	.77	.70	.63	.74	.68	.62	.71	.66	.61	.68	.64	.60	.57
4.0	.70	.61	.54	.68	.60	.54	.66	.59	.53	.63	.57	.52	.61	.56	.51	.49
5.0	.62	.53	.47	.61	.53	.46	.59	.51	.46	.57	.50	.45	.55	.49	.44	.42
6.0	.56	.47	.41	.55	.46	.40	.53	.45	.40	.51	.44	.39	.49	.44	.39	.37
7.0	.51	.42	.36	.50	.41	.36	.48	.41	.35	.47	.40	.35	.45	.39	.34	.32
8.0	.46	.38	.32	.45	.37	.32	.44	.37	.31	.43	.36	.31	.41	.35	.31	.29
9.0	.42	.34	.29	.42	.34	.28	.40	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.25	.35	.29	.25	.23

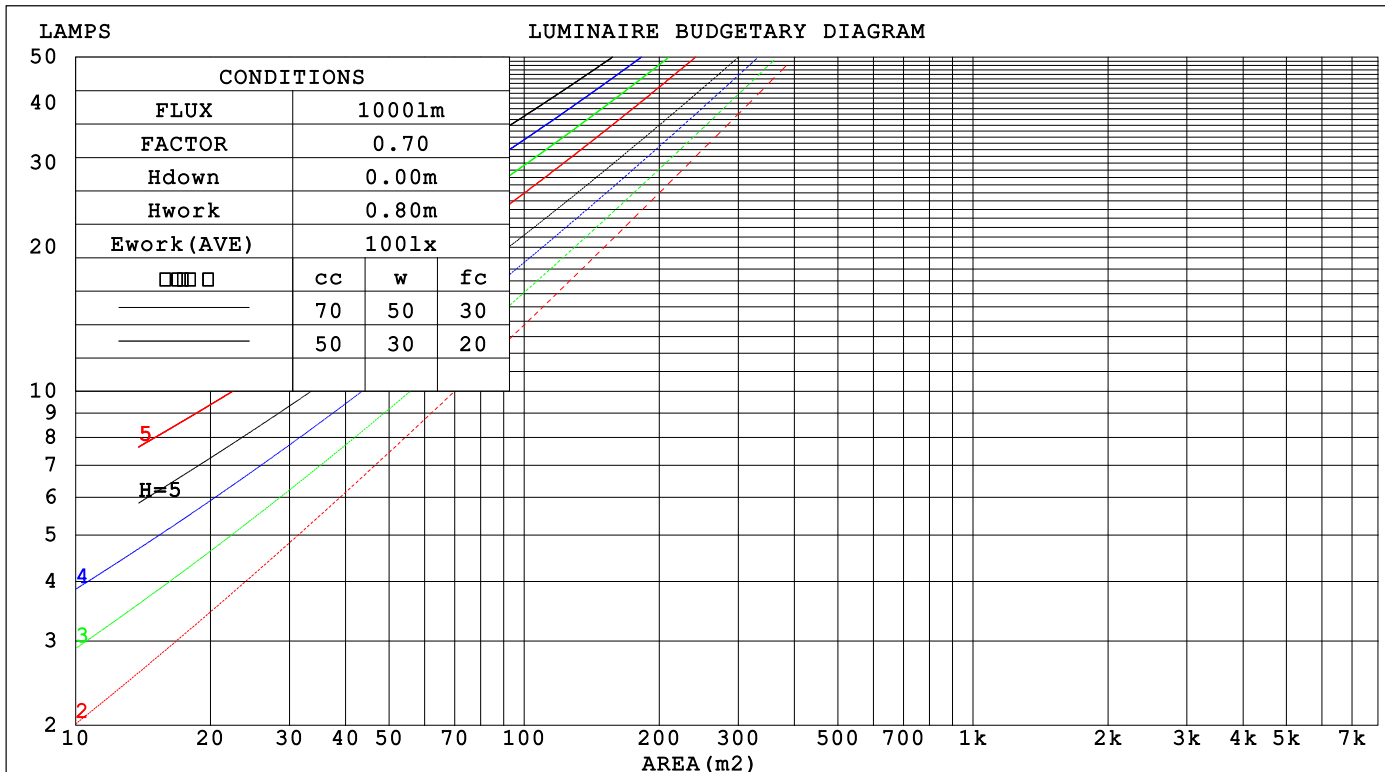

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-17

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: 2835 IP20	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.: 202-00487-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.008*0.5	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0	
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.310	.176	.056	.302	.172	.055	.288	.165	.053	.275	.159	.051	.263	.153	.049		
2.0	.292	.160	.049	.285	.157	.048	.273	.152	.047	.261	.147	.046	.251	.142	.045		
3.0	.270	.144	.043	.265	.142	.043	.254	.137	.042	.243	.133	.041	.234	.129	.040		
4.0	.250	.130	.038	.244	.128	.038	.235	.124	.037	.226	.121	.037	.217	.118	.036		
5.0	.231	.118	.034	.226	.116	.034	.217	.113	.033	.209	.110	.033	.202	.108	.032		
6.0	.214	.107	.031	.210	.106	.031	.202	.104	.030	.195	.101	.030	.188	.099	.029		
7.0	.199	.098	.028	.196	.097	.028	.189	.095	.027	.182	.093	.027	.176	.091	.027		
8.0	.186	.091	.026	.183	.090	.025	.176	.088	.025	.171	.086	.025	.165	.085	.025		
9.0	.174	.084	.024	.171	.084	.023	.166	.082	.023	.160	.080	.023	.155	.079	.023		
10.0	.164	.079	.022	.161	.078	.022	.156	.076	.022	.151	.075	.021	.147	.074	.021		

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0	
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.201	.201	.201	.172	.172	.172	.117	.117	.117	.067	.067	.067	.022	.022	.022		
1.0	.191	.167	.145	.163	.143	.125	.112	.098	.086	.064	.057	.050	.021	.018	.016		
2.0	.183	.142	.108	.157	.123	.094	.107	.085	.065	.062	.049	.038	.020	.016	.012		
3.0	.175	.125	.085	.150	.108	.074	.103	.075	.052	.060	.044	.030	.019	.014	.010		
4.0	.168	.112	.069	.144	.096	.060	.099	.067	.042	.057	.039	.025	.018	.013	.008		
5.0	.160	.101	.058	.138	.088	.050	.095	.061	.035	.055	.036	.021	.018	.012	.007		
6.0	.153	.093	.050	.132	.080	.043	.091	.056	.031	.053	.033	.018	.017	.011	.006		
7.0	.146	.086	.044	.126	.075	.038	.087	.052	.027	.050	.031	.016	.016	.010	.005		
8.0	.140	.080	.039	.120	.070	.034	.083	.049	.024	.048	.029	.015	.016	.009	.005		
9.0	.134	.075	.036	.115	.065	.031	.080	.046	.022	.046	.027	.013	.015	.009	.004		
10.0	.128	.071	.033	.110	.062	.029	.077	.043	.021	.045	.026	.012	.014	.008	.004		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-17

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME: 2835 IP20					TYPE: 2835 160LED 24V			WEIGHT:			
SPEC.: 202-00487-00					DIM.:			SERIAL No.:			
MFR.:					SUR.: 0.008*0.5			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H		25.9	27.4	26.2	27.6	27.8	26.1	27.6	26.4	27.8	28.1
3H		27.4	28.8	27.7	29.0	29.3	27.8	29.1	28.1	29.4	29.7
4H		28.0	29.3	28.3	29.6	29.8	28.4	29.7	28.8	30.0	30.3
6H		28.3	29.6	28.7	29.9	30.2	28.9	30.2	29.3	30.5	30.8
8H		28.4	29.6	28.8	29.9	30.3	29.1	30.3	29.4	30.6	30.9
12H		28.5	29.6	28.9	30.0	30.3	29.2	30.3	29.6	30.7	31.0
4H 2H		26.5	27.9	26.9	28.1	28.4	26.7	28.1	27.1	28.3	28.6
3H		28.2	29.4	28.6	29.7	30.1	28.6	29.7	28.9	30.0	30.4
4H		28.9	30.0	29.3	30.3	30.7	29.3	30.4	29.7	30.8	31.1
6H		29.4	30.4	29.9	30.8	31.1	30.0	30.9	30.4	31.3	31.7
8H		29.6	30.5	30.0	30.9	31.3	30.2	31.1	30.6	31.5	31.9
12H		29.7	30.5	30.1	30.9	31.3	30.4	31.2	30.8	31.6	32.0
8H 4H		29.2	30.1	29.7	30.5	30.9	29.6	30.5	30.0	30.9	31.3
6H		29.9	30.6	30.4	31.0	31.5	30.4	31.1	30.8	31.5	32.0
8H		30.1	30.8	30.6	31.2	31.7	30.7	31.3	31.2	31.8	32.3
12H		30.3	30.8	30.8	31.3	31.8	30.9	31.5	31.4	32.0	32.5
12H 4H		29.3	30.1	29.7	30.5	30.9	29.6	30.4	30.1	30.8	31.3
6H		30.0	30.6	30.4	31.1	31.5	30.4	31.1	30.9	31.5	32.0
8H		30.2	30.8	30.7	31.3	31.8	30.8	31.3	31.3	31.8	32.3
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H		+ 0.1 / - 0.2					+ 0.1 / - 0.2				
1.5H		+ 0.2 / - 0.4					+ 0.2 / - 0.3				
2.0H		+ 0.2 / - 0.4					+ 0.1 / - 0.3				

CIE Pub.117, 607.5 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.7)
Area: 0.008 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-17

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:


```

Range: 0 - 180DEG
Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

```

ISOCANDELA DIAGRAM

NAME: 2835 IP20	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.: 202-00487-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.008*0.5	Shielding Angle:

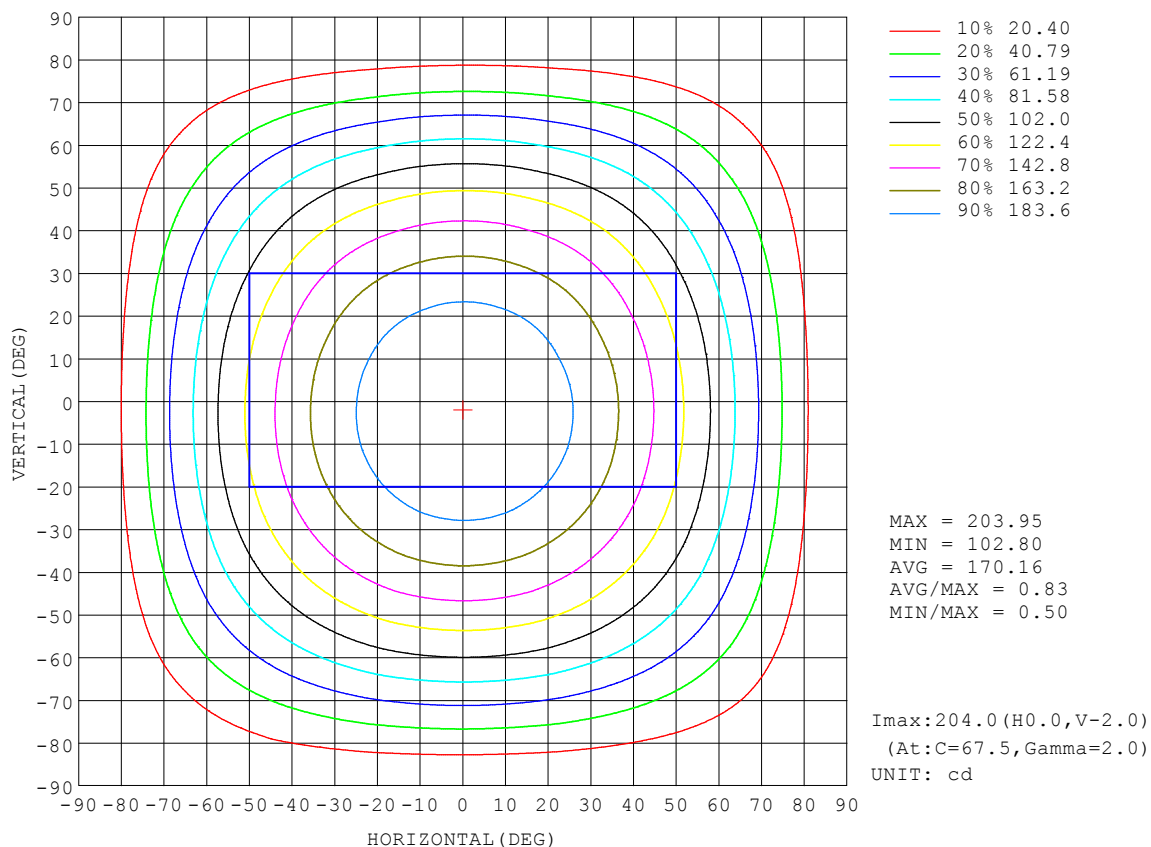


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-03-17

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

AAI Figure

NAME: 2835 IP20	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.: 202-00487-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.008*0.5	Shielding Angle:

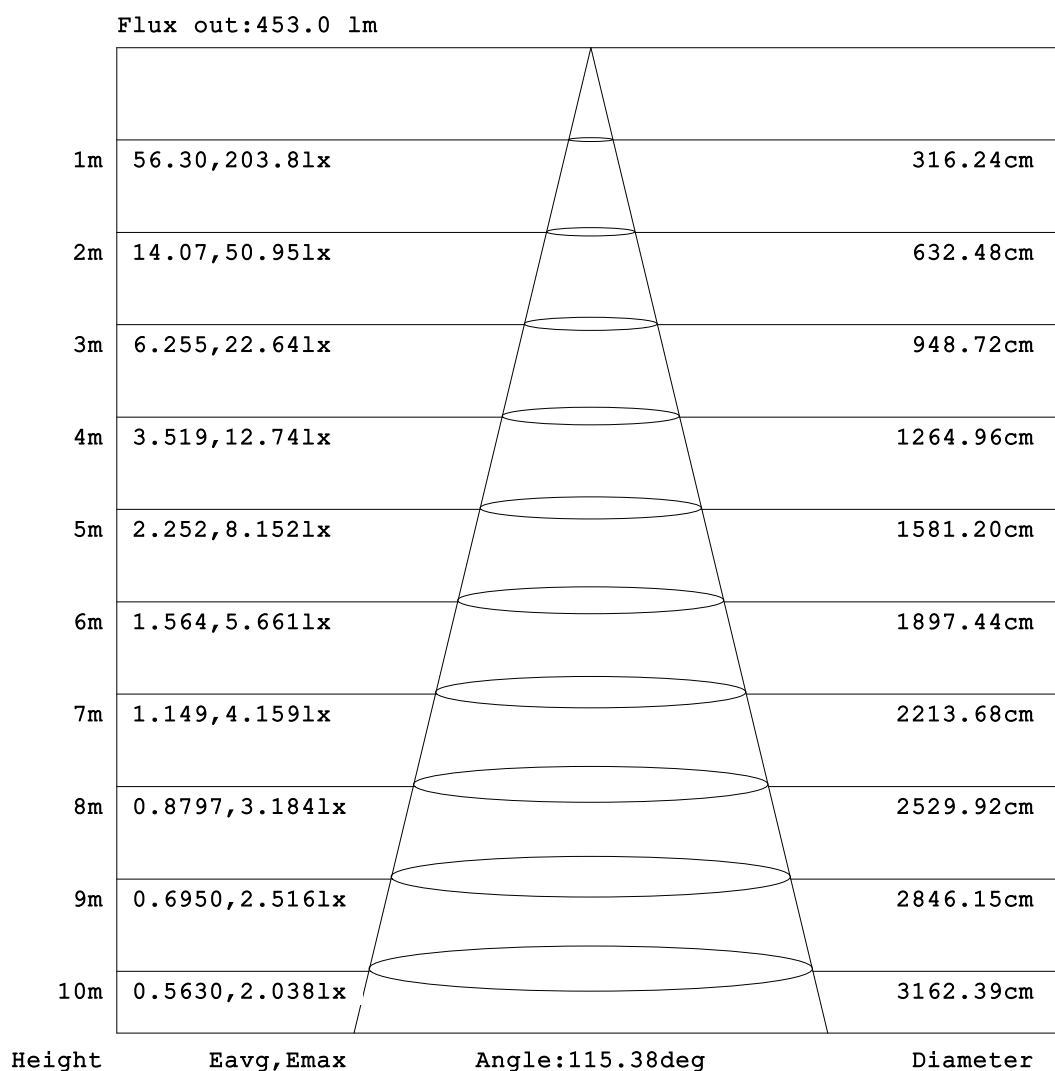


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-03-17

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity:65.0%
 Test Distance:5.749m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

NAME: 2835 IP20	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.: 202-00487-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.008*0.5	Shielding Angle:

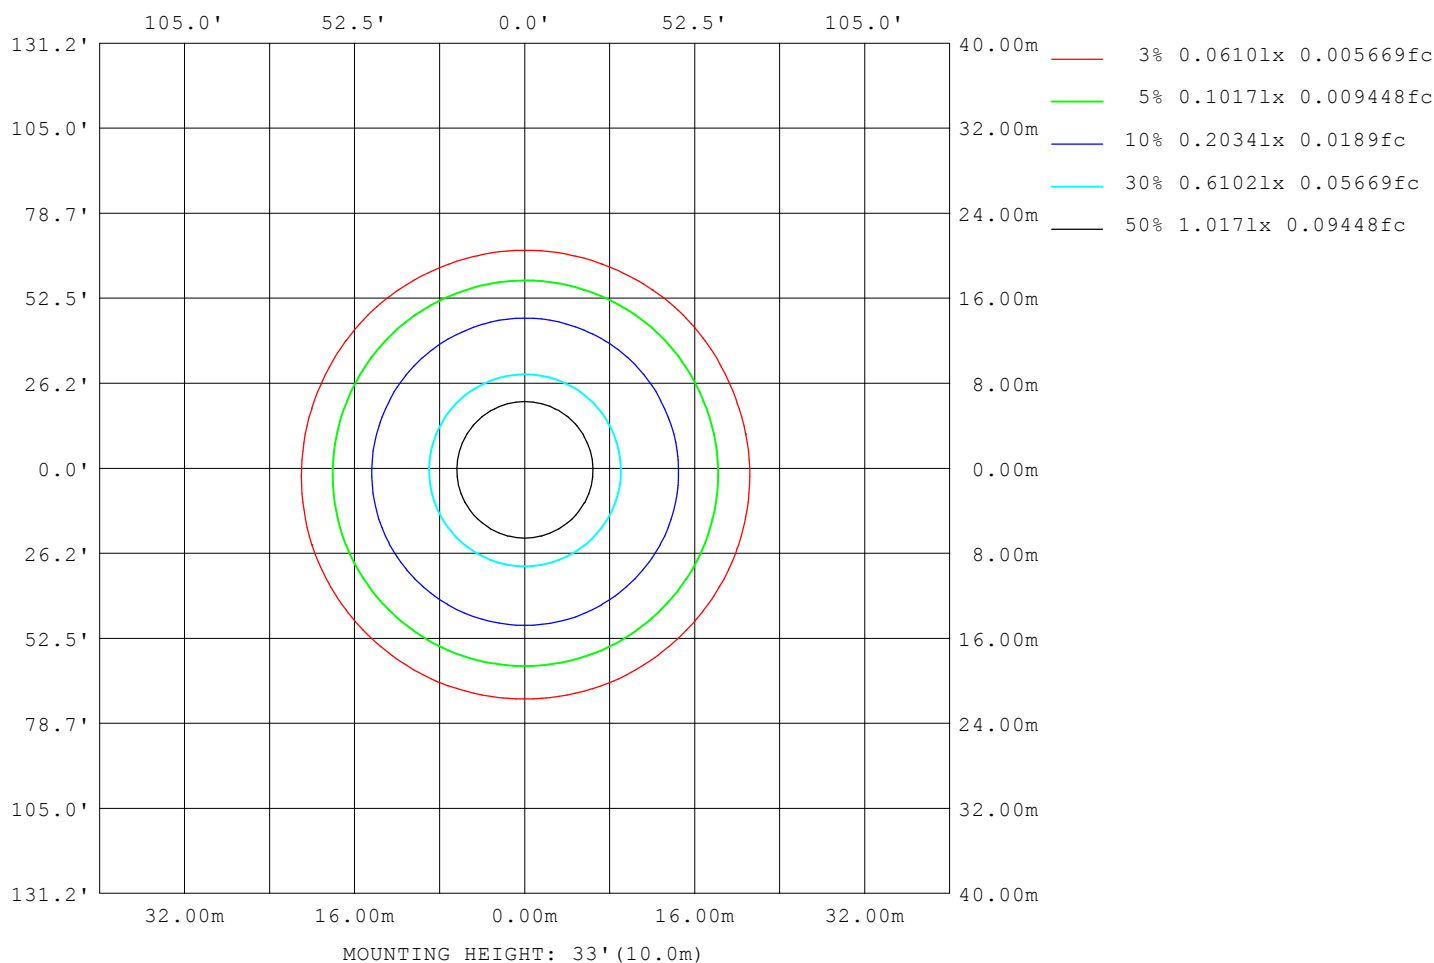

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-03-17

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

LED Avg.L Report

NAME: 2835 IP20	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.: 202-00487-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.008*0.5	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	22489
L_0~180 (75) av	18842
L_0~180 (85) av	11554
L_90~270 (65) av	22596
L_90~270 (75) av	19154
L_90~270 (85) av	13467
L_45 (65) av	22576
L_45 (75) av	19004
L_45 (85) av	13454

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-17

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

Planar Illuminance Curve

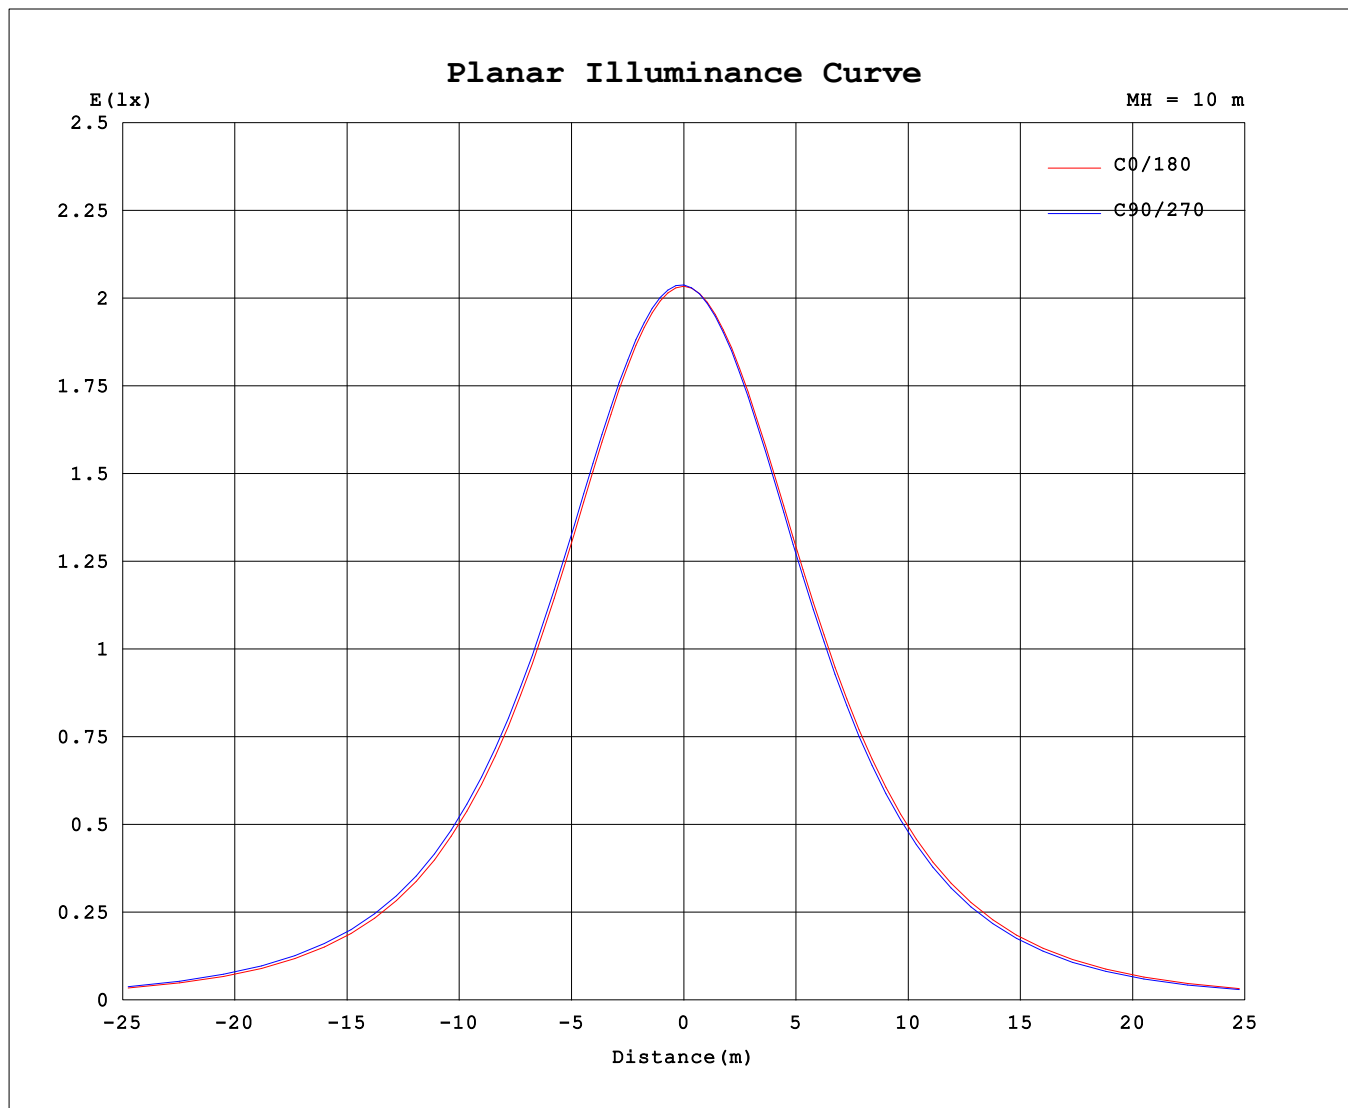

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-03-17

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: 2835 IP20	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.: 202-00487-00	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.008*0.5	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	204	204	204	204	204	204	204	204	204	204	204	204	204	204	204	204			
5	203	203	204	204	204	204	203	203	203	203	203	203	203	203	203	203			
10	201	201	202	202	202	202	201	201	200	200	199	199	199	199	200	200			
15	198	199	199	200	200	199	199	198	197	196	196	196	196	196	196	197			
20	192	193	194	194	194	194	193	192	191	189	189	188	188	189	190	190			
25	186	188	188	189	189	189	188	187	185	184	183	182	182	183	184	185			
30	176	178	179	180	180	180	178	177	175	173	172	171	171	172	173	174			
35	169	171	172	172	173	172	171	169	167	165	164	163	163	163	165	166			
40	155	157	158	160	160	159	158	156	153	151	150	148	149	149	151	152			
45	145	147	148	150	150	149	148	146	143	140	139	138	138	138	140	142			
50	128	131	132	133	133	133	131	129	126	123	121	120	120	121	123	125			
55	115	118	120	121	121	121	119	117	113	110	109	107	107	108	110	112			
60	95.2	98.3	99.8	102	102	101	99.3	96.8	92.8	89.7	88.1	86.5	86.7	87.3	89.7	91.5			
65	80.9	84.1	85.7	87.6	87.8	87.4	85.3	82.7	78.5	75.2	73.7	72.1	72.3	72.9	75.3	77.0			
70	58.7	61.7	63.6	65.5	65.9	65.4	63.4	60.5	56.2	52.9	51.3	49.8	50.0	50.6	52.9	54.8			
75	43.8	46.7	48.5	50.4	50.9	50.4	48.4	45.6	41.4	38.3	36.7	35.3	35.6	36.1	38.3	40.0			
80	23.2	25.7	27.1	28.7	29.3	28.9	27.3	23.1	20.4	18.5	17.5	16.3	16.5	17.0	18.7	20.1			
85	11.7	13.8	15.1	16.3	16.7	16.6	15.5	10.7	8.97	8.30	7.66	6.71	6.70	7.17	8.56	9.48			
90	0.21	1.94	2.72	3.46	3.91	3.85	3.35	1.54	0.19	0.55	0.50	0.45	0.46	0.47	0.54	0.56			
95	0.29	0.38	0.71	1.05	1.44	1.33	1.18	0.35	0.26	0.29	0.31	0.33	0.33	0.33	0.32	0.28			
100	0.49	0.45	0.44	0.52	0.69	0.64	0.59	0.48	0.44	0.45	0.47	0.49	0.50	0.49	0.47	0.44			
105	0.66	0.60	0.58	0.57	0.62	0.59	0.61	0.63	0.58	0.58	0.60	0.62	0.63	0.62	0.60	0.57			
110	0.91	0.84	0.82	0.81	0.81	0.82	0.83	0.86	0.81	0.80	0.82	0.84	0.85	0.84	0.81	0.79			
115	1.09	1.00	0.98	0.96	0.96	0.97	0.99	1.03	0.97	0.95	0.97	0.98	1.00	0.98	0.96	0.93			
120	1.34	1.24	1.21	1.20	1.19	1.21	1.24	1.27	1.20	1.18	1.18	1.20	1.21	1.20	1.17	1.16			
125	1.49	1.39	1.36	1.35	1.34	1.36	1.39	1.43	1.36	1.34	1.32	1.33	1.34	1.33	1.31	1.30			
130	1.71	1.61	1.57	1.55	1.55	1.58	1.60	1.65	1.56	1.55	1.53	1.52	1.52	1.52	1.50	1.52			
135	1.84	1.75	1.70	1.68	1.67	1.71	1.74	1.79	1.69	1.67	1.65	1.64	1.63	1.64	1.62	1.65			
140	2.01	1.93	1.87	1.85	1.85	1.90	1.92	1.97	1.86	1.84	1.82	1.81	1.79	1.79	1.79	1.82			
145	2.11	2.04	1.98	1.95	1.96	2.01	2.03	2.07	1.96	1.94	1.93	1.92	1.87	1.89	1.90	1.93			
150	2.24	2.19	2.14	2.10	2.11	2.16	2.17	2.21	2.10	2.08	2.07	2.06	2.01	2.03	2.04	2.07			
155	2.32	2.28	2.23	2.20	2.22	2.26	2.27	2.30	2.18	2.17	2.16	2.16	2.11	2.12	2.14	2.17			
160	2.43	2.41	2.37	2.34	2.38	2.40	2.38	2.41	2.31	2.30	2.29	2.29	2.27	2.26	2.28	2.31			
165	2.51	2.48	2.45	2.43	2.49	2.48	2.47	2.49	2.40	2.39	2.38	2.39	2.38	2.35	2.37	2.41			
170	2.62	2.61	2.60	2.58	2.63	2.61	2.60	2.62	2.56	2.55	2.54	2.55	2.56	2.52	2.53	2.57			
175	2.71	2.70	2.69	2.69	2.73	2.71	2.70	2.72	2.66	2.66	2.65	2.66	2.68	2.64	2.66	2.68			
180	2.81	2.81	2.81	2.82	2.84	2.82	2.82	2.84	2.81	2.81	2.81	2.82	2.84	2.82	2.82	2.83			

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:

Test Date:2022-03-17

□ Range: 0 - 180DEG

□ Interval: 2.0DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450

Humidity:65.0%

Test Distance:5.749m [K=1.0000]

Remarks: