


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 108.95 lm/W			
MODEL	3000K RA90 12MM 9.6W	I _{max} (cd)	142.9	S/MH(C0/180)	1.26
NOMINAL POWER(W)	4.8	LOR(%)	100.0	S/MH(C90/270)	1.32
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	498.59	□ UP,DN(C0-180)	4.6,45.6
NOMINAL FLUX(lm)	6.23233	CIE CLASS	DIRECT	□ UP,DN(C180-360)	2.5,47.4
LAMPS INSIDE	80	□ up (%)	7.0	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)	24	□ down (%)	93.0	CIBSE SHR MAX	1.50

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

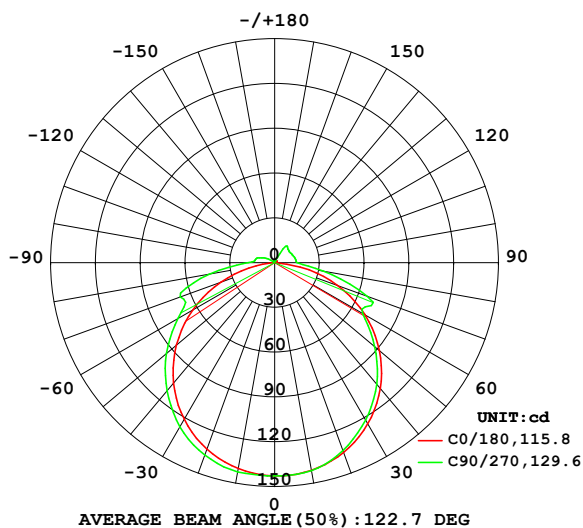

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

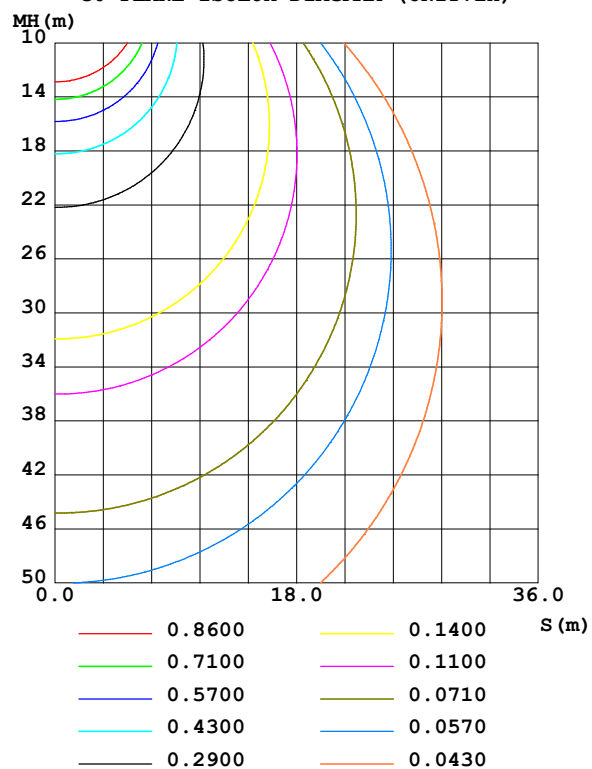

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-15

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	141.3	141.6	141.5	140.7	140.0	140.9	142.4	142.0	0- 10	13.56	13.56	2.72,2.72
20	135.3	135.5	134.0	133.9	132.9	135.6	137.1	137.5	10- 20	39.23	52.79	10.6,10.6
30	124.7	124.3	121.8	121.9	121.2	125.3	126.9	127.8	20- 30	60.12	112.9	22.6,22.6
40	110.1	109.0	106.4	105.8	105.4	110.4	112.0	113.5	30- 40	73.39	186.3	37.4,37.4
50	91.65	90.67	87.55	86.78	85.90	91.91	94.65	95.58	40- 50	77.43	263.7	52.9,52.9
60	69.83	69.48	68.22	65.76	63.33	71.19	74.81	75.36	50- 60	71.98	335.7	67.3,67.3
70	44.79	55.34	66.10	53.09	38.44	50.97	67.49	55.18	60- 70	60.66	396.4	79.5,79.5
80	17.52	30.87	33.03	29.41	12.71	35.81	44.51	38.77	70- 80	46.35	442.7	88.8,88.8
90	0.1738	11.75	15.03	12.02	0.1859	12.92	17.91	13.60	80- 90	20.76	463.5	93,93
100	0.3713	11.68	14.31	11.90	0.3742	8.315	13.09	10.42	90-100	10.58	474.1	95.1,95.1
110	0.6594	10.34	13.27	10.32	0.6457	4.617	9.717	5.292	100-110	8.366	482.4	96.8,96.8
120	0.9428	8.853	12.74	8.845	0.9101	0.9134	5.343	0.8461	110-120	5.667	488.1	97.9,97.9
130	1.202	7.875	12.63	7.995	1.151	1.068	1.065	1.036	120-130	3.850	491.9	98.7,98.7
140	1.415	5.188	13.53	5.500	1.344	1.251	1.201	1.215	130-140	3.098	495.0	99.3,99.3
150	1.581	1.560	7.422	1.609	1.503	1.420	1.341	1.386	140-150	2.087	497.1	99.7,99.7
160	1.727	1.705	1.723	1.730	1.644	1.582	1.533	1.559	150-160	0.7924	497.9	99.9,99.9
170	1.869	1.853	1.875	1.856	1.815	1.772	1.757	1.759	160-170	0.4882	498.4	100,100
180	2.001	1.984	2.001	1.994	2.001	1.984	2.001	1.987	170-180	0.1796	498.6	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 232.89 lm

%lum = 46.7%

%lamp = 46.7%

Conical surface Flux(120deg): 335.7 lm

%lum = 67.3%


%lamp = 67.3%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-04-15

□ Range: 0 - 180DEG
 □ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity:65.0%
 Test Distance:5.749m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

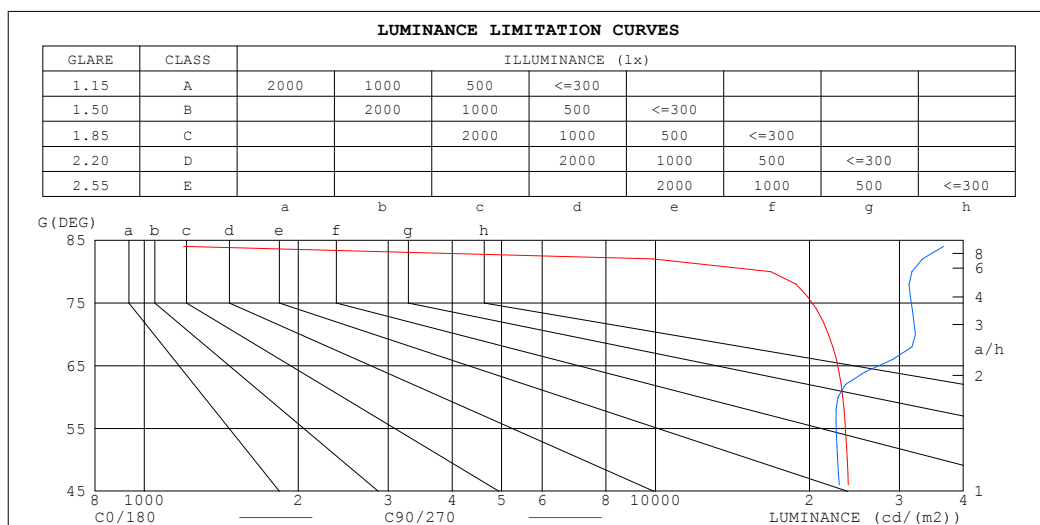

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1431	43892
80	16793	31716
75	21979	33844
70	21795	32225
65	23700	26663
60	23241	22750
55	24146	23145
50	23726	22711
45	24281	23364


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-04-15

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0														
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
□fc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Coefficients of Utilization(CU)														
0.0	1.17	1.17	1.17	1.14	1.14	1.14	1.07	1.07	1.07	1.01	1.01	1.01	.96	.96	.96	.93														
1.0	1.00	.95	.91	.97	.93	.89	.92	.88	.85	.86	.84	.81	.82	.79	.77	.75														
2.0	.86	.79	.73	.84	.77	.71	.79	.73	.69	.75	.70	.66	.71	.67	.63	.61														
3.0	.75	.67	.60	.73	.65	.59	.69	.62	.57	.65	.60	.55	.62	.57	.53	.50														
4.0	.66	.57	.50	.65	.56	.49	.61	.54	.48	.58	.52	.47	.55	.50	.45	.43														
5.0	.59	.50	.43	.58	.49	.42	.55	.47	.41	.52	.45	.40	.49	.44	.39	.37														
6.0	.53	.44	.37	.52	.43	.37	.49	.42	.36	.47	.40	.35	.45	.39	.34	.32														
7.0	.48	.39	.33	.47	.38	.32	.45	.37	.32	.43	.36	.31	.41	.35	.30	.28														
8.0	.44	.35	.29	.43	.34	.29	.41	.33	.28	.39	.32	.28	.37	.31	.27	.25														
9.0	.40	.32	.26	.39	.31	.26	.37	.30	.25	.36	.29	.25	.34	.29	.24	.22														
10.0	.37	.29	.24	.36	.28	.23	.35	.28	.23	.33	.27	.22	.32	.26	.22	.20														

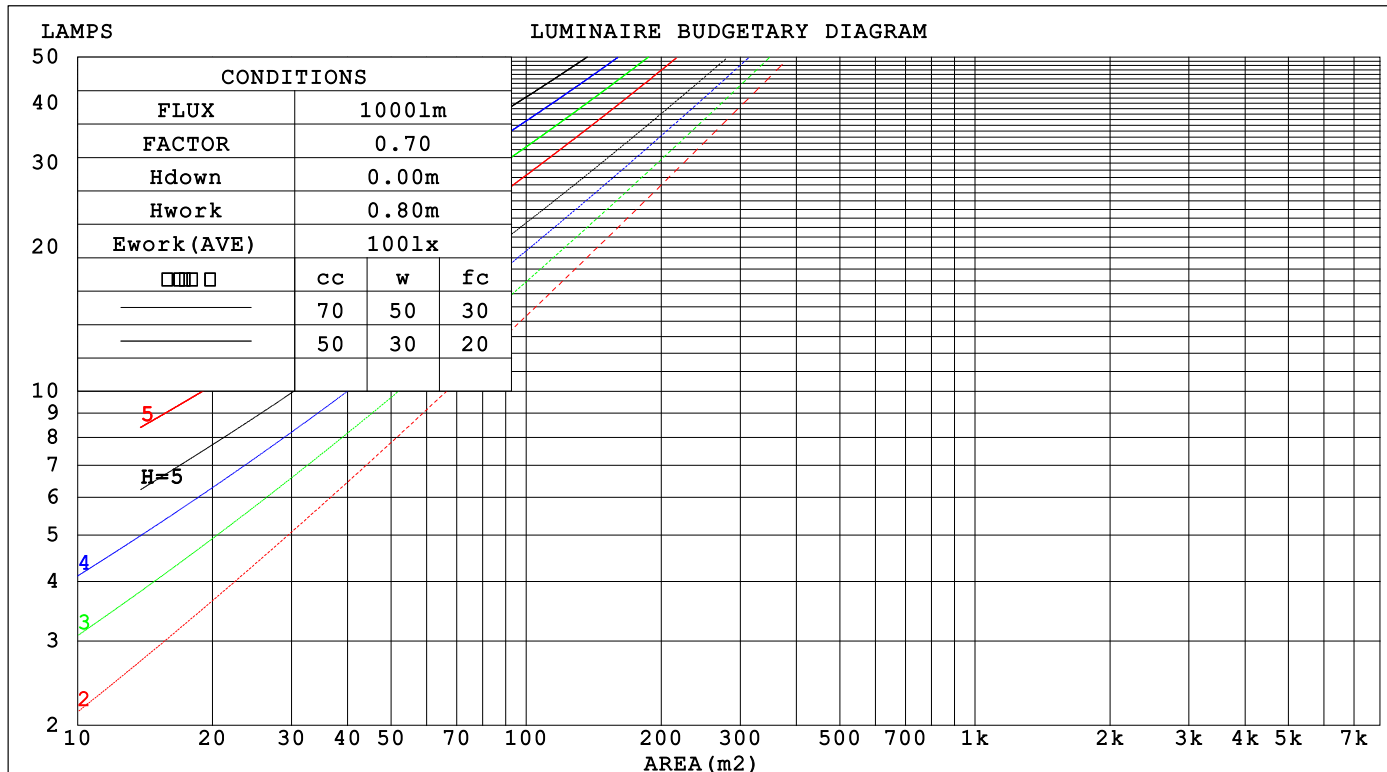

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-15

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

□cc	80%	70%	50%	30%	10%	0
□w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
□fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)					
0.0						
1.0	.347 .198 .063	.338 .193 .061	.321 .184 .059	.305 .176 .056	.290 .168 .054	
2.0	.314 .172 .053	.306 .169 .052	.290 .162 .050	.276 .155 .048	.263 .149 .047	
3.0	.285 .152 .045	.278 .149 .045	.264 .143 .043	.251 .137 .042	.239 .132 .041	
4.0	.260 .135 .040	.253 .132 .039	.240 .127 .038	.229 .123 .037	.218 .118 .036	
5.0	.238 .121 .035	.232 .119 .035	.221 .115 .034	.210 .111 .033	.200 .107 .032	
6.0	.219 .110 .031	.214 .108 .031	.203 .104 .030	.194 .101 .030	.185 .097 .029	
7.0	.203 .100 .028	.198 .099 .028	.189 .095 .027	.180 .092 .027	.172 .089 .026	
8.0	.189 .092 .026	.184 .091 .026	.176 .088 .025	.168 .085 .025	.161 .083 .024	
9.0	.176 .085 .024	.172 .084 .024	.165 .081 .023	.158 .079 .023	.151 .077 .022	
10.0	.165 .079 .022	.162 .078 .022	.155 .076 .021	.148 .074 .021	.142 .071 .020	

□cc	80%	70%	50%	30%	10%	0
□w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
□fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)					
0.0	.244 .244 .244	.209 .209 .209	.142 .142 .142	.082 .082 .082	.026 .026 .026	
1.0	.237 .210 .185	.203 .180 .160	.139 .124 .110	.080 .072 .064	.026 .023 .021	
2.0	.230 .186 .150	.197 .160 .129	.135 .111 .090	.078 .065 .053	.025 .021 .017	
3.0	.222 .169 .127	.190 .146 .110	.131 .101 .077	.076 .059 .045	.024 .019 .015	
4.0	.214 .156 .112	.184 .135 .097	.127 .094 .068	.073 .055 .040	.024 .018 .013	
5.0	.207 .146 .101	.178 .126 .088	.122 .088 .062	.071 .052 .037	.023 .017 .012	
6.0	.199 .138 .094	.171 .119 .082	.118 .084 .058	.069 .049 .034	.022 .016 .011	
7.0	.192 .131 .088	.166 .114 .077	.114 .080 .054	.066 .047 .032	.021 .015 .011	
8.0	.186 .125 .084	.160 .109 .073	.111 .076 .052	.064 .045 .031	.021 .015 .010	
9.0	.180 .121 .081	.155 .105 .070	.107 .074 .050	.062 .043 .030	.020 .014 .010	
10.0	.174 .116 .078	.150 .101 .068	.104 .071 .048	.061 .042 .029	.020 .014 .010	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-15

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME: 2835 IP67						TYPE: 2835 160LED 24V		WEIGHT:			
SPEC.:						DIM.:		SERIAL No.:			
MFR.:						SUR.: 0.012*0.5		Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	25.8	27.3	26.1	27.6	27.9	25.7	27.1	26.0	27.5	27.8	
	27.4	28.8	27.8	29.1	29.5	28.4	29.8	28.8	30.2	30.5	
	28.1	29.4	28.5	29.8	30.2	29.5	30.8	29.9	31.2	31.6	
	28.6	29.8	29.0	30.2	30.7	30.3	31.6	30.8	32.0	32.4	
	28.6	29.8	29.1	30.2	30.7	30.7	31.9	31.1	32.3	32.7	
	28.6	29.7	29.0	30.2	30.6	31.0	32.1	31.4	32.5	33.0	
4H	2H	26.4	27.7	26.9	28.1	28.5	26.4	27.7	26.8	28.1	28.5
	3H	28.3	29.5	28.8	29.9	30.3	29.4	30.5	29.8	30.9	31.4
	4H	29.2	30.3	29.7	30.7	31.2	30.6	31.6	31.1	32.1	32.6
	6H	29.9	30.9	30.4	31.3	31.9	31.6	32.5	32.1	33.0	33.5
	8H	30.0	30.9	30.5	31.4	31.9	32.0	32.8	32.5	33.3	33.9
	12H	30.0	30.8	30.5	31.3	31.9	32.3	33.1	32.9	33.6	34.2
8H	4H	29.8	30.7	30.3	31.2	31.7	31.0	31.8	31.5	32.3	32.9
	6H	30.8	31.5	31.3	32.0	32.6	32.1	32.8	32.7	33.4	34.0
	8H	31.0	31.7	31.6	32.2	32.8	32.6	33.3	33.2	33.8	34.4
	12H	31.1	31.7	31.7	32.2	32.9	33.2	33.7	33.8	34.3	34.9
12H	4H	29.9	30.7	30.4	31.2	31.8	31.0	31.8	31.5	32.3	32.9
	6H	30.9	31.6	31.5	32.1	32.7	32.2	32.9	32.8	33.4	34.0
	8H	31.3	31.8	31.8	32.4	33.0	32.8	33.4	33.4	33.9	34.6
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H		+ 0.1 / - 0.1					+ 0.1 / - 0.1				
1.5H		+ 0.1 / - 0.2					+ 0.1 / - 0.2				
2.0H		+ 0.1 / - 0.2					+ 0.1 / - 0.3				

CIE Pub.117, 498.6 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -2.4)
Area: 0.006 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-15

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:


```

Range: 0 - 180DEG
Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

```

ISOCANDELA DIAGRAM

NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

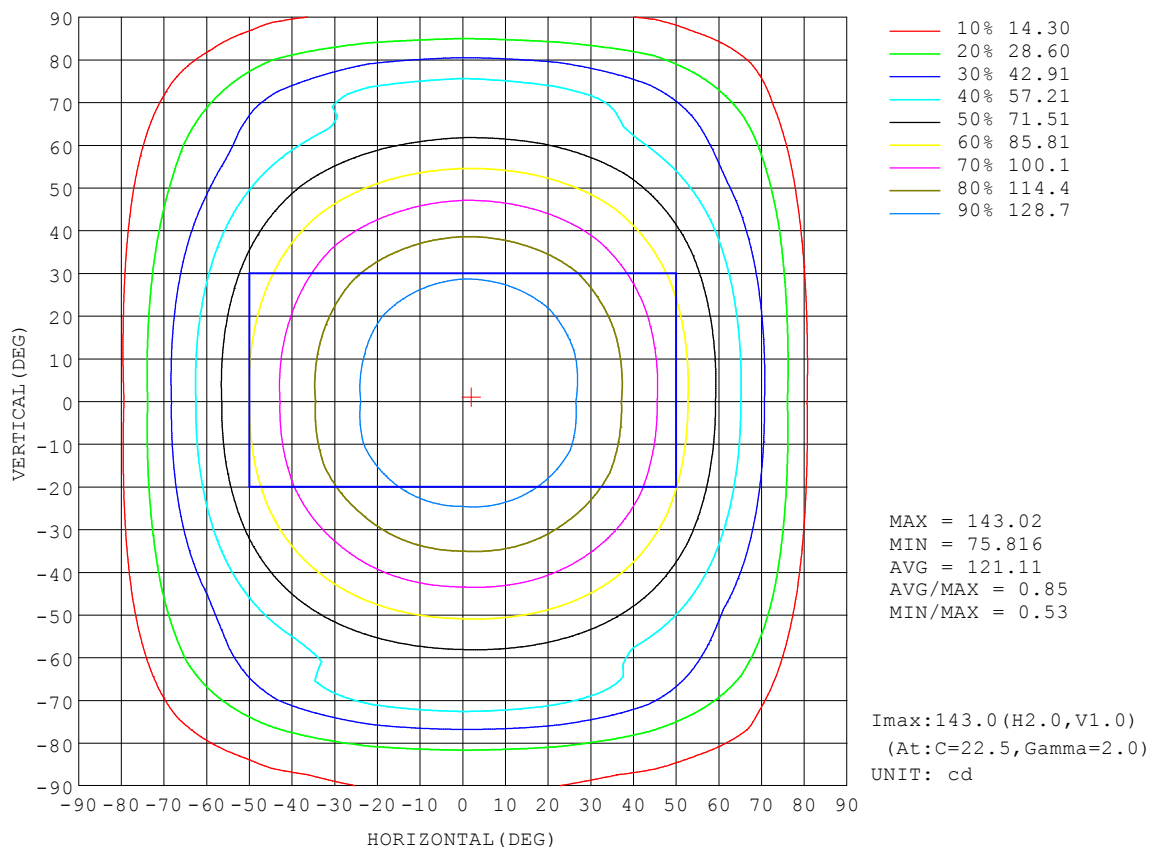


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-15

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

AAI Figure

NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

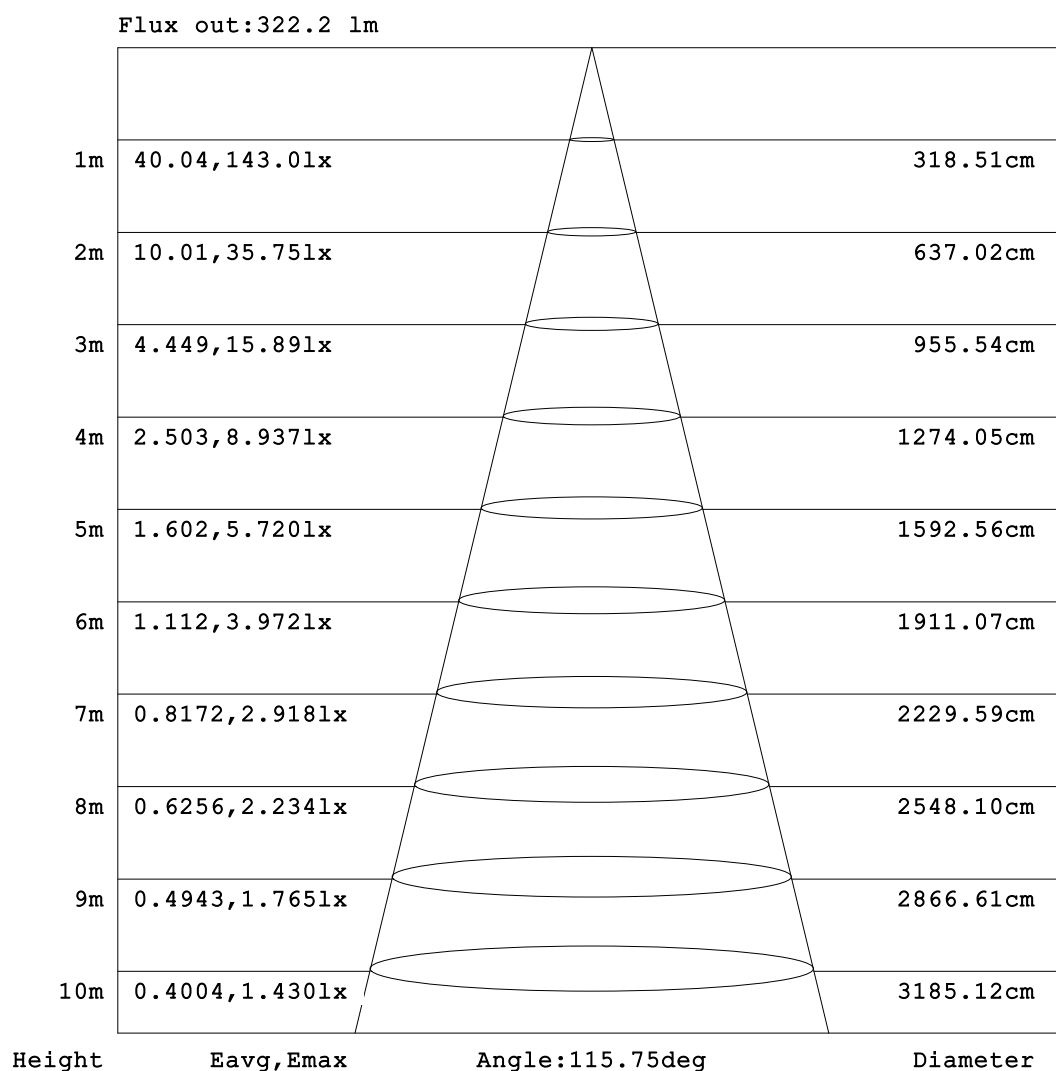


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-15

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

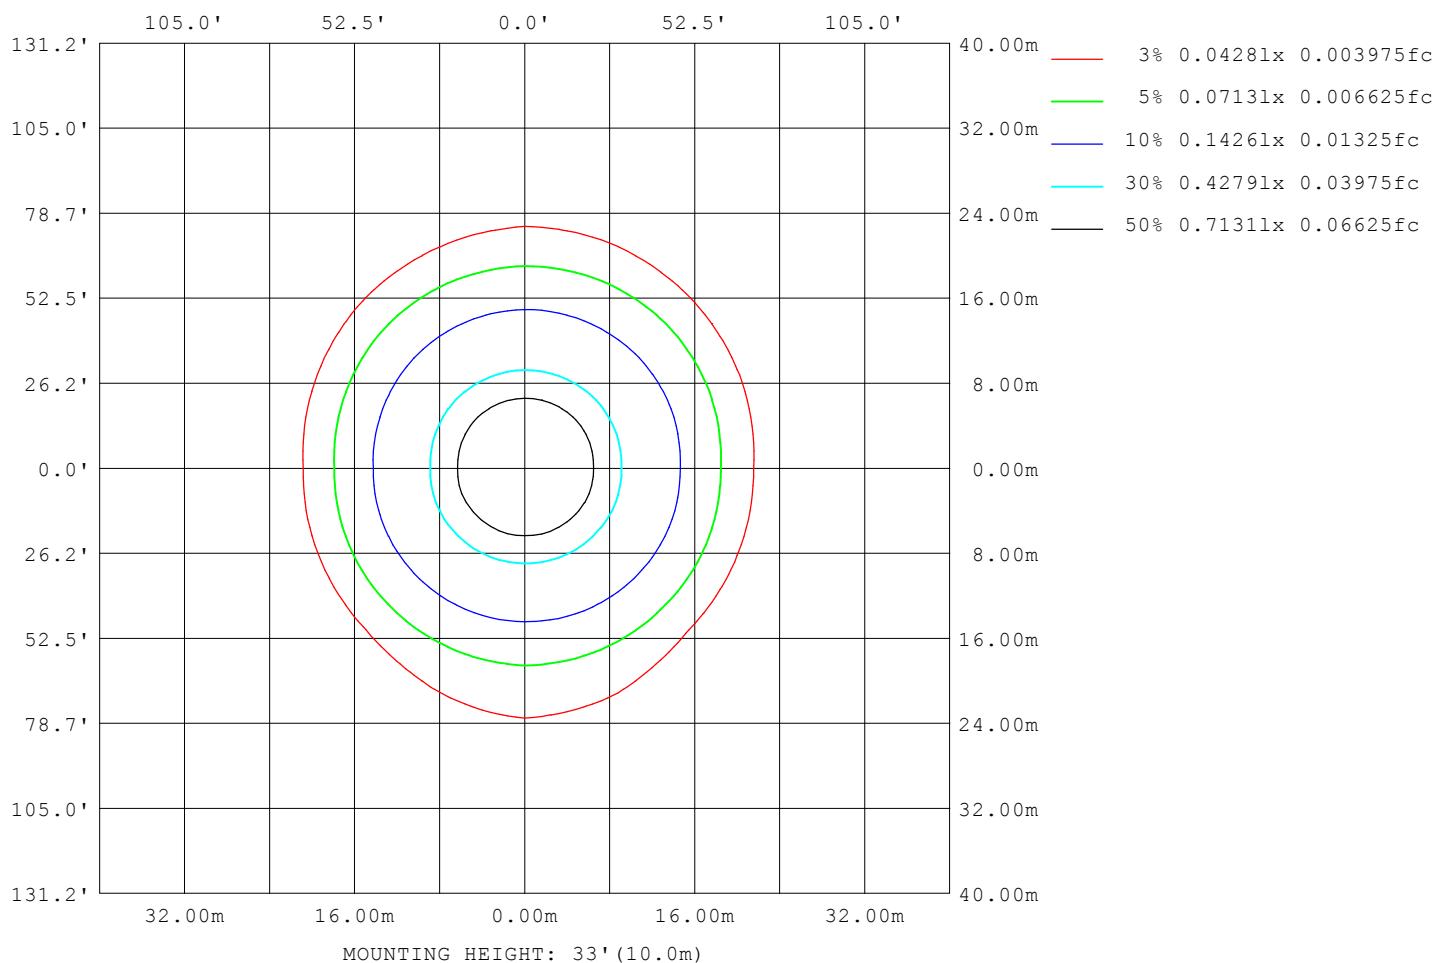

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-04-15

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

LED Avg.L Report

NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	21460
L_0~180 (75) av	18396
L_0~180 (85) av	2509
L_90~270 (65) av	26744
L_90~270 (75) av	34763
L_90~270 (85) av	47039
L_45 (65) av	23565
L_45 (75) av	31150
L_45 (85) av	39427

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-04-15

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

Planar Illuminance Curve

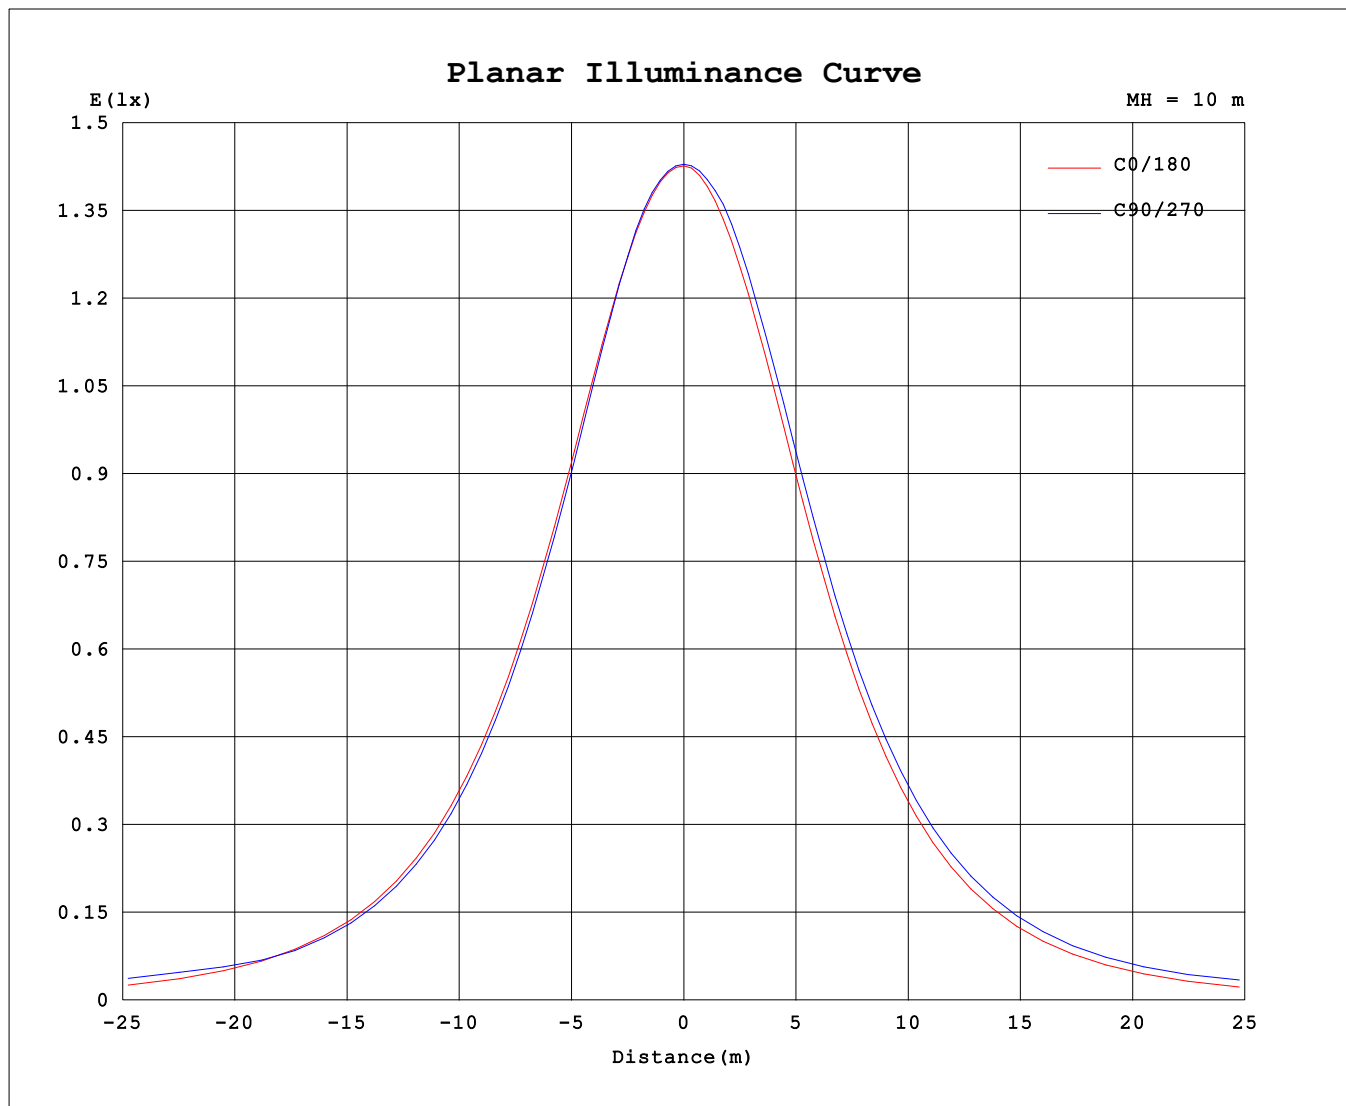

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-04-15

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	143	143	143	143	143	143	143	143	143	143	143	143	143	143	143	143			
5	143	143	143	143	143	143	142	142	142	142	143	143	143	143	143	143			
10	141	142	142	142	142	141	141	140	140	140	141	142	142	142	142	141			
15	139	140	140	140	139	139	139	138	138	138	139	140	141	141	141	140			
20	135	136	136	135	134	134	134	134	133	134	136	136	137	137	138	136			
25	132	133	132	131	129	130	130	130	129	130	132	133	134	134	134	133			
30	125	126	124	123	122	122	122	122	121	123	125	126	127	127	128	127			
35	119	120	118	117	116	116	116	117	115	118	120	120	121	122	123	121			
40	110	111	109	108	106	106	106	107	105	108	110	111	112	113	114	112			
45	103	104	102	101	99.1	99.0	98.6	99.1	98.0	101	103	104	105	106	107	105			
50	91.6	92.3	90.7	89.1	87.5	87.2	86.8	86.9	85.9	88.9	91.9	93.2	94.6	95.1	95.6	94.4			
55	83.2	83.9	82.4	81.0	79.6	79.2	78.5	78.2	77.2	80.5	83.7	85.5	86.8	87.4	87.7	86.3			
60	69.8	70.4	69.5	68.9	68.2	67.0	65.8	64.6	63.3	67.4	71.2	73.3	74.8	75.4	75.4	73.4			
65	60.2	60.8	60.6	64.6	67.6	61.7	57.2	55.2	53.6	58.2	62.7	65.3	67.6	67.7	66.8	64.2			
70	44.8	46.1	55.3	64.7	66.1	64.9	53.1	41.3	38.4	44.1	51.0	61.3	67.5	65.1	55.2	49.8			
75	34.2	37.9	50.2	52.4	52.5	51.6	47.6	34.6	28.1	35.1	49.9	59.7	61.6	59.6	54.0	40.4			
80	17.5	27.2	30.9	32.8	33.0	32.4	29.4	23.7	12.7	24.7	35.8	42.4	44.5	43.4	38.8	30.4			
85	0.75	16.1	20.4	22.2	22.9	22.1	19.5	13.9	4.29	15.7	25.4	29.7	31.3	30.2	27.3	19.5			
90	0.17	6.93	11.7	14.3	15.0	14.6	12.0	7.24	0.19	6.80	12.9	16.5	17.9	16.8	13.6	7.93			
95	0.24	6.54	11.5	13.9	14.6	14.0	11.8	7.04	0.25	6.02	11.0	13.5	14.1	13.5	11.0	6.21			
100	0.37	6.44	11.7	13.7	14.3	13.8	11.9	6.76	0.37	3.27	8.32	12.6	13.1	12.5	10.4	3.99			
105	0.49	5.67	11.6	13.5	14.0	13.5	11.7	6.07	0.48	1.28	7.24	11.5	12.5	11.7	8.75	1.69			
110	0.66	4.38	10.3	12.8	13.3	12.6	10.3	4.66	0.65	0.63	4.62	6.49	9.72	8.70	5.29	0.58			
115	0.78	3.61	9.74	12.6	13.1	12.3	9.71	3.89	0.76	0.73	2.87	4.96	7.92	6.91	3.28	0.67			
120	0.94	2.60	8.85	12.0	12.7	11.9	8.84	2.93	0.91	0.86	0.91	3.57	5.34	4.07	0.85	0.81			
125	1.05	1.85	8.43	11.7	12.5	11.6	8.40	2.23	1.01	0.96	0.95	1.46	3.01	1.47	0.91	0.90			
130	1.20	1.19	7.88	11.7	12.6	11.7	8.00	1.36	1.15	1.09	1.07	1.06	1.06	1.04	1.04	1.04			
135	1.29	1.27	7.27	11.5	12.8	11.9	7.54	1.35	1.23	1.18	1.14	1.13	1.11	1.11	1.11	1.13			
140	1.41	1.40	5.19	12.0	13.5	12.4	5.50	1.46	1.34	1.29	1.25	1.23	1.20	1.20	1.21	1.25			
145	1.49	1.47	2.51	11.5	14.0	11.7	2.94	1.53	1.41	1.36	1.32	1.30	1.26	1.27	1.28	1.32			
150	1.58	1.57	1.56	4.11	7.42	4.01	1.61	1.61	1.50	1.46	1.42	1.39	1.34	1.36	1.39	1.43			
155	1.64	1.63	1.62	1.64	2.24	1.72	1.66	1.66	1.56	1.52	1.48	1.46	1.41	1.42	1.45	1.49			
160	1.73	1.72	1.71	1.69	1.72	1.74	1.73	1.74	1.64	1.61	1.58	1.57	1.53	1.52	1.56	1.60			
165	1.78	1.78	1.76	1.74	1.79	1.78	1.78	1.78	1.71	1.68	1.65	1.64	1.63	1.60	1.63	1.68			
170	1.87	1.87	1.85	1.84	1.88	1.86	1.86	1.87	1.82	1.79	1.77	1.76	1.76	1.73	1.76	1.81			
175	1.93	1.93	1.92	1.91	1.93	1.92	1.92	1.93	1.89	1.88	1.86	1.85	1.85	1.83	1.86	1.89			
180	2.00	1.99	1.98	1.99	2.00	1.98	1.99	2.00	2.00	1.99	1.98	1.99	2.00	1.98	1.99	2.00			

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:

Test Date:2022-04-15

□ Range: 0 - 180DEG

□ Interval: 2.0DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450

Humidity:65.0%

Test Distance:5.749m [K=1.0000]

Remarks: