


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 110.09 lm/W
MODEL	2700K RA90 12MM 9.6W	I _{max} (cd)	142.6	S/MH (C0/180)	1.27	
NOMINAL POWER(W)	4.8	LOR (%)	100.0	S/MH (C90/270)	1.30	
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	504.59	<input type="checkbox"/> UP,DN (C0-180)	5.1,46.4	
NOMINAL FLUX(lm)	6.30735	CIE CLASS	DIRECT	<input type="checkbox"/> UP,DN (C180-360)	2.6,45.8	
LAMPS INSIDE	80	<input type="checkbox"/> up (%)	7.8	CIBSE SHR NOM	1.50	
TEST VOLTAGE(V)	24	<input type="checkbox"/> down (%)	92.2	CIBSE SHR MAX	1.50	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

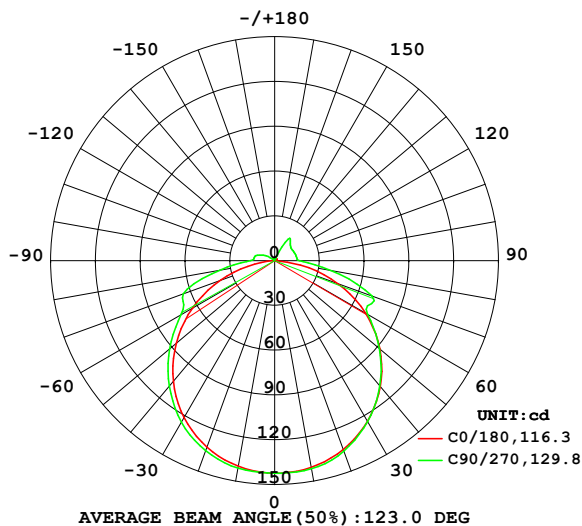

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

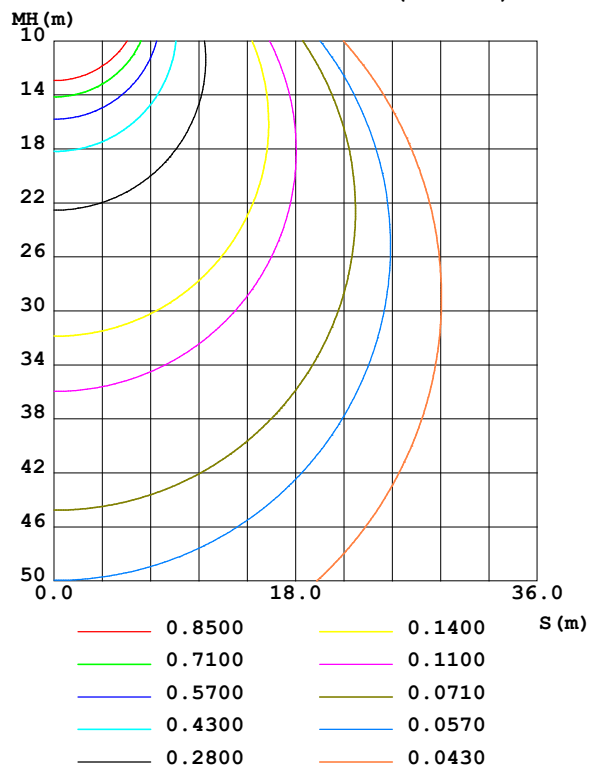

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-04-15

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity:65.0%
 Test Distance:5.749m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	140.6	141.3	141.6	140.8	139.9	140.3	141.1	141.0	0- 10	13.52	13.52	2.68,2.68
20	134.6	136.2	135.8	135.4	132.9	134.7	135.4	136.0	10- 20	39.15	52.67	10.4,10.4
30	124.3	125.7	124.5	124.2	121.4	124.1	125.0	126.1	20- 30	60.12	112.8	22.4,22.4
40	110.1	111.1	109.7	108.7	105.6	109.1	109.8	111.8	30- 40	73.58	186.4	36.9,36.9
50	92.05	93.00	91.66	89.96	86.06	90.38	91.82	93.76	40- 50	77.81	264.2	52.4,52.4
60	70.34	72.35	71.97	69.15	63.53	69.72	72.56	73.43	50- 60	72.52	336.7	66.7,66.7
70	45.13	57.04	69.36	54.80	38.75	52.58	65.01	56.15	60- 70	61.48	398.2	78.9,78.9
80	17.67	34.60	38.47	33.52	13.89	32.22	37.23	34.14	70- 80	46.45	444.6	88.1,88.1
90	0.1809	12.95	16.69	13.14	0.1883	12.50	16.41	12.88	80- 90	20.80	465.4	92.2,92.2
100	0.3785	12.18	14.98	12.43	0.3743	8.670	13.85	11.00	90-100	10.97	476.4	94.4,94.4
110	0.6643	11.39	14.47	11.45	0.6482	5.480	11.01	6.212	100-110	9.054	485.5	96.2,96.2
120	0.9501	10.13	14.10	10.12	0.9174	0.9699	6.480	0.9244	110-120	6.438	491.9	97.5,97.5
130	1.207	9.655	14.22	9.825	1.156	1.096	1.117	1.072	120-130	4.468	496.4	98.4,98.4
140	1.420	9.443	16.52	9.631	1.346	1.272	1.236	1.248	130-140	3.711	500.1	99.1,99.1
150	1.589	1.714	14.33	1.672	1.499	1.441	1.369	1.410	140-150	2.863	502.9	99.7,99.7
160	1.725	1.700	1.712	1.716	1.641	1.591	1.550	1.576	150-160	0.9867	503.9	99.9,99.9
170	1.870	1.845	1.863	1.849	1.811	1.771	1.764	1.771	160-170	0.4881	504.4	100,100
180	1.999	1.980	1.999	1.994	1.996	1.978	1.996	1.989	170-180	0.1794	504.6	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 233.17 lm

%lum = 46.2%

%lamp = 46.2%

Conical surface Flux(120deg): 336.7 lm

%lum = 66.7%


%lamp = 66.7%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-15

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

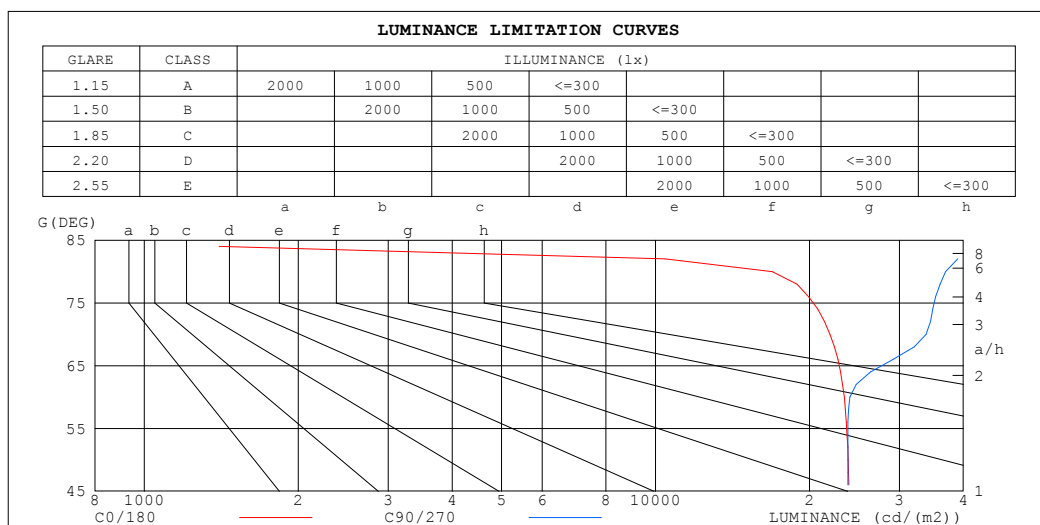

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1680	52336
80	16930	36949
75	22105	37108
70	21952	33820
65	23866	27312
60	23405	24005
55	24283	24373
50	23828	23780
45	24317	24250


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-04-15

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.17	1.17	1.17	1.14	1.14	1.14	1.07	1.07	1.07	1.01	1.01	1.01	.95	.95	.95	.92
1.0	1.00	.95	.91	.97	.93	.89	.91	.88	.84	.86	.83	.80	.81	.79	.77	.74
2.0	.86	.79	.73	.84	.77	.71	.79	.73	.68	.74	.70	.66	.70	.66	.63	.60
3.0	.75	.66	.60	.73	.65	.59	.69	.62	.56	.65	.59	.55	.61	.57	.53	.50
4.0	.66	.57	.50	.64	.56	.49	.61	.54	.48	.58	.51	.46	.54	.49	.45	.42
5.0	.59	.50	.43	.57	.49	.42	.54	.47	.41	.51	.45	.40	.49	.43	.39	.36
6.0	.53	.44	.37	.52	.43	.37	.49	.41	.36	.46	.40	.35	.44	.38	.34	.32
7.0	.48	.39	.33	.47	.38	.32	.44	.37	.31	.42	.36	.31	.40	.34	.30	.28
8.0	.44	.35	.29	.43	.34	.29	.41	.33	.28	.39	.32	.27	.37	.31	.27	.25
9.0	.40	.32	.26	.39	.31	.26	.37	.30	.25	.36	.29	.25	.34	.28	.24	.22
10.0	.37	.29	.23	.36	.28	.23	.34	.27	.23	.33	.27	.22	.32	.26	.22	.20

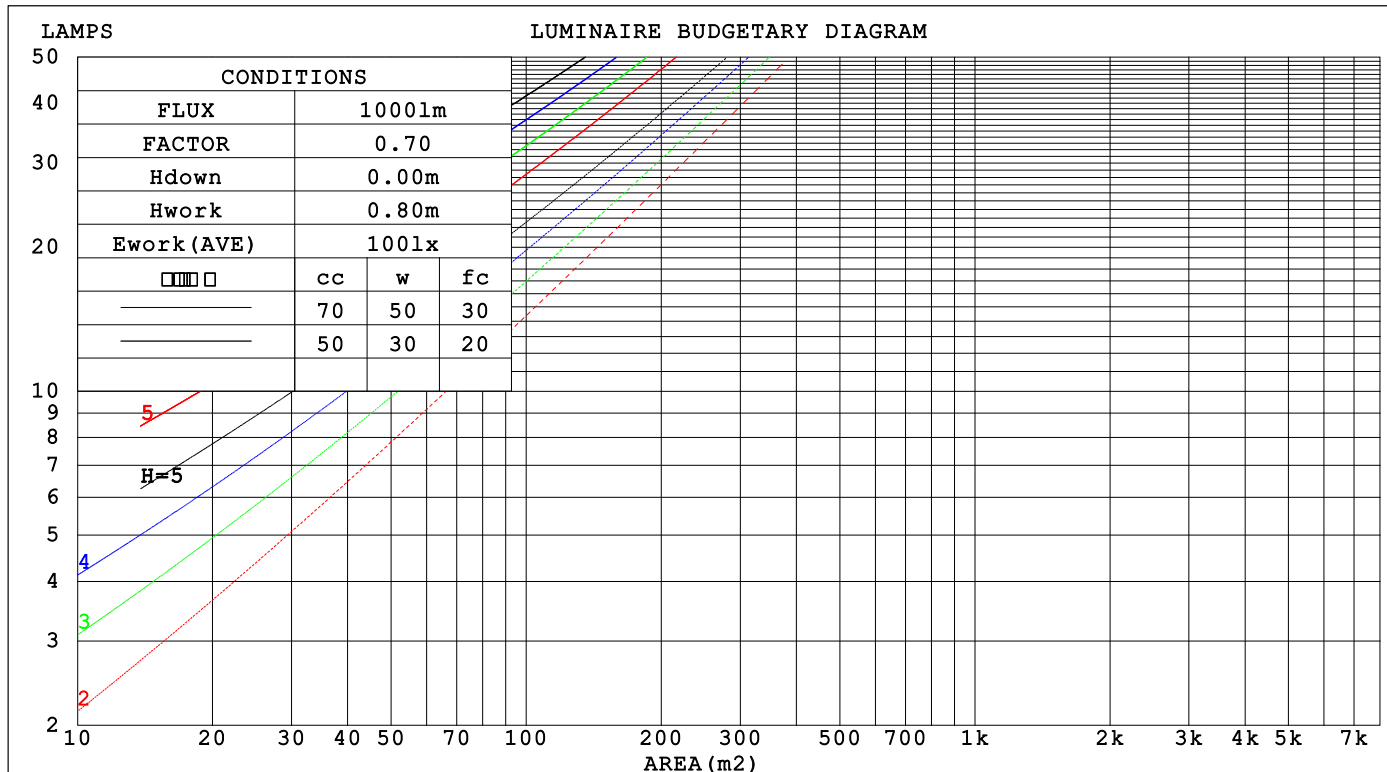

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-15

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio					Wall Exitance Coefficients(WEC)
0.0						
1.0	.347 .197 .062	.337 .192 .061	.320 .183 .059	.303 .175 .056	.288 .167 .054	
2.0	.314 .172 .053	.306 .168 .052	.290 .161 .050	.275 .154 .048	.261 .148 .047	
3.0	.285 .152 .045	.277 .148 .045	.263 .142 .043	.250 .137 .042	.237 .131 .041	
4.0	.259 .135 .040	.253 .132 .039	.240 .127 .038	.228 .122 .037	.217 .118 .036	
5.0	.238 .121 .035	.231 .119 .035	.220 .114 .034	.209 .110 .033	.199 .106 .032	
6.0	.219 .110 .031	.213 .108 .031	.203 .104 .030	.193 .100 .030	.184 .097 .029	
7.0	.203 .100 .028	.198 .099 .028	.188 .095 .027	.179 .092 .027	.171 .089 .026	
8.0	.189 .092 .026	.184 .091 .026	.175 .088 .025	.167 .085 .024	.160 .082 .024	
9.0	.176 .085 .024	.172 .084 .024	.164 .081 .023	.157 .079 .023	.150 .076 .022	
10.0	.165 .079 .022	.161 .078 .022	.154 .076 .021	.148 .073 .021	.141 .071 .020	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio					Ceiling Cavity Exitance Coefficients(CCEC)
0.0	.250 .250 .250	.213 .213 .213	.146 .146 .146	.084 .084 .084	.027 .027 .027	
1.0	.242 .215 .191	.207 .185 .164	.142 .127 .114	.082 .074 .066	.026 .024 .021	
2.0	.235 .192 .155	.201 .165 .134	.138 .114 .094	.080 .066 .055	.026 .021 .018	
3.0	.228 .175 .133	.195 .151 .115	.134 .105 .081	.077 .061 .048	.025 .020 .016	
4.0	.220 .162 .117	.189 .140 .102	.130 .097 .072	.075 .057 .042	.024 .019 .014	
5.0	.212 .152 .107	.182 .131 .093	.126 .092 .066	.073 .054 .039	.023 .018 .013	
6.0	.205 .144 .099	.176 .124 .087	.122 .087 .061	.071 .051 .036	.023 .017 .012	
7.0	.198 .137 .094	.170 .119 .082	.118 .083 .058	.068 .049 .034	.022 .016 .011	
8.0	.191 .131 .090	.165 .114 .078	.114 .080 .055	.066 .047 .033	.021 .015 .011	
9.0	.185 .126 .086	.160 .110 .075	.111 .077 .053	.064 .045 .032	.021 .015 .011	
10.0	.179 .122 .084	.155 .106 .073	.107 .075 .052	.063 .044 .031	.020 .014 .010	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-15

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME: 2835 IP67					TYPE: 2835 160LED 24V			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.:					SUR.: 0.012*0.5			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H		25.8	27.3	26.2	27.6	28.0	25.9	27.3	26.2	27.7	28.0
3H		27.4	28.8	27.8	29.2	29.6	28.6	29.9	29.0	30.3	30.7
4H		28.1	29.4	28.5	29.8	30.2	29.8	31.1	30.2	31.5	31.9
6H		28.6	29.9	29.1	30.3	30.7	30.8	32.0	31.2	32.4	32.8
8H		28.7	29.8	29.1	30.3	30.7	31.2	32.3	31.6	32.8	33.2
12H		28.6	29.8	29.1	30.2	30.7	31.5	32.7	32.0	33.1	33.6
4H 2H		26.5	27.8	26.9	28.2	28.6	26.6	27.9	27.0	28.3	28.7
3H		28.4	29.5	28.9	30.0	30.4	29.5	30.6	30.0	31.1	31.5
4H		29.3	30.3	29.8	30.8	31.3	30.9	31.9	31.4	32.4	32.9
6H		30.0	30.9	30.5	31.4	31.9	32.0	32.9	32.5	33.4	33.9
8H		30.1	31.0	30.6	31.5	32.0	32.5	33.3	33.0	33.8	34.4
12H		30.1	30.9	30.6	31.4	32.0	32.9	33.7	33.5	34.2	34.8
8H 4H		29.9	30.8	30.5	31.3	31.9	31.2	32.1	31.8	32.6	33.2
6H		30.9	31.6	31.5	32.2	32.7	32.6	33.3	33.1	33.8	34.4
8H		31.2	31.8	31.7	32.4	33.0	33.2	33.8	33.8	34.4	35.0
12H		31.3	31.8	31.9	32.4	33.0	33.8	34.4	34.4	35.0	35.6
12H 4H		30.0	30.8	30.6	31.4	31.9	31.3	32.1	31.8	32.6	33.2
6H		31.1	31.7	31.7	32.3	32.9	32.7	33.3	33.2	33.9	34.5
8H		31.5	32.0	32.1	32.6	33.2	33.4	33.9	34.0	34.5	35.1
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H		+ 0.1 / - 0.2					+ 0.1 / - 0.1				
1.5H		+ 0.1 / - 0.3					+ 0.1 / - 0.3				
2.0H		+ 0.1 / - 0.3					+ 0.1 / - 0.2				

CIE Pub.117, 504.6 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -2.4)
Area: 0.006 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-15

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:


```

Range: 0 - 180DEG
Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

```

ISOCANDELA DIAGRAM

NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

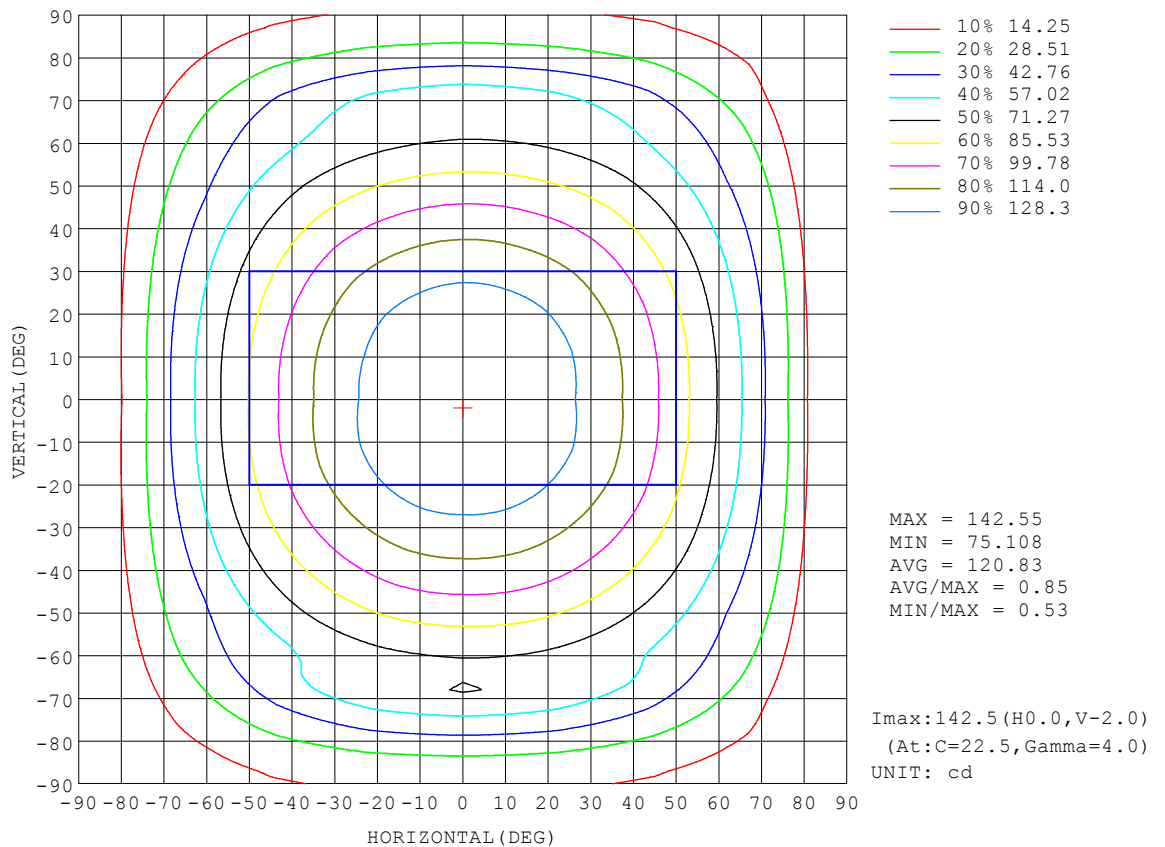


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-15

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

AAI Figure

NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

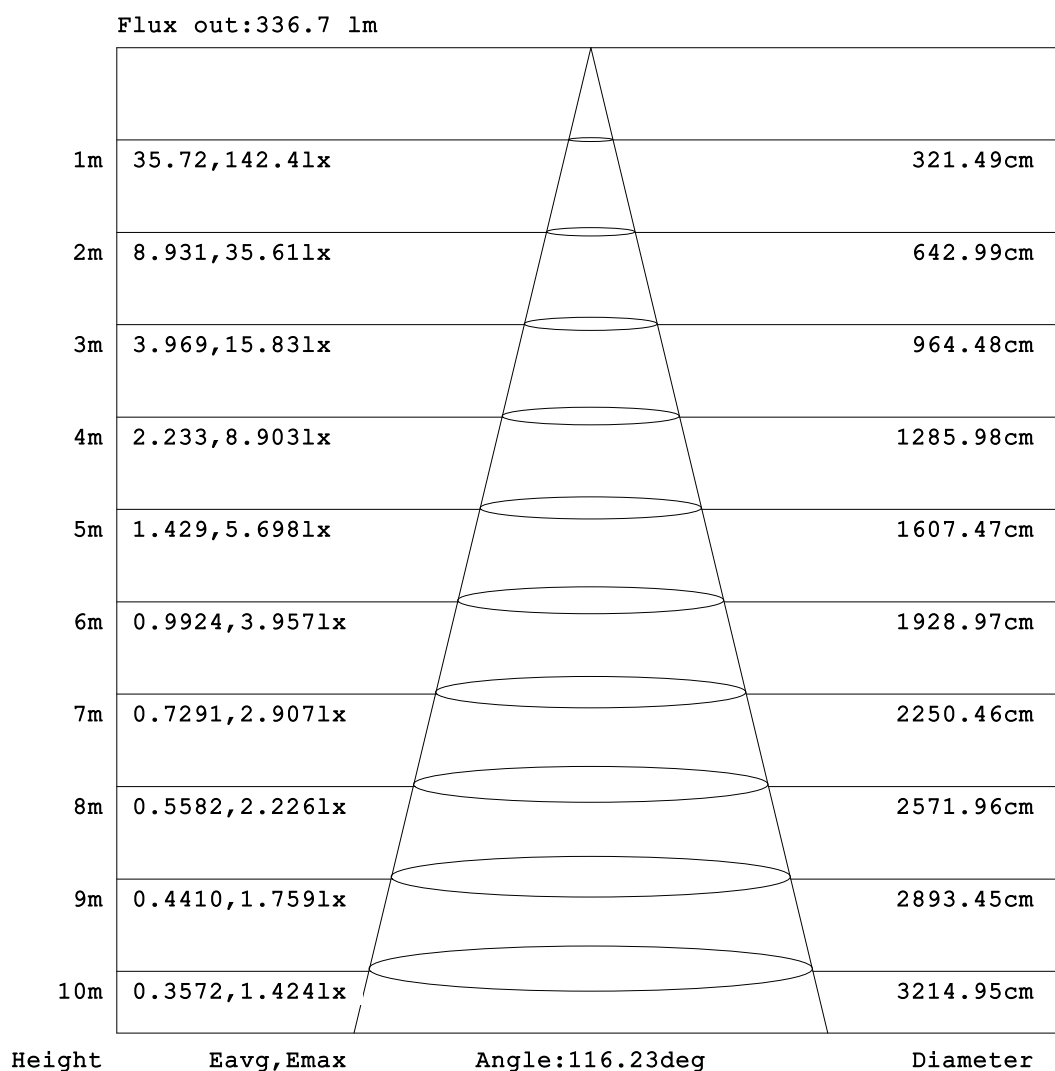


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-15

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

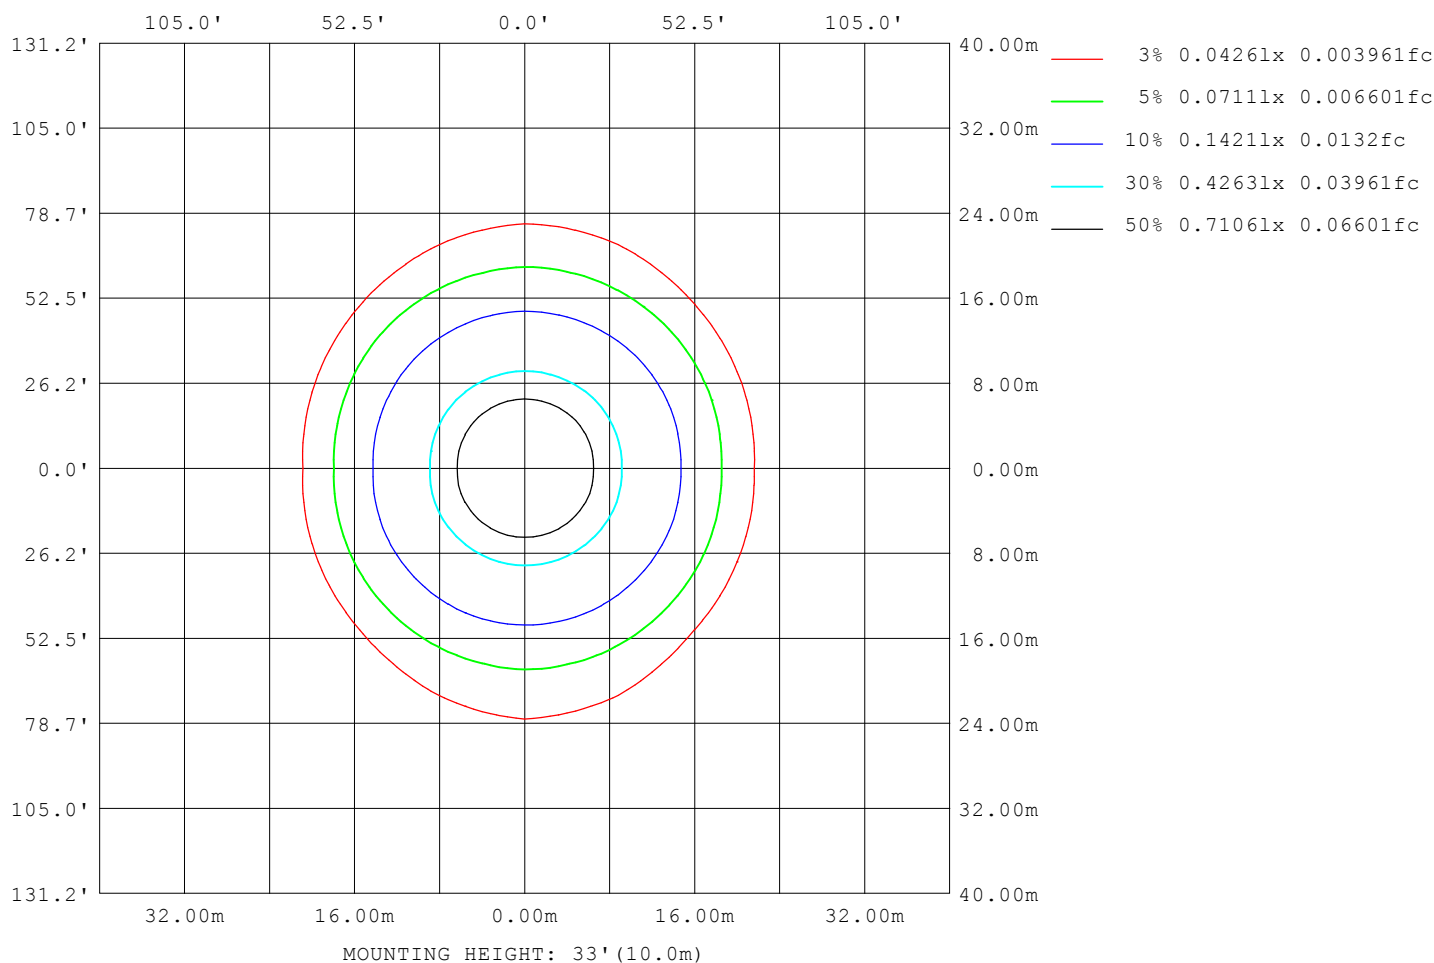

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-04-15

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

LED Avg.L Report

NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	21593
L_0~180 (75) av	18569
L_0~180 (85) av	3203
L_90~270 (65) av	27134
L_90~270 (75) av	34686
L_90~270 (85) av	47819
L_45 (65) av	23954
L_45 (75) av	30808
L_45 (85) av	39674

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-15

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

Planar Illuminance Curve

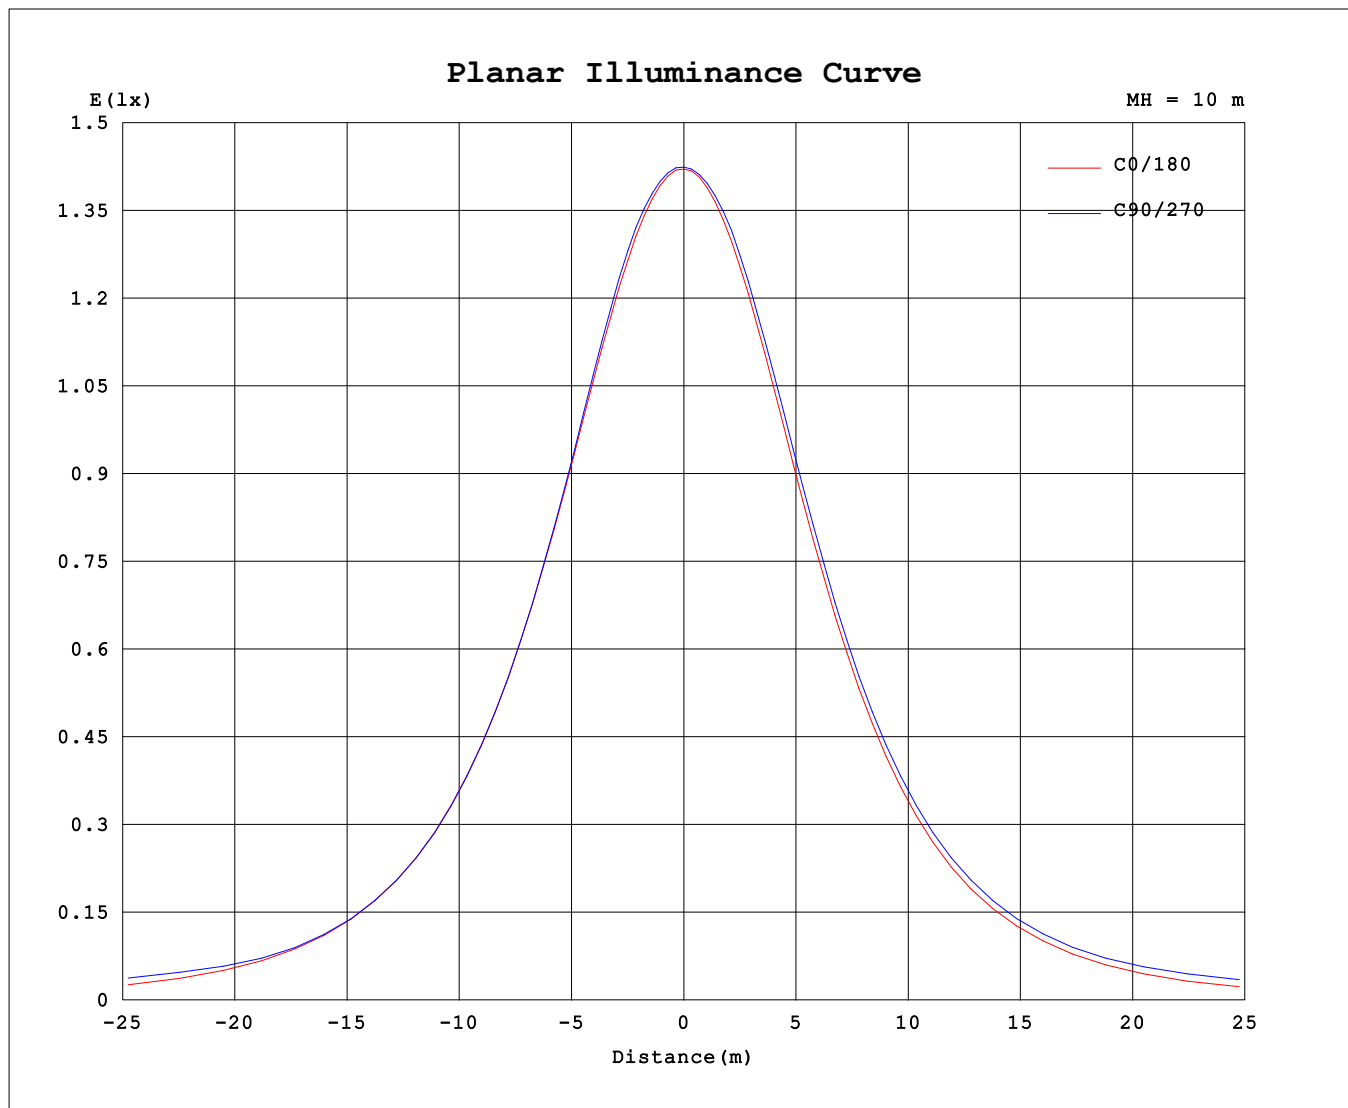

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-04-15

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	142	142	142	142	142	142	142	142	142	142	142	142	142	142	142	142			
5	142	143	142	143	142	142	142	142	142	142	142	142	142	142	142	142			
10	141	141	141	142	142	142	141	140	140	140	140	141	141	141	141	141			
15	139	139	140	140	140	140	139	138	138	138	139	139	140	140	140	139			
20	135	136	136	136	136	136	135	134	133	133	135	135	135	135	136	135			
25	131	132	133	132	132	132	132	130	129	130	131	131	132	132	133	132			
30	124	126	126	125	124	125	124	124	121	123	124	124	125	125	126	126			
35	119	121	120	120	119	119	118	118	116	117	119	119	119	120	121	120			
40	110	112	111	111	110	110	109	108	106	107	109	109	110	110	112	112			
45	103	105	104	104	103	103	102	101	98.2	100	102	102	103	103	105	105			
50	92.1	93.8	93.0	92.7	91.7	91.4	90.0	88.7	86.1	88.3	90.4	91.0	91.8	92.4	93.8	93.7			
55	83.7	85.5	85.0	84.8	83.8	83.5	81.7	80.2	77.4	79.9	82.2	83.1	84.0	84.6	85.8	85.6			
60	70.3	72.1	72.3	72.6	72.0	71.2	69.1	66.6	63.5	66.7	69.7	71.3	72.6	73.0	73.4	72.6			
65	60.6	62.5	63.7	67.3	69.2	65.1	60.7	57.3	53.9	57.4	61.3	64.9	67.9	67.1	65.1	63.3			
70	45.1	47.9	57.0	67.1	69.4	66.4	54.8	43.3	38.8	43.5	52.6	61.3	65.0	63.0	56.2	49.0			
75	34.4	39.9	52.1	56.6	57.6	56.1	50.3	36.5	28.5	35.4	47.5	54.4	56.4	55.0	50.7	40.3			
80	17.7	28.0	34.6	37.9	38.5	37.8	33.5	25.0	13.9	23.5	32.2	35.8	37.2	36.2	34.1	27.8			
85	0.88	17.4	23.3	26.5	27.4	26.5	22.8	15.4	5.21	14.2	22.3	26.1	27.5	26.4	23.7	17.4			
90	0.18	7.52	13.0	15.9	16.7	16.2	13.1	7.69	0.19	6.87	12.5	15.5	16.4	15.5	12.9	7.52			
95	0.24	6.82	11.9	14.5	15.1	14.6	12.2	7.30	0.25	6.31	11.4	13.8	14.4	13.7	11.4	6.47			
100	0.38	6.78	12.2	14.4	15.0	14.4	12.4	7.27	0.37	3.69	8.67	13.3	13.9	13.3	11.0	4.39			
105	0.49	6.23	12.2	14.3	14.8	14.3	12.4	6.63	0.48	1.59	8.02	12.5	13.4	12.7	9.63	1.96			
110	0.66	5.15	11.4	13.9	14.5	13.8	11.4	5.47	0.65	0.65	5.48	7.56	11.0	9.96	6.21	0.61			
115	0.78	4.46	10.9	13.7	14.3	13.6	10.9	4.79	0.76	0.74	3.43	6.06	9.27	8.14	3.97	0.70			
120	0.95	3.60	10.1	13.3	14.1	13.2	10.1	3.95	0.92	0.88	0.97	4.33	6.48	4.89	0.92	0.83			
125	1.06	3.00	9.83	13.1	13.9	13.0	9.80	3.40	1.02	0.98	0.98	2.04	3.77	2.11	0.95	0.93			
130	1.21	1.74	9.66	13.3	14.2	13.4	9.82	2.14	1.16	1.11	1.10	1.10	1.12	1.08	1.07	1.06			
135	1.30	1.30	9.64	13.8	14.9	14.1	9.85	1.44	1.23	1.19	1.17	1.17	1.15	1.15	1.14	1.15			
140	1.42	1.39	9.44	15.1	16.5	15.5	9.63	1.45	1.35	1.31	1.27	1.26	1.24	1.24	1.25	1.27			
145	1.49	1.47	6.43	16.0	18.1	16.3	6.02	1.51	1.41	1.37	1.34	1.33	1.29	1.30	1.31	1.34			
150	1.59	1.57	1.71	9.96	14.3	8.96	1.67	1.60	1.50	1.46	1.44	1.42	1.37	1.39	1.41	1.44			
155	1.65	1.63	1.61	3.41	6.06	2.77	1.64	1.65	1.56	1.52	1.50	1.49	1.44	1.44	1.47	1.51			
160	1.72	1.72	1.70	1.67	1.71	1.72	1.72	1.72	1.64	1.61	1.59	1.59	1.55	1.55	1.58	1.61			
165	1.79	1.77	1.75	1.73	1.78	1.77	1.76	1.78	1.71	1.68	1.66	1.65	1.64	1.62	1.65	1.69			
170	1.87	1.86	1.84	1.83	1.86	1.85	1.85	1.86	1.81	1.79	1.77	1.77	1.76	1.74	1.77	1.81			
175	1.93	1.93	1.92	1.90	1.93	1.91	1.92	1.93	1.88	1.87	1.86	1.85	1.86	1.84	1.86	1.89			
180	2.00	1.98	1.98	1.98	2.00	1.98	1.99	2.00	2.00	1.99	1.98	1.98	2.00	1.98	1.99	2.00			

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:

Test Date:2022-04-15

□ Range: 0 - 180DEG

□ Interval: 2.0DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450

Humidity:65.0%

Test Distance:5.749m [K=1.0000]

Remarks: