


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: 2835 IP67	TYPE: 2835 70LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 106.18 lm/W			
MODEL	6500K RA90 12MM 9.6W	Imax (cd)	141.6	S/MH(C0/180)	1.29
NOMINAL POWER(W)	4.8	LOR(%)	100.0	S/MH(C90/270)	1.35
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	511.17	□ UP,DN(C0-180)	5.2,44.2
NOMINAL FLUX(lm)	14.6047	CIE CLASS	DIRECT	□ UP,DN(C180-360)	2.6,48.0
LAMPS INSIDE	35	□ up (%)	7.8	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)	24	□ down (%)	92.2	CIBSE SHR MAX	1.50

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

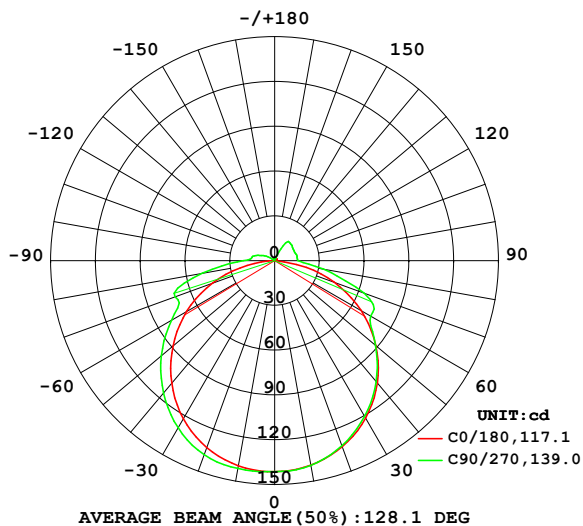

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

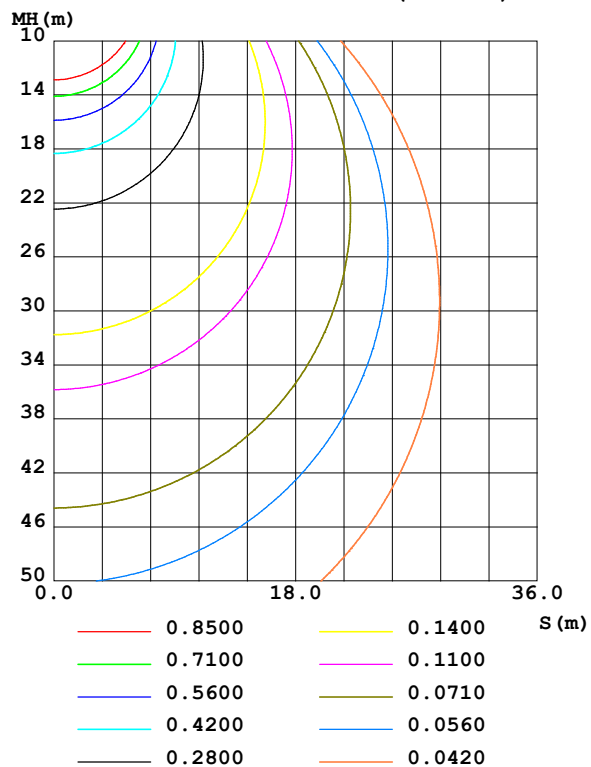

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-04-15

□ Range: 0 - 180DEG
 □ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity:65.0%
 Test Distance:5.749m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	139.1	139.2	139.3	139.7	139.6	140.8	141.4	140.5	0- 10	13.43	13.43	2.63,2.63
20	132.6	132.0	132.0	133.0	133.3	137.0	138.3	136.4	10- 20	38.90	52.33	10.2,10.2
30	121.9	120.6	120.4	121.9	122.4	128.3	129.4	127.7	20- 30	59.86	112.2	21.9,21.9
40	107.0	105.4	105.8	107.0	107.3	114.6	115.9	113.8	30- 40	73.49	185.7	36.3,36.3
50	88.47	87.31	88.37	89.17	88.95	97.35	99.13	96.06	40- 50	78.10	263.8	51.6,51.6
60	66.82	67.21	74.33	69.55	68.11	77.38	79.89	75.67	50- 60	73.58	337.4	66,66
70	42.45	54.85	63.78	57.14	44.41	57.24	70.93	54.91	60- 70	63.37	400.7	78.4,78.4
80	14.95	29.66	33.09	30.54	18.81	41.41	49.28	42.14	70- 80	47.97	448.7	87.8,87.8
90	0.2189	12.51	15.84	12.56	0.1930	15.56	21.06	15.88	80- 90	22.70	471.4	92.2,92.2
100	0.4378	12.36	15.32	12.48	0.3622	10.44	15.38	11.43	90-100	11.62	483.0	94.5,94.5
110	0.7331	11.38	14.84	11.85	0.6218	4.883	10.63	5.165	100-110	9.138	492.1	96.3,96.3
120	1.002	10.71	14.82	11.17	0.8765	0.8732	5.206	0.8793	110-120	6.371	498.5	97.5,97.5
130	1.247	10.47	15.45	10.22	1.115	1.038	1.060	1.058	120-130	4.618	503.1	98.4,98.4
140	1.445	8.561	15.87	8.338	1.315	1.218	1.198	1.224	130-140	3.750	506.9	99.2,99.2
150	1.605	1.939	11.71	2.581	1.469	1.387	1.331	1.388	140-150	2.620	509.5	99.7,99.7
160	1.731	1.722	1.757	1.718	1.619	1.554	1.519	1.559	150-160	0.9971	510.5	99.9,99.9
170	1.864	1.856	1.866	1.844	1.796	1.744	1.733	1.754	160-170	0.4857	511.0	100,100
180	1.988	1.968	1.980	1.977	1.988	1.968	1.980	1.975	170-180	0.1784	511.2	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 232.58 lm

%lum = 45.5%

%lamp = 45.5%

Conical surface Flux(120deg): 337.35 lm

%lum = 66.0%


%lamp = 66.0%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-15

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

NAME: 2835 IP67	TYPE: 2835 70LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

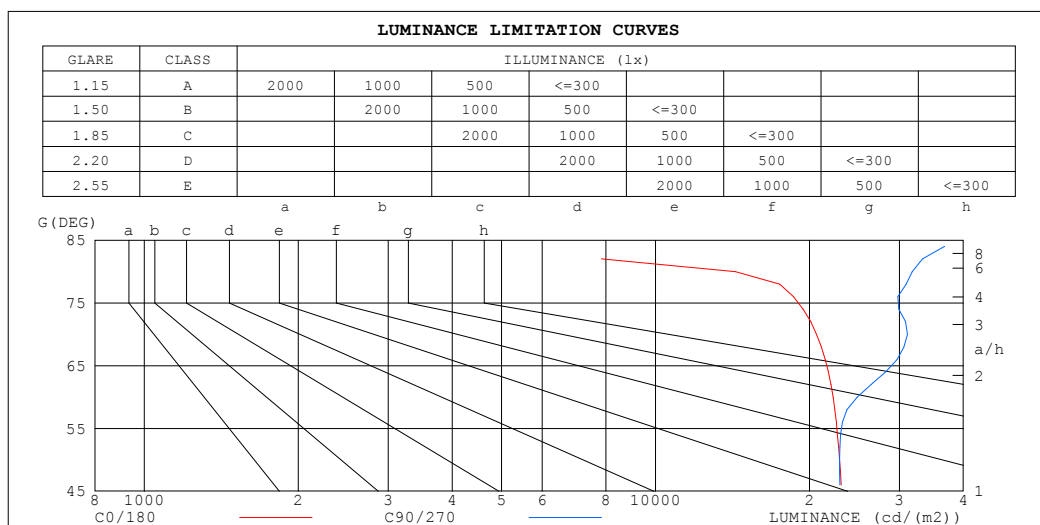

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	941	44113
80	14328	31775
75	20703	31855
70	20661	31091
65	22604	29259
60	22243	24787
55	23258	23586
50	22908	22921
45	23538	23356


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-04-15

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: 2835 IP67	TYPE: 2835 70LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.17	1.17	1.17	1.14	1.14	1.14	1.07	1.07	1.07	1.01	1.01	1.01	.95	.95	.95	.92
1.0	.00	.95	.91	.97	.92	.88	.91	.87	.84	.86	.83	.80	.81	.79	.76	.74
2.0	.86	.78	.72	.83	.76	.71	.78	.73	.68	.74	.69	.65	.70	.66	.62	.60
3.0	.75	.66	.59	.73	.65	.58	.68	.62	.56	.65	.59	.54	.61	.56	.52	.50
4.0	.66	.57	.50	.64	.55	.49	.60	.53	.47	.57	.51	.46	.54	.49	.44	.42
5.0	.59	.49	.42	.57	.48	.42	.54	.46	.41	.51	.45	.39	.48	.43	.38	.36
6.0	.53	.43	.37	.51	.43	.36	.49	.41	.35	.46	.39	.34	.44	.38	.33	.31
7.0	.48	.39	.32	.46	.38	.32	.44	.37	.31	.42	.35	.30	.40	.34	.30	.27
8.0	.43	.35	.29	.42	.34	.28	.40	.33	.28	.38	.32	.27	.37	.31	.26	.24
9.0	.40	.31	.26	.39	.31	.25	.37	.30	.25	.35	.29	.24	.34	.28	.24	.22
10.0	.36	.28	.23	.36	.28	.23	.34	.27	.22	.33	.26	.22	.31	.26	.21	.20

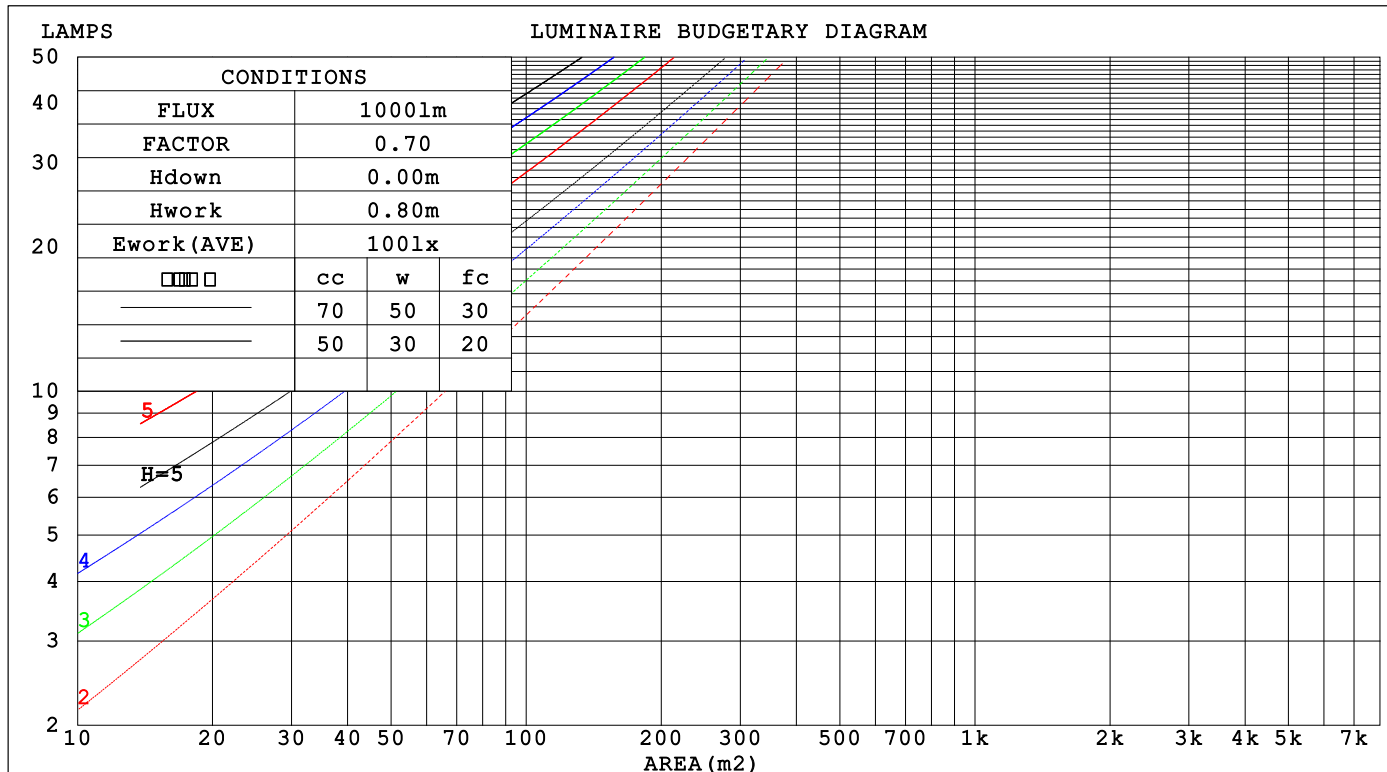

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-15

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: 2835 IP67	TYPE: 2835 70LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio					Wall Exitance Coefficients(WEC)
0.0						
1.0	.352 .200 .063	.342 .195 .062	.324 .186 .059	.308 .178 .057	.293 .170 .055	
2.0	.317 .174 .053	.309 .170 .052	.293 .163 .051	.278 .156 .049	.264 .149 .047	
3.0	.287 .153 .046	.279 .150 .045	.265 .144 .044	.252 .138 .042	.239 .133 .041	
4.0	.261 .136 .040	.254 .133 .039	.241 .128 .038	.229 .123 .037	.218 .119 .036	
5.0	.239 .122 .035	.233 .120 .035	.221 .115 .034	.210 .111 .033	.200 .107 .032	
6.0	.220 .110 .032	.214 .108 .031	.204 .105 .030	.194 .101 .030	.185 .097 .029	
7.0	.204 .101 .029	.199 .099 .028	.189 .096 .028	.180 .092 .027	.172 .089 .026	
8.0	.189 .093 .026	.185 .091 .026	.176 .088 .025	.168 .085 .025	.160 .082 .024	
9.0	.177 .086 .024	.173 .084 .024	.165 .081 .023	.157 .079 .023	.150 .076 .022	
10.0	.166 .079 .022	.162 .078 .022	.155 .076 .021	.148 .073 .021	.142 .071 .020	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio					Ceiling Cavity Exitance Coefficients(CCEC)
0.0	.250 .250 .250	.213 .213 .213	.146 .146 .146	.084 .084 .084	.027 .027 .027	
1.0	.243 .216 .191	.208 .185 .164	.142 .127 .114	.082 .074 .066	.026 .024 .021	
2.0	.236 .192 .155	.202 .165 .134	.138 .114 .094	.080 .067 .055	.026 .022 .018	
3.0	.228 .175 .132	.196 .151 .115	.134 .105 .081	.078 .061 .047	.025 .020 .016	
4.0	.221 .162 .117	.189 .140 .102	.130 .098 .072	.075 .057 .042	.024 .019 .014	
5.0	.213 .152 .107	.183 .131 .093	.126 .092 .066	.073 .054 .039	.024 .018 .013	
6.0	.206 .144 .099	.177 .124 .087	.122 .087 .061	.071 .051 .036	.023 .017 .012	
7.0	.199 .137 .094	.171 .119 .082	.118 .083 .058	.069 .049 .035	.022 .016 .011	
8.0	.192 .131 .090	.165 .114 .078	.114 .080 .055	.066 .047 .033	.022 .015 .011	
9.0	.186 .126 .086	.160 .110 .075	.111 .077 .054	.065 .046 .032	.021 .015 .011	
10.0	.180 .122 .084	.155 .106 .073	.108 .075 .052	.063 .044 .031	.020 .014 .010	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-15

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME: 2835 IP67					TYPE: 2835 70LED 24V			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.:					SUR.: 0.012*0.5			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	25.3	26.7	25.6	27.1	27.5	25.7	27.1	26.0	27.5	27.8	
3H	26.9	28.2	27.3	28.6	29.0	28.3	29.6	28.7	30.0	30.4	
4H	27.5	28.8	28.0	29.2	29.7	29.2	30.5	29.7	30.9	31.4	
6H	28.0	29.2	28.5	29.7	30.1	30.1	31.3	30.5	31.7	32.1	
8H	28.0	29.2	28.5	29.6	30.1	30.4	31.6	30.8	32.0	32.5	
12H	28.0	29.1	28.4	29.5	30.0	30.7	31.8	31.2	32.3	32.8	
4H 2H	26.0	27.3	26.4	27.7	28.1	26.3	27.6	26.8	28.0	28.4	
3H	27.8	29.0	28.3	29.4	29.9	29.1	30.3	29.6	30.7	31.2	
4H	28.7	29.8	29.2	30.2	30.7	30.2	31.3	30.7	31.8	32.3	
6H	29.3	30.3	29.9	30.8	31.3	31.2	32.2	31.7	32.6	33.2	
8H	29.4	30.3	29.9	30.8	31.3	31.6	32.5	32.2	33.0	33.6	
12H	29.4	30.2	29.9	30.7	31.3	32.0	32.8	32.6	33.4	33.9	
8H 4H	29.3	30.2	29.8	30.7	31.2	30.6	31.4	31.1	31.9	32.5	
6H	30.1	30.9	30.7	31.4	32.0	31.7	32.5	32.3	33.0	33.6	
8H	30.4	31.0	30.9	31.6	32.2	32.3	32.9	32.9	33.5	34.1	
12H	30.5	31.0	31.1	31.6	32.3	32.8	33.4	33.4	34.0	34.6	
12H 4H	29.4	30.2	29.9	30.7	31.3	30.6	31.4	31.1	31.9	32.5	
6H	30.3	31.0	30.9	31.5	32.2	31.8	32.5	32.4	33.0	33.7	
8H	30.6	31.2	31.2	31.8	32.4	32.4	33.0	33.0	33.6	34.2	
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.1					
1.5H	+ 0.1 / - 0.2					+ 0.1 / - 0.2					
2.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2					

CIE Pub.117, 511.2 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -2.3)
Area: 0.006 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-15

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:


```

Range: 0 - 180DEG
Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

```

ISOCANDELA DIAGRAM

NAME: 2835 IP67	TYPE: 2835 70LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

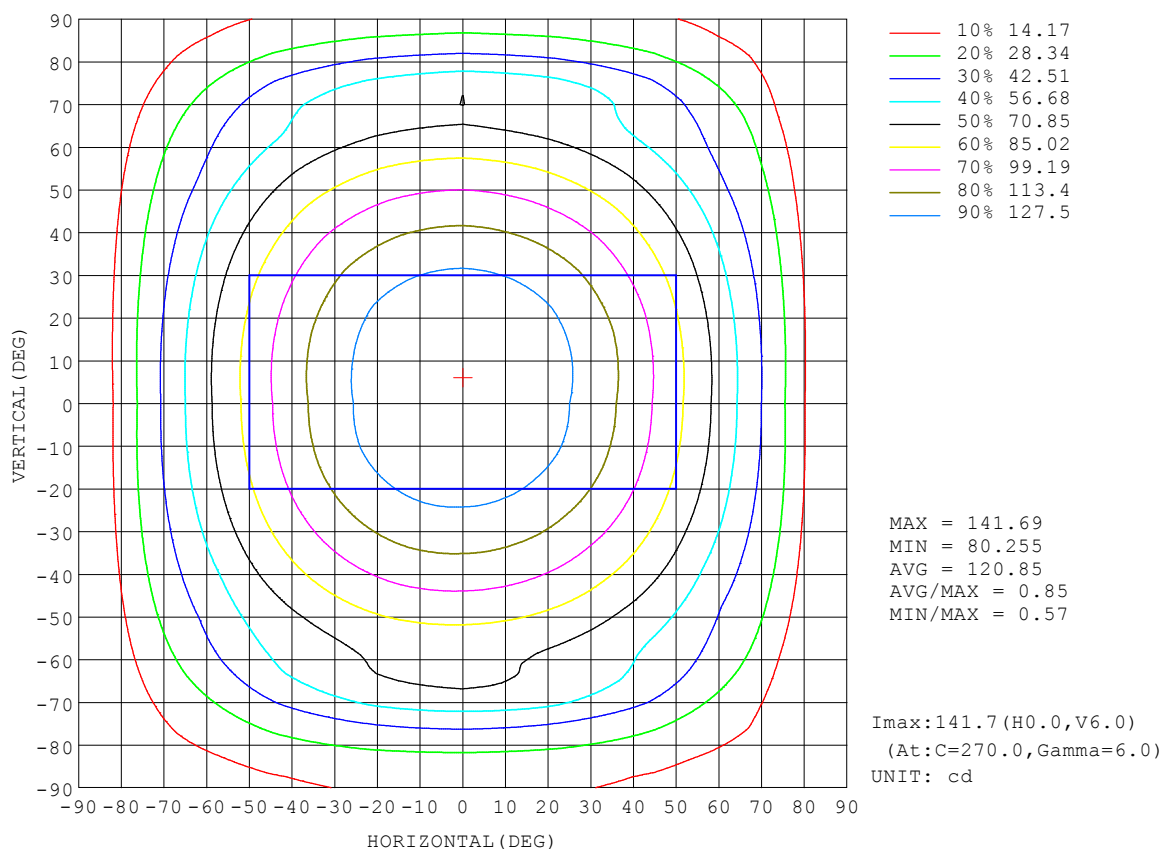


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-04-15

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

AAI Figure

NAME: 2835 IP67	TYPE: 2835 70LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

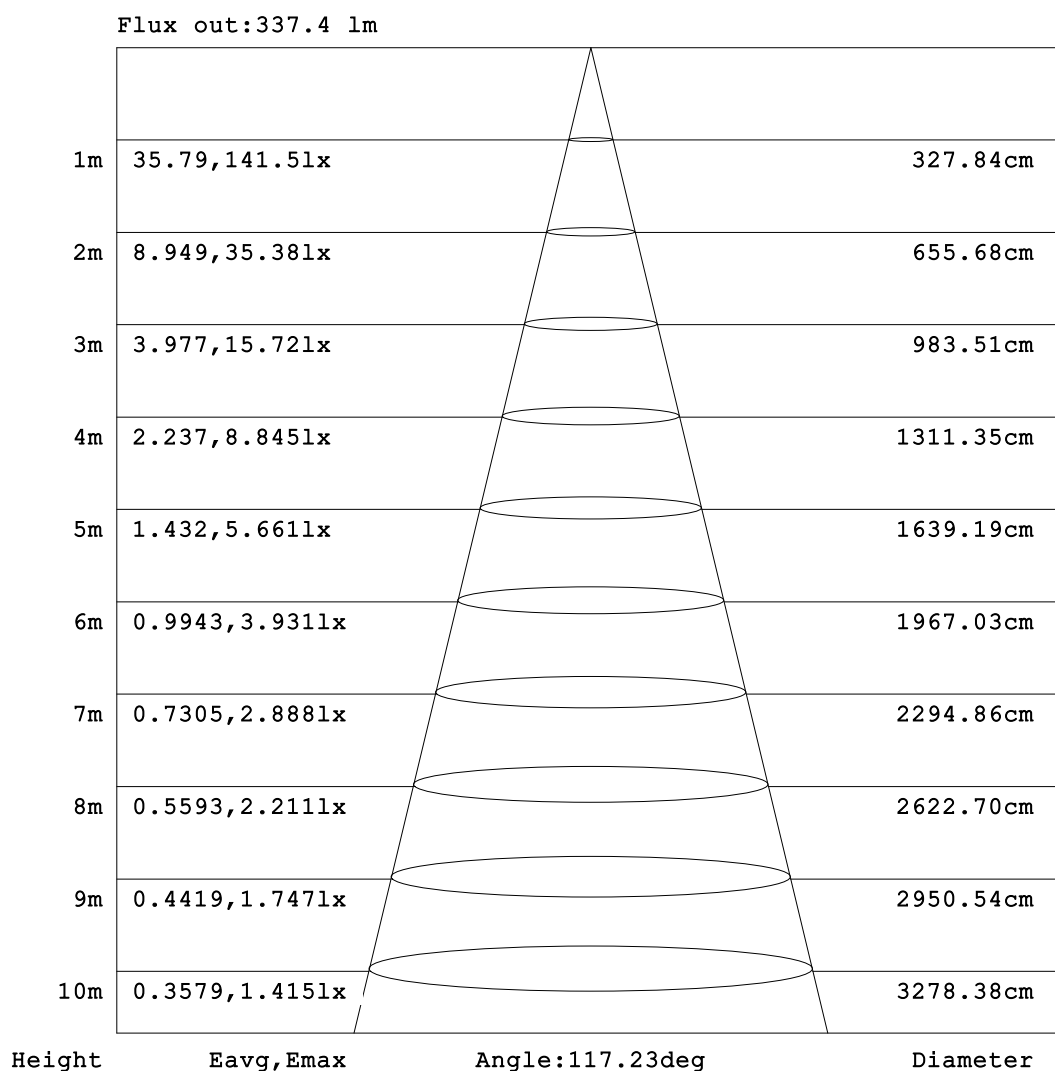


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-04-15

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

NAME: 2835 IP67	TYPE: 2835 70LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

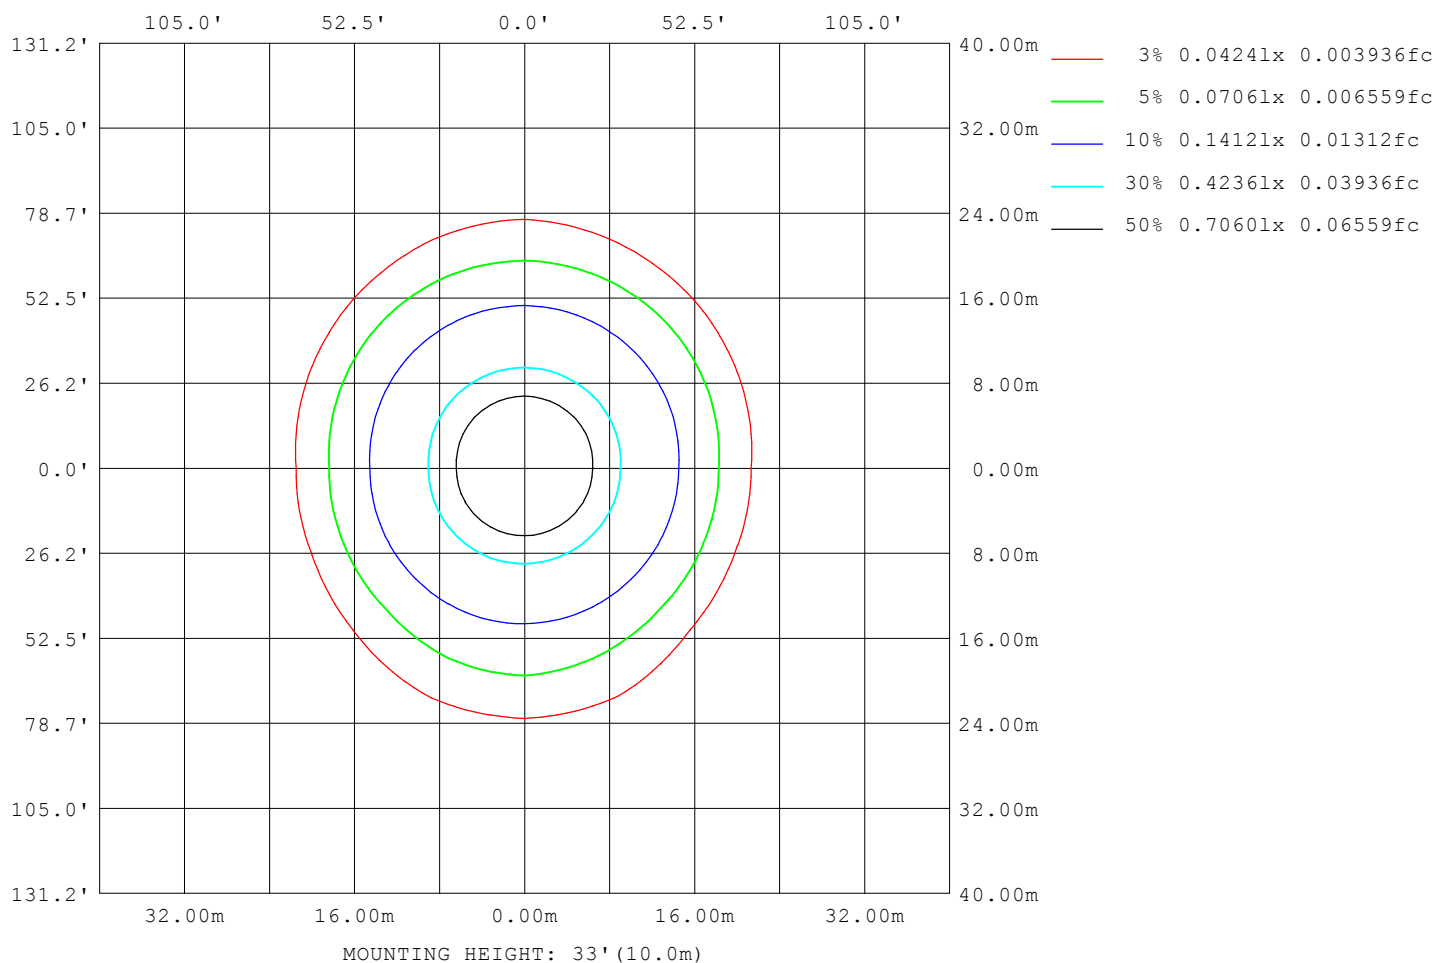

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-04-15

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

LED Avg.L Report

NAME: 2835 IP67	TYPE: 2835 70LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	22013
L_0~180 (75) av	19712
L_0~180 (85) av	6447
L_90~270 (65) av	28498
L_90~270 (75) av	35845
L_90~270 (85) av	51714
L_45 (65) av	24892
L_45 (75) av	31404
L_45 (85) av	42532

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-04-15

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

Planar Illuminance Curve

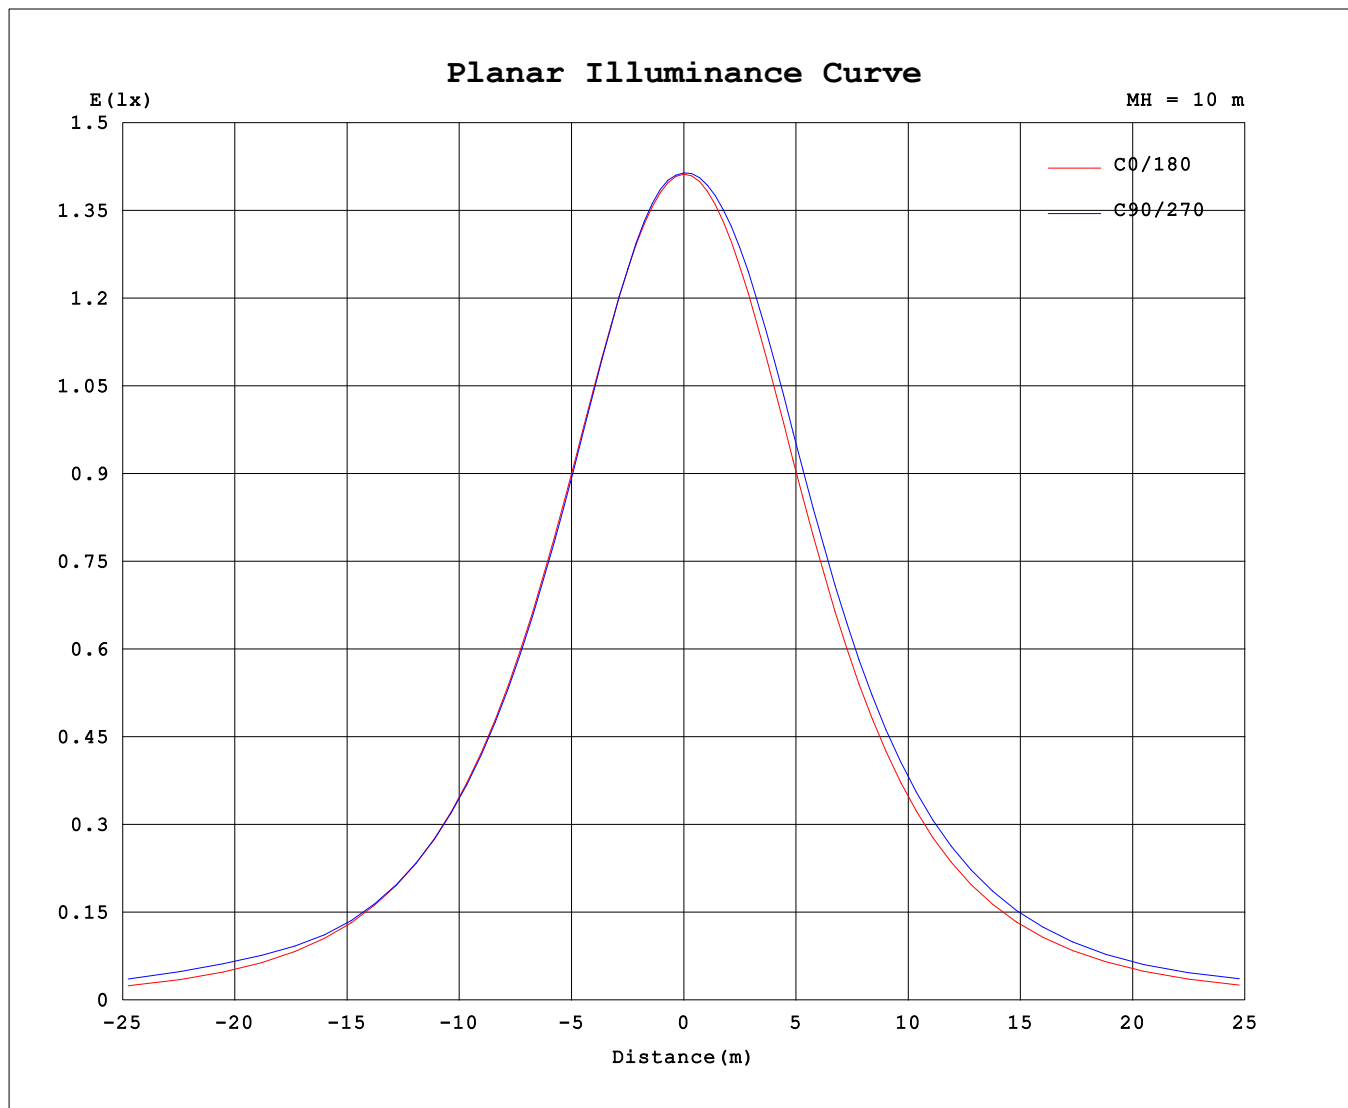

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-04-15

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: 2835 IP67	TYPE: 2835 70LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	141	141	141	141	141	141	141	141	141	141	141	141	141	141	141	141			
5	141	141	141	141	141	141	141	141	141	141	141	142	142	141	141	141			
10	139	139	139	139	139	140	140	140	140	140	141	141	141	141	140	140			
15	137	137	137	137	137	137	138	138	138	138	140	141	141	140	139	138			
20	133	133	132	132	132	132	133	134	133	135	137	138	138	138	136	134			
25	129	129	128	128	128	128	129	130	129	131	134	135	135	135	134	131			
30	122	122	121	120	120	121	122	123	122	125	128	129	129	129	128	125			
35	116	116	115	115	115	116	116	117	117	120	123	124	124	124	123	120			
40	107	106	105	105	106	107	107	107	107	111	115	116	116	115	114	111			
45	100.0	99.4	98.5	98.6	99.1	99.9	100	100	100	105	108	109	110	108	107	104			
50	88.5	87.9	87.3	87.7	88.4	89.2	89.2	89.0	89.0	93.6	97.4	98.9	99.1	97.8	96.1	93.0			
55	80.1	79.6	79.4	80.2	81.1	81.8	81.4	81.0	80.9	85.7	89.6	91.4	91.6	90.2	88.1	84.8			
60	66.8	66.4	67.2	70.5	74.3	72.9	69.5	68.3	68.1	73.1	77.4	79.4	79.9	78.2	75.7	71.8			
65	57.4	57.4	59.9	69.0	74.2	71.6	63.1	59.6	59.0	64.3	69.0	71.6	72.5	70.3	67.2	62.6			
70	42.5	43.8	54.8	62.9	63.8	62.6	57.1	46.7	44.4	50.3	57.2	67.3	70.9	64.9	54.9	48.5			
75	32.2	36.9	47.7	50.0	49.4	50.0	48.3	39.9	34.2	41.3	54.3	64.0	67.6	64.7	52.2	39.3			
80	14.9	24.3	29.7	32.6	33.1	33.0	30.5	25.7	18.8	30.2	41.4	46.8	49.3	47.4	42.1	30.1			
85	0.49	15.4	19.8	22.3	23.1	22.7	20.5	16.4	9.22	20.3	29.2	34.0	35.9	34.1	29.2	20.5			
90	0.22	7.11	12.5	15.2	15.8	15.1	12.6	7.46	0.19	8.42	15.6	19.4	21.1	19.6	15.9	8.82			
95	0.29	6.82	12.3	14.7	15.3	14.6	12.2	7.04	0.25	6.50	12.4	15.5	16.5	15.7	12.8	7.13			
100	0.44	6.78	12.4	14.7	15.3	14.7	12.5	7.15	0.36	3.16	10.4	14.5	15.4	14.6	11.4	3.94			
105	0.56	6.29	12.2	14.7	15.4	14.8	12.4	6.89	0.46	1.00	6.14	12.9	14.1	12.9	9.05	1.40			
110	0.73	5.27	11.4	14.0	14.8	14.3	11.9	5.92	0.62	0.61	4.88	8.93	10.6	9.16	5.16	0.63			
115	0.84	4.62	11.1	13.9	14.7	14.2	11.7	5.33	0.73	0.70	2.54	5.34	8.49	7.05	2.79	0.72			
120	1.00	3.79	10.7	13.9	14.8	14.2	11.2	4.40	0.88	0.83	0.87	2.62	5.21	3.53	0.88	0.85			
125	1.10	3.10	10.6	14.0	14.9	14.2	10.9	3.73	0.98	0.92	0.93	1.19	2.19	1.18	0.94	0.93			
130	1.25	1.91	10.5	14.5	15.4	14.6	10.2	2.47	1.11	1.05	1.04	1.04	1.06	1.06	1.06	1.07			
135	1.33	1.38	10.1	14.5	15.7	14.3	9.30	1.76	1.20	1.14	1.11	1.11	1.11	1.13	1.13	1.15			
140	1.45	1.44	8.56	14.8	15.9	13.7	8.34	1.44	1.31	1.26	1.22	1.21	1.20	1.22	1.22	1.26			
145	1.51	1.51	5.67	14.2	16.0	13.6	6.43	1.51	1.38	1.32	1.29	1.27	1.25	1.27	1.29	1.34			
150	1.60	1.60	1.94	8.34	11.7	8.95	2.58	1.59	1.47	1.42	1.39	1.37	1.33	1.35	1.39	1.44			
155	1.65	1.65	1.65	3.76	6.11	4.36	1.66	1.64	1.53	1.49	1.46	1.44	1.40	1.42	1.45	1.50			
160	1.73	1.73	1.72	1.70	1.76	1.74	1.72	1.72	1.62	1.58	1.55	1.54	1.52	1.52	1.56	1.60			
165	1.79	1.79	1.77	1.75	1.79	1.78	1.76	1.77	1.69	1.65	1.62	1.61	1.60	1.59	1.63	1.68			
170	1.86	1.87	1.86	1.84	1.87	1.85	1.84	1.85	1.80	1.77	1.74	1.73	1.73	1.72	1.75	1.80			
175	1.93	1.93	1.92	1.90	1.92	1.91	1.90	1.91	1.87	1.85	1.84	1.83	1.83	1.82	1.85	1.88			
180	1.99	1.97	1.97	1.97	1.98	1.97	1.98	1.99	1.99	1.97	1.97	1.97	1.97	1.98	1.97	1.99			

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:

Test Date:2022-04-15

□ Range: 0 - 180DEG

□ Interval: 2.0DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450

Humidity:65.0%

Test Distance:5.749m [K=1.0000]

Remarks: