


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: 2835 IP67	TYPE: 2835 70LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 104.48 lm/W
MODEL	4000K RA90 12MM 9.6W	I _{max} (cd)	141.8	S/MH(C0/180)	1.28	
NOMINAL POWER(W)	4.8	LOR(%)	100.0	S/MH(C90/270)	1.34	
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	505.23	□ UP,DN(C0-180)	5.5,44.3	
NOMINAL FLUX(lm)	14.4351	CIE CLASS	DIRECT	□ UP,DN(C180-360)	2.5,47.7	
LAMPS INSIDE	35	□ up (%)	8.0	CIBSE SHR NOM	1.50	
TEST VOLTAGE(V)	24	□ down (%)	92.0	CIBSE SHR MAX	1.50	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

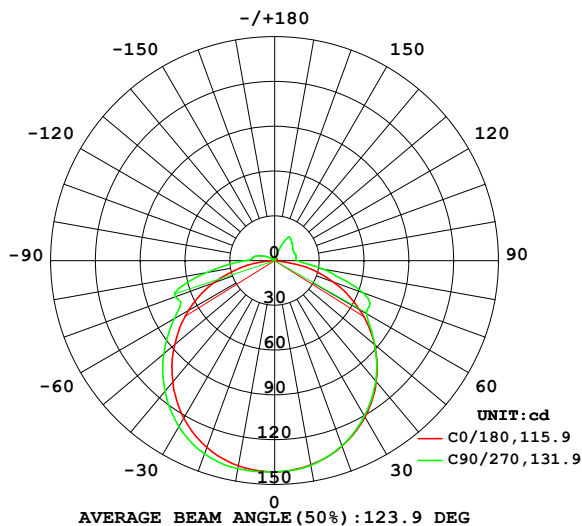

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

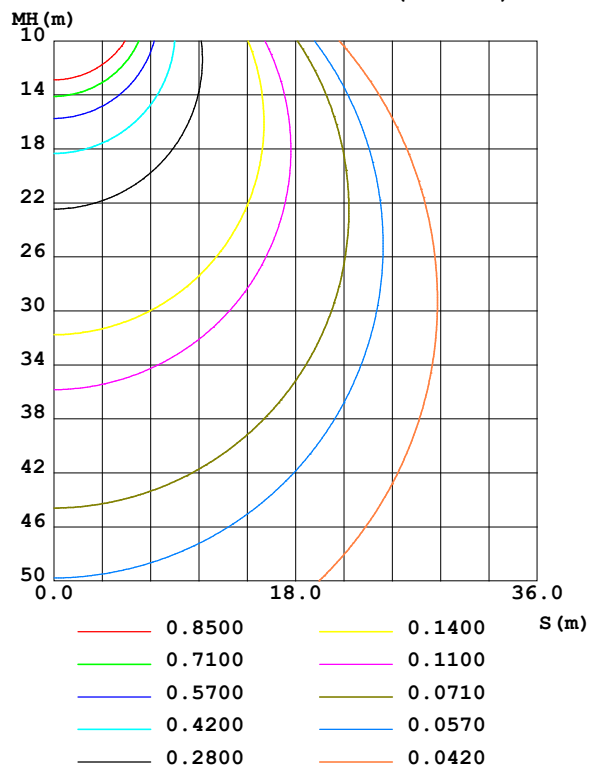

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-15

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	138.9	139.1	139.3	139.6	139.6	140.9	141.5	140.4	0- 10	13.43	13.43	2.66,2.66
20	132.2	131.9	131.9	132.9	133.1	136.8	137.7	135.8	10- 20	38.85	52.28	10.3,10.3
30	121.1	120.3	120.2	121.6	121.8	127.4	128.2	126.3	20- 30	59.62	111.9	22.1,22.1
40	106.0	104.7	105.4	106.3	106.3	113.0	114.3	111.9	30- 40	72.90	184.8	36.6,36.6
50	87.35	86.38	87.65	88.17	87.51	95.17	97.02	93.95	40- 50	77.11	261.9	51.8,51.8
60	65.79	66.16	71.11	68.40	66.68	75.06	77.54	73.69	50- 60	72.19	334.1	66.1,66.1
70	41.71	52.23	63.01	55.11	43.44	55.95	71.15	53.64	60- 70	61.65	395.7	78.3,78.3
80	15.25	29.10	33.03	30.04	18.39	40.08	46.90	40.55	70- 80	47.11	442.9	87.7,87.7
90	0.2142	11.90	15.17	12.03	0.1835	14.64	19.72	14.98	80- 90	21.92	464.8	92,92
100	0.4308	11.95	14.62	12.02	0.3575	10.01	14.57	10.78	90-100	11.09	475.9	94.2,94.2
110	0.7166	10.96	14.30	11.43	0.6077	4.118	9.588	4.349	100-110	8.677	484.5	95.9,95.9
120	0.9834	10.96	14.40	11.39	0.8672	0.8615	4.036	0.8744	110-120	6.117	490.7	97.1,97.1
130	1.229	11.77	15.75	11.21	1.103	1.028	1.053	1.048	120-130	4.773	495.4	98.1,98.1
140	1.431	12.40	17.54	10.25	1.301	1.214	1.191	1.221	130-140	4.204	499.6	98.9,98.9
150	1.598	6.299	18.09	6.308	1.463	1.380	1.327	1.385	140-150	3.353	503.0	99.6,99.6
160	1.727	1.720	4.194	1.755	1.615	1.549	1.514	1.556	150-160	1.562	504.5	99.9,99.9
170	1.865	1.854	1.868	1.839	1.791	1.747	1.733	1.756	160-170	0.5022	505.0	100,100
180	1.991	1.968	1.982	1.977	1.989	1.966	1.980	1.977	170-180	0.1783	505.2	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 231.16 lm

%lum = 45.8%

%lamp = 45.8%

Conical surface Flux(120deg): 334.09 lm

%lum = 66.1%


%lamp = 66.1%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-15

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

NAME: 2835 IP67	TYPE: 2835 70LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

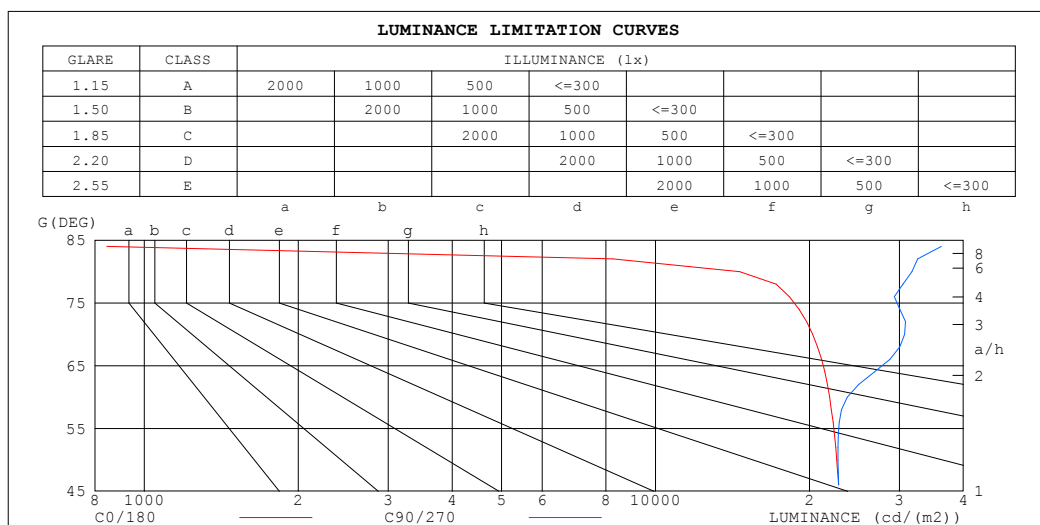

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1012	43446
80	14610	31717
75	20315	32016
70	20293	30718
65	22229	27828
60	21895	23714
55	22932	23341
50	22613	22737
45	23279	23232


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-04-15

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: 2835 IP67	TYPE: 2835 70LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.17	1.17	1.17	1.13	1.13	1.13	1.07	1.07	1.07	1.00	1.00	1.00	.95	.95	.95	.92
1.0	.00	.95	.91	.97	.92	.88	.91	.87	.84	.86	.83	.80	.81	.78	.76	.74
2.0	.86	.79	.72	.83	.77	.71	.78	.73	.68	.74	.69	.65	.70	.66	.63	.60
3.0	.75	.66	.59	.73	.65	.58	.69	.62	.56	.65	.59	.54	.61	.56	.52	.50
4.0	.66	.57	.50	.64	.56	.49	.61	.53	.47	.57	.51	.46	.54	.49	.44	.42
5.0	.59	.49	.43	.57	.48	.42	.54	.46	.41	.51	.45	.39	.49	.43	.38	.36
6.0	.53	.43	.37	.51	.43	.36	.49	.41	.35	.46	.40	.34	.44	.38	.34	.31
7.0	.48	.39	.32	.46	.38	.32	.44	.37	.31	.42	.35	.30	.40	.34	.30	.27
8.0	.43	.35	.29	.42	.34	.28	.40	.33	.28	.38	.32	.27	.37	.31	.26	.24
9.0	.40	.31	.26	.39	.31	.25	.37	.30	.25	.35	.29	.24	.34	.28	.24	.22
10.0	.37	.29	.23	.36	.28	.23	.34	.27	.23	.33	.27	.22	.31	.26	.22	.20

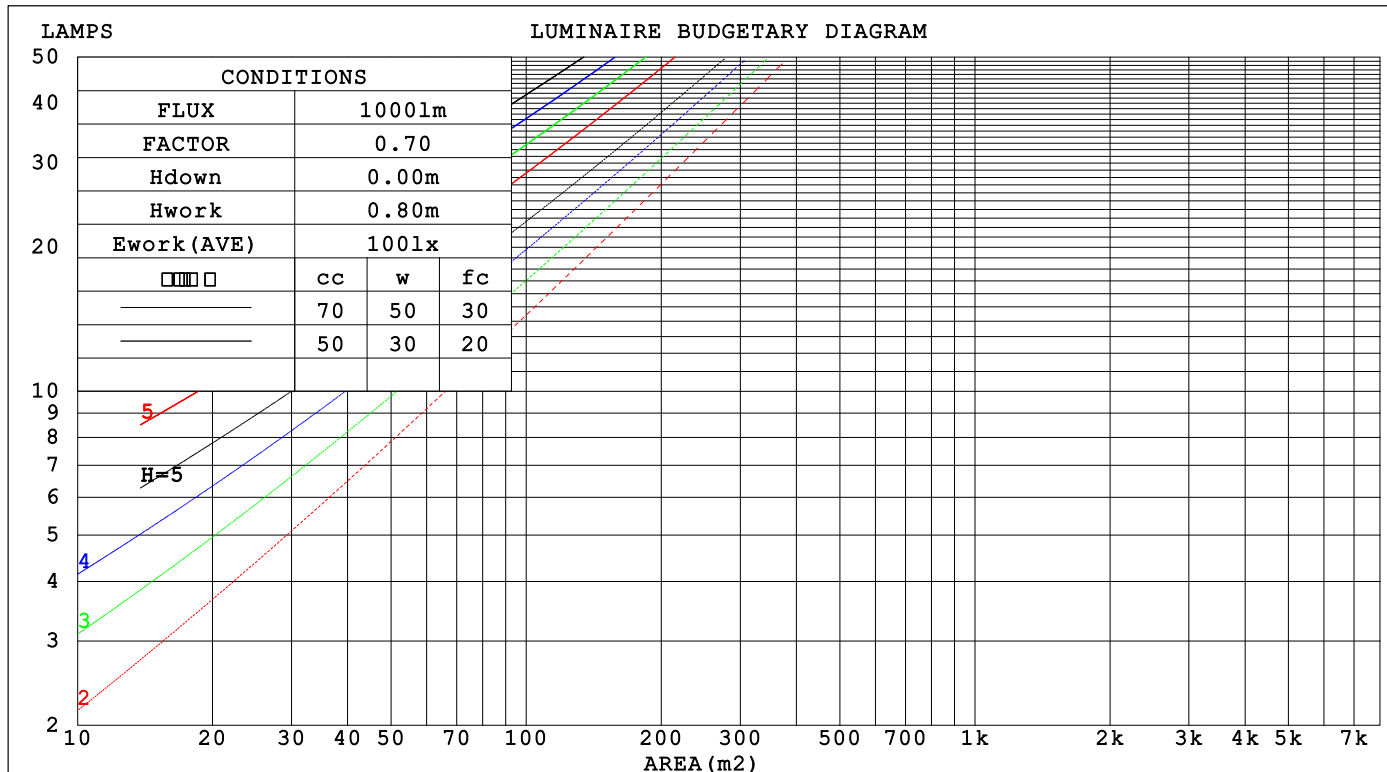

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-15

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: 2835 IP67	TYPE: 2835 70LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio					Wall Exitance Coefficients(WEC)
0.0						
1.0	.350 .199 .063	.340 .194 .062	.322 .185 .059	.306 .176 .057	.290 .168 .054	
2.0	.316 .173 .053	.307 .169 .052	.291 .162 .050	.276 .155 .048	.262 .148 .047	
3.0	.286 .152 .046	.278 .149 .045	.264 .143 .043	.250 .137 .042	.238 .132 .041	
4.0	.260 .135 .040	.253 .133 .039	.240 .127 .038	.228 .123 .037	.217 .118 .036	
5.0	.238 .121 .035	.232 .119 .035	.220 .115 .034	.209 .110 .033	.199 .106 .032	
6.0	.219 .110 .031	.214 .108 .031	.203 .104 .030	.193 .100 .030	.184 .097 .029	
7.0	.203 .100 .028	.198 .099 .028	.188 .095 .027	.179 .092 .027	.171 .089 .026	
8.0	.189 .092 .026	.184 .091 .026	.176 .088 .025	.167 .085 .024	.160 .082 .024	
9.0	.176 .085 .024	.172 .084 .024	.164 .081 .023	.157 .079 .023	.150 .076 .022	
10.0	.165 .079 .022	.162 .078 .022	.154 .076 .021	.147 .073 .021	.141 .071 .020	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio					Ceiling Cavity Exitance Coefficients(CCEC)
0.0	.251 .251 .251	.215 .215 .215	.147 .147 .147	.084 .084 .084	.027 .027 .027	
1.0	.245 .217 .193	.209 .186 .166	.143 .128 .115	.082 .074 .067	.026 .024 .022	
2.0	.237 .194 .157	.203 .167 .136	.139 .115 .095	.080 .067 .056	.026 .022 .018	
3.0	.230 .177 .134	.197 .152 .116	.135 .106 .082	.078 .062 .048	.025 .020 .016	
4.0	.222 .164 .119	.191 .142 .104	.131 .099 .073	.076 .058 .043	.024 .019 .014	
5.0	.214 .154 .109	.184 .133 .095	.127 .093 .067	.073 .055 .040	.024 .018 .013	
6.0	.207 .145 .101	.178 .126 .088	.123 .088 .062	.071 .052 .037	.023 .017 .012	
7.0	.200 .139 .096	.172 .120 .083	.119 .084 .059	.069 .050 .035	.022 .016 .012	
8.0	.193 .133 .092	.167 .115 .080	.115 .081 .057	.067 .048 .034	.022 .016 .011	
9.0	.187 .128 .088	.161 .111 .077	.112 .078 .055	.065 .046 .033	.021 .015 .011	
10.0	.181 .124 .086	.156 .108 .075	.109 .076 .053	.063 .045 .032	.021 .015 .011	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-15

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME: 2835 IP67						TYPE: 2835 70LED 24V			WEIGHT:		
SPEC.:						DIM.:			SERIAL No.:		
MFR.:						SUR.: 0.012*0.5			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	25.3	26.7	25.6	27.1	27.4	25.5	27.0	25.9	27.4	27.7	
	3H	26.8	28.2	27.3	28.6	29.0	28.2	29.5	28.6	29.9	30.3
	4H	27.5	28.8	27.9	29.2	29.6	29.2	30.5	29.6	30.9	31.3
	6H	28.0	29.2	28.4	29.6	30.1	30.0	31.2	30.5	31.6	32.1
	8H	28.0	29.2	28.5	29.6	30.1	30.3	31.5	30.8	31.9	32.4
	12H	27.9	29.1	28.4	29.5	30.0	30.7	31.8	31.1	32.2	32.7
4H	2H	25.9	27.2	26.4	27.6	28.1	26.2	27.5	26.6	27.9	28.3
	3H	27.8	28.9	28.3	29.4	29.8	29.0	30.2	29.5	30.6	31.1
	4H	28.6	29.7	29.1	30.1	30.6	30.2	31.2	30.7	31.7	32.2
	6H	29.3	30.2	29.8	30.7	31.2	31.2	32.1	31.7	32.6	33.1
	8H	29.4	30.2	29.9	30.7	31.3	31.6	32.5	32.1	33.0	33.5
	12H	29.3	30.1	29.9	30.7	31.2	32.0	32.8	32.5	33.3	33.9
8H	4H	29.2	30.1	29.8	30.6	31.2	30.5	31.4	31.0	31.9	32.4
	6H	30.1	30.8	30.6	31.4	32.0	31.7	32.4	32.3	33.0	33.6
	8H	30.3	31.0	30.9	31.5	32.1	32.2	32.9	32.8	33.5	34.1
	12H	30.4	31.0	31.0	31.6	32.2	32.8	33.4	33.4	33.9	34.6
12H	4H	29.3	30.1	29.9	30.6	31.2	30.5	31.3	31.1	31.8	32.4
	6H	30.3	30.9	30.8	31.5	32.1	31.8	32.4	32.4	33.0	33.6
	8H	30.6	31.1	31.2	31.7	32.4	32.4	33.0	33.0	33.5	34.2
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H		+ 0.1 / - 0.1					+ 0.1 / - 0.1				
1.5H		+ 0.1 / - 0.2					+ 0.1 / - 0.3				
2.0H		+ 0.1 / - 0.2					+ 0.1 / - 0.3				

CIE Pub.117, 505.2 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -2.4)
Area: 0.006 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-15

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:


```

Range: 0 - 180DEG
Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

```

ISOCANDELA DIAGRAM

NAME: 2835 IP67	TYPE: 2835 70LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

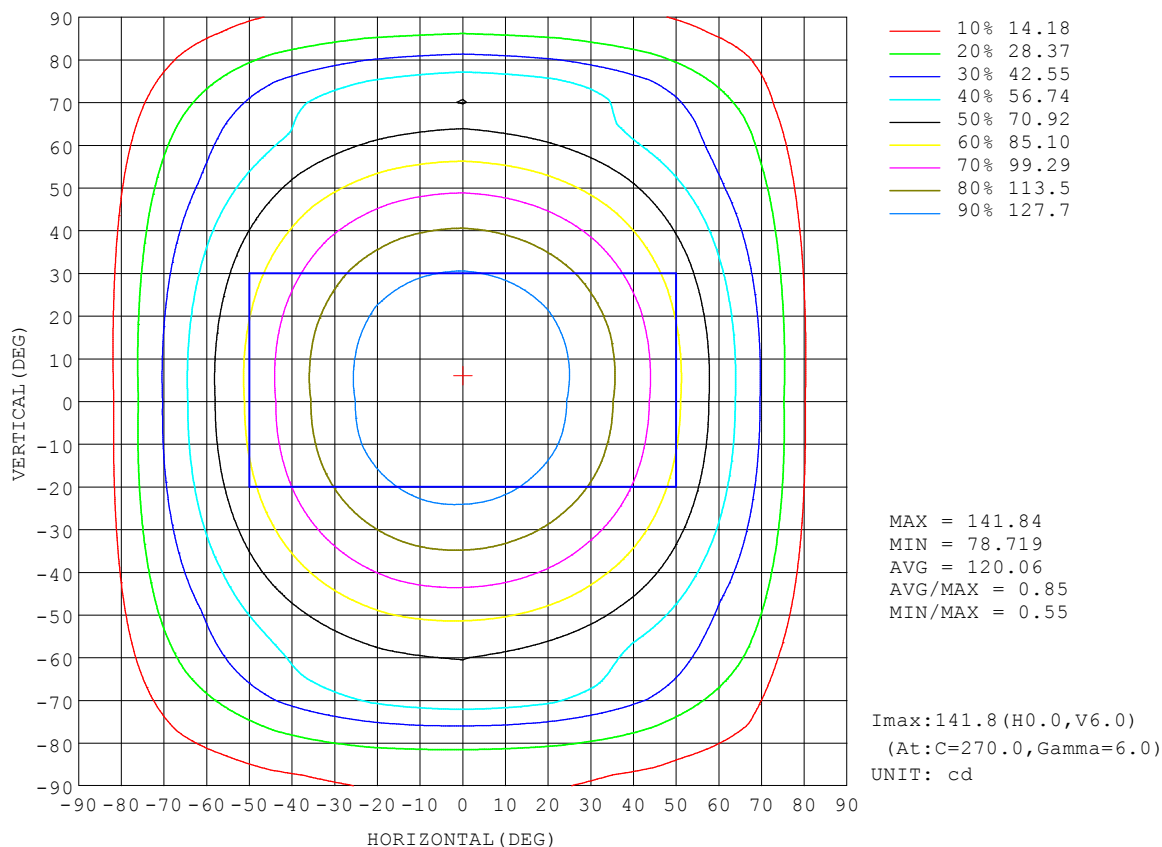


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-04-15

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

AAI Figure

NAME: 2835 IP67	TYPE: 2835 70LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

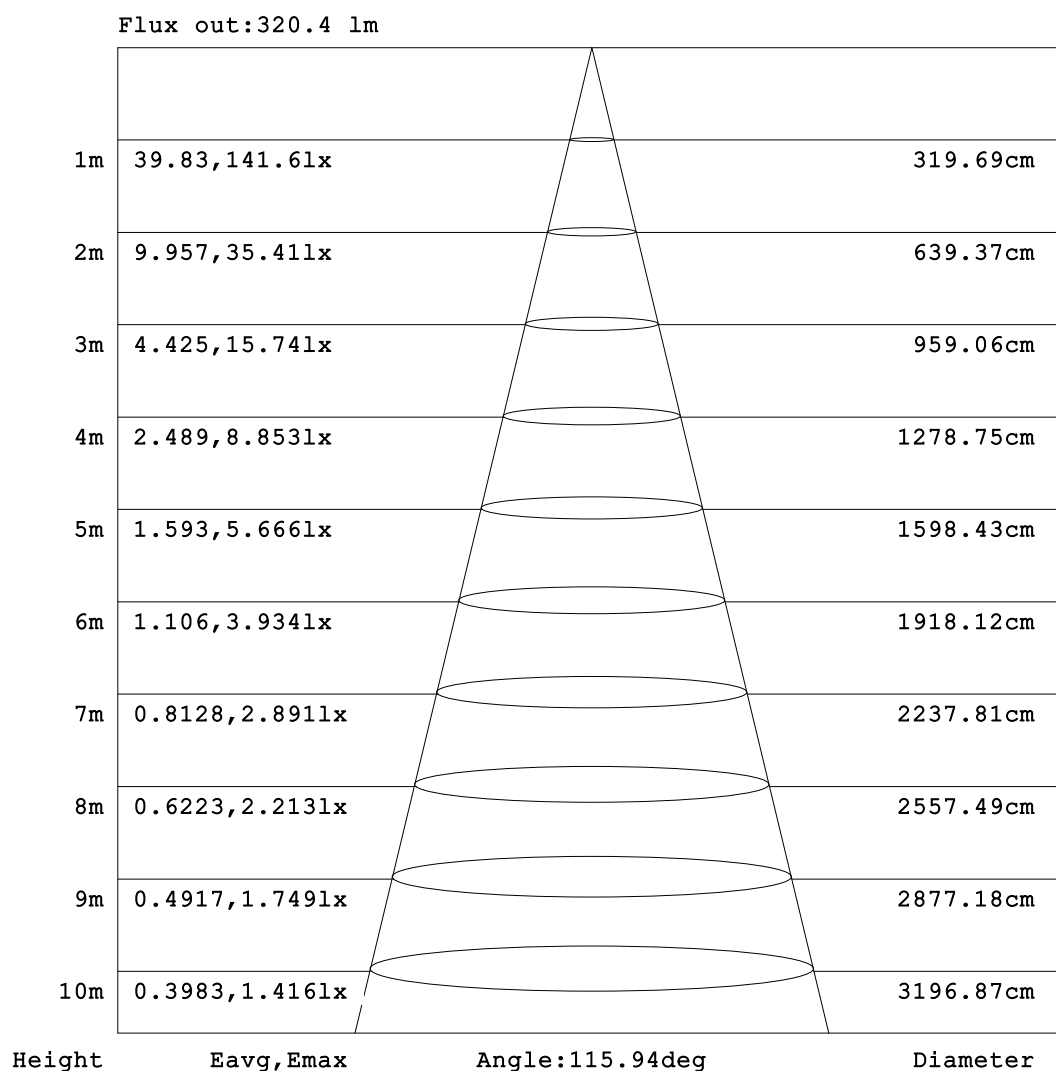


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-15

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

NAME: 2835 IP67	TYPE: 2835 70LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

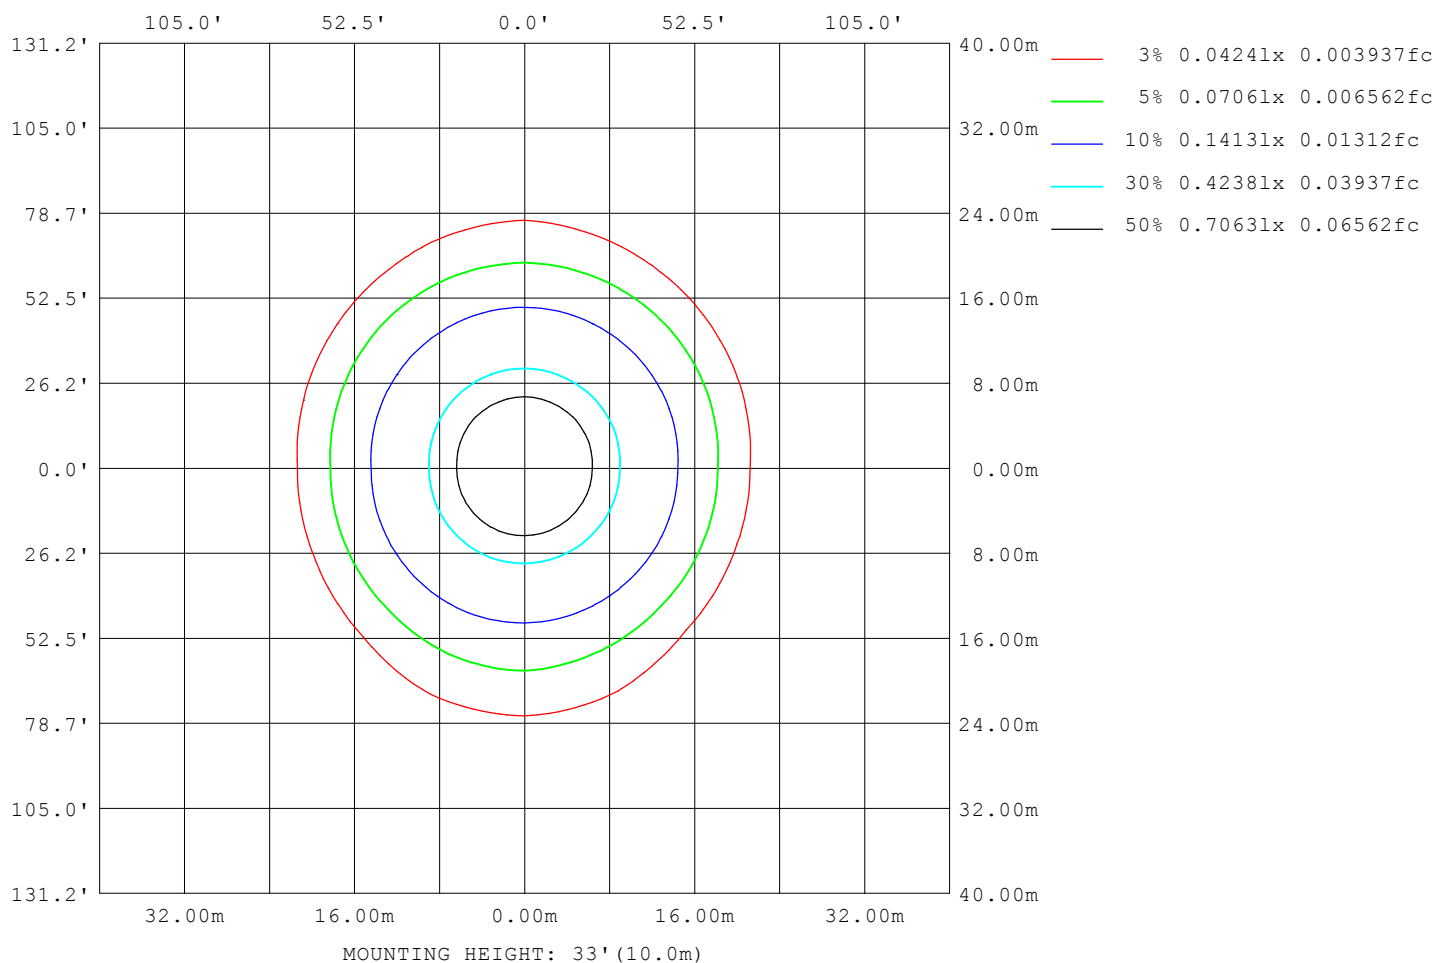

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-15

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

LED Avg.L Report

NAME: 2835 IP67	TYPE: 2835 70LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	21596
L_0~180 (75) av	19310
L_0~180 (85) av	6300
L_90~270 (65) av	27610
L_90~270 (75) av	35186
L_90~270 (85) av	49647
L_45 (65) av	24051
L_45 (75) av	31164
L_45 (85) av	40937

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-15

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

Planar Illuminance Curve

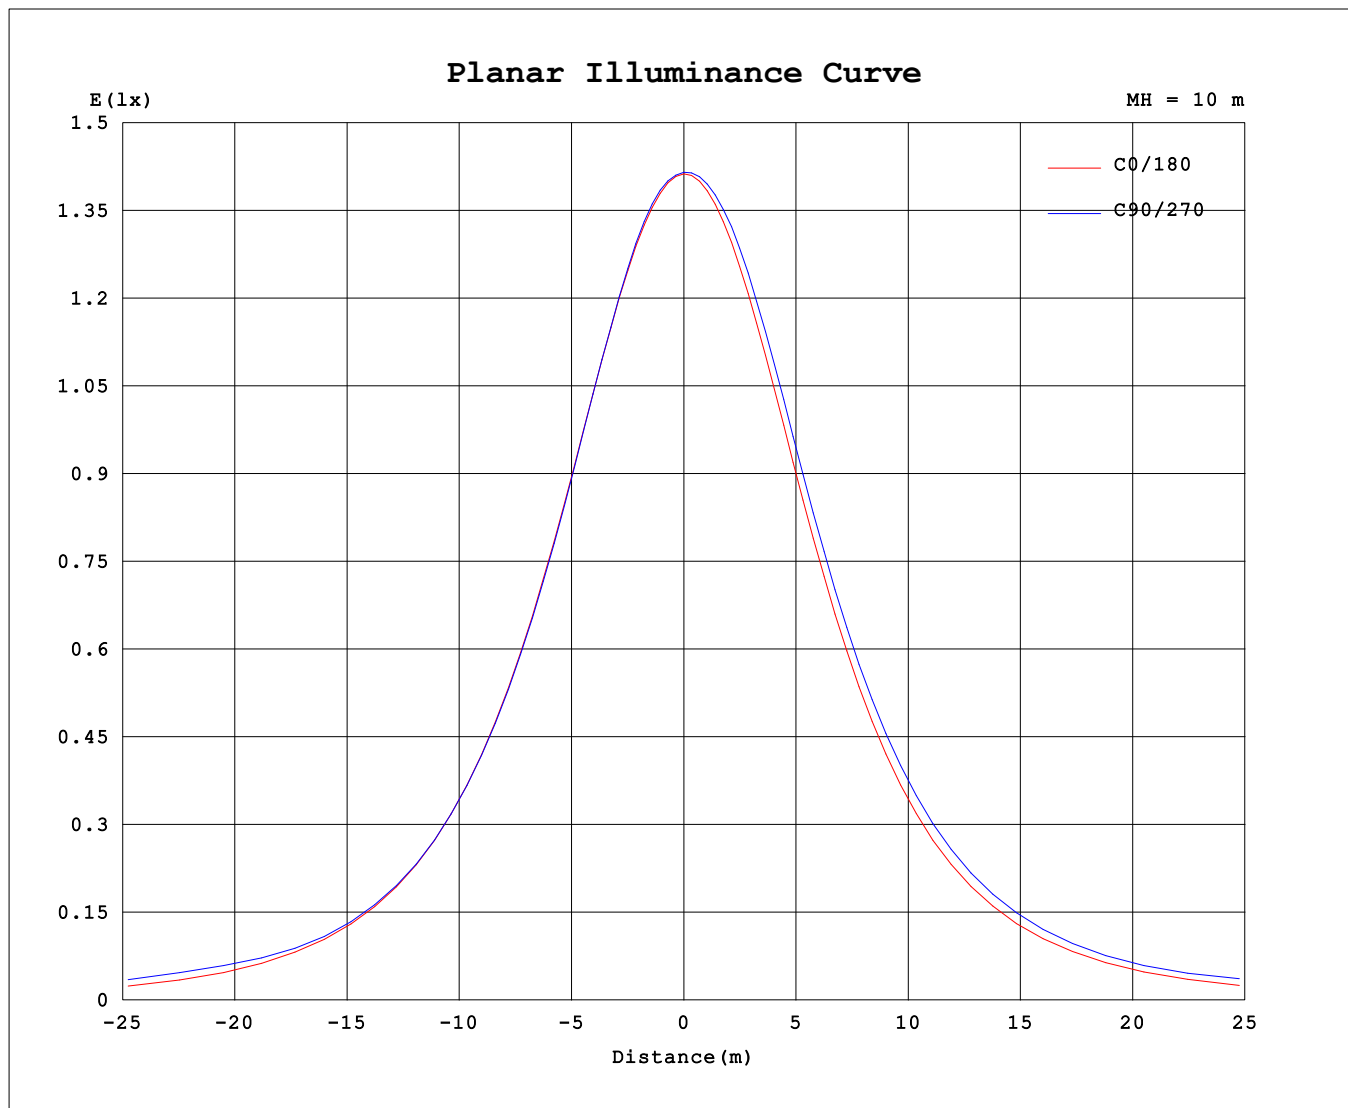

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-04-15

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: 2835 IP67	TYPE: 2835 70LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	141	141	141	141	141	141	141	141	141	141	141	141	141	141	141	141			
5	141	141	141	141	141	141	141	141	141	141	142	142	142	142	141	141			
10	139	139	139	139	139	139	140	139	140	140	141	141	141	141	140	140			
15	137	137	137	137	137	137	138	138	138	138	140	141	141	140	139	138			
20	132	132	132	132	132	132	133	133	133	135	137	138	138	137	136	134			
25	128	128	128	128	128	128	129	129	129	131	134	135	135	134	133	130			
30	121	121	120	120	120	121	122	122	122	125	127	128	128	127	126	124			
35	116	115	114	114	115	115	116	116	116	119	122	123	123	122	121	119			
40	106	106	105	105	105	106	106	106	106	110	113	114	114	113	112	110			
45	98.9	98.5	97.6	98.0	98.5	99.4	99.3	99.3	99.1	103	106	108	108	106	105	103			
50	87.4	87.0	86.4	86.9	87.7	88.6	88.2	87.7	87.5	91.8	95.2	96.8	97.0	95.8	94.0	91.4			
55	79.0	78.8	78.4	79.3	80.3	81.1	80.4	79.7	79.4	83.8	87.3	89.0	89.4	88.0	86.0	83.3			
60	65.8	65.7	66.2	68.4	71.1	70.7	68.4	67.1	66.7	71.1	75.1	77.0	77.5	76.0	73.7	70.2			
65	56.5	56.6	58.3	65.0	70.5	68.1	61.0	58.5	57.8	62.4	66.7	69.4	70.6	68.2	65.2	61.2			
70	41.7	43.0	52.2	61.4	63.0	61.9	55.1	45.6	43.4	48.8	55.9	67.3	71.1	64.7	53.6	47.2			
75	31.6	35.5	46.6	50.2	49.7	50.4	47.6	38.5	33.4	40.2	54.1	62.8	66.1	63.7	52.0	38.4			
80	15.2	23.9	29.1	32.4	33.0	32.9	30.0	25.6	18.4	29.8	40.1	44.7	46.9	45.0	40.6	29.9			
85	0.53	15.0	19.2	21.8	22.7	22.5	20.2	16.3	8.93	19.7	27.9	32.2	34.0	32.2	27.9	19.8			
90	0.21	6.84	11.9	14.5	15.2	14.5	12.0	7.28	0.18	8.07	14.6	18.2	19.7	18.4	15.0	8.47			
95	0.28	6.61	11.7	14.0	14.6	13.9	11.7	6.86	0.24	6.21	11.8	14.7	15.6	14.9	12.3	6.86			
100	0.43	6.52	11.9	14.1	14.6	14.1	12.0	6.88	0.36	2.80	10.0	13.7	14.6	13.8	10.8	3.46			
105	0.55	6.26	11.9	14.2	14.8	14.3	12.2	6.77	0.46	0.65	5.68	12.0	13.1	11.9	8.26	0.88			
110	0.72	5.68	11.0	13.5	14.3	13.8	11.4	6.32	0.61	0.60	4.12	8.06	9.59	8.21	4.35	0.62			
115	0.83	5.22	10.9	13.4	14.2	13.6	11.4	5.90	0.72	0.69	1.70	4.90	7.51	6.10	1.83	0.71			
120	0.98	4.68	11.0	13.6	14.4	13.9	11.4	5.21	0.87	0.81	0.86	1.96	4.04	2.28	0.87	0.83			
125	1.09	4.38	11.3	14.0	14.7	14.2	11.4	4.83	0.96	0.91	0.91	1.08	1.35	1.07	0.94	0.93			
130	1.23	3.67	11.8	15.1	15.8	15.1	11.2	3.90	1.10	1.05	1.03	1.03	1.05	1.05	1.05	1.05			
135	1.32	2.92	12.0	15.7	16.5	15.3	10.7	3.30	1.19	1.13	1.10	1.10	1.11	1.11	1.12	1.14			
140	1.43	1.76	12.4	16.8	17.5	15.4	10.2	2.40	1.30	1.24	1.21	1.20	1.19	1.21	1.22	1.26			
145	1.50	1.52	11.3	17.5	18.5	16.2	9.20	1.83	1.37	1.31	1.28	1.26	1.25	1.27	1.29	1.33			
150	1.60	1.59	6.30	15.6	18.1	13.5	6.31	1.58	1.46	1.41	1.38	1.36	1.33	1.35	1.39	1.44			
155	1.65	1.65	2.71	10.7	14.1	9.51	3.55	1.63	1.52	1.48	1.45	1.43	1.39	1.41	1.46	1.50			
160	1.73	1.73	1.72	2.70	4.19	3.05	1.75	1.71	1.62	1.58	1.55	1.54	1.51	1.51	1.56	1.60			
165	1.78	1.78	1.77	1.75	1.89	1.81	1.76	1.76	1.68	1.65	1.62	1.61	1.60	1.59	1.63	1.68			
170	1.86	1.86	1.85	1.84	1.87	1.85	1.84	1.85	1.79	1.77	1.75	1.73	1.73	1.72	1.76	1.80			
175	1.92	1.93	1.92	1.90	1.92	1.91	1.90	1.91	1.87	1.85	1.84	1.83	1.83	1.82	1.85	1.88			
180	1.99	1.97	1.97	1.97	1.98	1.97	1.98	1.99	1.99	1.98	1.97	1.97	1.98	1.97	1.98	1.99			

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:

Test Date:2022-04-15

□ Range: 0 - 180DEG

□ Interval: 2.0DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450

Humidity:65.0%

Test Distance:5.749m [K=1.0000]

Remarks: