


## LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: 2835 IP67	TYPE: 2835 70LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 93.14 lm/W			
MODEL	2700K RA90 12MM 9.6W	I <sub>max</sub> (cd)	128.7	S/MH(C0/180)	1.28
NOMINAL POWER(W)	4.8	LOR(%)	100.0	S/MH(C90/270)	1.33
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	449.07	<input type="checkbox"/> UP,DN(C0-180)	5.2,44.4
NOMINAL FLUX(lm)	12.8305	CIE CLASS	DIRECT	<input type="checkbox"/> UP,DN(C180-360)	2.5,47.9
LAMPS INSIDE	35	<input type="checkbox"/> up (%)	7.6	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)	24	<input type="checkbox"/> down (%)	92.4	CIBSE SHR MAX	1.50

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

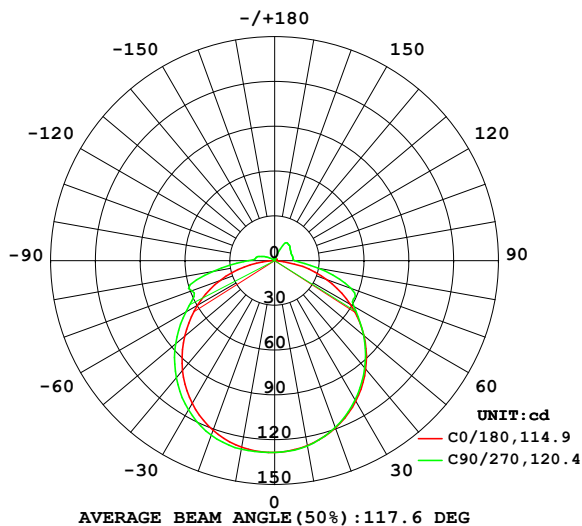

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

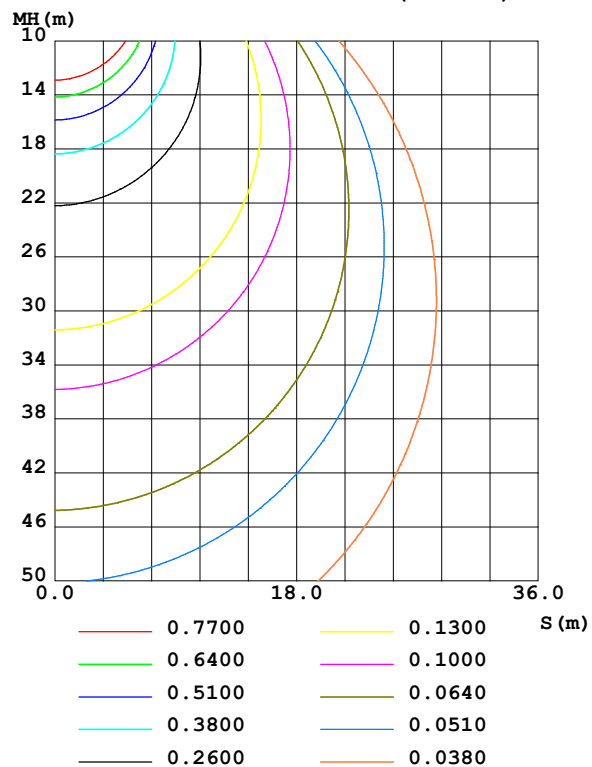

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-04-15

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:

## ZONAL FLUX DIAGRAM

### ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	125.8	125.7	126.0	126.7	126.9	127.9	128.2	127.1	0- 10	12.18	12.18	2.71,2.71
20	119.1	118.6	118.9	120.2	120.9	123.9	124.3	122.5	10- 20	35.15	47.33	10.5,10.5
30	108.8	107.8	107.8	109.6	110.5	114.9	115.5	113.6	20- 30	53.76	101.1	22.5,22.5
40	94.96	93.60	93.94	95.37	96.07	101.3	102.4	100.2	30- 40	65.49	166.6	37.1,37.1
50	78.05	77.00	77.81	78.71	78.71	84.90	86.65	83.86	40- 50	68.96	235.5	52.5,52.5
60	58.63	58.79	61.19	60.65	59.68	66.49	68.78	65.41	50- 60	64.24	299.8	66.8,66.8
70	37.15	43.19	54.30	46.76	38.87	48.08	59.23	46.48	60- 70	53.81	353.6	78.7,78.7
80	13.61	26.73	29.39	28.03	16.63	36.23	42.06	36.71	70- 80	41.46	395.0	88,88
90	0.1904	10.46	13.43	10.68	0.1644	13.19	17.60	13.24	80- 90	19.70	414.7	92.4,92.4
100	0.3784	10.18	12.47	10.26	0.3169	8.875	12.71	9.409	90-100	9.621	424.4	94.5,94.5
110	0.6355	9.254	12.16	9.761	0.5408	3.759	8.560	3.920	100-110	7.488	431.9	96.2,96.2
120	0.8832	9.239	12.54	9.951	0.7717	0.7686	3.799	0.7794	110-120	5.294	437.1	97.3,97.3
130	1.100	9.650	13.69	9.762	0.9813	0.9115	0.9296	0.9316	120-130	4.110	441.3	98.3,98.3
140	1.290	9.141	14.40	8.109	1.160	1.080	1.063	1.093	130-140	3.500	444.8	99,99
150	1.441	3.329	13.43	3.612	1.310	1.235	1.186	1.245	140-150	2.606	447.4	99.6,99.6
160	1.560	1.551	2.139	1.542	1.450	1.387	1.365	1.402	150-160	1.106	448.5	99.9,99.9
170	1.683	1.675	1.688	1.656	1.615	1.571	1.564	1.583	160-170	0.4391	448.9	100,100
180	1.798	1.780	1.790	1.784	1.795	1.775	1.788	1.784	170-180	0.1609	449.1	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 208.07 lm

%lum = 46.3%

%lamp = 46.3%

Conical surface Flux(120deg): 299.77 lm

%lum = 66.8%


%lamp = 66.8%

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-04-15

□ Range: 0 - 180DEG  
 □ Interval: 2.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
 Humidity:65.0%  
 Test Distance:5.749m [K=1.0000]  
 Remarks:

# LUMINANCE LIMITATION CURVES

NAME: 2835 IP67	TYPE: 2835 70LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

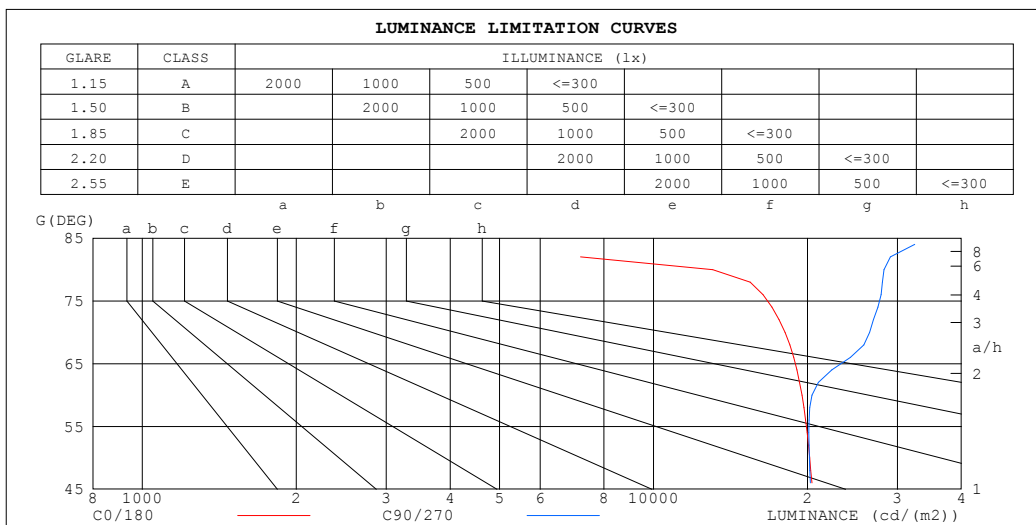

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	848	38887
80	13046	28224
75	18150	29242
70	18080	26471
65	19791	23153
60	19516	20403
55	20474	20629
50	20211	20184
45	20841	20686


C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-04-15

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: 2835 IP67	TYPE: 2835 70LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio                      Coefficients of Utilization(CU)															
0.0	1.17	1.17	1.17	1.14	1.14	1.14	1.07	1.07	1.07	1.01	1.01	1.01	.95	.95	.95	.92
1.0	.00	.95	.91	.97	.93	.89	.91	.88	.84	.86	.83	.80	.81	.79	.77	.74
2.0	.86	.79	.73	.84	.77	.71	.79	.73	.68	.74	.70	.66	.70	.66	.63	.60
3.0	.75	.66	.60	.73	.65	.59	.69	.62	.56	.65	.59	.55	.61	.57	.53	.50
4.0	.66	.57	.50	.64	.56	.49	.61	.54	.48	.58	.51	.46	.55	.49	.45	.42
5.0	.59	.50	.43	.57	.49	.42	.54	.47	.41	.52	.45	.40	.49	.43	.39	.36
6.0	.53	.44	.37	.52	.43	.37	.49	.41	.36	.47	.40	.35	.44	.38	.34	.32
7.0	.48	.39	.33	.47	.38	.32	.44	.37	.31	.42	.36	.31	.40	.34	.30	.28
8.0	.44	.35	.29	.43	.34	.29	.41	.33	.28	.39	.32	.27	.37	.31	.27	.25
9.0	.40	.32	.26	.39	.31	.26	.37	.30	.25	.36	.29	.25	.34	.28	.24	.22
10.0	.37	.29	.23	.36	.28	.23	.35	.28	.23	.33	.27	.22	.32	.26	.22	.20

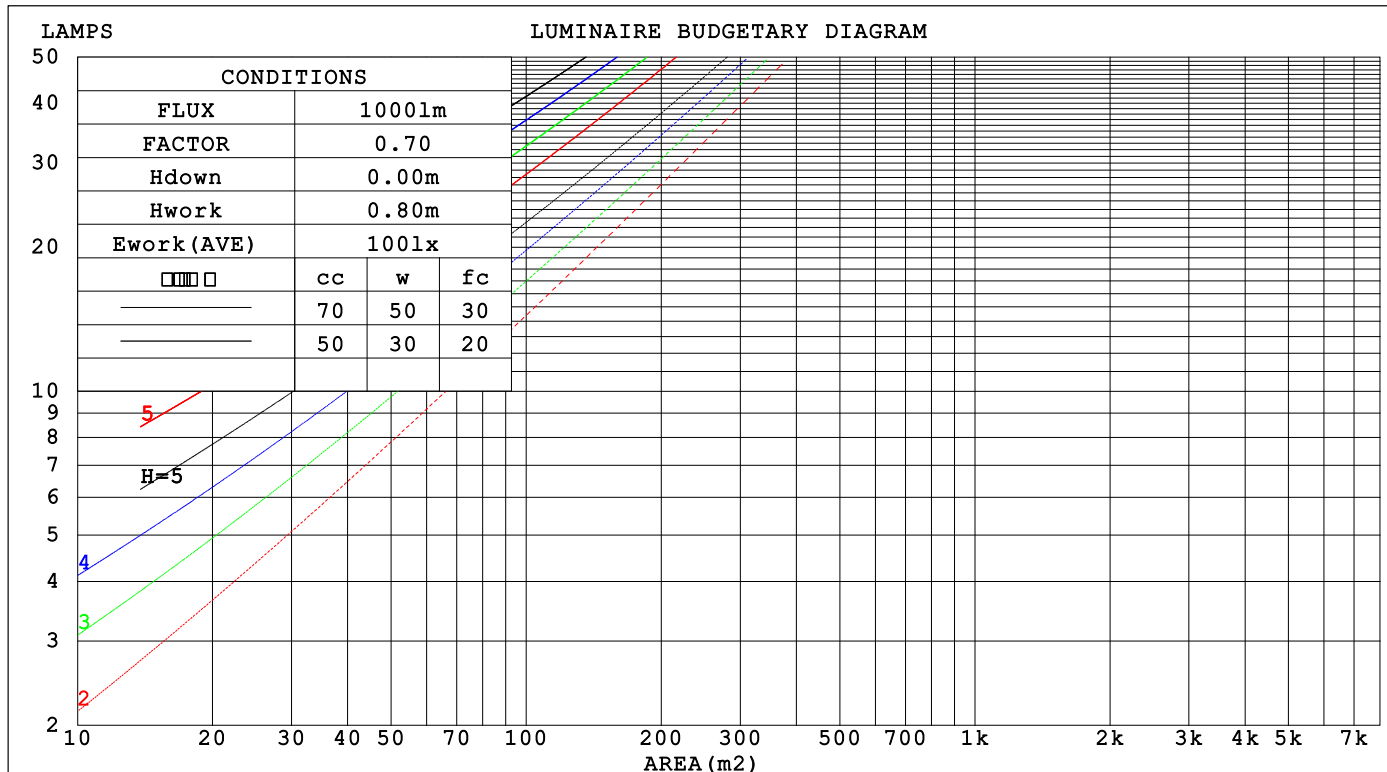

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-04-15

□ Range: 0 - 180DEG  
□ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:

### WEC AND CCEC

NAME: 2835 IP67	TYPE: 2835 70LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)					
0.0						
1.0	.349 .198 .063	.340 .194 .062	.322 .185 .059	.305 .176 .057	.290 .168 .054	
2.0	.315 .173 .053	.306 .169 .052	.290 .162 .050	.276 .155 .048	.262 .148 .047	
3.0	.285 .152 .045	.277 .149 .045	.263 .143 .043	.250 .137 .042	.238 .132 .041	
4.0	.259 .135 .040	.253 .132 .039	.240 .127 .038	.228 .122 .037	.217 .118 .036	
5.0	.238 .121 .035	.232 .119 .035	.220 .115 .034	.209 .110 .033	.199 .106 .032	
6.0	.219 .110 .031	.213 .108 .031	.203 .104 .030	.193 .100 .030	.184 .097 .029	
7.0	.203 .100 .028	.198 .098 .028	.188 .095 .027	.179 .092 .027	.171 .089 .026	
8.0	.189 .092 .026	.184 .091 .026	.175 .088 .025	.167 .085 .024	.160 .082 .024	
9.0	.176 .085 .024	.172 .084 .024	.164 .081 .023	.157 .079 .023	.150 .076 .022	
10.0	.165 .079 .022	.161 .078 .022	.154 .076 .021	.148 .073 .021	.141 .071 .020	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)					
0.0	.249 .249 .249	.213 .213 .213	.145 .145 .145	.083 .083 .083	.027 .027 .027	
1.0	.242 .215 .190	.207 .184 .164	.141 .127 .113	.081 .073 .066	.026 .024 .021	
2.0	.234 .191 .154	.201 .164 .133	.138 .114 .093	.079 .066 .055	.025 .021 .018	
3.0	.227 .174 .132	.194 .150 .114	.133 .104 .080	.077 .061 .047	.025 .020 .015	
4.0	.219 .161 .116	.188 .139 .101	.129 .097 .071	.075 .057 .042	.024 .018 .014	
5.0	.211 .151 .106	.182 .130 .092	.125 .091 .065	.072 .054 .039	.023 .017 .013	
6.0	.204 .143 .098	.175 .123 .086	.121 .086 .061	.070 .051 .036	.023 .017 .012	
7.0	.197 .136 .093	.170 .118 .081	.117 .083 .057	.068 .049 .034	.022 .016 .011	
8.0	.190 .130 .089	.164 .113 .077	.113 .079 .055	.066 .047 .033	.021 .015 .011	
9.0	.184 .125 .085	.159 .109 .074	.110 .076 .053	.064 .045 .032	.021 .015 .010	
10.0	.178 .121 .083	.154 .105 .072	.107 .074 .051	.062 .044 .031	.020 .014 .010	

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-04-15

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:

### UGR(Unified Glare Rating) Table

NAME: 2835 IP67					TYPE: 2835 70LED 24V			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.:					SUR.: 0.012*0.5			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	25.3	26.8	25.7	27.1	27.5	25.4	26.9	25.8	27.2	27.6	
	26.9	28.2	27.3	28.6	29.0	27.9	29.3	28.4	29.7	30.1	
	27.5	28.8	27.9	29.2	29.6	29.1	30.4	29.5	30.8	31.2	
	28.0	29.2	28.4	29.6	30.1	30.0	31.2	30.4	31.6	32.1	
	28.0	29.2	28.5	29.6	30.1	30.3	31.5	30.8	31.9	32.4	
	28.0	29.1	28.4	29.5	30.0	30.7	31.8	31.1	32.2	32.7	
4H	2H	25.9	27.2	26.4	27.6	28.0	26.1	27.3	26.5	27.7	28.2
	3H	27.8	28.9	28.2	29.3	29.8	28.8	29.9	29.3	30.4	30.8
	4H	28.6	29.6	29.1	30.1	30.6	30.1	31.2	30.6	31.6	32.1
	6H	29.2	30.2	29.8	30.7	31.2	31.2	32.1	31.7	32.6	33.1
	8H	29.3	30.2	29.9	30.7	31.2	31.6	32.5	32.1	33.0	33.5
	12H	29.3	30.1	29.9	30.6	31.2	32.0	32.8	32.5	33.3	33.9
8H	4H	29.2	30.0	29.7	30.5	31.1	30.5	31.3	31.0	31.8	32.4
	6H	30.1	30.8	30.6	31.3	31.9	31.7	32.5	32.3	33.0	33.6
	8H	30.3	31.0	30.9	31.5	32.1	32.3	32.9	32.8	33.5	34.1
	12H	30.4	31.0	31.0	31.6	32.2	32.8	33.4	33.4	34.0	34.6
12H	4H	29.3	30.1	29.8	30.6	31.2	30.5	31.3	31.0	31.8	32.4
	6H	30.3	30.9	30.9	31.5	32.1	31.8	32.5	32.4	33.0	33.6
	8H	30.6	31.2	31.2	31.8	32.4	32.4	33.0	33.0	33.6	34.2
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.1					
1.5H	+ 0.1 / - 0.3					+ 0.1 / - 0.2					
2.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2					

CIE Pub.117, 449.1 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -2.8)  
Area: 0.006 m2

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-04-15

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:


```

Range: 0 - 180DEG
Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

```

### ISOCANDELA DIAGRAM

NAME: 2835 IP67	TYPE: 2835 70LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

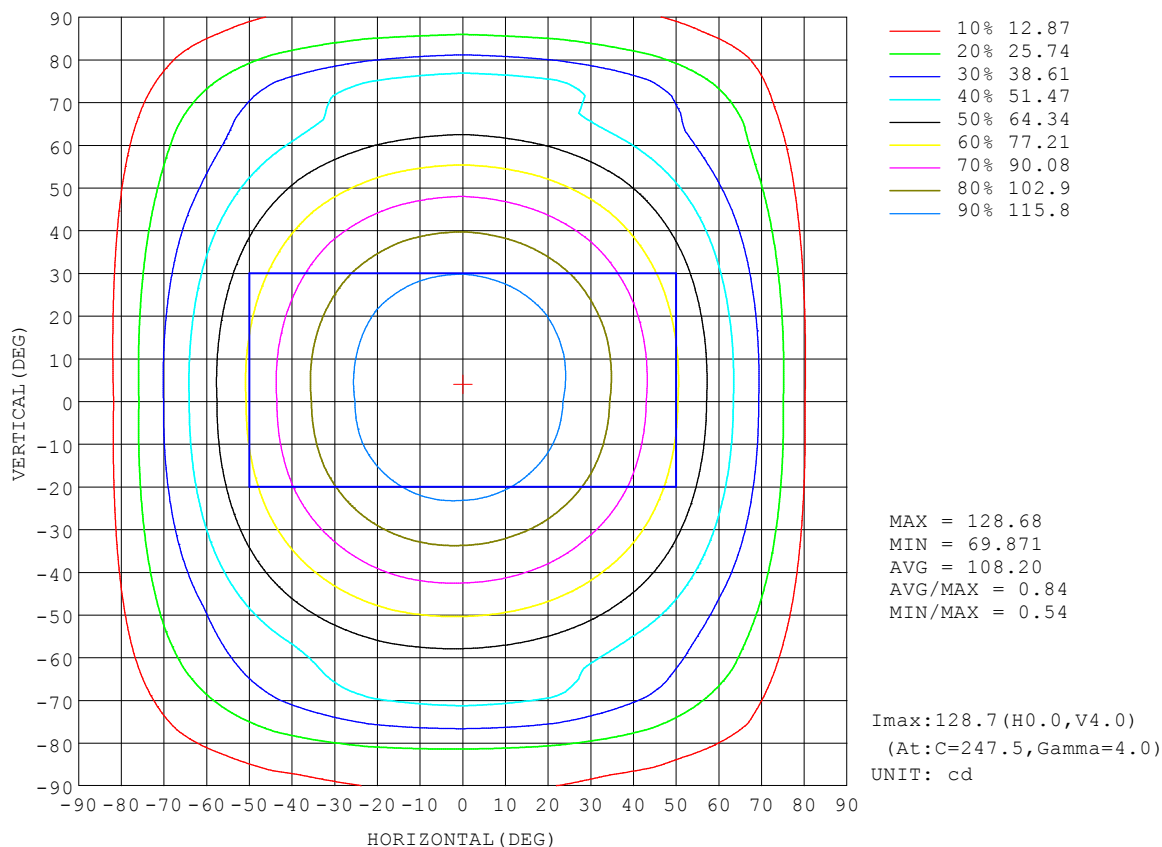


C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2022-04-15

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity: 65.0%  
Test Distance: 5.749m [K=1.0000]  
Remarks:



### AAI Figure

NAME: 2835 IP67	TYPE: 2835 70LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

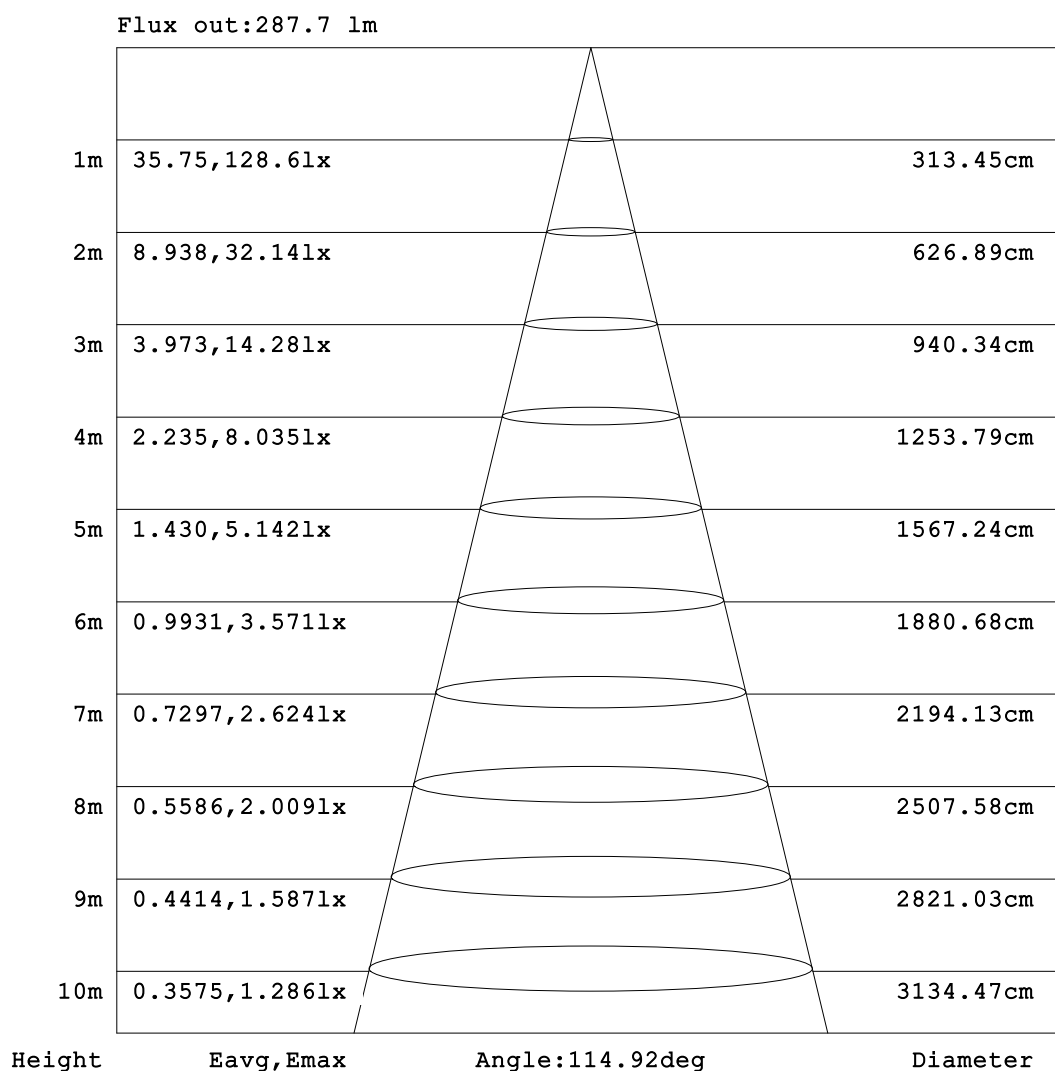


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-04-15

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:

### ISOLUX DIAGRAM

NAME: 2835 IP67	TYPE: 2835 70LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

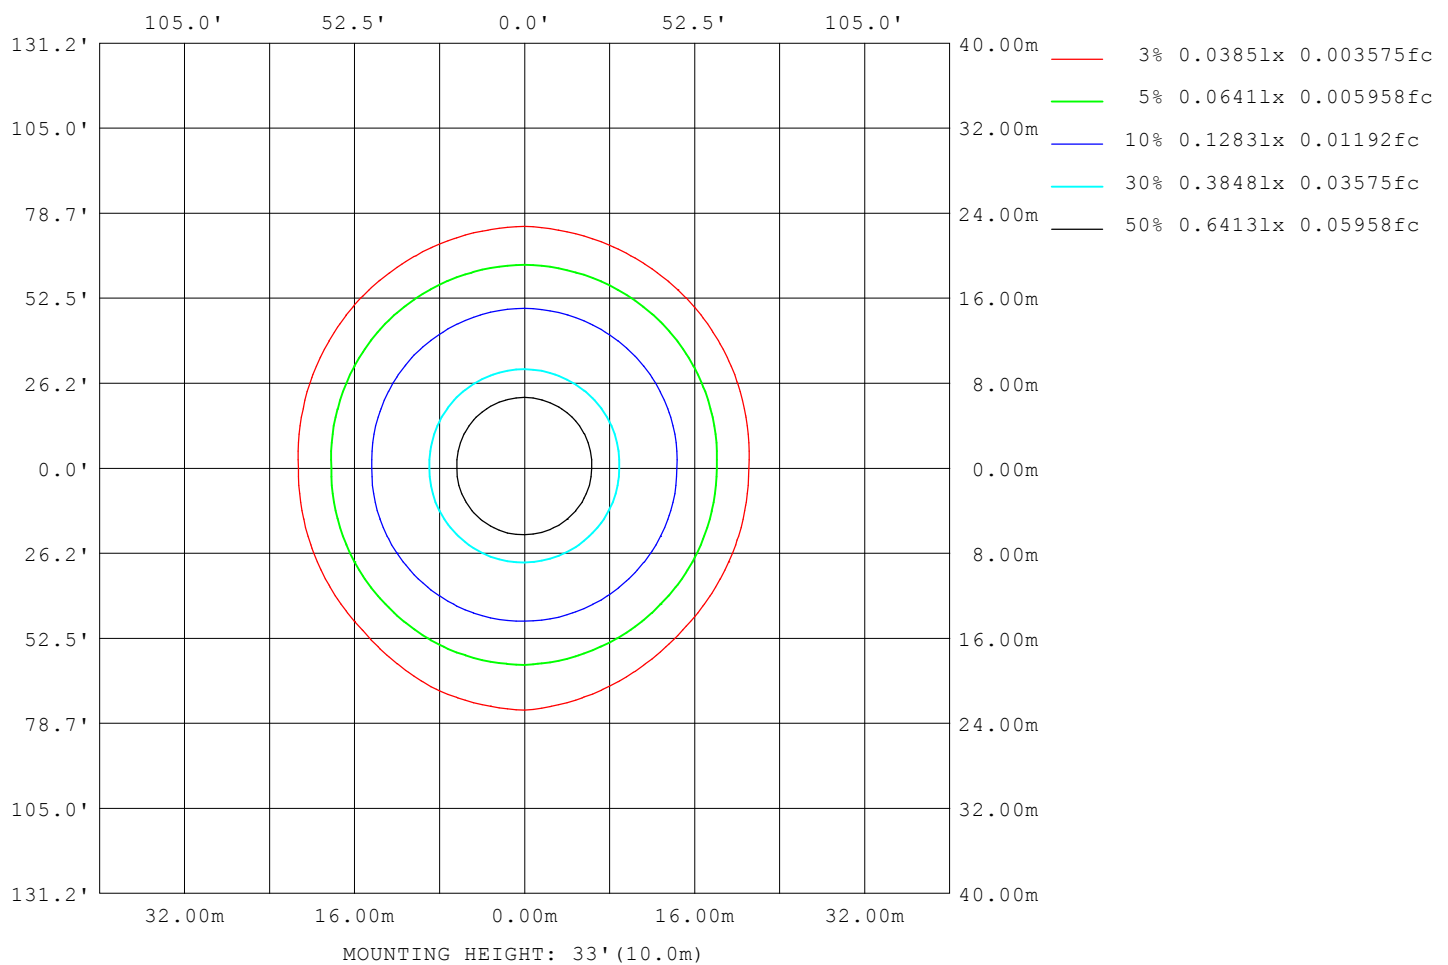

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2022-04-15

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity: 65.0%  
Test Distance: 5.749m [K=1.0000]  
Remarks:

## LED Avg.L Report

NAME: 2835 IP67	TYPE: 2835 70LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	19263
L_0~180 (75) av	17300
L_0~180 (85) av	5948
L_90~270 (65) av	23531
L_90~270 (75) av	32098
L_90~270 (85) av	44432
L_45 (65) av	21103
L_45 (75) av	26899
L_45 (85) av	36783

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2022-04-15

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity: 65.0%  
Test Distance: 5.749m [K=1.0000]  
Remarks:

## Planar Illuminance Curve

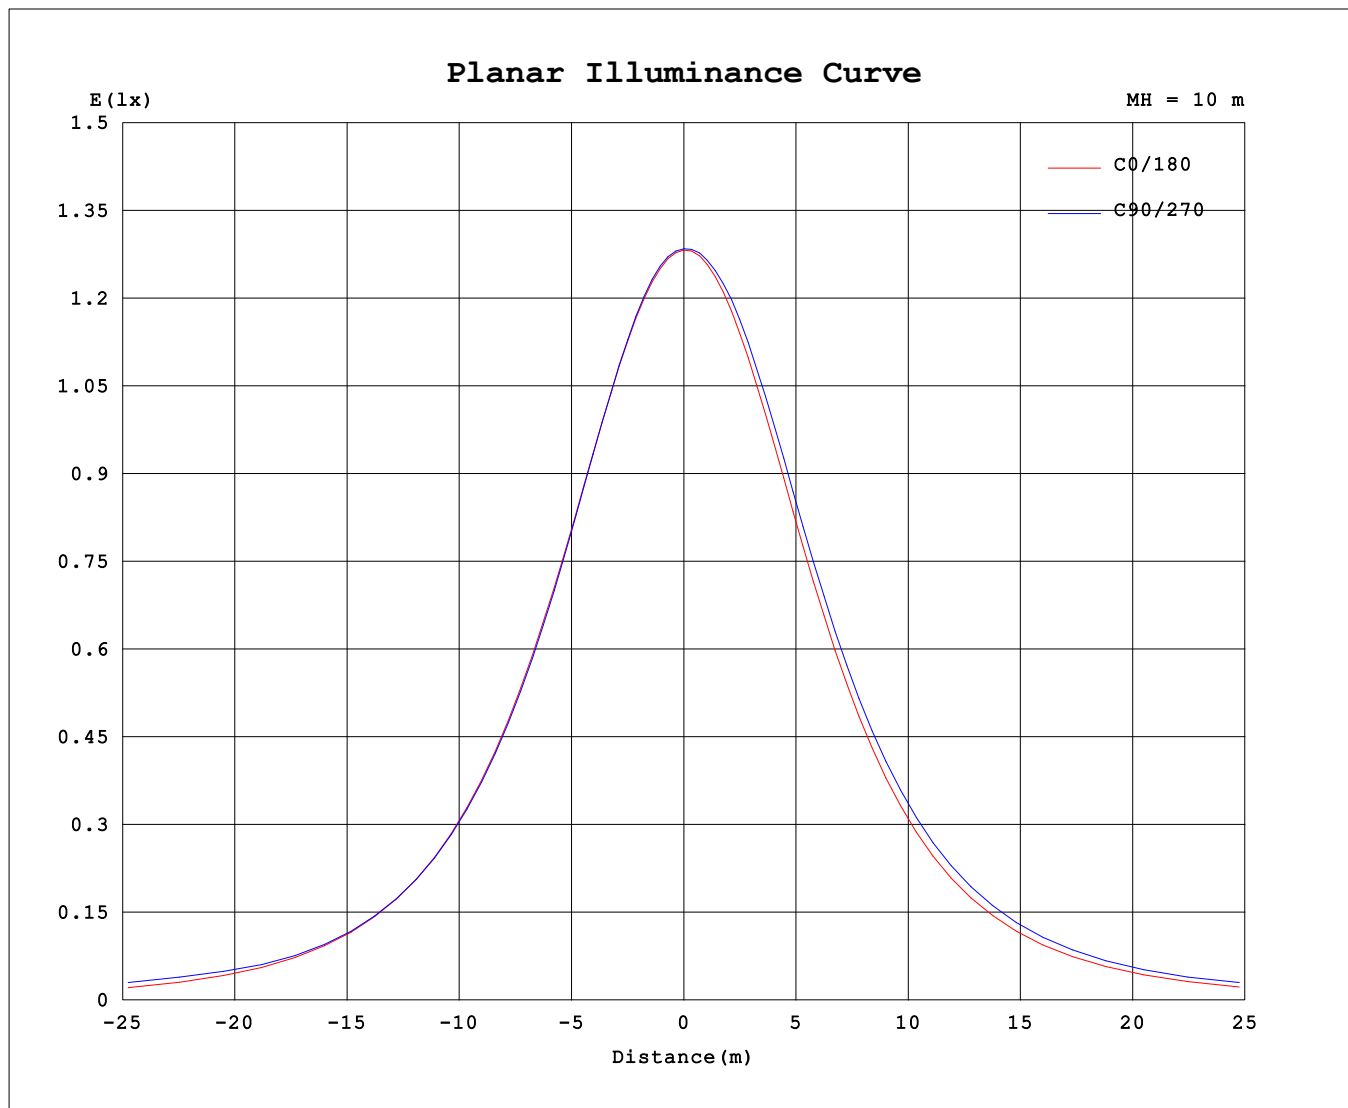

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2022-04-15

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity: 65.0%  
Test Distance: 5.749m [K=1.0000]  
Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: 2835 IP67	TYPE: 2835 70LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	128	128	128	128	128	128	128	128	128	128	128	128	128	128	128	128			
5	128	128	128	128	128	128	128	128	128	128	129	129	129	128	128	128			
10	126	126	126	126	126	126	127	127	127	127	128	128	128	128	127	126			
15	124	124	123	123	124	124	125	125	125	126	127	127	127	127	126	124			
20	119	119	119	119	119	120	120	121	121	122	124	124	124	124	123	121			
25	115	115	115	115	115	116	116	117	117	119	121	122	121	121	119	117			
30	109	108	108	108	108	109	110	110	110	113	115	116	116	115	114	111			
35	104	103	102	102	103	103	104	105	105	108	110	111	111	110	109	106			
40	95.0	94.5	93.6	93.5	93.9	94.9	95.4	96.1	96.1	98.9	101	102	102	102	100	98.0			
45	88.5	88.2	87.1	87.2	87.7	88.6	88.9	89.5	89.4	92.4	95.0	96.2	96.4	95.3	94.0	91.7			
50	78.1	77.7	77.0	77.3	77.8	78.7	78.7	79.0	78.7	81.9	84.9	86.2	86.6	85.5	83.9	81.4			
55	70.6	70.4	69.9	70.4	71.0	71.8	71.6	71.7	71.2	74.6	77.7	79.1	79.6	78.6	76.6	73.9			
60	58.6	58.6	58.8	59.9	61.2	61.5	60.7	60.2	59.7	63.2	66.5	68.1	68.8	67.5	65.4	62.3			
65	50.3	50.5	51.3	54.5	58.7	56.8	53.4	52.4	51.7	55.4	58.9	60.9	61.8	60.2	57.8	54.2			
70	37.2	38.1	43.2	52.9	54.3	53.6	46.8	40.4	38.9	43.2	48.1	55.7	59.2	53.5	46.5	41.7			
75	28.2	30.3	40.9	44.4	45.4	44.7	42.1	33.0	30.0	35.1	45.3	56.1	58.9	55.7	42.8	33.5			
80	13.6	21.7	26.7	29.0	29.4	29.7	28.0	23.5	16.6	26.7	36.2	40.0	42.1	40.3	36.7	26.0			
85	0.44	13.5	17.4	19.6	20.3	20.2	18.4	14.7	8.39	18.0	24.9	28.8	30.3	28.6	24.6	17.9			
90	0.19	5.98	10.5	12.9	13.4	13.0	10.7	6.46	0.16	7.18	13.2	16.3	17.6	16.2	13.2	7.44			
95	0.25	5.62	10.00	12.0	12.5	12.0	10.0	5.80	0.21	5.47	10.4	12.9	13.7	12.9	10.6	5.89			
100	0.38	5.53	10.2	12.0	12.5	12.0	10.3	5.91	0.32	2.56	8.87	12.0	12.7	12.0	9.41	3.09			
105	0.48	5.29	9.99	12.0	12.5	12.1	10.3	5.73	0.40	0.68	5.09	10.7	11.6	10.6	7.34	0.89			
110	0.64	4.66	9.25	11.5	12.2	11.8	9.76	5.25	0.54	0.53	3.76	7.25	8.56	7.31	3.92	0.55			
115	0.74	4.18	9.19	11.4	12.2	11.8	9.82	4.89	0.64	0.60	1.64	4.51	6.75	5.49	1.81	0.63			
120	0.88	3.69	9.24	11.7	12.5	12.2	9.95	4.38	0.77	0.73	0.77	1.85	3.80	2.29	0.78	0.75			
125	0.97	3.32	9.36	12.1	12.9	12.5	9.95	3.95	0.86	0.80	0.80	1.00	1.40	0.99	0.82	0.83			
130	1.10	2.55	9.65	12.8	13.7	13.2	9.76	3.06	0.98	0.93	0.91	0.91	0.93	0.93	0.93	0.95			
135	1.19	1.83	9.54	13.2	14.2	13.3	9.18	2.35	1.06	1.01	0.98	0.97	0.97	0.99	1.00	1.02			
140	1.29	1.28	9.14	13.4	14.4	12.8	8.11	1.43	1.16	1.11	1.08	1.07	1.06	1.08	1.09	1.13			
145	1.35	1.34	7.89	13.5	14.6	12.7	6.77	1.34	1.23	1.17	1.14	1.13	1.11	1.13	1.15	1.19			
150	1.44	1.44	3.33	11.1	13.4	10.0	3.61	1.42	1.31	1.26	1.24	1.22	1.19	1.21	1.25	1.29			
155	1.49	1.49	1.59	6.21	9.04	5.70	1.85	1.47	1.36	1.32	1.30	1.28	1.25	1.27	1.31	1.35			
160	1.56	1.56	1.55	1.63	2.14	1.74	1.54	1.53	1.45	1.41	1.39	1.38	1.36	1.36	1.40	1.44			
165	1.61	1.61	1.60	1.58	1.62	1.60	1.58	1.58	1.51	1.48	1.46	1.45	1.44	1.43	1.47	1.51			
170	1.68	1.69	1.67	1.66	1.69	1.67	1.66	1.67	1.61	1.59	1.57	1.56	1.56	1.55	1.58	1.63			
175	1.74	1.74	1.73	1.72	1.73	1.72	1.72	1.73	1.69	1.67	1.66	1.64	1.65	1.64	1.67	1.70			
180	1.80	1.78	1.78	1.78	1.79	1.78	1.78	1.80	1.80	1.78	1.78	1.78	1.79	1.78	1.78	1.80			

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:

Test Date:2022-04-15

□ Range: 0 - 180DEG

□ Interval: 2.0DEG

Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450

Humidity:65.0%

Test Distance:5.749m [K=1.0000]

Remarks: