


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: 2835 IP20	TYPE: 2835 180LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 198.62 lm/W
MODEL	3000K	I _{max} (cd)	284.2	S/MH(C0/180)	1.28	
NOMINAL POWER(W)	4.5	LOR(%)	100.0	S/MH(C90/270)	1.17	
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	843.69	□ UP,DN(C0-180)	0.9,56.6	
NOMINAL FLUX(lm)	9.37429	CIE CLASS	DIRECT	□ UP,DN(C180-360)	0.7,41.8	
LAMPS INSIDE	90	□ up (%)	1.6	CIBSE SHR NOM	1.25	
TEST VOLTAGE(V)	24	□ down (%)	98.4	CIBSE SHR MAX	1.35	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

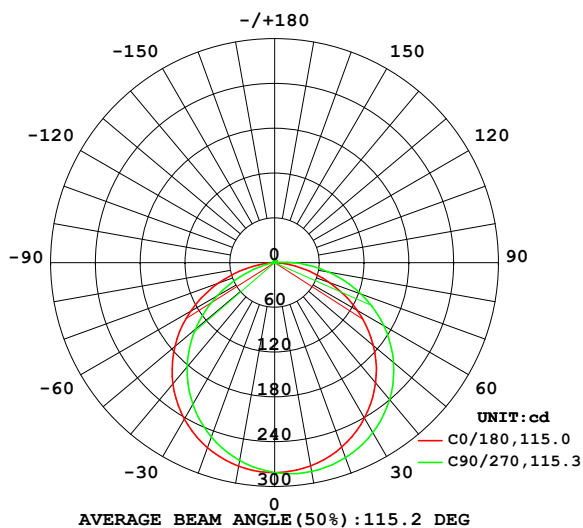

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

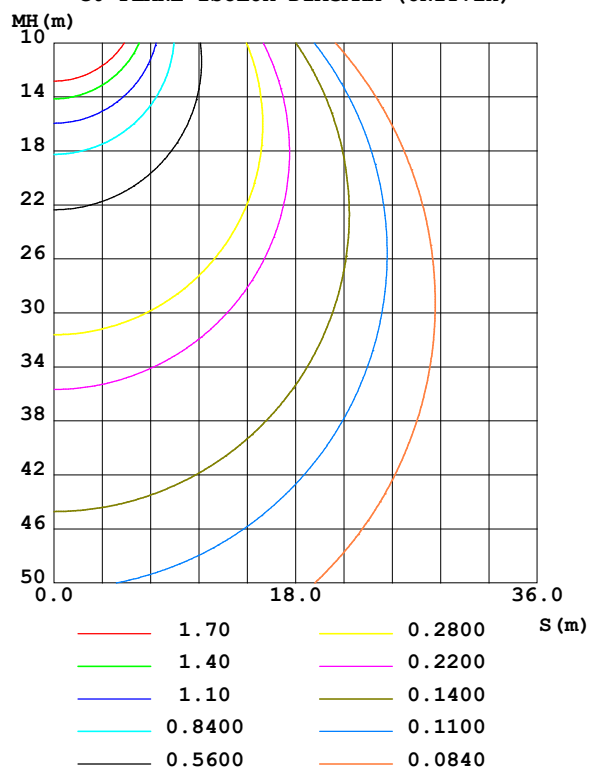

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-04

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	zone	total	%lum, lamp
10	276.5	281.5	284.1	282.3	277.0	271.8	269.2	271.0	0- 10	26.63	26.63	3.16,3.16
20	262.9	273.1	277.9	274.5	263.8	253.7	248.5	252.0	10- 20	76.53	103.2	12.2,12.2
30	240.7	255.7	263.0	257.8	242.0	227.0	219.4	224.6	20- 30	116.8	219.9	26.1,26.1
40	210.4	230.1	239.5	232.7	212.1	192.6	182.5	189.3	30- 40	142.1	362.1	42.9,42.9
50	172.6	196.6	208.0	199.7	174.4	150.8	138.5	146.9	40- 50	148.9	511.0	60.6,60.6
60	127.9	155.8	169.1	159.3	129.8	102.6	88.69	98.03	50- 60	135.6	646.6	76.6,76.6
70	78.03	108.7	123.5	112.5	79.84	51.37	38.06	46.96	60- 70	103.5	750.1	88.9,88.9
80	29.00	58.10	73.21	61.79	30.43	9.771	3.799	7.697	70- 80	59.29	809.3	95.9,95.9
90	0.2987	14.09	24.95	16.29	0.2535	0.5351	0.6764	0.5632	80- 90	20.70	830.1	98.4,98.4
100	0.7161	0.6889	1.790	0.7869	0.5882	0.8474	1.005	0.9037	90-100	3.184	833.2	98.8,98.8
110	1.289	0.9271	0.7923	0.9025	1.097	1.349	1.512	1.407	100-110	1.020	834.3	98.9,98.9
120	1.865	1.479	1.340	1.454	1.644	1.839	1.982	1.890	110-120	1.404	835.7	99,99
130	2.374	1.995	1.867	1.984	2.136	2.277	2.369	2.308	120-130	1.724	837.4	99.3,99.3
140	2.783	2.459	2.335	2.464	2.547	2.653	2.673	2.672	130-140	1.834	839.2	99.5,99.5
150	3.101	2.861	2.765	2.873	2.884	2.974	2.941	2.990	140-150	1.726	840.9	99.7,99.7
160	3.354	3.204	3.197	3.208	3.194	3.245	3.285	3.282	150-160	1.425	842.4	99.8,99.8
170	3.626	3.563	3.591	3.555	3.529	3.569	3.630	3.603	160-170	0.9616	843.3	100,100
180	3.896	3.901	3.971	3.921	3.889	3.897	3.964	3.919	170-180	0.3538	843.7	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 451.87 lm

%lum = 53.6%

%lamp = 53.6%

Conical surface Flux(120deg): 646.6 lm

%lum = 76.6%


%lamp = 76.6%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-04

° Range: 0 - 180DEG
° Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

NAME: 2835 IP20	TYPE: 2835 180LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

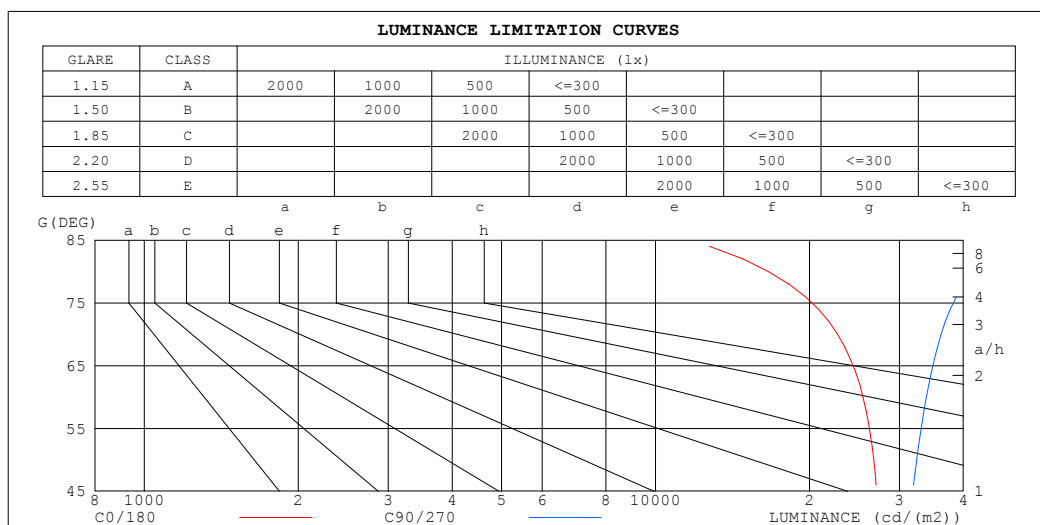

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	15307	60785
80	16624	42240
75	22198	40170
70	22709	36174
65	25533	35941
60	25459	33880
55	26978	33772
50	26729	32422
45	27619	32274


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-03-04

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: 2835 IP20	TYPE: 2835 180LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

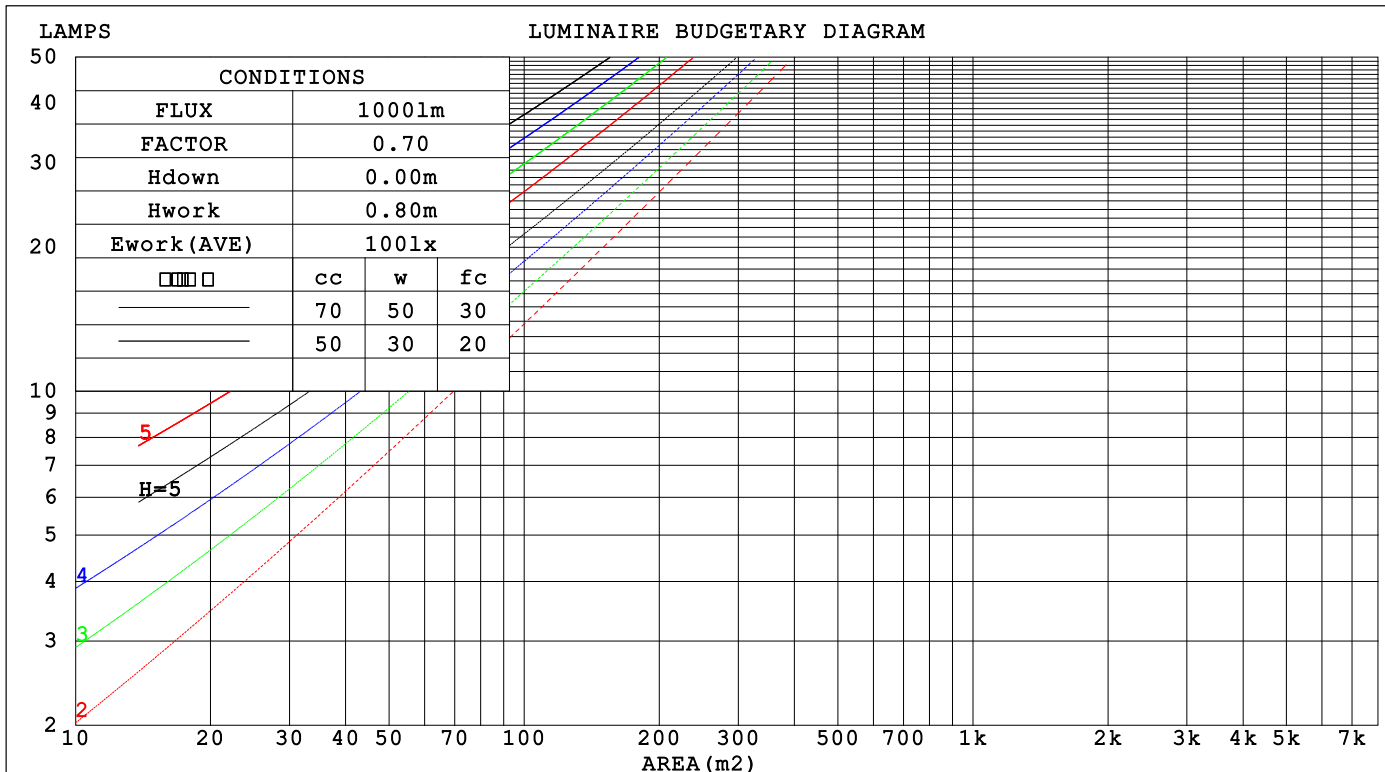

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-04

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: 2835 IP20	TYPE: 2835 180LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)					
0.0						
1.0	.317 .180 .057	.309 .176 .056	.295 .169 .054	.282 .163 .052	.270 .156 .050	
2.0	.296 .162 .050	.289 .159 .049	.276 .154 .048	.265 .149 .046	.254 .144 .045	
3.0	.273 .145 .043	.267 .143 .043	.255 .138 .042	.245 .134 .041	.236 .130 .040	
4.0	.251 .130 .038	.246 .129 .038	.236 .125 .037	.227 .122 .037	.218 .118 .036	
5.0	.232 .118 .034	.227 .117 .034	.218 .114 .033	.210 .111 .033	.202 .108 .032	
6.0	.215 .108 .031	.211 .106 .031	.203 .104 .030	.195 .101 .030	.188 .099 .029	
7.0	.200 .099 .028	.196 .098 .028	.189 .095 .027	.182 .093 .027	.176 .091 .027	
8.0	.186 .091 .026	.183 .090 .025	.177 .088 .025	.171 .086 .025	.165 .085 .025	
9.0	.175 .084 .024	.172 .084 .023	.166 .082 .023	.160 .080 .023	.155 .079 .023	
10.0	.164 .079 .022	.161 .078 .022	.156 .076 .022	.151 .075 .021	.147 .074 .021	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)					
0.0	.203 .203 .203	.173 .173 .173	.118 .118 .118	.068 .068 .068	.022 .022 .022	
1.0	.193 .168 .146	.165 .145 .126	.113 .099 .087	.065 .058 .051	.021 .019 .016	
2.0	.185 .144 .110	.159 .124 .095	.109 .086 .066	.063 .050 .039	.020 .016 .013	
3.0	.178 .127 .086	.152 .109 .075	.104 .076 .053	.060 .044 .031	.019 .014 .010	
4.0	.170 .114 .071	.146 .098 .061	.100 .068 .043	.058 .040 .026	.019 .013 .008	
5.0	.162 .103 .060	.140 .089 .052	.096 .062 .037	.056 .037 .022	.018 .012 .007	
6.0	.155 .095 .052	.134 .082 .045	.092 .058 .032	.053 .034 .019	.017 .011 .006	
7.0	.148 .088 .046	.128 .076 .040	.088 .054 .028	.051 .032 .017	.017 .010 .006	
8.0	.142 .082 .041	.122 .071 .036	.085 .050 .026	.049 .030 .015	.016 .010 .005	
9.0	.136 .077 .038	.117 .067 .033	.081 .047 .023	.047 .028 .014	.015 .009 .005	
10.0	.130 .073 .035	.112 .064 .031	.078 .045 .022	.045 .026 .013	.015 .009 .004	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-04

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME: 2835 IP20						TYPE: 2835 180LED 24V		WEIGHT:			
SPEC.:						DIM.:		SERIAL No.:			
MFR.:						SUR.: 0.01*0.5		Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	25.3	26.8	25.5	27.0	27.2	26.3	27.8	26.6	28.0	28.3	
	26.8	28.2	27.1	28.4	28.7	28.3	29.7	28.6	30.0	30.3	
	27.3	28.7	27.7	28.9	29.2	29.3	30.6	29.6	30.9	31.2	
	27.7	28.9	28.0	29.2	29.6	30.2	31.4	30.5	31.7	32.0	
	27.8	29.0	28.1	29.3	29.6	30.6	31.8	30.9	32.1	32.4	
	27.8	29.0	28.2	29.3	29.6	31.0	32.1	31.3	32.4	32.8	
4H	2H	26.1	27.5	26.5	27.8	28.0	26.9	28.2	27.3	28.5	28.8
	3H	27.9	29.0	28.3	29.4	29.7	29.2	30.3	29.5	30.6	31.0
	4H	28.6	29.7	29.0	30.0	30.4	30.3	31.3	30.7	31.7	32.1
	6H	29.1	30.0	29.5	30.4	30.8	31.3	32.3	31.8	32.7	33.1
	8H	29.2	30.1	29.7	30.5	30.9	31.8	32.7	32.3	33.1	33.5
	12H	29.3	30.1	29.8	30.5	31.0	32.3	33.1	32.8	33.5	34.0
8H	4H	29.1	30.0	29.6	30.4	30.8	30.6	31.5	31.0	31.9	32.3
	6H	29.9	30.6	30.3	31.0	31.5	31.8	32.6	32.3	33.0	33.5
	8H	30.1	30.8	30.6	31.2	31.7	32.5	33.1	33.0	33.6	34.1
	12H	30.3	30.8	30.8	31.3	31.8	33.1	33.7	33.6	34.2	34.7
12H	4H	29.2	30.1	29.7	30.5	30.9	30.6	31.4	31.0	31.8	32.3
	6H	30.1	30.7	30.6	31.2	31.7	31.9	32.6	32.4	33.0	33.5
	8H	30.4	31.0	30.9	31.4	32.0	32.6	33.2	33.1	33.7	34.2
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H		+ 0.1 / - 0.2					+ 0.1 / - 0.1				
1.5H		+ 0.2 / - 0.4					+ 0.2 / - 0.3				
2.0H		+ 0.2 / - 0.5					+ 0.2 / - 0.3				

CIE Pub.117, 843.7 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.6)
Area: 0.01 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-04

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

NAME: 2835 IP20	TYPE: 2835 180LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	56	45	38	56	44	38	54	44	37	31
0.80	66	55	47	65	54	47	63	53	47	40
1.00	75	64	56	74	63	56	71	64	55	48
1.25	82	71	64	80	71	64	78	69	63	55
1.50	87	77	70	85	76	69	82	74	68	60
2.00	94	85	79	92	84	78	88	81	76	68
2.50	98	90	84	96	88	83	92	86	81	72
3.00	101	94	89	99	93	87	95	89	85	76
4.00	105	100	95	103	98	93	98	94	90	81
5.00	108	103	99	105	101	97	100	97	94	84
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-03-04

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME: 2835 IP20	TYPE: 2835 180LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

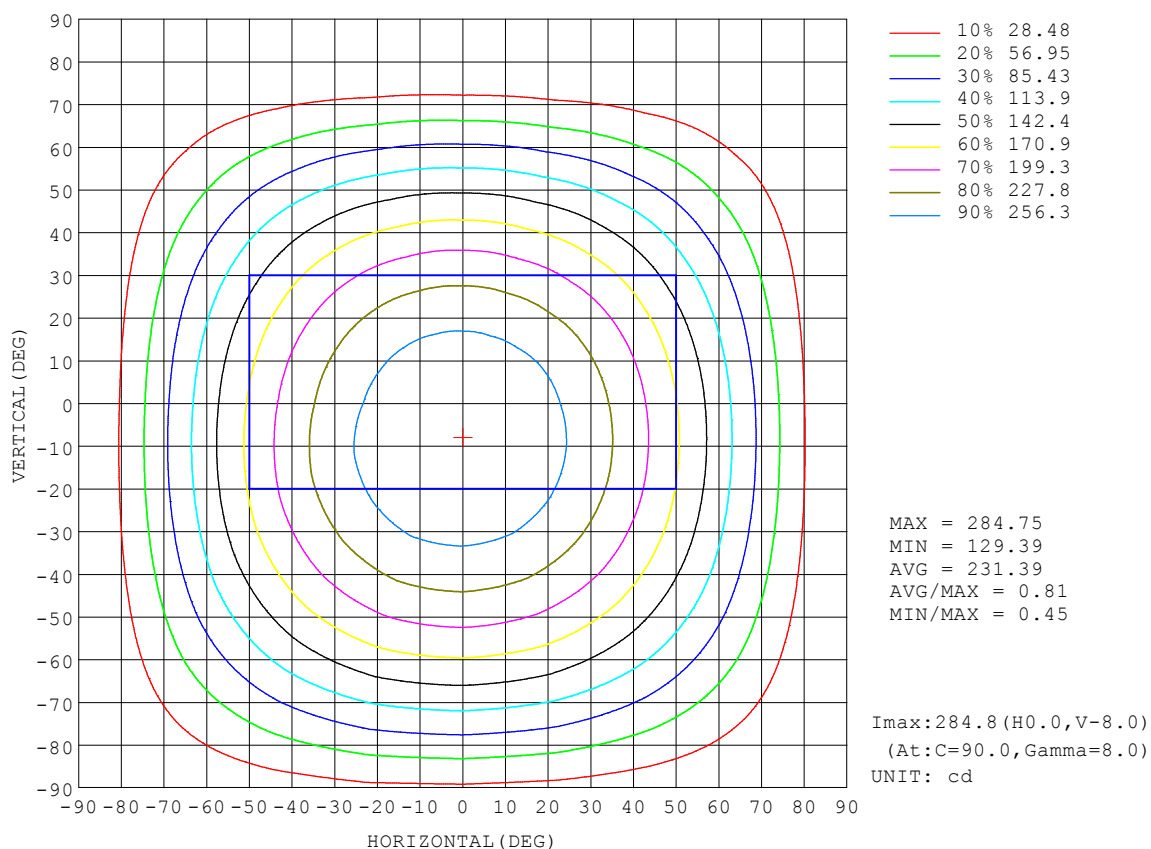


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-03-04

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

AAI Figure

NAME: 2835 IP20	TYPE: 2835 180LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

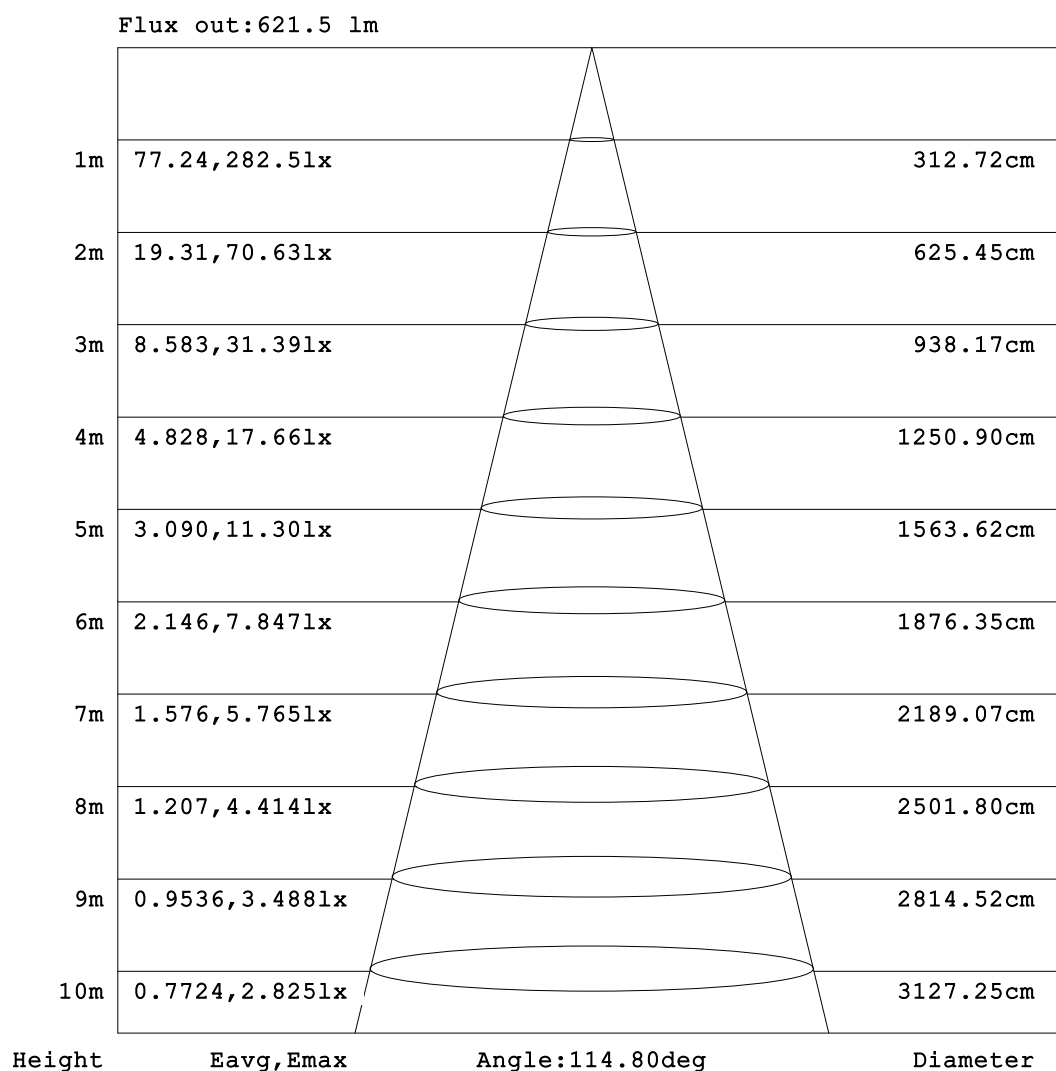


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-03-04

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

NAME: 2835 IP20	TYPE: 2835 180LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

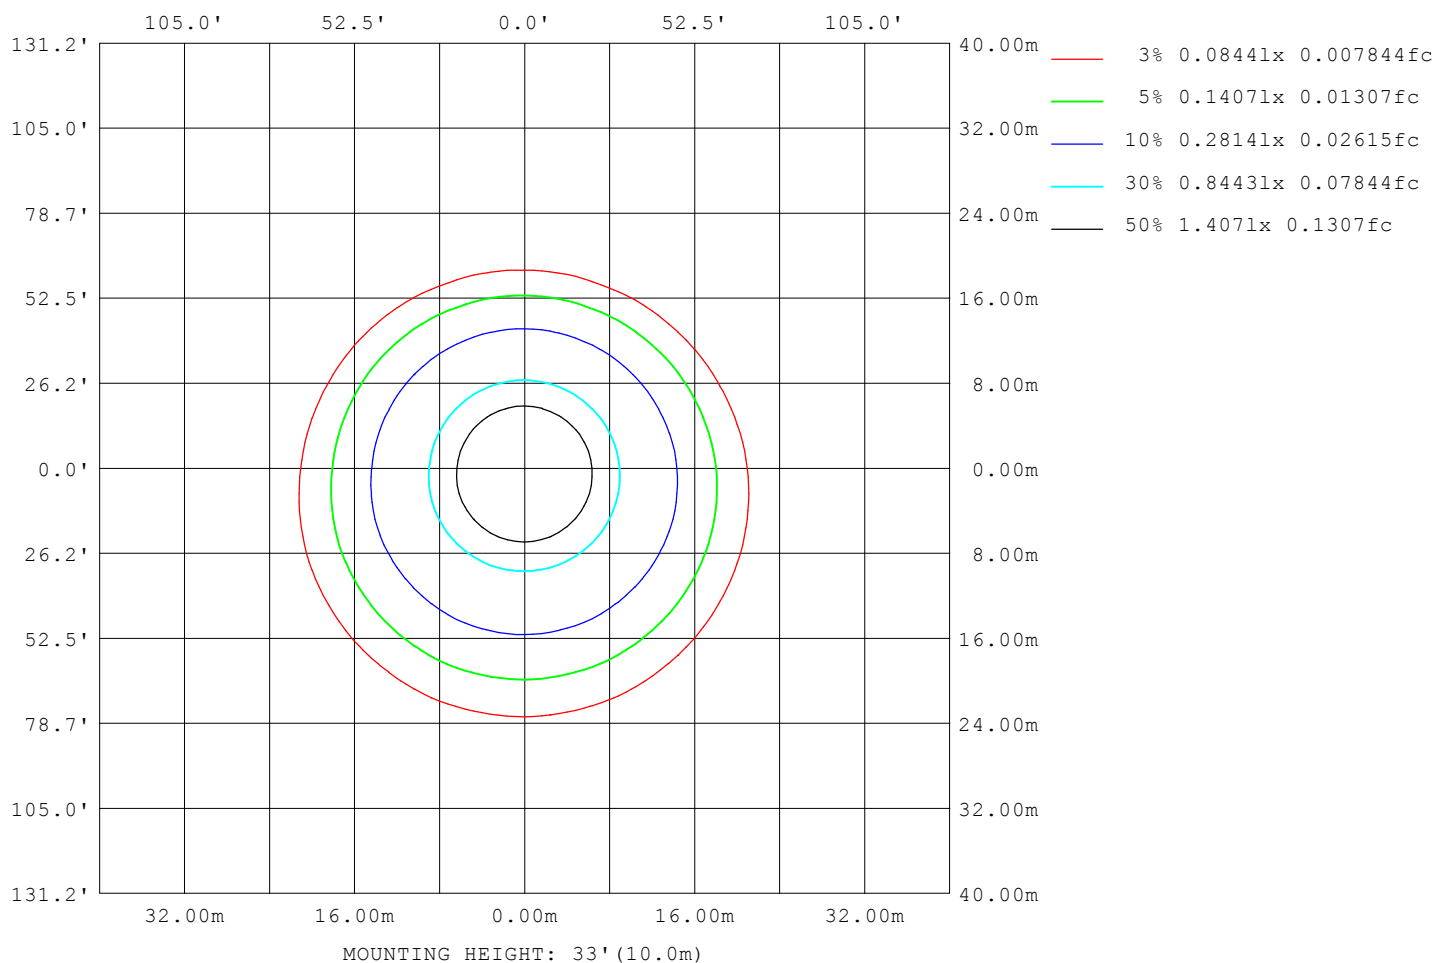

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-03-04

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

LED Avg.L Report

NAME: 2835 IP20	TYPE: 2835 180LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	24692
L_0~180 (75) av	20680
L_0~180 (85) av	12272
L_90~270 (65) av	24840
L_90~270 (75) av	22366
L_90~270 (85) av	27847
L_45 (65) av	24780
L_45 (75) av	21538
L_45 (85) av	21056

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-03-04

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

Planar Illuminance Curve

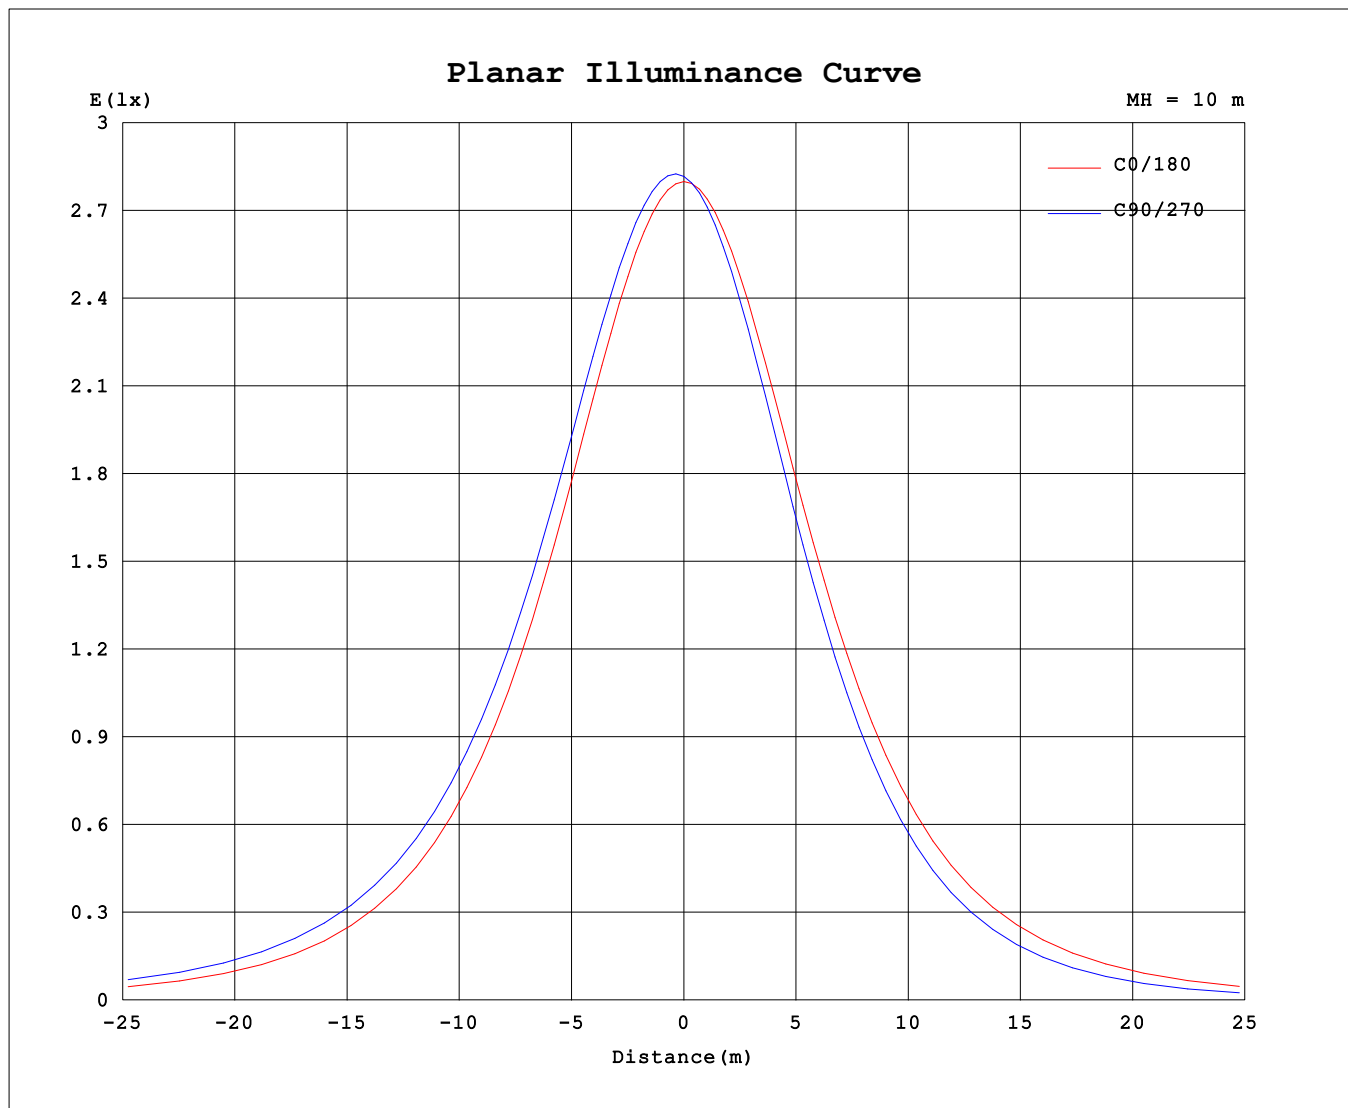

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-03-04

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: 2835 IP20	TYPE: 2835 180LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	281	281	281	281	281	281	281	281	281	281	281	281	281	281	281	281			
5	280	281	282	283	283	283	283	282	281	279	279	278	278	278	278	279			
10	276	279	282	283	284	284	282	280	277	274	272	270	269	269	271	273			
15	272	276	279	282	283	282	280	277	273	269	266	263	262	262	264	268			
20	263	268	273	277	278	278	274	270	264	258	254	250	248	249	252	257			
25	255	262	267	271	273	273	269	263	256	250	244	240	238	238	242	248			
30	241	249	256	261	263	262	258	251	242	234	227	222	219	220	225	231			
35	230	239	246	252	255	254	249	241	231	222	214	208	206	206	211	219			
40	210	221	230	237	239	239	233	224	212	201	193	185	183	183	189	198			
45	196	208	218	225	228	227	220	211	198	186	177	169	166	166	173	183			
50	173	186	197	205	208	207	200	189	174	161	151	142	139	139	147	158			
55	155	170	181	190	193	192	184	173	157	144	132	123	119	120	128	140			
60	128	143	156	165	169	168	159	147	130	115	103	92.5	88.7	89.7	98.0	111			
65	108	124	138	148	152	150	141	128	110	94.7	82.1	71.9	68.0	69.0	77.5	90.5			
70	78.0	94.9	109	120	123	122	113	98.3	79.8	64.0	51.4	41.7	38.1	39.0	47.0	59.8			
75	57.7	74.4	88.6	99.5	104	102	92.4	77.8	59.4	43.9	32.3	23.8	20.8	21.6	28.5	40.0			
80	29.0	44.3	58.1	68.9	73.2	71.5	61.8	47.5	30.4	17.7	9.77	5.12	3.80	4.29	7.70	15.0			
85	13.4	26.0	38.6	48.8	52.9	51.2	42.0	28.9	14.5	5.36	1.89	0.91	0.71	0.77	1.47	4.18			
90	0.30	6.01	14.1	21.7	25.0	23.6	16.3	7.54	0.25	0.39	0.54	0.64	0.68	0.65	0.56	0.44			
95	0.42	0.74	4.04	8.60	10.7	9.89	5.06	1.17	0.35	0.46	0.58	0.68	0.73	0.71	0.63	0.52			
100	0.72	0.55	0.69	1.31	1.79	1.58	0.79	0.54	0.59	0.71	0.85	0.95	1.00	0.99	0.90	0.77			
105	0.93	0.74	0.62	0.75	0.89	0.80	0.61	0.73	0.78	0.90	1.04	1.16	1.21	1.20	1.10	0.96			
110	1.29	1.06	0.93	0.83	0.79	0.81	0.90	1.05	1.10	1.21	1.35	1.46	1.51	1.50	1.41	1.26			
115	1.53	1.29	1.15	1.05	1.01	1.03	1.12	1.27	1.32	1.42	1.55	1.65	1.71	1.70	1.60	1.47			
120	1.87	1.63	1.48	1.38	1.34	1.36	1.45	1.61	1.64	1.73	1.84	1.93	1.98	1.98	1.89	1.77			
125	2.08	1.84	1.69	1.59	1.56	1.59	1.67	1.83	1.85	1.94	2.02	2.11	2.15	2.15	2.07	1.97			
130	2.37	2.15	2.00	1.90	1.87	1.90	1.98	2.14	2.14	2.22	2.28	2.34	2.37	2.37	2.31	2.25			
135	2.55	2.34	2.18	2.09	2.06	2.11	2.18	2.33	2.31	2.39	2.44	2.49	2.50	2.51	2.46	2.42			
140	2.78	2.60	2.46	2.36	2.34	2.39	2.46	2.59	2.55	2.61	2.65	2.69	2.67	2.69	2.67	2.65			
145	2.92	2.76	2.63	2.53	2.51	2.58	2.64	2.75	2.69	2.75	2.79	2.83	2.78	2.81	2.80	2.80			
150	3.10	2.97	2.86	2.77	2.76	2.84	2.87	2.96	2.88	2.94	2.97	3.01	2.94	2.97	2.99	2.99			
155	3.21	3.10	3.01	2.92	2.94	3.00	3.01	3.09	3.01	3.05	3.08	3.12	3.07	3.08	3.11	3.11			
160	3.35	3.28	3.20	3.14	3.20	3.21	3.21	3.26	3.19	3.23	3.25	3.29	3.29	3.25	3.28	3.29			
165	3.46	3.40	3.33	3.28	3.37	3.34	3.34	3.39	3.32	3.35	3.37	3.40	3.43	3.38	3.41	3.42			
170	3.63	3.59	3.56	3.52	3.59	3.56	3.56	3.59	3.53	3.56	3.57	3.60	3.63	3.59	3.60	3.62			
175	3.75	3.73	3.72	3.69	3.75	3.72	3.71	3.74	3.68	3.70	3.71	3.74	3.77	3.73	3.75	3.76			
180	3.90	3.89	3.90	3.92	3.97	3.92	3.92	3.92	3.89	3.90	3.90	3.92	3.96	3.93	3.92	3.93			

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:

Test Date:2022-03-04

□ Range: 0 - 180DEG

□ Interval: 2.0DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450

Humidity:65.0%

Test Distance:5.749m [K=1.0000]

Remarks: