


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: COB 480LED 24V 6500K	TYPE: 480D COB 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 96.80 lm/W
MODEL	6500K 5W	I _{max} (cd)	135.7	S/MH(C0/180)	1.28	
NOMINAL POWER(W)	5	LOR(%)	100.0	S/MH(C90/270)	1.27	
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	498.72	□ UP,DN(C0-180)	3.6,50.3	
NOMINAL FLUX(lm)	2.07802	CIE CLASS	DIRECT	□ UP,DN(C180-360)	1.2,45.0	
LAMPS INSIDE	240	□ up (%)	4.7	CIBSE SHR NOM	1.50	
TEST VOLTAGE(V)	24	□ down (%)	95.3	CIBSE SHR MAX	1.50	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

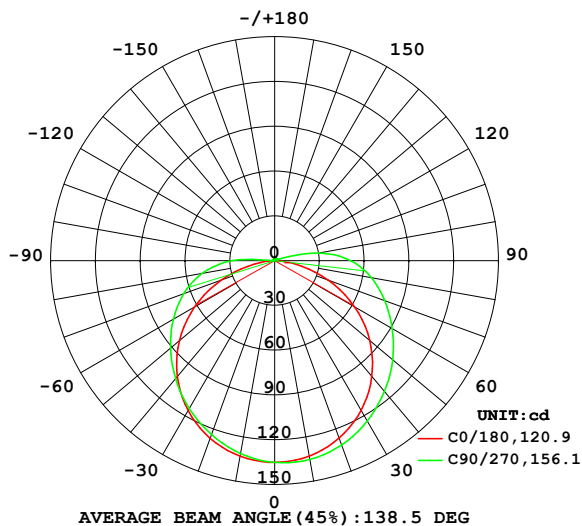

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

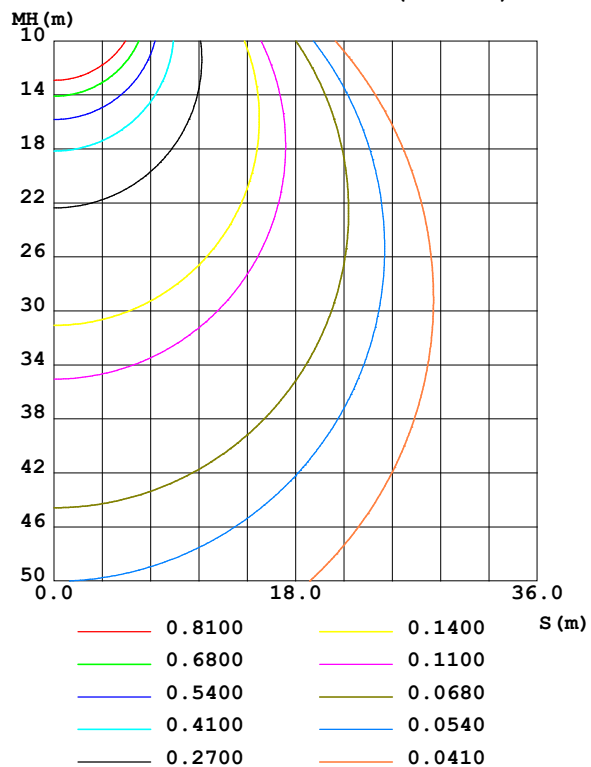

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-08-19

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	zone	total	%lum, lamp
10	133.0	134.4	135.2	134.6	133.0	131.8	131.3	131.7	0- 10	12.81	12.81	2.57,2.57
20	126.5	129.6	131.4	129.9	126.6	124.5	124.0	124.3	10- 20	36.88	49.68	9.96,9.96
30	115.8	120.9	124.2	121.3	116.0	113.7	114.4	113.5	20- 30	56.59	106.3	21.3,21.3
40	101.3	108.8	114.4	109.3	101.5	100.4	103.3	100.4	30- 40	69.83	176.1	35.3,35.3
50	83.17	94.09	103.3	94.87	83.32	85.19	90.99	85.34	40- 50	75.43	251.5	50.4,50.4
60	61.82	78.26	90.90	79.34	61.90	69.24	78.35	69.75	50- 60	73.33	324.9	65.1,65.1
70	38.01	62.34	78.49	63.73	37.98	53.57	64.91	54.31	60- 70	64.55	389.4	78.1,78.1
80	14.44	48.05	65.73	49.56	14.02	37.15	49.28	38.07	70- 80	51.09	440.5	88.3,88.3
90	0.2113	32.54	50.87	34.02	0.2543	18.30	28.88	19.05	80- 90	34.62	475.1	95.3,95.3
100	0.4017	11.38	29.96	12.60	0.3499	0.6398	0.8346	0.6566	90-100	15.05	490.2	98.3,98.3
110	0.6657	0.8275	2.608	0.8064	0.5806	0.7968	0.9677	0.8159	100-110	3.552	493.7	99,99
120	0.9297	0.9557	1.055	0.9820	0.8256	0.9608	1.089	0.9681	110-120	0.8974	494.6	99.2,99.2
130	1.177	1.136	1.191	1.163	1.056	1.123	1.196	1.123	120-130	0.9466	495.6	99.4,99.4
140	1.372	1.310	1.317	1.341	1.247	1.282	1.296	1.275	130-140	0.9478	496.5	99.6,99.6
150	1.524	1.469	1.452	1.493	1.406	1.420	1.396	1.413	140-150	0.8640	497.4	99.7,99.7
160	1.653	1.614	1.619	1.622	1.556	1.553	1.553	1.553	150-160	0.7013	498.1	99.9,99.9
170	1.781	1.764	1.773	1.762	1.713	1.717	1.729	1.724	160-170	0.4696	498.6	100,100
180	1.898	1.890	1.909	1.907	1.896	1.888	1.907	1.907	170-180	0.1720	498.7	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 221.2 lm

%lum = 44.4%

%lamp = 44.4%

Conical surface Flux(130deg): 365 lm

%lum = 73.2%


%lamp = 73.2%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-08-19

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

NAME: COB 480LED 24V 6000K	TYPE: 480D COB 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

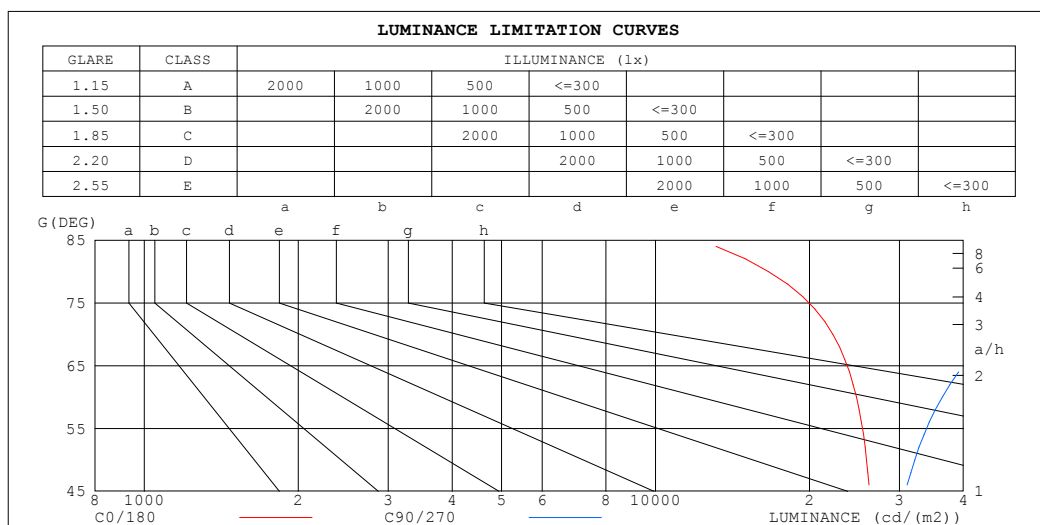

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	15751	138273
80	16631	75724
75	21830	56840
70	22221	45911
65	24845	40648
60	24723	36370
55	26144	34333
50	25873	32141
45	26712	31161


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-08-19

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: COB 480LED 24V 6000K	TYPE: 480D COB 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0												
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0												
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0												
RCR	RCR:Room Cavity Ratio																Coefficients of Utilization(CU)											
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.08	1.08	1.08	1.03	1.03	1.03	.98	.98	.98	.95												
1.0	.99	.94	.89	.96	.91	.87	.91	.87	.83	.86	.83	.80	.82	.79	.77	.74												
2.0	.85	.77	.70	.82	.75	.69	.78	.72	.67	.74	.69	.64	.70	.66	.62	.60												
3.0	.74	.64	.57	.72	.63	.56	.68	.61	.55	.64	.58	.53	.61	.56	.52	.49												
4.0	.65	.55	.48	.63	.54	.47	.60	.52	.46	.57	.50	.45	.54	.48	.44	.41												
5.0	.58	.48	.41	.56	.47	.40	.53	.45	.39	.51	.44	.38	.48	.42	.38	.35												
6.0	.52	.42	.35	.50	.41	.35	.48	.40	.34	.46	.39	.33	.44	.38	.33	.30												
7.0	.47	.37	.31	.46	.37	.31	.44	.36	.30	.42	.35	.29	.40	.34	.29	.27												
8.0	.42	.34	.27	.41	.33	.27	.40	.32	.27	.38	.31	.26	.37	.30	.26	.24												
9.0	.39	.30	.25	.38	.30	.24	.37	.29	.24	.35	.28	.24	.34	.28	.23	.21												
10.0	.36	.28	.22	.35	.27	.22	.34	.27	.22	.32	.26	.21	.31	.25	.21	.19												

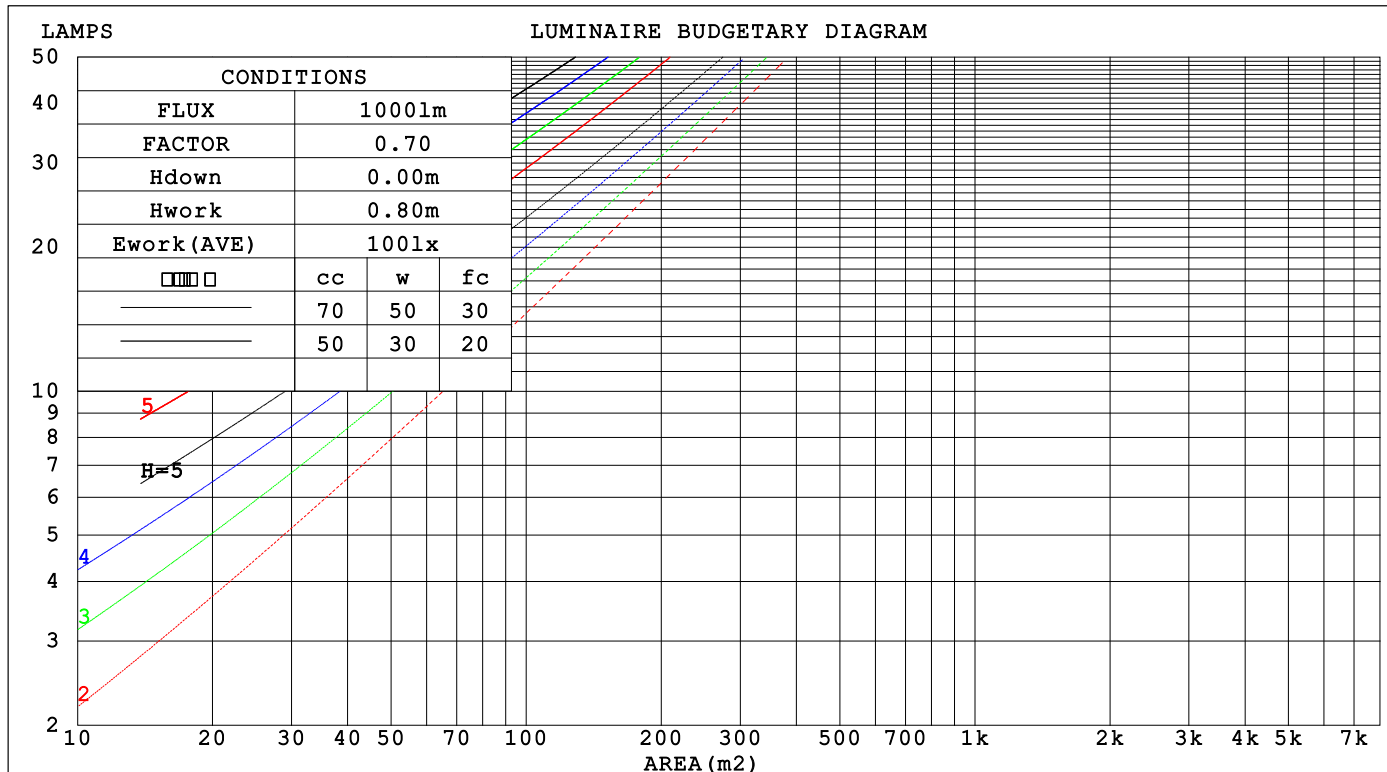

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-08-19

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: COB 480LED 24V 6000K	TYPE: 480D COB 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0	
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.383	.218	.069	.374	.213	.068	.358	.205	.066	.343	.198	.063	.329	.191	.061		
2.0	.336	.184	.056	.328	.181	.056	.313	.174	.054	.300	.168	.053	.287	.162	.051		
3.0	.300	.159	.048	.293	.157	.047	.280	.152	.046	.268	.147	.045	.256	.142	.044		
4.0	.270	.140	.041	.264	.138	.041	.253	.134	.040	.242	.130	.039	.232	.126	.038		
5.0	.246	.125	.036	.241	.124	.036	.230	.120	.035	.220	.116	.035	.211	.113	.034		
6.0	.226	.113	.032	.221	.112	.032	.211	.108	.032	.203	.105	.031	.194	.102	.030		
7.0	.208	.103	.029	.204	.102	.029	.195	.099	.028	.187	.096	.028	.180	.094	.027		
8.0	.193	.094	.027	.189	.093	.026	.182	.091	.026	.174	.088	.025	.168	.086	.025		
9.0	.180	.087	.024	.177	.086	.024	.170	.084	.024	.163	.082	.023	.157	.080	.023		
10.0	.169	.081	.022	.165	.080	.022	.159	.078	.022	.153	.076	.022	.147	.074	.021		

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0	
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.227	.227	.227	.194	.194	.194	.132	.132	.132	.076	.076	.076	.024	.024	.024		
1.0	.222	.192	.165	.190	.165	.142	.130	.113	.098	.075	.066	.057	.024	.021	.018		
2.0	.215	.168	.129	.184	.145	.112	.126	.100	.078	.073	.058	.046	.023	.019	.015		
3.0	.207	.151	.107	.177	.131	.093	.122	.091	.065	.070	.053	.038	.023	.017	.013		
4.0	.199	.138	.092	.171	.120	.080	.117	.083	.056	.068	.049	.033	.022	.016	.011		
5.0	.191	.128	.082	.164	.111	.071	.113	.078	.050	.066	.046	.030	.021	.015	.010		
6.0	.184	.120	.075	.158	.104	.065	.109	.073	.046	.063	.043	.027	.020	.014	.009		
7.0	.176	.113	.069	.152	.098	.060	.105	.069	.043	.061	.041	.025	.020	.013	.008		
8.0	.169	.108	.065	.146	.093	.057	.101	.066	.040	.059	.039	.024	.019	.013	.008		
9.0	.163	.103	.062	.140	.089	.054	.097	.063	.038	.057	.037	.023	.018	.012	.008		
10.0	.157	.098	.059	.135	.085	.052	.094	.060	.037	.055	.036	.022	.018	.012	.007		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-08-19

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME: COB 480LED 24V 6000K					TYPE: 480D COB 24V			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.:					SUR.: 0.01*0.5			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	2H	26.1	27.7	26.5	28.0	28.3	27.7	29.2	28.0	29.5	29.8
	3H	27.7	29.2	28.1	29.5	29.8	30.3	31.7	30.7	32.1	32.4
	4H	28.3	29.7	28.7	30.1	30.4	31.7	33.1	32.1	33.5	33.8
	6H	28.8	30.1	29.2	30.4	30.8	33.3	34.6	33.7	35.0	35.4
	8H	28.9	30.1	29.3	30.5	30.9	34.2	35.5	34.6	35.8	36.2
	12H	28.9	30.2	29.4	30.5	31.0	35.2	36.4	35.6	36.8	37.2
4H	2H	27.2	28.6	27.6	28.9	29.3	28.3	29.7	28.7	30.0	30.4
	3H	29.0	30.2	29.4	30.6	31.0	31.2	32.4	31.6	32.8	33.2
	4H	29.8	30.9	30.2	31.3	31.8	32.8	33.9	33.3	34.3	34.8
	6H	30.4	31.4	30.9	31.9	32.4	34.6	35.6	35.1	36.1	36.5
	8H	30.6	31.6	31.1	32.1	32.6	35.6	36.6	36.1	37.0	37.5
	12H	30.8	31.7	31.3	32.1	32.7	36.7	37.6	37.2	38.1	38.6
8H	4H	30.8	31.7	31.3	32.2	32.7	33.2	34.1	33.7	34.6	35.1
	6H	31.8	32.6	32.3	33.1	33.6	35.3	36.1	35.8	36.6	37.1
	8H	32.2	32.9	32.7	33.4	34.0	36.5	37.2	37.0	37.7	38.3
	12H	32.5	33.2	33.1	33.7	34.3	37.9	38.5	38.5	39.1	39.7
12H	4H	31.1	32.0	31.6	32.4	32.9	33.2	34.1	33.7	34.6	35.1
	6H	32.3	33.0	32.8	33.5	34.1	35.4	36.1	36.0	36.7	37.2
	8H	32.9	33.5	33.5	34.1	34.7	36.7	37.4	37.3	37.9	38.5
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H		+ 0.1 / - 0.1					+ 0.1 / - 0.1				
1.5H		+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H		+ 0.2 / - 0.4					+ 0.2 / - 0.3				

CIE Pub.117, 498.7 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -2.4)
Area: 0.005 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-08-19

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:


```

Range: 0 - 180DEG
Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

```

ISOCANDELA DIAGRAM

NAME: COB 480LED 24V 6000K	TYPE: 480D COB 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

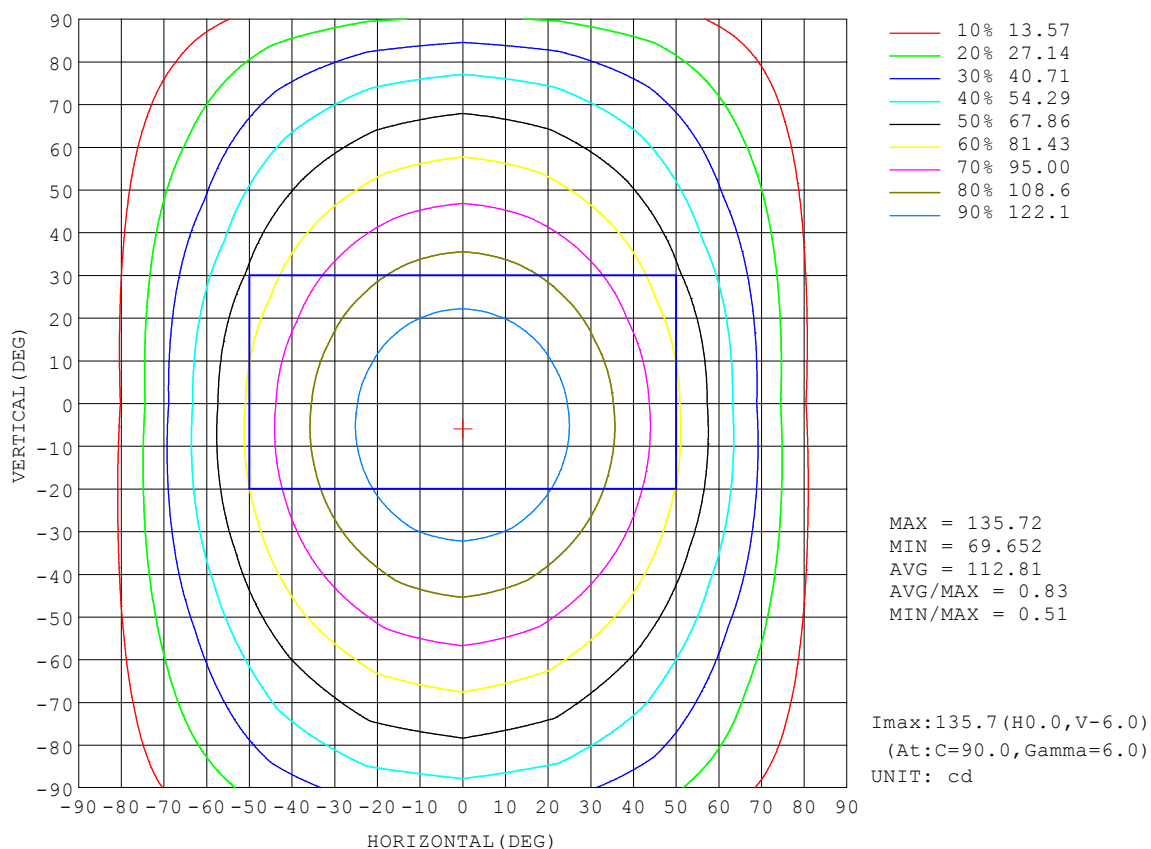


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-08-19

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

AAI Figure

NAME: COB 480LED 24V 6000K	TYPE: 480D COB 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

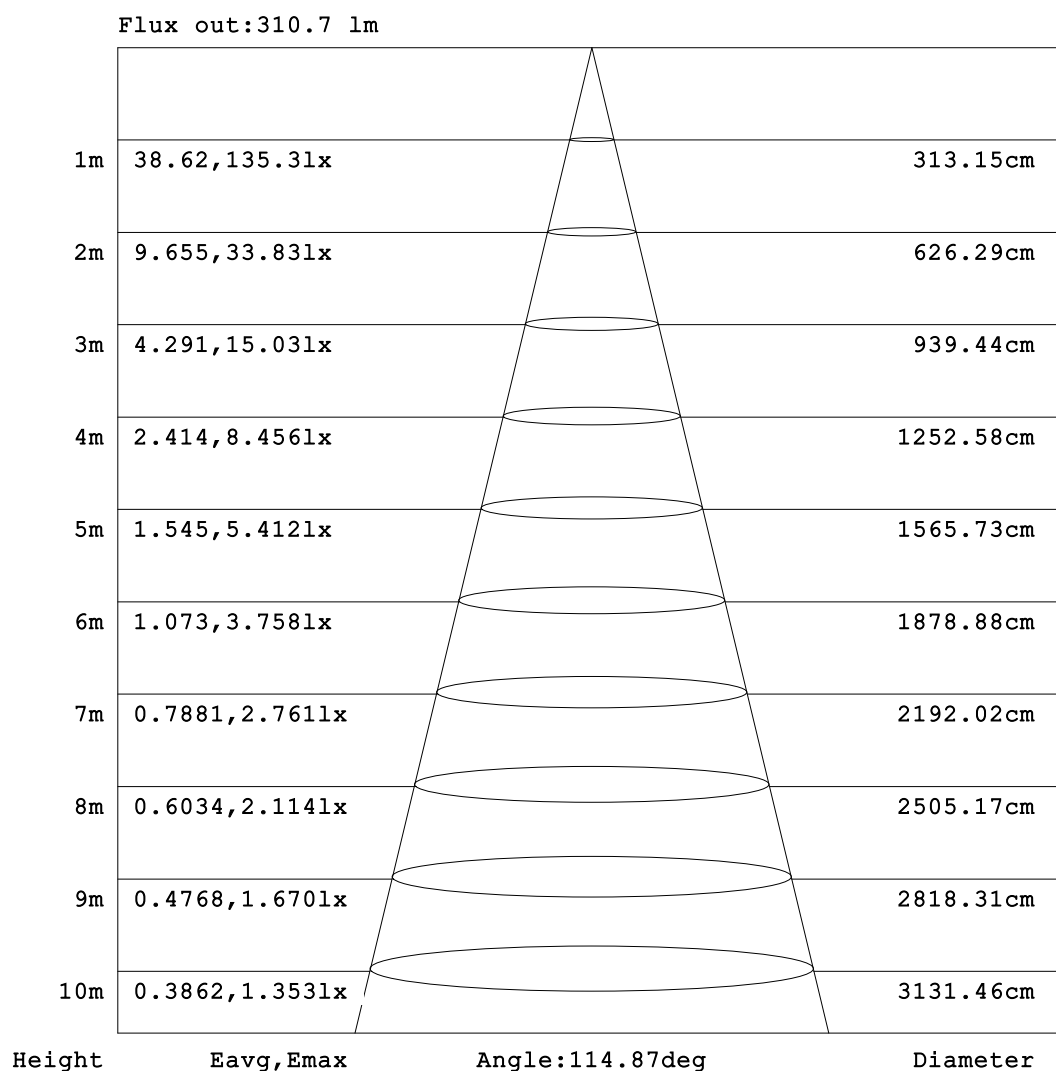


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-08-19

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

NAME: COB 480LED 24V 6000K	TYPE: 480D COB 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

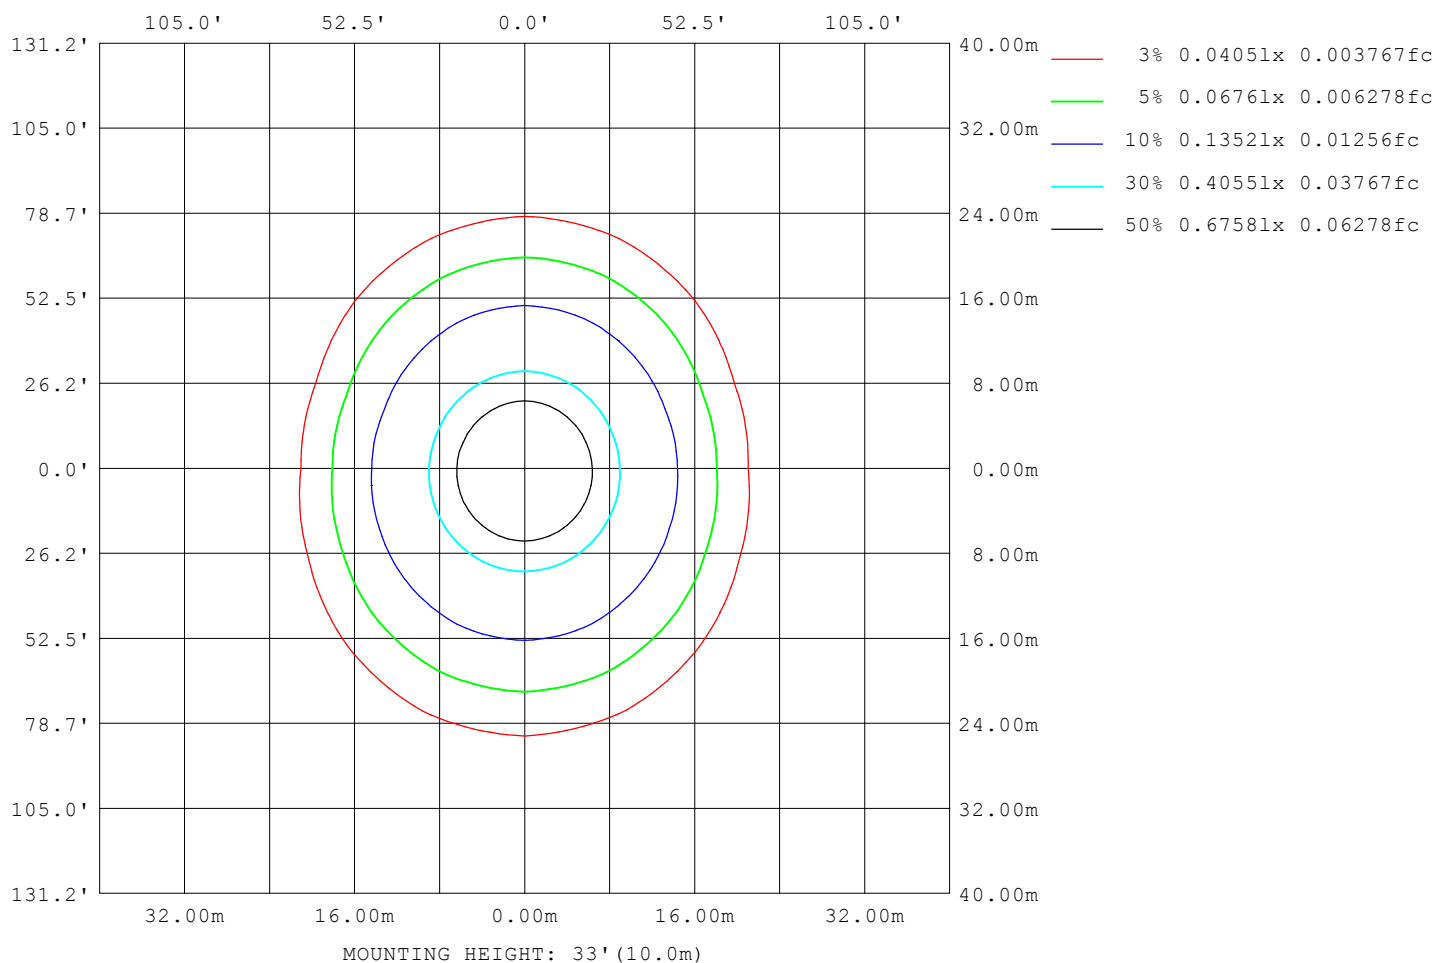

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-08-19

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

LED Avg.L Report

NAME: COB 480LED 24V 6000K	TYPE: 480D COB 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	23731
L_0~180 (75) av	19933
L_0~180 (85) av	11310
L_90~270 (65) av	36985
L_90~270 (75) av	50148
L_90~270 (85) av	113048
L_45 (65) av	31393
L_45 (75) av	39355
L_45 (85) av	80399

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2021-08-19

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

Planar Illuminance Curve

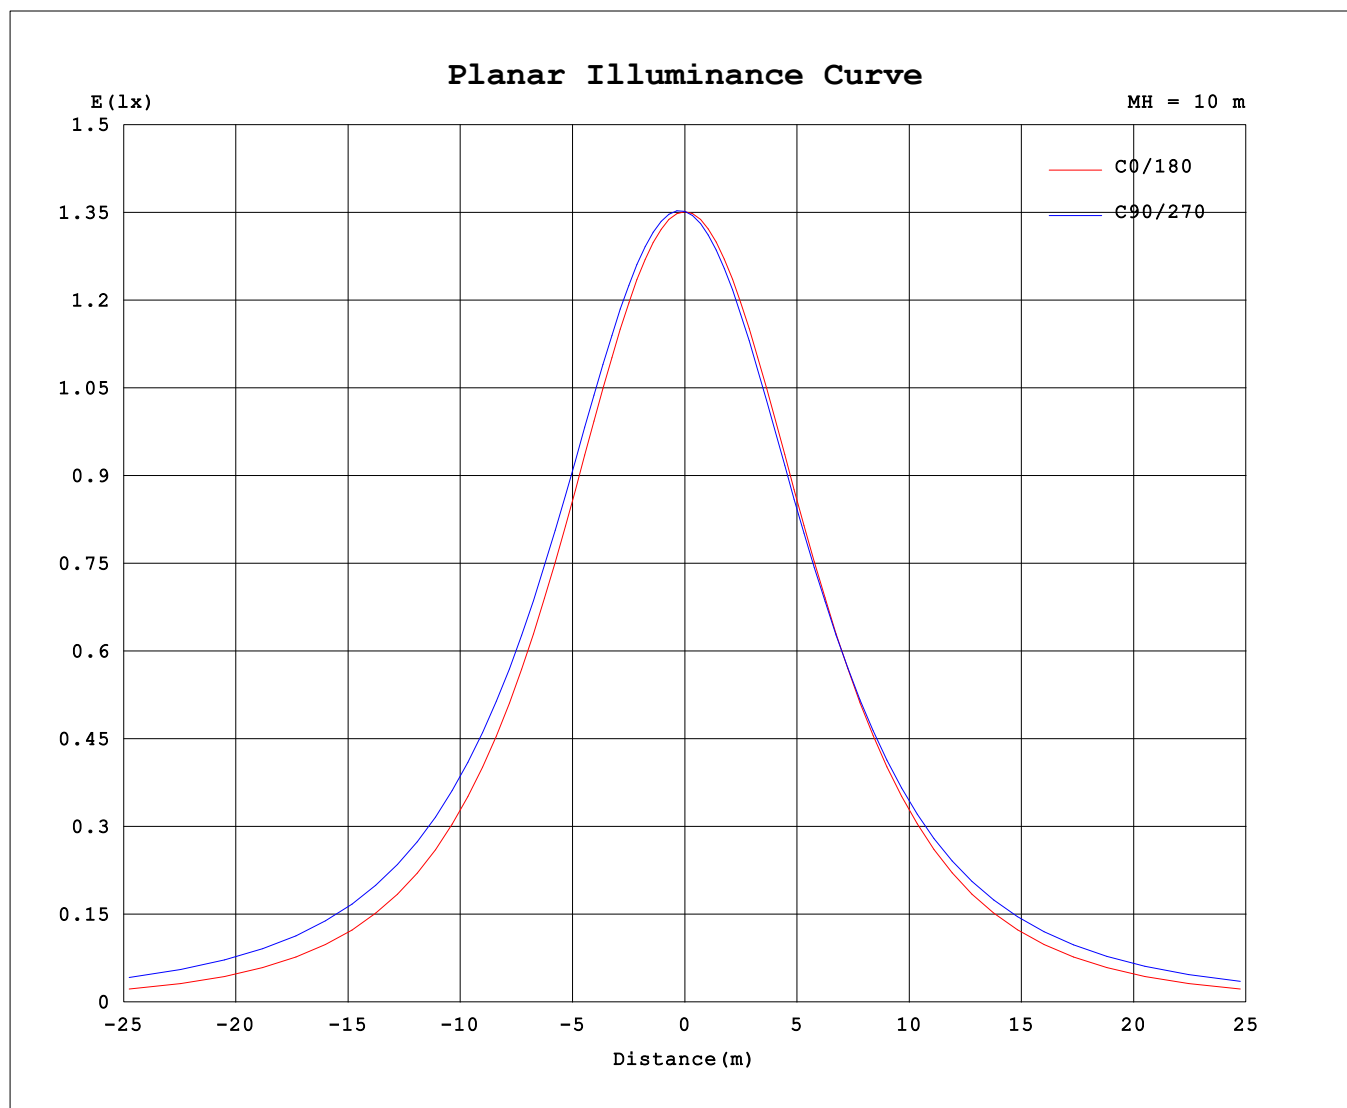

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2021-08-19

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: COB 480LED 24V 6000K	TYPE: 480D COB 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.01*0.5	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	135	135	135	135	135	135	135	135	135	135	135	135	135	135	135	135			
5	135	135	135	136	136	136	135	135	135	135	134	134	134	134	134	135			
10	133	134	134	135	135	135	135	134	133	132	132	131	131	131	132	132			
15	131	132	133	134	134	134	133	132	131	130	129	129	129	129	129	130			
20	126	128	130	131	131	131	130	128	127	125	125	124	124	124	124	125			
25	123	125	127	128	129	128	127	125	123	121	121	120	120	120	120	121			
30	116	118	121	123	124	124	121	119	116	114	114	114	114	114	114	114			
35	110	113	116	119	120	120	117	114	111	109	109	110	110	110	108	109			
40	101	105	109	113	114	113	109	105	101	99.5	100	102	103	102	100	99.3			
45	94.5	98.3	103	108	110	109	104	98.7	94.6	92.7	94.5	97.1	98.4	97.1	94.5	92.6			
50	83.2	87.8	94.1	101	103	101	94.9	88.2	83.3	81.7	85.2	89.2	91.0	89.3	85.3	81.7			
55	75.0	80.2	87.9	95.5	98.4	96.1	88.8	80.7	75.1	73.9	78.8	83.8	86.1	84.0	79.1	74.1			
60	61.8	68.0	78.3	87.4	90.9	88.1	79.3	68.7	61.9	61.9	69.2	75.8	78.4	76.0	69.7	62.4			
65	52.5	59.7	71.8	82.0	85.9	82.8	73.0	60.5	52.6	53.7	63.1	70.2	73.0	70.4	63.7	54.4			
70	38.0	47.3	62.3	74.1	78.5	75.0	63.7	48.5	38.0	41.8	53.6	61.7	64.9	62.0	54.3	43.0			
75	28.3	39.5	56.5	69.0	73.5	69.9	58.0	40.8	28.2	34.5	47.1	55.7	59.1	56.1	48.0	36.0			
80	14.4	29.1	48.0	61.0	65.7	61.9	49.6	30.7	14.0	23.9	37.2	45.9	49.3	46.2	38.1	25.5			
85	6.86	23.3	42.1	55.4	60.2	56.3	43.6	24.9	6.13	17.0	30.1	38.6	41.8	38.8	31.0	18.6			
90	0.21	14.2	32.5	46.0	50.9	46.9	34.0	15.5	0.25	7.21	18.3	25.9	28.9	26.1	19.1	8.49			
95	0.27	7.70	25.5	38.9	43.8	39.8	26.9	8.80	0.24	0.36	2.88	11.1	14.9	11.0	3.27	0.39			
100	0.40	0.53	11.4	25.1	30.0	26.0	12.6	0.58	0.35	0.46	0.64	0.78	0.83	0.79	0.66	0.48			
105	0.51	0.53	1.89	13.7	18.6	14.5	2.75	0.56	0.43	0.53	0.70	0.84	0.89	0.85	0.72	0.55			
110	0.67	0.66	0.83	1.29	2.61	1.48	0.81	0.69	0.58	0.65	0.80	0.92	0.97	0.93	0.82	0.66			
115	0.78	0.75	0.85	0.97	1.01	0.95	0.87	0.79	0.68	0.74	0.87	0.98	1.02	0.99	0.88	0.74			
120	0.93	0.89	0.96	1.02	1.06	1.04	0.98	0.92	0.83	0.87	0.96	1.05	1.09	1.06	0.97	0.87			
125	1.04	0.99	1.03	1.08	1.11	1.10	1.06	1.02	0.92	0.95	1.02	1.10	1.13	1.11	1.03	0.95			
130	1.18	1.13	1.14	1.17	1.19	1.19	1.16	1.15	1.06	1.07	1.12	1.18	1.20	1.18	1.12	1.08			
135	1.26	1.21	1.20	1.22	1.24	1.25	1.23	1.23	1.14	1.15	1.19	1.23	1.23	1.23	1.18	1.16			
140	1.37	1.33	1.31	1.31	1.32	1.34	1.34	1.34	1.25	1.26	1.28	1.31	1.30	1.30	1.27	1.27			
145	1.44	1.39	1.38	1.36	1.37	1.40	1.41	1.41	1.32	1.32	1.34	1.36	1.33	1.35	1.33	1.33			
150	1.52	1.49	1.47	1.45	1.45	1.49	1.49	1.50	1.41	1.41	1.42	1.43	1.40	1.41	1.41	1.42			
155	1.58	1.55	1.53	1.51	1.52	1.55	1.55	1.56	1.47	1.46	1.47	1.48	1.46	1.46	1.47	1.48			
160	1.65	1.64	1.61	1.58	1.62	1.63	1.62	1.64	1.56	1.55	1.55	1.56	1.55	1.54	1.55	1.57			
165	1.70	1.69	1.67	1.64	1.69	1.67	1.67	1.69	1.62	1.61	1.61	1.62	1.63	1.60	1.62	1.64			
170	1.78	1.77	1.76	1.74	1.77	1.76	1.76	1.78	1.71	1.72	1.72	1.72	1.73	1.70	1.72	1.75			
175	1.84	1.83	1.83	1.82	1.84	1.83	1.83	1.84	1.79	1.79	1.79	1.79	1.80	1.78	1.80	1.82			
180	1.90	1.89	1.89	1.89	1.91	1.90	1.91	1.92	1.90	1.89	1.89	1.89	1.91	1.89	1.91	1.92			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-08-19

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks: