


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: 2835 128LED 24V 6500K	TYPE: 128D 2835 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 131.07 lm/W
MODEL	6500K 2.4W	I _{max} (cd)	94.33	S/MH (C0/180)	1.31	
NOMINAL POWER(W)	2.4	LOR (%)	100.0	S/MH (C90/270)	1.25	
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	283.71	□ UP, DN (C0-180)	0.7, 51.5	
NOMINAL FLUX(lm)	4.43291	CIE CLASS	DIRECT	□ UP, DN (C180-360)	0.6, 47.1	
LAMPS INSIDE	64	□ up (%)	1.4	CIBSE SHR NOM	1.25	
TEST VOLTAGE (V)	24	□ down (%)	98.6	CIBSE SHR MAX	1.35	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

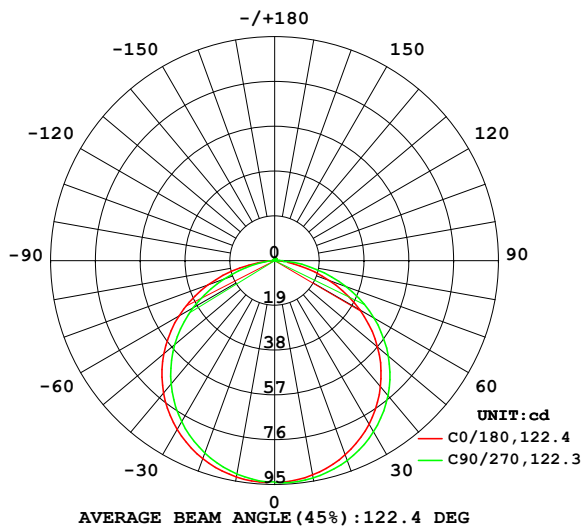

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

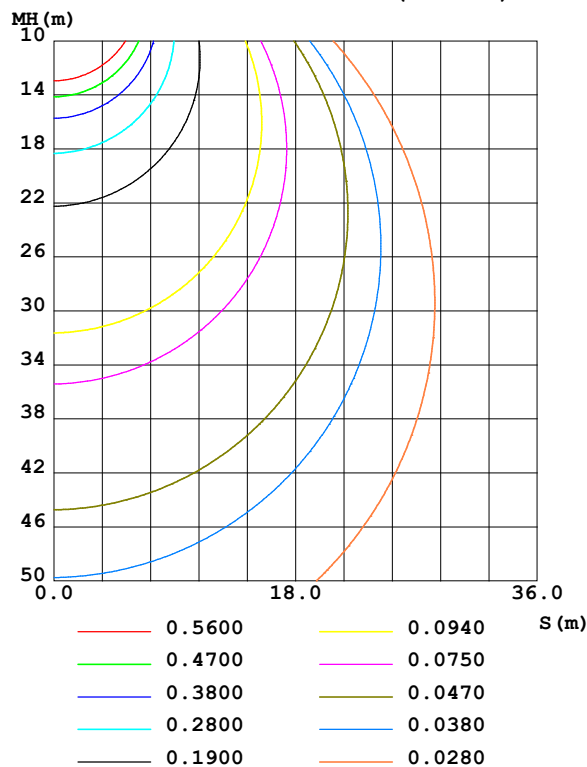

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2021-08-24

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	92.33	93.01	93.59	93.67	93.21	92.54	91.92	91.84	0- 10	8.922	8.922	3.14,3.14
20	87.63	88.98	90.16	90.32	89.39	88.06	86.81	86.66	10- 20	25.69	34.61	12.2,12.2
30	80.12	82.13	83.86	84.11	82.75	80.78	78.95	78.70	20- 30	39.33	73.94	26.1,26.1
40	69.87	72.50	74.77	75.12	73.36	70.81	68.39	68.05	30- 40	48.08	122.0	43,43
50	57.01	60.20	62.97	63.45	61.34	58.23	55.30	54.81	40- 50	50.66	172.7	60.9,60.9
60	41.74	45.43	48.66	49.26	46.85	43.27	39.87	39.22	50- 60	46.43	219.1	77.2,77.2
70	24.66	28.65	32.22	32.90	30.25	26.44	22.81	22.02	60- 70	35.62	254.7	89.8,89.8
80	8.150	11.61	14.91	15.57	11.11	9.748	6.831	6.123	70- 80	19.93	274.7	96.8,96.8
90	0.1322	1.003	2.027	2.150	0.0739	0.5691	0.1734	0.2944	80- 90	5.169	279.8	98.6,98.6
100	0.2689	0.2401	0.2137	0.1996	0.1764	0.2095	0.2450	0.2545	90-100	0.3469	280.2	98.8,98.8
110	0.4760	0.4160	0.3777	0.3706	0.3479	0.3736	0.4090	0.4186	100-110	0.3256	280.5	98.9,98.9
120	0.6713	0.5945	0.5630	0.5608	0.5383	0.5401	0.5753	0.5850	110-120	0.4824	281.0	99,99
130	0.8356	0.7610	0.7271	0.7320	0.7026	0.6971	0.7156	0.7324	120-130	0.5890	281.6	99.3,99.3
140	0.9666	0.8990	0.8602	0.8818	0.8431	0.8303	0.8319	0.8584	130-140	0.6223	282.2	99.5,99.5
150	1.069	1.018	0.9838	1.006	0.9479	0.9421	0.9271	0.9630	140-150	0.5816	282.8	99.7,99.7
160	1.148	1.120	1.112	1.103	1.057	1.049	1.053	1.068	150-160	0.4784	283.3	99.8,99.8
170	1.231	1.218	1.226	1.208	1.176	1.170	1.184	1.184	160-170	0.3223	283.6	100,100
180	1.307	1.301	1.319	1.312	1.303	1.301	1.319	1.315	170-180	0.1183	283.7	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 152.54 lm

%lum = 53.8%

%lamp = 53.8%

Conical surface Flux(130deg): 242.17 lm

%lum = 85.4%


%lamp = 85.4%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-08-24

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

NAME: 2835 128LED 24V 6500K	TYPE: 128D 2835 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

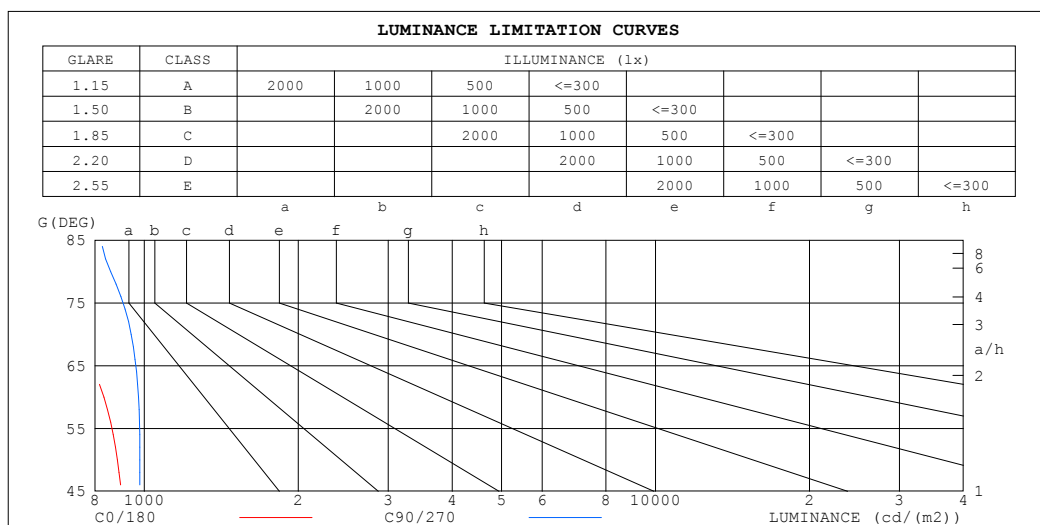

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	383	992
80	469	859
75	683	977
70	720	943
65	829	1002
60	834	974
55	891	1004
50	886	980
45	918	996


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-08-24

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: 2835 128LED 24V 6500K	TYPE: 128D 2835 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

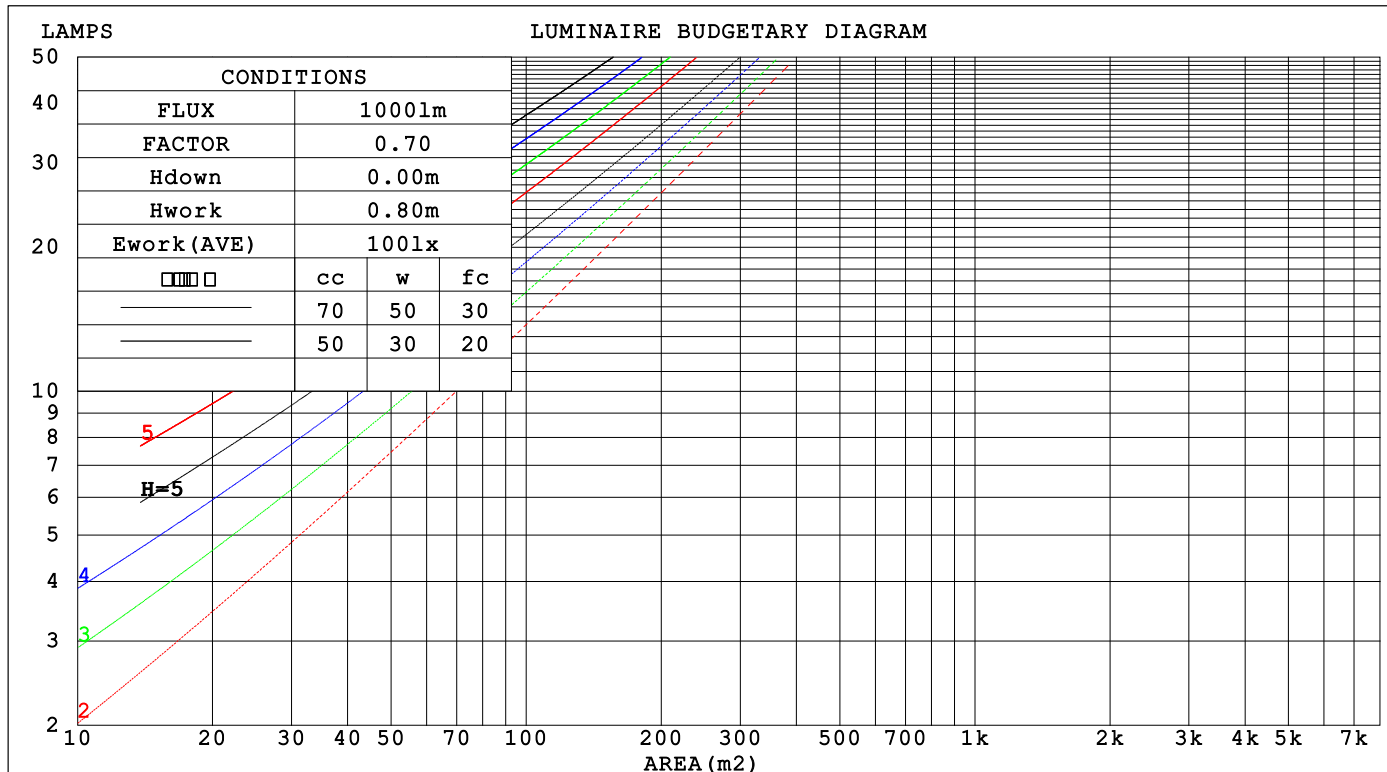

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-08-24

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: 2835 128LED 24V 6500K	TYPE: 128D 2835 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio					Wall Exitance Coefficients(WEC)
0.0						
1.0	.311 .177 .056	.304 .173 .055	.290 .166 .053	.277 .160 .051	.265 .154 .049	
2.0	.293 .161 .049	.287 .158 .049	.274 .152 .047	.263 .147 .046	.252 .143 .045	
3.0	.271 .144 .043	.266 .142 .043	.255 .138 .042	.244 .134 .041	.235 .130 .040	
4.0	.250 .130 .038	.245 .128 .038	.235 .125 .037	.226 .122 .037	.218 .118 .036	
5.0	.232 .118 .034	.227 .116 .034	.218 .114 .033	.210 .111 .033	.202 .108 .032	
6.0	.215 .108 .031	.211 .106 .031	.203 .104 .030	.195 .102 .030	.189 .099 .029	
7.0	.200 .099 .028	.196 .098 .028	.189 .096 .028	.182 .094 .027	.176 .092 .027	
8.0	.186 .091 .026	.183 .090 .025	.177 .088 .025	.171 .087 .025	.165 .085 .025	
9.0	.175 .084 .024	.172 .084 .023	.166 .082 .023	.161 .081 .023	.156 .079 .023	
10.0	.164 .079 .022	.161 .078 .022	.156 .077 .022	.151 .075 .021	.147 .074 .021	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio					Ceiling Cavity Exitance Coefficients(CCEC)
0.0	.201 .201 .201	.172 .172 .172	.117 .117 .117	.067 .067 .067	.022 .022 .022	
1.0	.191 .167 .145	.163 .143 .125	.112 .098 .086	.064 .057 .050	.021 .018 .016	
2.0	.183 .142 .108	.157 .123 .094	.107 .085 .065	.062 .049 .038	.020 .016 .012	
3.0	.175 .125 .085	.150 .108 .073	.103 .075 .052	.060 .044 .030	.019 .014 .010	
4.0	.168 .112 .069	.144 .096 .060	.099 .067 .042	.057 .039 .025	.018 .013 .008	
5.0	.160 .101 .058	.138 .088 .050	.095 .061 .035	.055 .036 .021	.018 .012 .007	
6.0	.153 .093 .050	.132 .081 .043	.091 .056 .031	.053 .033 .018	.017 .011 .006	
7.0	.146 .086 .044	.126 .075 .038	.087 .052 .027	.051 .031 .016	.016 .010 .005	
8.0	.140 .080 .039	.121 .070 .034	.083 .049 .024	.049 .029 .015	.016 .009 .005	
9.0	.134 .075 .036	.115 .065 .031	.080 .046 .022	.047 .027 .013	.015 .009 .004	
10.0	.128 .071 .033	.111 .062 .029	.077 .043 .021	.045 .026 .012	.015 .008 .004	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-08-24

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME: 2835 128LED 24V 6500K					TYPE: 128D 2835 24V					WEIGHT:				
SPEC.:					DIM.:					SERIAL No.:				
MFR.:					SUR.:					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3				
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3				
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2				
Room dimensions					Viewed crosswise					Viewed endwise				
x = 2H y = 2H					16.8	18.3	17.1	18.5	18.8	17.3	18.9	17.6	19.1	19.3
3H					18.2	19.6	18.5	19.8	20.1	19.1	20.5	19.4	20.7	21.0
4H					18.7	20.0	19.0	20.3	20.6	19.8	21.1	20.1	21.4	21.7
6H					18.9	20.2	19.3	20.5	20.8	20.3	21.6	20.7	21.9	22.2
8H					19.0	20.2	19.3	20.5	20.8	20.5	21.7	20.9	22.0	22.3
12H					19.0	20.1	19.3	20.5	20.8	20.6	21.8	21.0	22.1	22.4
4H 2H					17.5	18.8	17.8	19.1	19.4	17.9	19.2	18.2	19.5	19.8
3H					19.1	20.2	19.4	20.6	20.9	19.8	21.0	20.2	21.3	21.6
4H					19.7	20.7	20.1	21.1	21.5	20.6	21.7	21.0	22.1	22.4
6H					20.1	21.0	20.5	21.4	21.8	21.3	22.3	21.7	22.6	23.0
8H					20.1	21.0	20.6	21.4	21.8	21.6	22.4	22.0	22.8	23.3
12H					20.1	21.0	20.6	21.4	21.8	21.8	22.6	22.2	23.0	23.4
8H 4H					20.0	20.9	20.4	21.3	21.7	20.9	21.7	21.3	22.1	22.5
6H					20.5	21.2	21.0	21.7	22.1	21.7	22.4	22.1	22.8	23.3
8H					20.7	21.3	21.1	21.7	22.2	22.0	22.7	22.5	23.1	23.6
12H					20.7	21.3	21.2	21.7	22.2	22.3	22.8	22.8	23.3	23.8
12H 4H					20.0	20.8	20.5	21.2	21.7	20.8	21.7	21.3	22.1	22.5
6H					20.6	21.2	21.1	21.7	22.2	21.7	22.4	22.2	22.8	23.3
8H					20.8	21.3	21.3	21.8	22.3	22.1	22.6	22.6	23.1	23.6
Variations with the observer position at spacings(CIE Pub.117):														
S = 1.0H					+ 0.2 / - 0.2					+ 0.1 / - 0.2				
1.5H					+ 0.2 / - 0.4					+ 0.2 / - 0.3				
2.0H					+ 0.2 / - 0.4					+ 0.1 / - 0.3				

CIE Pub.117, 283.7 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -4.4)
Area: 0.1 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-08-24

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

NAME: 2835 128LED 24V 6500K	TYPE: 128D 2835 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	57	45	38	56	45	38	54	44	37	31
0.80	67	55	47	66	54	47	64	53	47	40
1.00	75	64	56	74	63	56	71	64	55	48
1.25	82	72	64	81	71	64	78	69	63	55
1.50	87	77	70	86	76	70	82	74	68	61
2.00	94	86	79	92	84	78	89	82	77	68
2.50	98	90	84	96	89	83	92	86	81	73
3.00	102	95	89	99	93	88	95	90	86	77
4.00	106	100	95	103	98	94	99	94	91	82
5.00	108	103	99	106	101	97	101	97	94	85
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2021-08-24

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME: 2835 128LED 24V 6500K	TYPE: 128D 2835 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

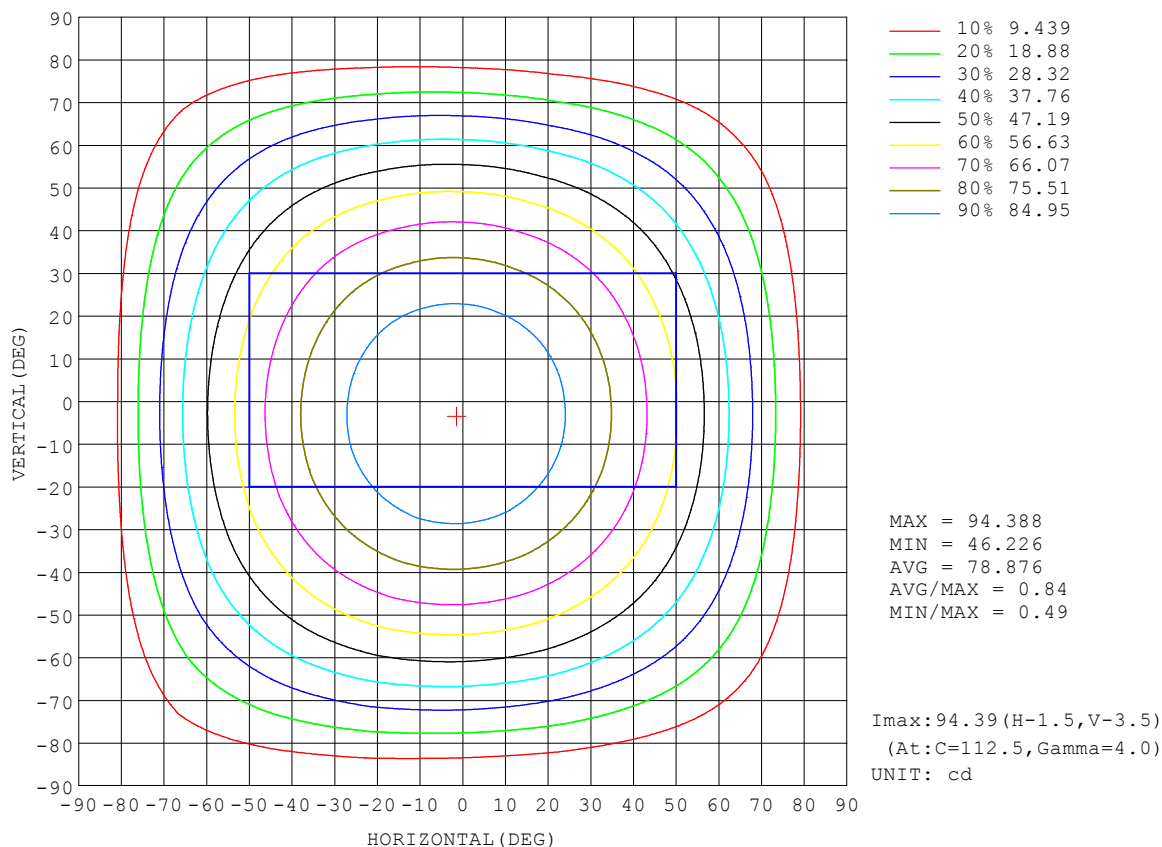


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-08-24

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

AAI Figure

NAME: 2835 128LED 24V 6500K	TYPE: 128D 2835 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

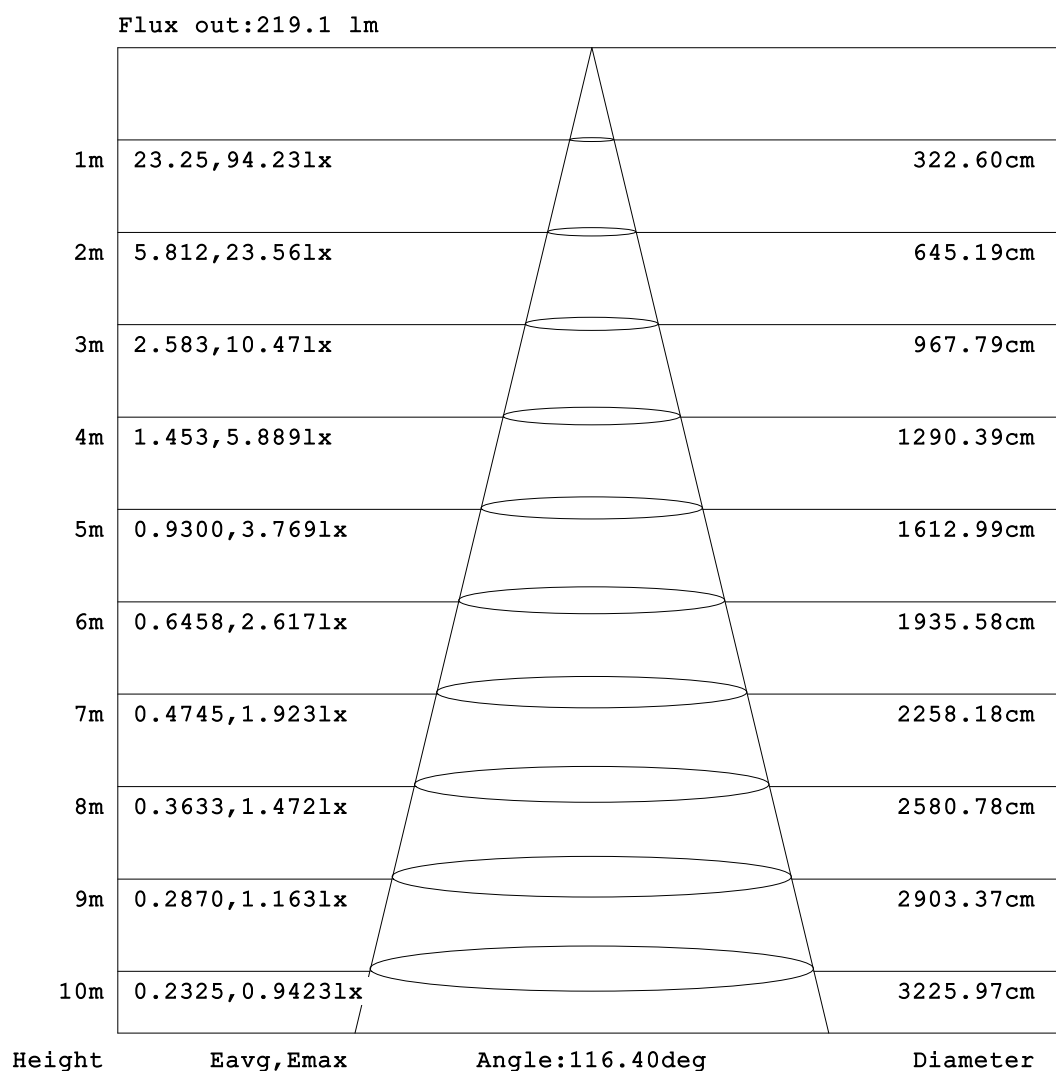


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-08-24

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity:65.0%
 Test Distance:5.749m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

NAME: 2835 128LED 24V 6500K	TYPE: 128D 2835 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

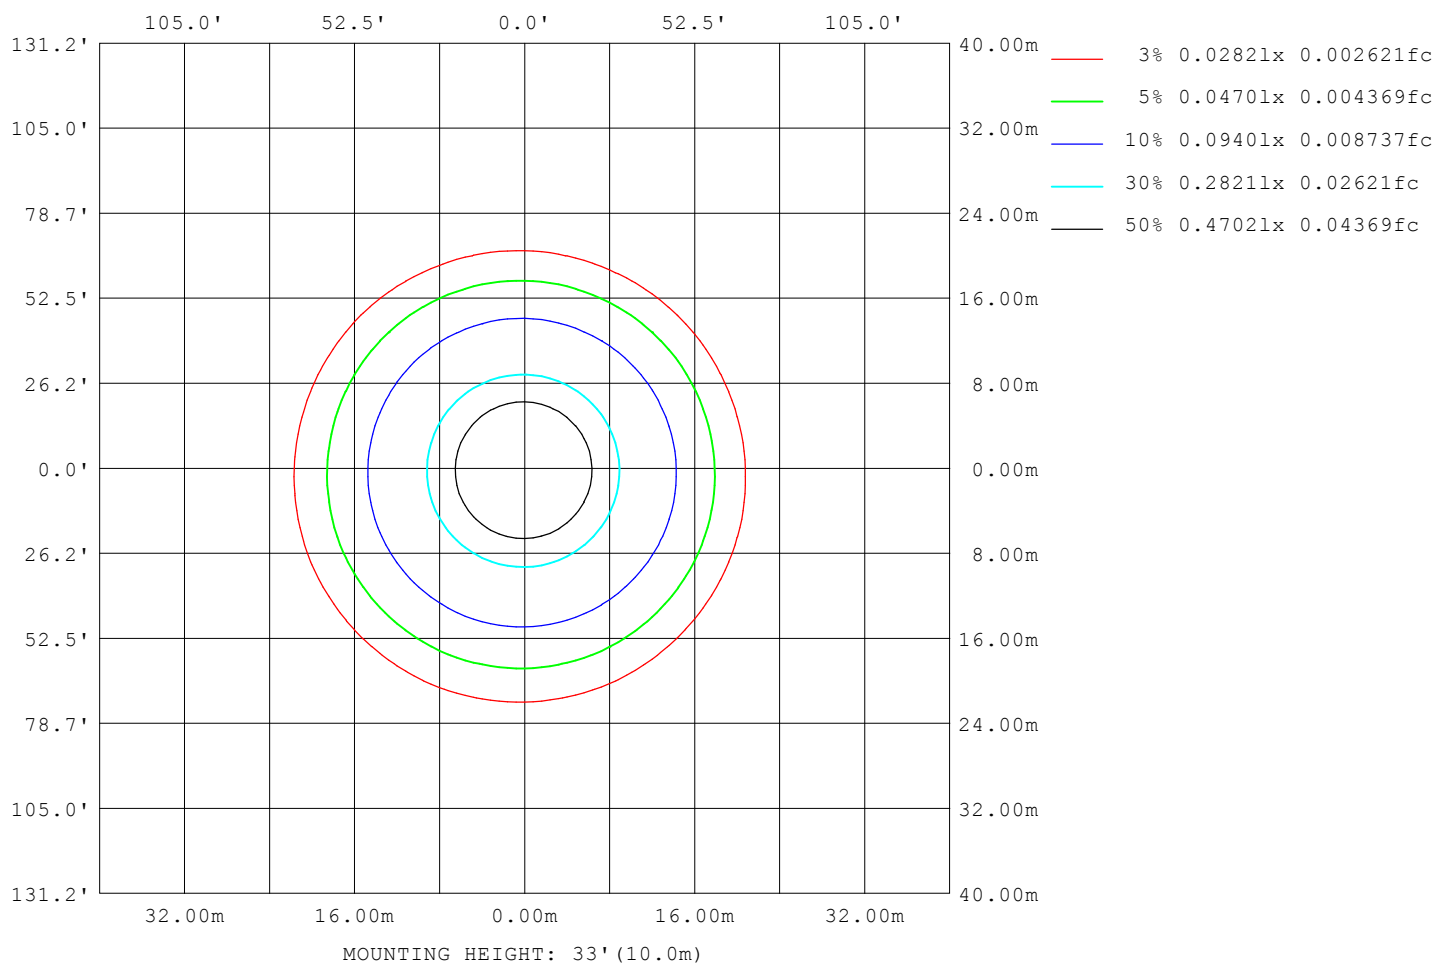

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-08-24

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

LED Avg.L Report

NAME: 2835 128LED 24V 6500K	TYPE: 128D 2835 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	854
L_0~180 (75) av	715
L_0~180 (85) av	282
L_90~270 (65) av	853
L_90~270 (75) av	731
L_90~270 (85) av	523
L_45 (65) av	854
L_45 (75) av	729
L_45 (85) av	502

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-08-24

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

Planar Illuminance Curve

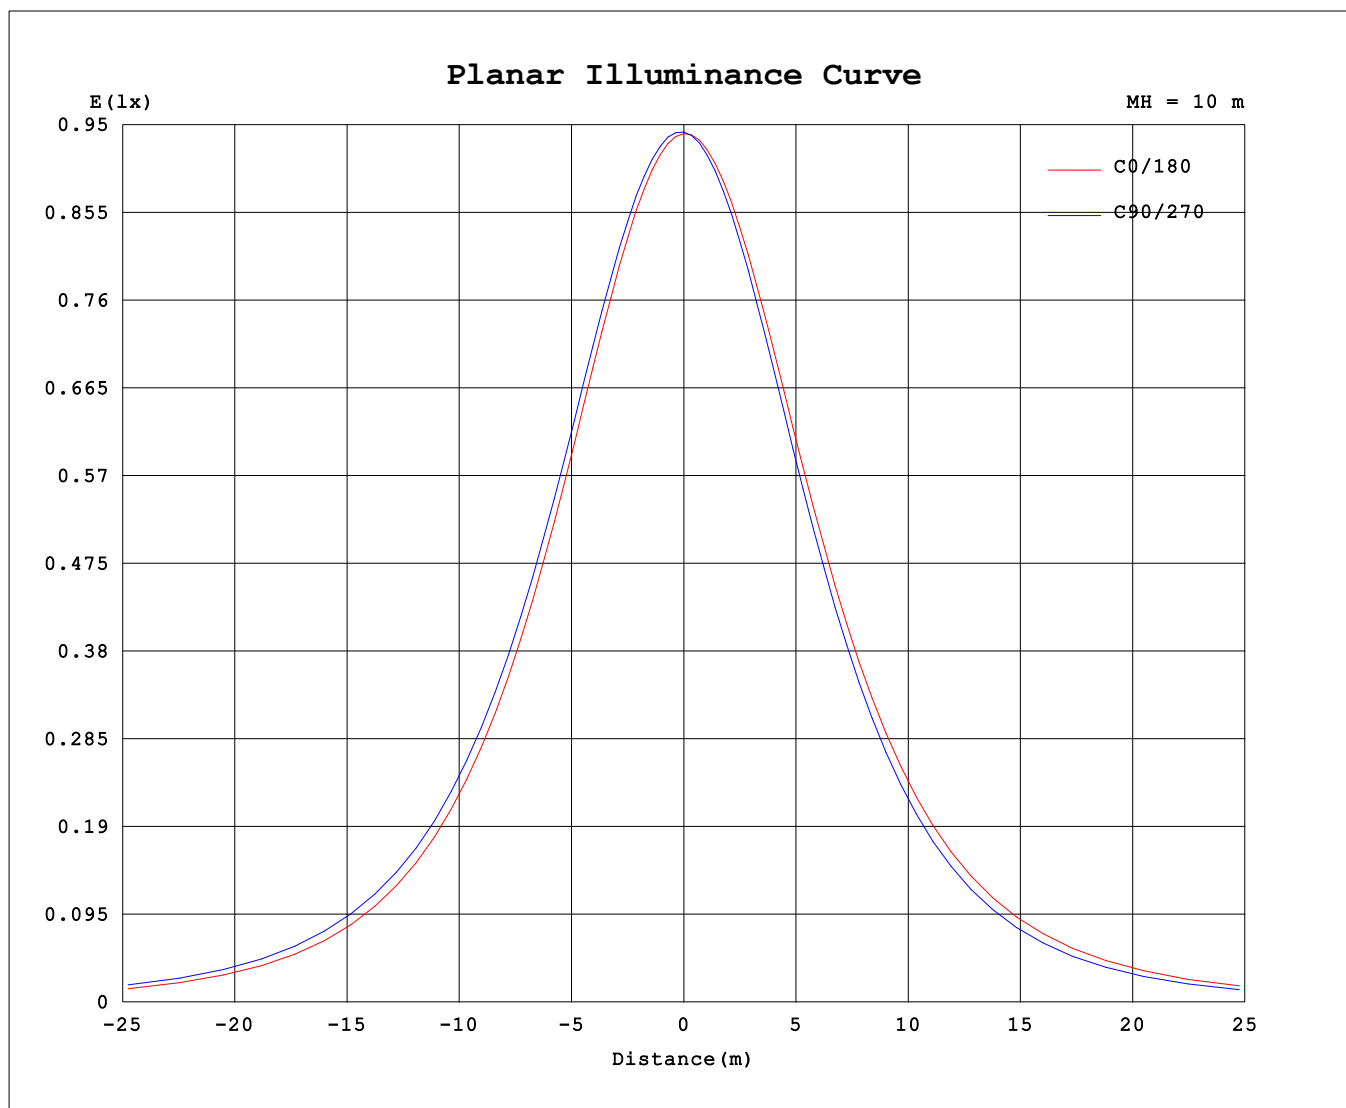

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2021-08-24

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: 2835 128LED 24V 6500K	TYPE: 128D 2835 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2			
5	93.8	93.9	94.0	94.2	94.3	94.3	94.3	94.2	94.1	94.0	93.9	93.7	93.6	93.5	93.6	93.7			
10	92.3	92.7	93.0	93.4	93.6	93.7	93.7	93.5	93.2	92.9	92.5	92.2	91.9	91.8	91.8	92.0			
15	90.8	91.3	91.7	92.2	92.6	92.8	92.7	92.4	92.0	91.5	91.1	90.6	90.2	90.0	90.1	90.3			
20	87.6	88.3	89.0	89.7	90.2	90.5	90.3	90.0	89.4	88.7	88.1	87.3	86.8	86.5	86.7	87.0			
25	85.0	85.8	86.6	87.4	88.0	88.3	88.2	87.8	87.1	86.3	85.5	84.6	84.0	83.6	83.8	84.2			
30	80.1	81.2	82.1	83.2	83.9	84.3	84.1	83.6	82.8	81.7	80.8	79.7	78.9	78.5	78.7	79.2			
35	76.3	77.5	78.6	79.8	80.6	81.1	80.8	80.3	79.3	78.2	77.1	75.8	75.0	74.5	74.8	75.3			
40	69.9	71.2	72.5	73.9	74.8	75.4	75.1	74.5	73.4	72.1	70.8	69.3	68.4	67.8	68.1	68.7			
45	65.0	66.5	67.9	69.4	70.4	71.0	70.8	70.1	68.9	67.4	66.1	64.5	63.5	62.8	63.1	63.7			
50	57.0	58.7	60.2	61.9	63.0	63.7	63.5	62.7	61.3	59.7	58.2	56.5	55.3	54.5	54.8	55.5			
55	51.2	52.9	54.6	56.4	57.5	58.3	58.1	57.3	55.8	54.1	52.5	50.6	49.4	48.5	48.8	49.6			
60	41.7	43.7	45.4	47.4	48.7	49.5	49.3	48.4	46.9	45.0	43.3	41.2	39.9	38.9	39.2	40.0			
65	35.1	37.1	38.9	41.0	42.3	43.2	42.9	42.1	40.5	38.5	36.7	34.6	33.2	32.2	32.5	33.3			
70	24.7	26.7	28.6	30.8	32.2	33.2	32.9	32.0	30.3	28.3	26.4	24.3	22.8	21.8	22.0	22.8			
75	17.7	19.7	21.7	23.8	25.3	26.2	26.0	25.1	23.0	21.3	19.5	17.4	16.0	15.0	15.2	15.9			
80	8.15	9.91	11.6	13.6	14.9	15.9	15.6	14.8	11.1	11.3	9.75	7.96	6.83	5.98	6.12	6.69			
85	3.35	4.63	5.95	7.56	8.64	9.46	9.24	8.56	3.66	5.52	4.49	3.33	2.59	2.05	2.08	2.43			
90	0.13	0.61	1.00	1.61	2.03	2.37	2.15	1.47	0.07	0.50	0.57	0.34	0.17	0.21	0.29	0.35			
95	0.16	0.21	0.21	0.35	0.48	0.52	0.38	0.20	0.11	0.12	0.14	0.15	0.17	0.18	0.19	0.22			
100	0.27	0.25	0.24	0.23	0.21	0.20	0.20	0.20	0.18	0.19	0.21	0.23	0.24	0.25	0.25	0.24			
105	0.36	0.32	0.30	0.29	0.28	0.26	0.26	0.27	0.24	0.25	0.27	0.29	0.31	0.33	0.32	0.31			
110	0.48	0.43	0.42	0.39	0.38	0.37	0.37	0.38	0.35	0.36	0.37	0.40	0.41	0.42	0.42	0.41			
115	0.56	0.51	0.49	0.47	0.45	0.44	0.45	0.46	0.42	0.42	0.44	0.46	0.48	0.49	0.49	0.48			
120	0.67	0.62	0.59	0.58	0.56	0.55	0.56	0.57	0.54	0.53	0.54	0.56	0.58	0.59	0.59	0.58			
125	0.74	0.69	0.66	0.64	0.63	0.62	0.63	0.65	0.60	0.60	0.60	0.63	0.64	0.65	0.65	0.65			
130	0.84	0.79	0.76	0.74	0.73	0.72	0.73	0.75	0.70	0.70	0.70	0.70	0.72	0.73	0.73	0.74			
135	0.89	0.85	0.82	0.80	0.78	0.78	0.79	0.81	0.76	0.75	0.75	0.76	0.77	0.78	0.78	0.80			
140	0.97	0.93	0.90	0.87	0.86	0.87	0.88	0.90	0.84	0.84	0.83	0.84	0.83	0.85	0.86	0.87			
145	1.01	0.98	0.95	0.92	0.91	0.92	0.94	0.95	0.89	0.88	0.88	0.88	0.87	0.89	0.90	0.92			
150	1.07	1.04	1.02	0.99	0.98	1.00	1.01	1.01	0.95	0.94	0.94	0.95	0.93	0.95	0.96	0.98			
155	1.10	1.09	1.06	1.03	1.04	1.05	1.05	1.05	0.99	0.99	0.98	0.99	0.97	0.99	1.00	1.02			
160	1.15	1.14	1.12	1.10	1.11	1.11	1.10	1.11	1.06	1.05	1.05	1.06	1.05	1.05	1.07	1.09			
165	1.18	1.17	1.16	1.14	1.16	1.15	1.15	1.15	1.10	1.10	1.10	1.10	1.11	1.09	1.11	1.13			
170	1.23	1.23	1.22	1.20	1.23	1.21	1.21	1.22	1.18	1.17	1.17	1.18	1.18	1.17	1.18	1.20			
175	1.27	1.27	1.26	1.26	1.27	1.26	1.25	1.26	1.23	1.22	1.23	1.23	1.24	1.23	1.24	1.25			
180	1.31	1.30	1.30	1.31	1.32	1.31	1.31	1.32	1.30	1.30	1.30	1.31	1.32	1.30	1.31	1.31			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-08-24

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks: