


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: 2835 IP67	TYPE: 128LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 125.41 lm/W
MODEL	6500K RA90 12MM 9.6W	I _{max} (cd)	81.95	S/MH(C0/180)	1.32	
NOMINAL POWER(W)	2.4	LOR(%)	100.0	S/MH(C90/270)	1.31	
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	300.95	□ UP,DN(C0-180)	5.6,46.1	
NOMINAL FLUX(lm)	9.4047	CIE CLASS	DIRECT	□ UP,DN(C180-360)	2.4,45.9	
LAMPS INSIDE	32	□ up (%)	7.9	CIBSE SHR NOM	1.50	
TEST VOLTAGE(V)	24	□ down (%)	92.1	CIBSE SHR MAX	1.55	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

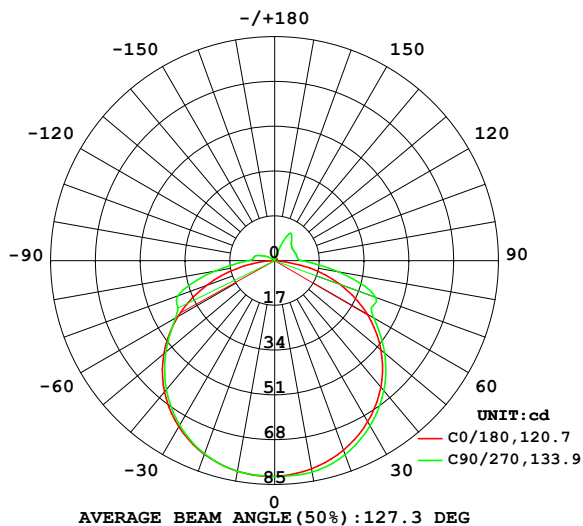

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

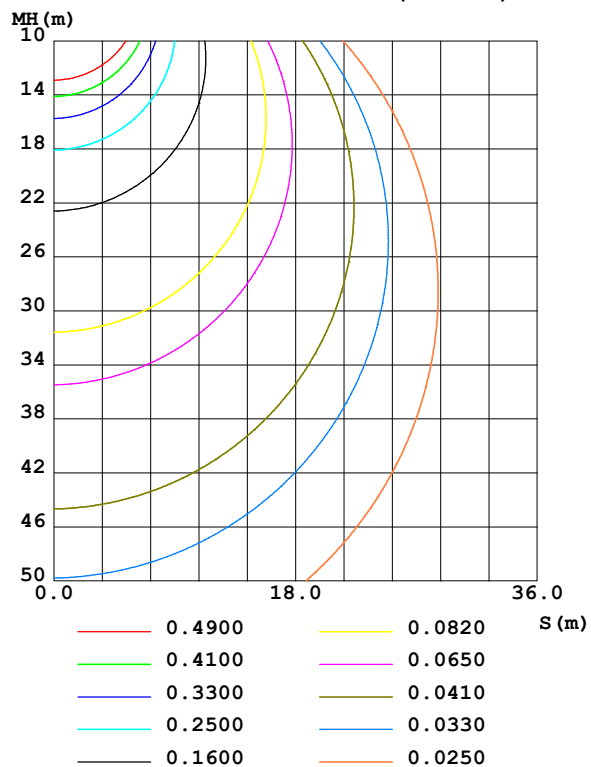

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-04-14

□ Range: 0 - 180DEG
 □ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity:65.0%
 Test Distance:5.749m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	80.28	80.95	81.54	81.65	81.18	81.33	81.20	80.69	0- 10	7.779	7.779	2.58,2.58
20	76.51	77.68	78.40	79.00	78.19	78.64	77.98	77.34	10- 20	22.56	30.34	10.1,10.1
30	70.63	71.79	72.46	73.63	72.80	73.31	72.09	71.51	20- 30	34.81	65.15	21.6,21.6
40	62.72	63.63	64.47	65.79	65.10	65.55	63.98	63.41	30- 40	42.97	108.1	35.9,35.9
50	52.73	53.65	54.54	55.93	54.96	55.70	53.91	53.40	40- 50	46.04	154.2	51.2,51.2
60	40.54	41.91	43.43	44.07	42.35	43.98	43.36	41.86	50- 60	43.58	197.7	65.7,65.7
70	26.24	31.51	40.96	33.28	27.47	33.54	39.03	31.72	60- 70	37.27	235.0	78.1,78.1
80	9.791	20.31	24.37	23.74	11.72	22.74	23.18	19.64	70- 80	28.64	263.6	87.6,87.6
90	0.1237	7.578	10.47	8.762	0.1048	8.138	9.988	7.409	80- 90	13.39	277.0	92.1,92.1
100	0.2569	7.090	8.724	7.169	0.2073	5.778	8.072	6.335	90-100	6.464	283.5	94.2,94.2
110	0.4401	6.758	8.487	6.757	0.3667	2.394	5.757	2.934	100-110	5.156	288.7	95.9,95.9
120	0.6116	6.251	8.225	6.041	0.5214	0.5115	2.686	0.5350	110-120	3.592	292.2	97.1,97.1
130	0.7520	6.348	8.502	5.791	0.6547	0.6233	0.6348	0.6538	120-130	2.652	294.9	98,98
140	0.8568	7.253	10.04	6.261	0.7594	0.7256	0.7180	0.7441	130-140	2.378	297.3	98.8,98.8
150	0.9354	5.040	12.09	5.411	0.8403	0.8159	0.7917	0.8297	140-150	2.120	299.4	99.5,99.5
160	1.004	1.110	3.973	1.356	0.9260	0.9016	0.8892	0.9177	150-160	1.129	300.5	99.9,99.9
170	1.073	1.058	1.063	1.048	1.026	1.006	1.010	1.020	160-170	0.3210	300.8	100,100
180	1.140	1.127	1.139	1.139	1.140	1.127	1.139	1.139	170-180	0.1024	301.0	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 135.72 lm

%lum = 45.1%

%lamp = 45.1%

Conical surface Flux(120deg): 197.73 lm

%lum = 65.7%


%lamp = 65.7%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-14

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

NAME: 2835 IP67	TYPE: 128LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

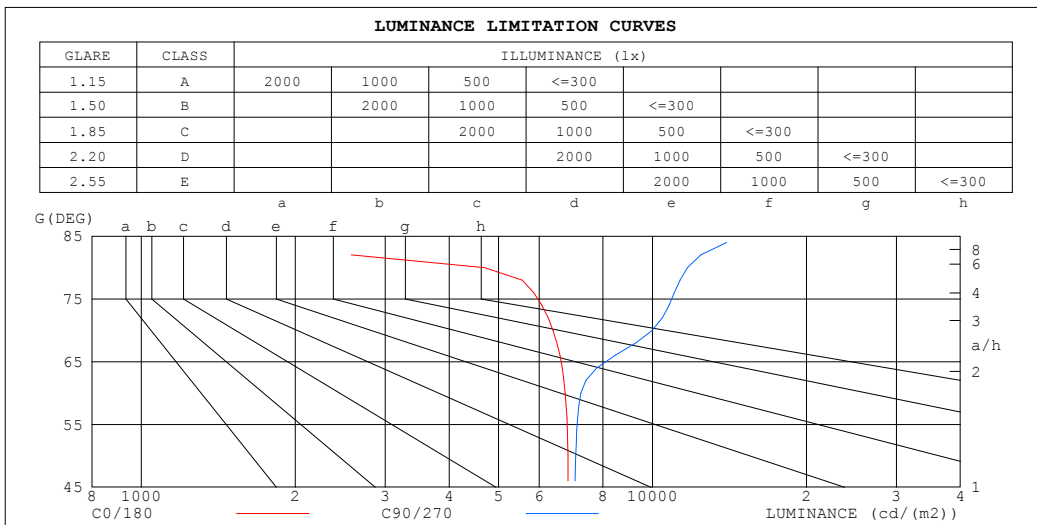

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	303	16747
80	4694	11702
75	6464	11481
70	6387	9984
65	6904	8069
60	6750	7241
55	6985	7285
50	6829	7073
45	6945	7162


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-04-14

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: 2835 IP67	TYPE: 128LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0														
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
□fc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Coefficients of Utilization(CU)														
0.0	1.17	1.17	1.17	1.14	1.14	1.14	1.07	1.07	1.07	1.00	1.00	1.00	.95	.95	.95	.92														
1.0	.00	.95	.90	.97	.92	.88	.91	.87	.84	.86	.83	.80	.81	.78	.76	.73														
2.0	.86	.78	.72	.83	.76	.70	.78	.73	.68	.74	.69	.65	.70	.66	.62	.60														
3.0	.75	.66	.59	.72	.64	.58	.68	.61	.56	.64	.59	.54	.61	.56	.52	.49														
4.0	.66	.56	.49	.64	.55	.49	.60	.53	.47	.57	.51	.45	.54	.48	.44	.41														
5.0	.58	.49	.42	.57	.48	.41	.54	.46	.40	.51	.44	.39	.48	.43	.38	.36														
6.0	.52	.43	.36	.51	.42	.36	.48	.41	.35	.46	.39	.34	.44	.38	.33	.31														
7.0	.47	.38	.32	.46	.38	.32	.44	.36	.31	.42	.35	.30	.40	.34	.29	.27														
8.0	.43	.34	.28	.42	.34	.28	.40	.33	.27	.38	.32	.27	.36	.31	.26	.24														
9.0	.39	.31	.25	.39	.31	.25	.37	.30	.25	.35	.29	.24	.34	.28	.23	.22														
10.0	.36	.28	.23	.36	.28	.23	.34	.27	.22	.33	.26	.22	.31	.25	.21	.19														

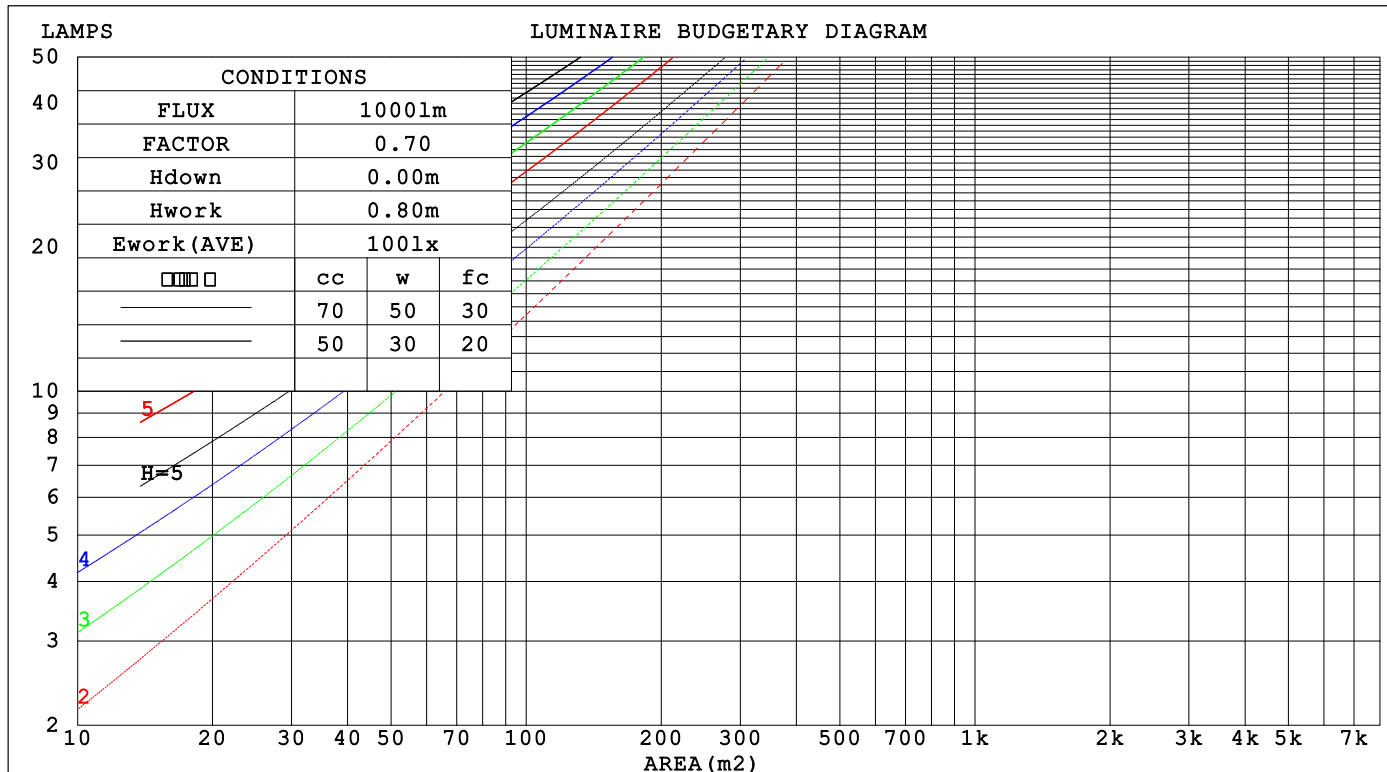

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-14

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: 2835 IP67	TYPE: 128LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio					Wall Exitance Coefficients(WEC)
0.0						
1.0	.353 .201 .064	.343 .196 .062	.325 .187 .060	.309 .178 .057	.294 .170 .055	
2.0	.318 .174 .053	.310 .170 .053	.293 .163 .051	.279 .156 .049	.265 .150 .047	
3.0	.288 .153 .046	.280 .150 .045	.266 .144 .044	.252 .138 .042	.240 .133 .041	
4.0	.262 .136 .040	.255 .133 .039	.242 .128 .038	.230 .123 .037	.219 .119 .036	
5.0	.239 .122 .035	.233 .120 .035	.222 .115 .034	.211 .111 .033	.201 .107 .032	
6.0	.220 .110 .032	.215 .109 .031	.204 .105 .030	.194 .101 .030	.185 .097 .029	
7.0	.204 .101 .029	.199 .099 .028	.189 .096 .028	.180 .092 .027	.172 .089 .026	
8.0	.190 .093 .026	.185 .091 .026	.176 .088 .025	.168 .085 .025	.161 .082 .024	
9.0	.177 .086 .024	.173 .084 .024	.165 .082 .023	.158 .079 .023	.150 .076 .022	
10.0	.166 .080 .022	.162 .078 .022	.155 .076 .021	.148 .074 .021	.142 .071 .020	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio					Ceiling Cavity Exitance Coefficients(CCEC)
0.0	.251 .251 .251	.215 .215 .215	.146 .146 .146	.084 .084 .084	.027 .027 .027	
1.0	.244 .217 .192	.209 .186 .165	.143 .128 .114	.082 .074 .066	.026 .024 .021	
2.0	.237 .193 .156	.203 .166 .135	.139 .115 .094	.080 .067 .055	.026 .022 .018	
3.0	.230 .176 .134	.197 .152 .116	.135 .106 .081	.078 .062 .048	.025 .020 .016	
4.0	.222 .163 .119	.190 .141 .103	.131 .098 .072	.076 .058 .043	.024 .019 .014	
5.0	.214 .153 .108	.184 .133 .094	.127 .093 .066	.073 .054 .039	.024 .018 .013	
6.0	.207 .145 .101	.178 .126 .088	.123 .088 .062	.071 .052 .037	.023 .017 .012	
7.0	.200 .138 .095	.172 .120 .083	.119 .084 .059	.069 .050 .035	.022 .016 .012	
8.0	.193 .133 .091	.166 .115 .079	.115 .081 .056	.067 .048 .034	.022 .016 .011	
9.0	.187 .128 .088	.161 .111 .076	.112 .078 .054	.065 .046 .032	.021 .015 .011	
10.0	.181 .124 .085	.156 .107 .074	.108 .075 .053	.063 .045 .031	.020 .015 .010	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-14

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME: 2835 IP67					TYPE: 128LED 24V			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.:					SUR.: 0.012*0.5			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.1	24.6	23.5	25.0	25.3	23.4	24.8	23.7	25.2	25.5	
	24.8	26.2	25.2	26.5	26.9	26.0	27.4	26.4	27.7	28.1	
	25.5	26.8	25.9	27.2	27.6	27.3	28.6	27.7	29.0	29.4	
	26.0	27.2	26.4	27.6	28.1	28.4	29.6	28.8	30.0	30.5	
	26.0	27.2	26.5	27.6	28.1	28.8	30.0	29.3	30.4	30.9	
	25.9	27.1	26.4	27.5	28.0	29.2	30.4	29.7	30.8	31.3	
4H	2H	23.8	25.1	24.3	25.5	26.0	24.0	25.3	24.4	25.7	26.1
	3H	25.7	26.9	26.2	27.3	27.8	26.9	28.0	27.4	28.5	28.9
	4H	26.6	27.6	27.1	28.1	28.6	28.4	29.4	28.8	29.9	30.4
	6H	27.3	28.2	27.8	28.7	29.3	29.6	30.5	30.1	31.0	31.5
	8H	27.4	28.3	27.9	28.8	29.3	30.1	31.0	30.6	31.5	32.1
	12H	27.4	28.2	27.9	28.7	29.3	30.6	31.4	31.2	32.0	32.5
8H	4H	27.3	28.1	27.8	28.6	29.2	28.7	29.6	29.2	30.1	30.6
	6H	28.2	28.9	28.8	29.5	30.1	30.1	30.9	30.7	31.4	32.0
	8H	28.5	29.1	29.0	29.7	30.3	30.8	31.5	31.4	32.0	32.7
	12H	28.6	29.2	29.2	29.7	30.4	31.5	32.1	32.1	32.7	33.3
12H	4H	27.4	28.2	27.9	28.7	29.3	28.7	29.5	29.3	30.1	30.6
	6H	28.4	29.1	29.0	29.6	30.3	30.2	30.9	30.8	31.5	32.1
	8H	28.8	29.4	29.4	29.9	30.6	31.0	31.5	31.6	32.1	32.8
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.1					
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					
2.0H	+ 0.1 / - 0.3					+ 0.1 / - 0.2					

CIE Pub.117, 301.0 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -4.2)
Area: 0.012 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-14

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:


```

Range: 0 - 180DEG
Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

```

ISOCANDELA DIAGRAM

NAME: 2835 IP67	TYPE: 128LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

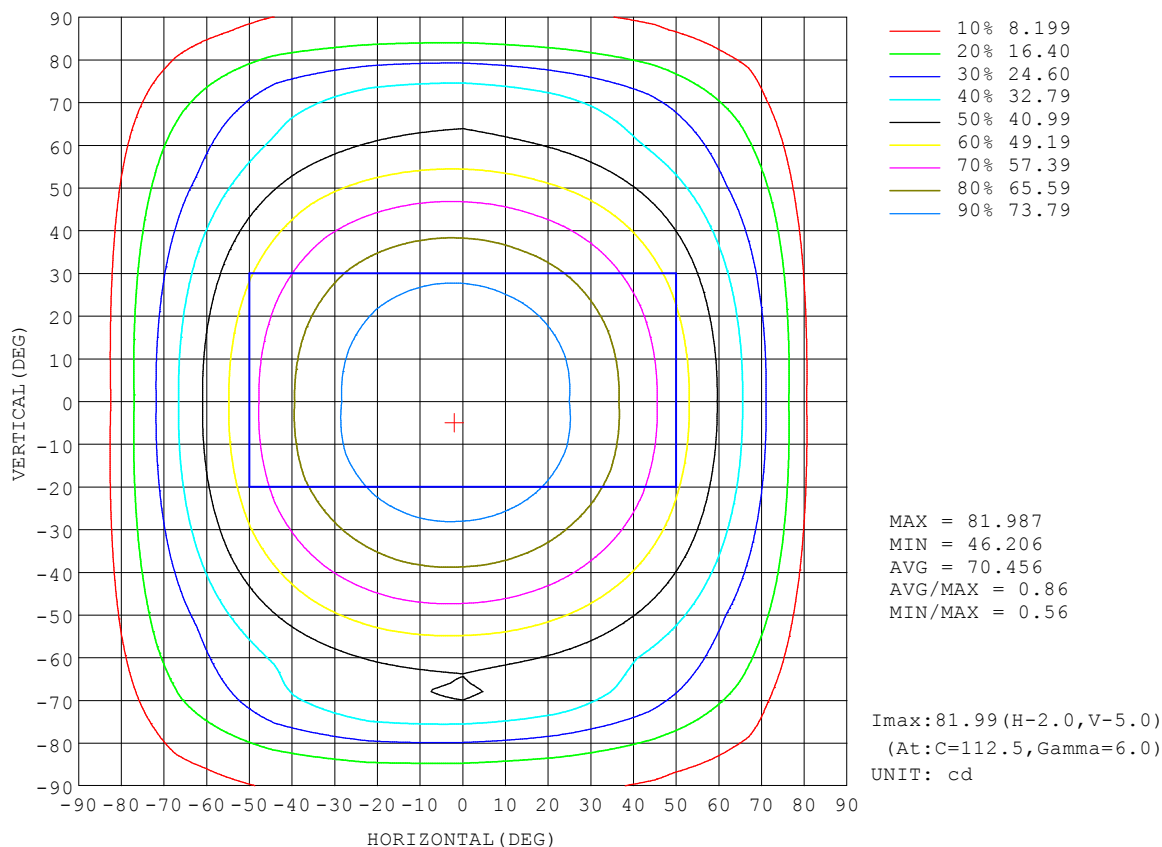


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-04-14

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

AAI Figure

NAME: 2835 IP67	TYPE: 128LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

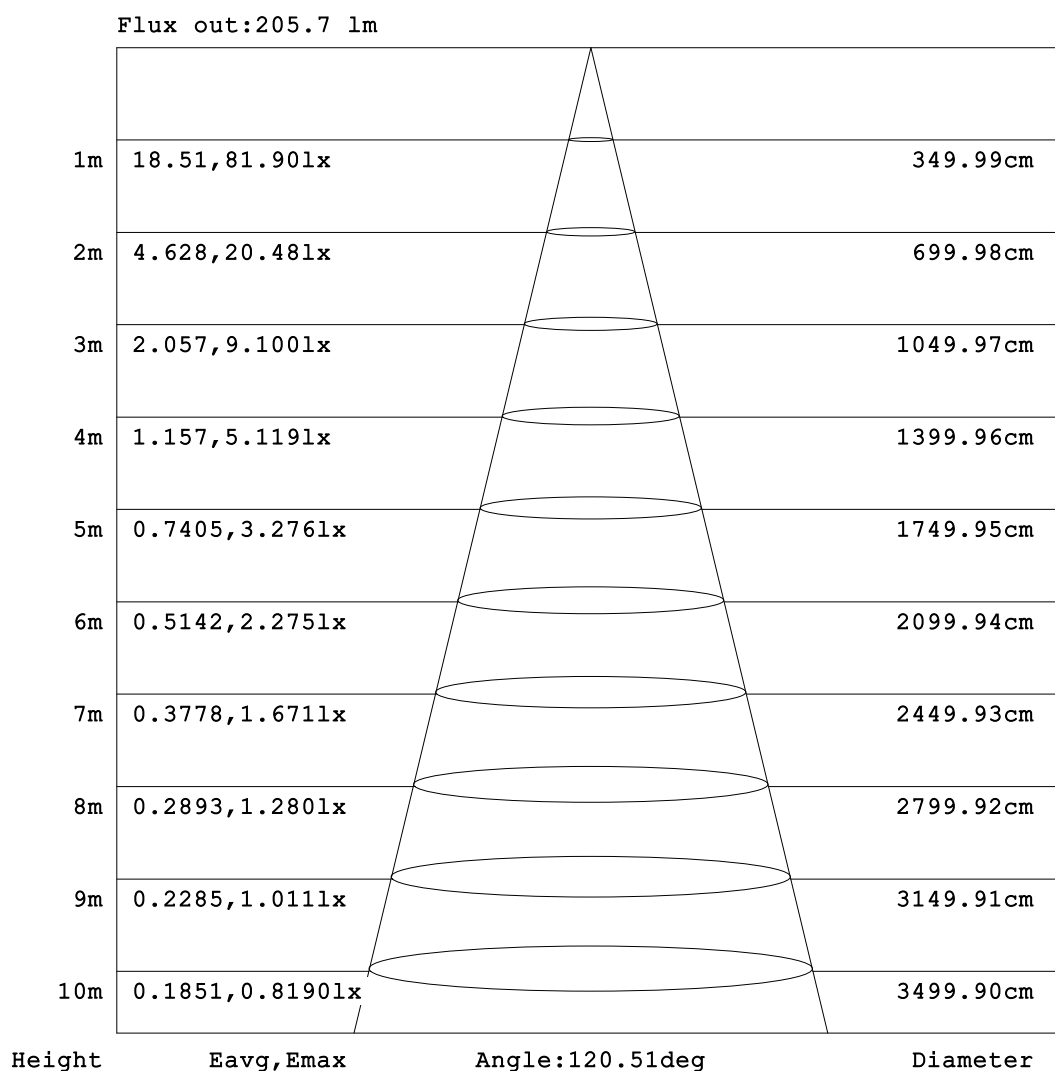


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-04-14

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity:65.0%
 Test Distance:5.749m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

NAME: 2835 IP67	TYPE: 128LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

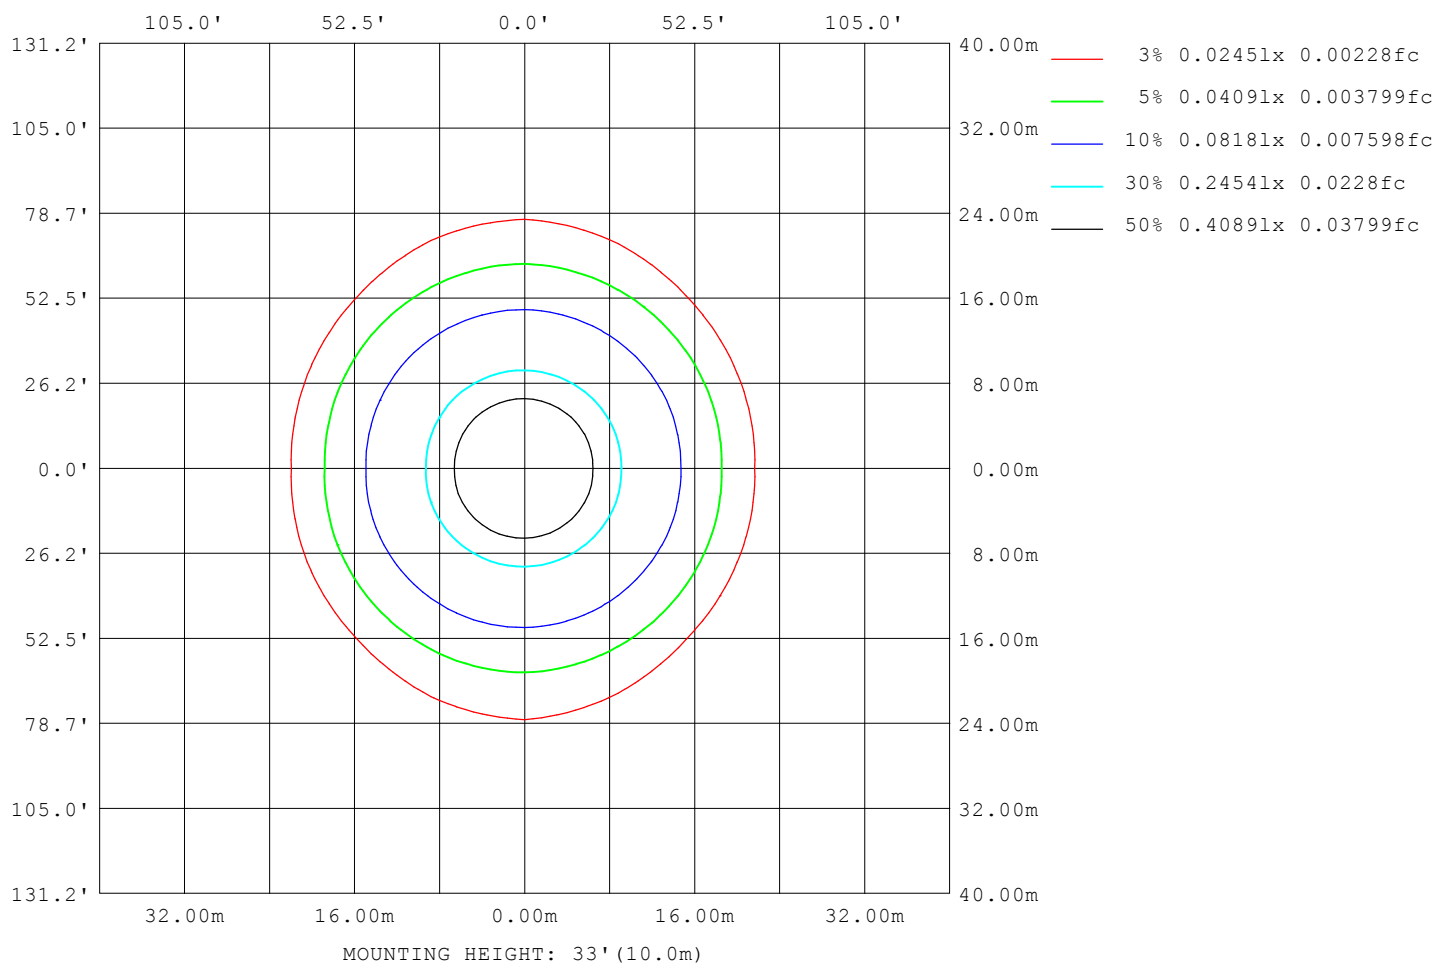

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-04-14

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

LED Avg.L Report

NAME: 2835 IP67	TYPE: 128LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	6783
L_0~180 (75) av	6129
L_0~180 (85) av	2174
L_90~270 (65) av	8055
L_90~270 (75) av	10605
L_90~270 (85) av	14788
L_45 (65) av	7268
L_45 (75) av	9439
L_45 (85) av	12614

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-04-14

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

Planar Illuminance Curve

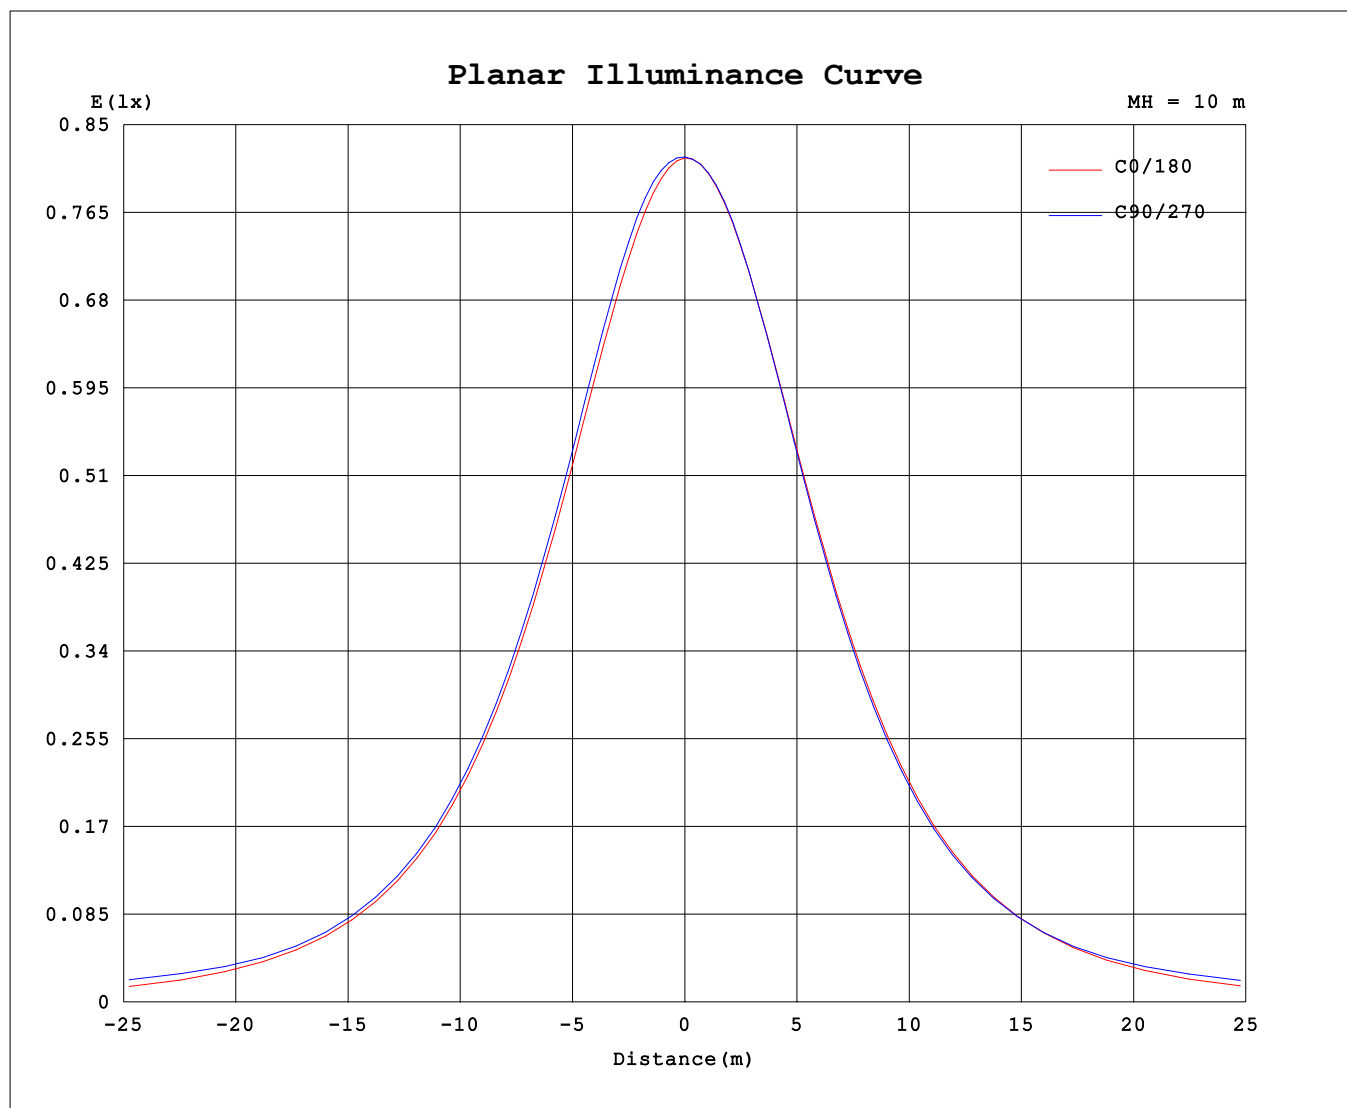

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-04-14

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: 2835 IP67	TYPE: 128LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	81.9	81.9	81.9	81.9	81.9	81.9	81.9	81.9	81.9	81.9	81.9	81.9	81.9	81.9	81.9	81.9			
5	81.5	81.6	81.7	81.8	81.9	81.9	81.9	81.9	81.9	81.8	81.8	81.8	81.7	81.6	81.5	81.5			
10	80.3	80.5	81.0	81.3	81.5	81.7	81.6	81.4	81.2	81.2	81.3	81.3	81.2	81.0	80.7	80.4			
15	79.0	79.4	80.0	80.4	80.6	80.9	80.9	80.6	80.3	80.4	80.6	80.5	80.3	80.0	79.7	79.3			
20	76.5	77.2	77.7	78.1	78.4	78.8	79.0	78.8	78.2	78.4	78.6	78.3	78.0	77.5	77.3	76.9			
25	74.4	75.2	75.6	76.0	76.3	76.9	77.2	77.1	76.3	76.7	76.8	76.4	76.0	75.5	75.2	74.9			
30	70.6	71.6	71.8	72.0	72.5	73.1	73.6	73.7	72.8	73.3	73.3	72.7	72.1	71.6	71.5	71.2			
35	67.7	68.7	68.8	69.1	69.5	70.3	70.8	71.0	70.0	70.5	70.5	69.7	69.1	68.5	68.5	68.3			
40	62.7	63.7	63.6	64.0	64.5	65.3	65.8	66.1	65.1	65.6	65.5	64.7	64.0	63.4	63.4	63.3			
45	59.0	59.9	59.9	60.2	60.7	61.6	62.1	62.4	61.3	61.9	61.8	60.9	60.1	59.5	59.6	59.5			
50	52.7	53.6	53.7	54.0	54.5	55.4	55.9	56.1	55.0	55.6	55.7	54.7	53.9	53.3	53.4	53.4			
55	48.1	49.0	49.1	49.6	50.1	51.0	51.4	51.4	50.2	51.0	51.2	50.3	49.6	48.9	49.0	48.8			
60	40.5	41.4	41.9	42.7	43.4	44.0	44.1	43.7	42.4	43.4	44.0	43.6	43.4	42.4	41.9	41.4			
65	35.0	36.1	37.0	38.9	40.9	40.1	39.0	38.2	36.7	38.0	39.1	40.3	40.9	39.2	37.2	36.1			
70	26.2	27.7	31.5	38.1	41.0	39.8	33.3	29.6	27.5	29.5	33.5	38.2	39.0	36.6	31.7	27.9			
75	20.1	22.5	29.5	33.6	35.6	36.1	32.1	24.1	21.1	24.2	31.0	33.7	33.7	31.7	28.7	22.8			
80	9.79	16.2	20.3	22.9	24.4	25.1	23.7	18.7	11.7	17.8	22.7	23.5	23.2	21.7	19.6	15.9			
85	0.32	10.3	13.7	16.2	17.5	17.9	16.4	12.7	6.05	11.8	15.5	16.4	16.4	15.1	13.3	9.97			
90	0.12	4.35	7.58	9.59	10.5	10.4	8.76	5.32	0.10	4.68	8.14	9.70	9.99	9.26	7.41	4.33			
95	0.17	3.84	6.82	8.41	8.95	8.69	7.23	4.27	0.14	3.72	6.72	8.18	8.47	8.06	6.65	3.75			
100	0.26	3.97	7.09	8.38	8.72	8.35	7.17	4.23	0.21	1.67	5.78	7.71	8.07	7.75	6.33	2.25			
105	0.33	3.90	7.12	8.35	8.63	8.27	7.18	4.11	0.27	0.42	3.32	7.04	7.63	7.17	5.16	0.68			
110	0.44	3.34	6.76	8.19	8.49	8.06	6.76	3.49	0.37	0.37	2.39	4.66	5.76	5.17	2.93	0.39			
115	0.51	3.04	6.61	8.02	8.28	7.83	6.52	3.11	0.43	0.42	1.04	2.74	4.58	3.95	1.40	0.44			
120	0.61	2.68	6.25	7.94	8.22	7.73	6.04	2.70	0.52	0.50	0.51	1.15	2.69	1.71	0.53	0.53			
125	0.67	2.51	6.17	7.89	8.20	7.67	5.91	2.56	0.57	0.55	0.56	0.60	0.89	0.63	0.58	0.58			
130	0.75	2.19	6.35	8.16	8.50	7.97	5.79	2.31	0.65	0.63	0.62	0.63	0.63	0.65	0.65	0.66			
135	0.80	1.92	6.59	8.52	8.94	8.20	5.86	2.15	0.70	0.68	0.67	0.67	0.67	0.68	0.69	0.71			
140	0.86	1.42	7.25	9.54	10.0	8.94	6.26	1.86	0.76	0.74	0.73	0.72	0.72	0.73	0.74	0.77			
145	0.89	0.98	7.37	10.5	11.1	9.88	6.41	1.42	0.79	0.77	0.76	0.76	0.75	0.76	0.78	0.80			
150	0.94	0.92	5.04	10.7	12.1	9.55	5.41	0.95	0.84	0.82	0.82	0.81	0.79	0.80	0.83	0.85			
155	0.97	0.95	2.79	8.00	10.1	7.52	3.65	0.93	0.87	0.86	0.85	0.84	0.82	0.84	0.87	0.89			
160	1.00	1.00	1.11	2.86	3.97	3.24	1.36	0.97	0.93	0.91	0.90	0.90	0.89	0.89	0.92	0.94			
165	1.03	1.03	1.01	1.38	1.81	1.50	1.02	1.00	0.96	0.95	0.94	0.94	0.94	0.93	0.96	0.98			
170	1.07	1.07	1.06	1.04	1.06	1.06	1.05	1.05	1.03	1.01	1.01	1.00	1.01	1.00	1.02	1.04			
175	1.11	1.10	1.10	1.08	1.10	1.09	1.09	1.10	1.07	1.06	1.06	1.05	1.06	1.05	1.07	1.09			
180	1.14	1.13	1.13	1.13	1.14	1.13	1.14	1.14	1.14	1.13	1.13	1.13	1.14	1.13	1.14	1.15			

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:

Test Date:2022-04-14

□ Range: 0 - 180DEG

□ Interval: 2.0DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450

Humidity:65.0%

Test Distance:5.749m [K=1.0000]

Remarks: