


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 104.59 lm/W
MODEL	2700K RA90 12MM 19.6W	I _{max} (cd)	110.5	S/MH (C0/180)	1.26	
NOMINAL POWER(W)	3.6	LOR (%)	100.0	S/MH (C90/270)	1.31	
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	385.90	□ UP, DN (C0-180)	5.6, 45.2	
NOMINAL FLUX(lm)	4.82373	CIE CLASS	DIRECT	□ UP, DN (C180-360)	2.3, 46.9	
LAMPS INSIDE	80	□ up (%)	7.9	CIBSE SHR NOM	1.50	
TEST VOLTAGE(V)	24	□ down (%)	92.1	CIBSE SHR MAX	1.50	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

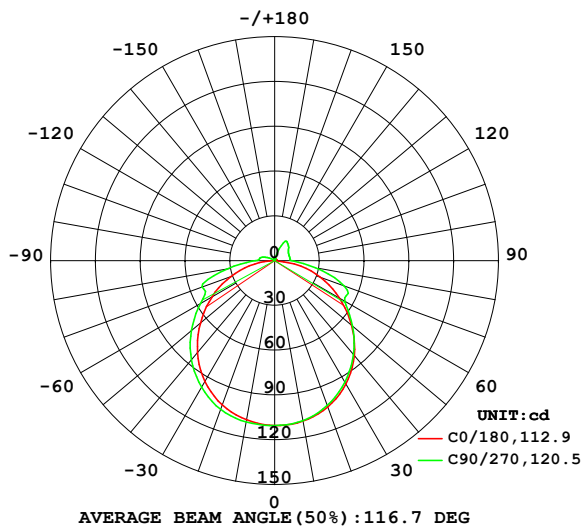

C0 PLANE ISOLUX DIAGRAM (UNIT: lx)

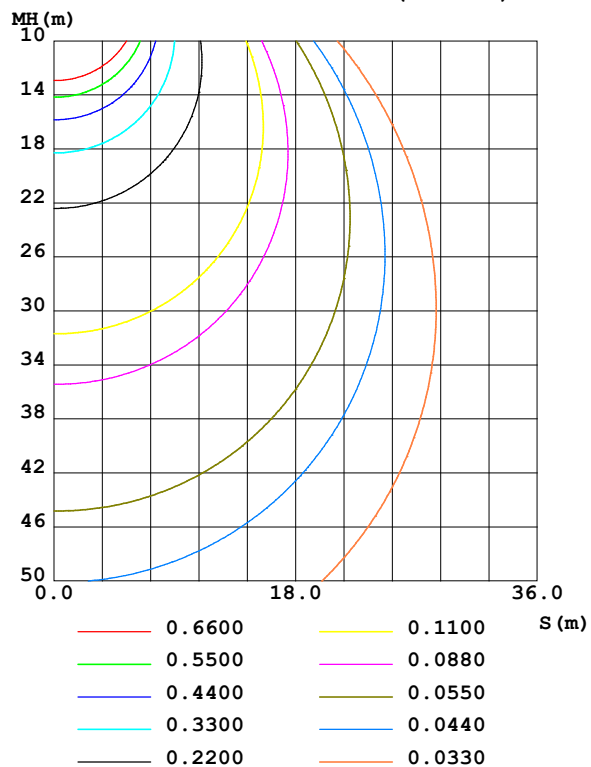

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-04-14

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	109.2	109.1	108.9	108.6	108.4	109.1	109.8	109.7	0- 10	10.48	10.48	2.72,2.72
20	104.3	104.0	103.3	103.1	102.8	104.9	106.0	105.9	10- 20	30.26	40.74	10.6,10.6
30	95.53	95.14	94.04	94.01	93.48	96.75	97.97	98.13	20- 30	46.30	87.04	22.6,22.6
40	83.05	82.88	82.18	81.64	80.45	84.70	86.78	86.63	30- 40	56.32	143.4	37.2,37.2
50	67.29	68.12	68.13	66.88	64.90	70.11	72.86	72.55	40- 50	59.06	202.4	52.5,52.5
60	50.05	52.12	54.34	51.04	48.47	53.98	57.36	56.29	50- 60	54.59	257.0	66.6,66.6
70	32.70	40.90	49.60	39.94	31.39	38.95	51.97	40.82	60- 70	46.11	303.1	78.5,78.5
80	13.48	26.66	27.81	24.36	13.85	27.18	32.35	30.19	70- 80	35.68	338.8	87.8,87.8
90	0.1545	9.465	11.60	9.059	0.1428	9.876	13.12	10.89	80- 90	16.69	355.5	92.1,92.1
100	0.3089	8.591	10.44	8.546	0.2808	6.984	10.16	7.754	90-100	7.898	363.4	94.2,94.2
110	0.5158	8.032	10.29	8.274	0.4687	2.895	7.004	3.241	100-110	6.207	369.6	95.8,95.8
120	0.7250	8.376	10.85	8.763	0.6660	0.6590	2.935	0.6469	110-120	4.525	374.1	96.9,96.9
130	0.9129	9.016	12.28	9.154	0.8515	0.8017	0.8015	0.7991	120-130	3.680	377.8	97.9,97.9
140	1.077	8.820	14.13	8.876	1.013	0.9492	0.9251	0.9346	130-140	3.363	381.2	98.8,98.8
150	1.215	6.679	15.31	6.311	1.144	1.082	1.027	1.075	140-150	2.737	383.9	99.5,99.5
160	1.329	1.421	5.615	1.524	1.263	1.211	1.180	1.208	150-160	1.438	385.3	99.9,99.9
170	1.443	1.441	1.450	1.429	1.401	1.363	1.346	1.363	160-170	0.4183	385.8	100,100
180	1.548	1.532	1.541	1.538	1.546	1.532	1.538	1.538	170-180	0.1387	385.9	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 178.95 lm

%lum = 46.4%

%lamp = 46.4%

Conical surface Flux(120deg): 257.01 lm

%lum = 66.6%


%lamp = 66.6%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-14

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

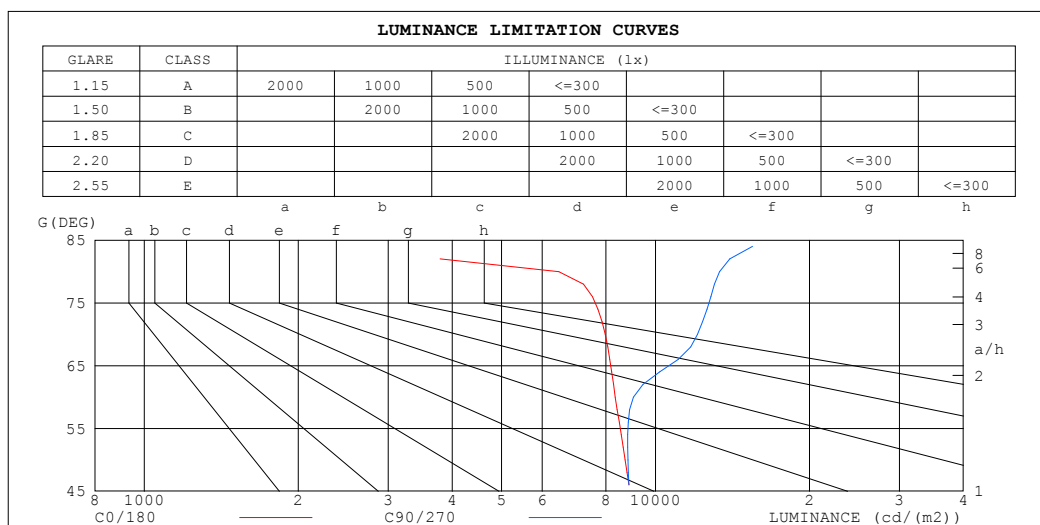

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	408	18559
80	6470	13345
75	8214	13440
70	7969	12085
65	8517	10571
60	8343	9057
55	8780	9043
50	8724	8834
45	9085	9047


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-04-14

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.17	1.17	1.17	1.14	1.14	1.14	1.07	1.07	1.07	1.01	1.01	1.01	.95	.95	.95	.92
1.0	.00	.95	.91	.97	.93	.89	.91	.88	.84	.86	.83	.80	.81	.79	.77	.74
2.0	.86	.79	.73	.84	.77	.71	.79	.73	.68	.74	.70	.65	.70	.66	.63	.60
3.0	.75	.66	.60	.73	.65	.59	.69	.62	.56	.65	.59	.54	.61	.57	.53	.50
4.0	.66	.57	.50	.64	.56	.49	.61	.54	.48	.58	.51	.46	.54	.49	.45	.42
5.0	.59	.50	.43	.57	.49	.42	.54	.47	.41	.52	.45	.40	.49	.43	.39	.36
6.0	.53	.44	.37	.52	.43	.37	.49	.41	.36	.47	.40	.35	.44	.38	.34	.32
7.0	.48	.39	.33	.47	.38	.32	.44	.37	.32	.42	.36	.31	.40	.34	.30	.28
8.0	.44	.35	.29	.43	.34	.29	.41	.33	.28	.39	.32	.27	.37	.31	.27	.25
9.0	.40	.32	.26	.39	.31	.26	.37	.30	.25	.36	.29	.25	.34	.28	.24	.22
10.0	.37	.29	.24	.36	.28	.23	.35	.28	.23	.33	.27	.22	.32	.26	.22	.20

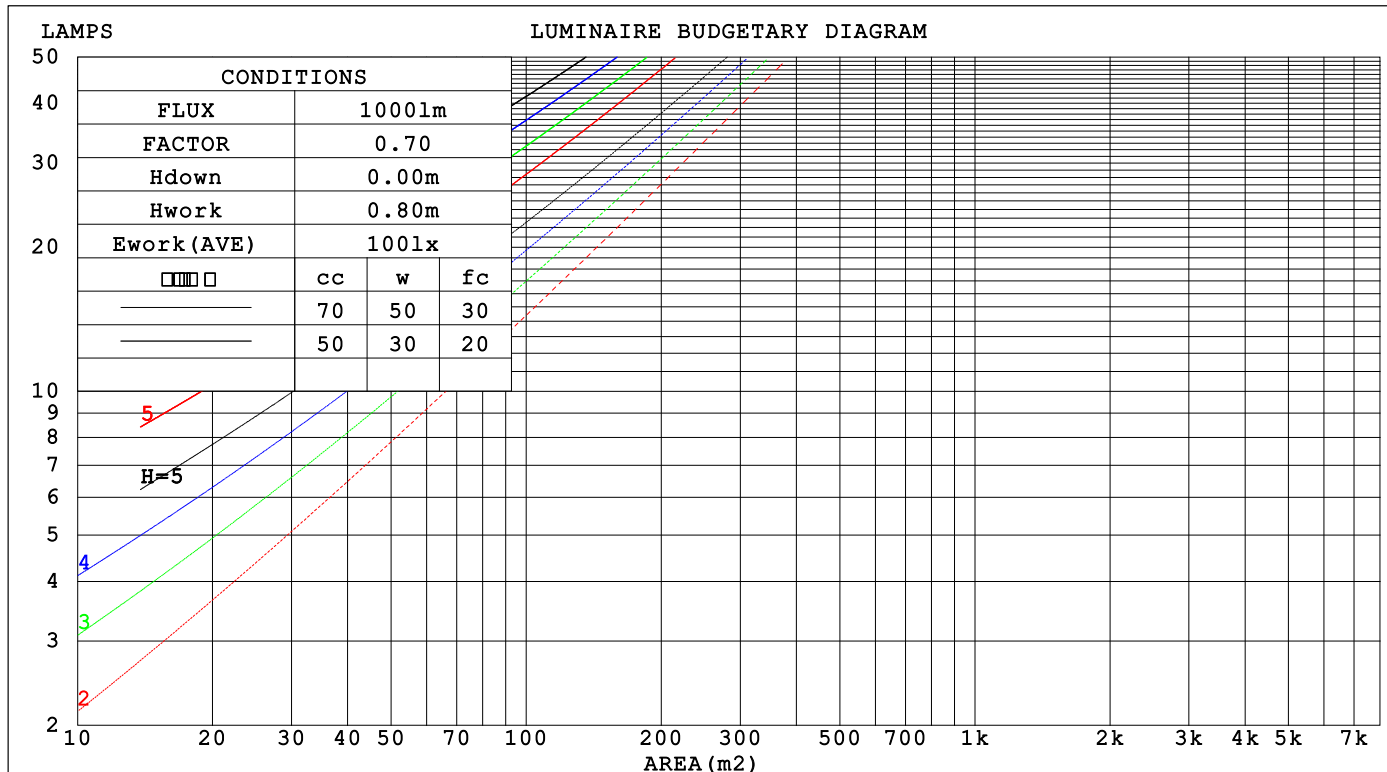

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-14

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0	
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.348	.198	.063	.339	.193	.061	.321	.184	.059	.304	.176	.056	.289	.168	.054		
2.0	.314	.172	.053	.306	.168	.052	.290	.161	.050	.275	.154	.048	.261	.148	.047		
3.0	.285	.151	.045	.277	.148	.045	.263	.142	.043	.249	.137	.042	.237	.131	.041		
4.0	.259	.135	.040	.252	.132	.039	.239	.127	.038	.227	.122	.037	.216	.117	.036		
5.0	.237	.121	.035	.231	.119	.035	.219	.114	.034	.209	.110	.033	.199	.106	.032		
6.0	.219	.110	.031	.213	.108	.031	.203	.104	.030	.193	.100	.029	.184	.097	.029		
7.0	.202	.100	.028	.197	.098	.028	.188	.095	.027	.179	.092	.027	.171	.089	.026		
8.0	.188	.092	.026	.184	.090	.026	.175	.087	.025	.167	.085	.024	.159	.082	.024		
9.0	.176	.085	.024	.172	.084	.023	.164	.081	.023	.156	.078	.022	.149	.076	.022		
10.0	.165	.079	.022	.161	.078	.022	.154	.075	.021	.147	.073	.021	.141	.071	.020		

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0	
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.251	.251	.251	.214	.214	.214	.146	.146	.146	.084	.084	.084	.027	.027	.027		
1.0	.243	.216	.192	.208	.186	.165	.143	.128	.114	.082	.074	.066	.026	.024	.021		
2.0	.236	.193	.156	.202	.166	.135	.139	.115	.094	.080	.067	.055	.026	.022	.018		
3.0	.229	.176	.133	.196	.152	.116	.135	.105	.081	.078	.061	.048	.025	.020	.016		
4.0	.221	.163	.118	.189	.141	.103	.130	.098	.072	.075	.057	.043	.024	.019	.014		
5.0	.213	.153	.108	.183	.132	.094	.126	.092	.066	.073	.054	.039	.024	.018	.013		
6.0	.206	.144	.100	.177	.125	.087	.122	.088	.062	.071	.052	.037	.023	.017	.012		
7.0	.199	.138	.095	.171	.119	.083	.118	.084	.059	.069	.049	.035	.022	.016	.012		
8.0	.192	.132	.091	.165	.114	.079	.115	.080	.056	.067	.047	.033	.022	.016	.011		
9.0	.186	.127	.087	.160	.110	.076	.111	.078	.054	.065	.046	.032	.021	.015	.011		
10.0	.180	.123	.085	.155	.107	.074	.108	.075	.052	.063	.044	.031	.020	.015	.010		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-14

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME: 2835 IP67					TYPE: 2835 160LED 24V			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.:					SUR.: 0.012*0.5			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	2H	23.0	24.4	23.3	24.8	25.1	23.3	24.7	23.7	25.1	25.5
	3H	24.6	25.9	25.0	26.3	26.7	25.9	27.3	26.3	27.7	28.1
	4H	25.3	26.6	25.7	27.0	27.4	27.1	28.4	27.5	28.8	29.2
	6H	25.9	27.1	26.3	27.5	27.9	28.1	29.3	28.5	29.7	30.1
	8H	25.9	27.1	26.4	27.5	28.0	28.4	29.6	28.9	30.0	30.5
	12H	25.9	27.0	26.3	27.4	27.9	28.8	29.9	29.3	30.4	30.8
4H	2H	23.7	25.0	24.1	25.4	25.8	23.9	25.2	24.4	25.6	26.0
	3H	25.5	26.7	26.0	27.1	27.6	26.8	27.9	27.3	28.4	28.9
	4H	26.4	27.5	26.9	27.9	28.4	28.2	29.2	28.7	29.7	30.2
	6H	27.2	28.2	27.7	28.6	29.2	29.3	30.2	29.8	30.7	31.2
	8H	27.4	28.2	27.9	28.7	29.3	29.7	30.6	30.3	31.1	31.7
	12H	27.3	28.1	27.9	28.7	29.2	30.2	31.0	30.7	31.5	32.1
8H	4H	27.1	28.0	27.7	28.5	29.1	28.5	29.4	29.1	29.9	30.5
	6H	28.2	28.9	28.7	29.5	30.0	29.9	30.6	30.4	31.1	31.7
	8H	28.5	29.1	29.1	29.7	30.3	30.5	31.1	31.1	31.7	32.3
	12H	28.6	29.2	29.2	29.8	30.4	31.1	31.6	31.7	32.2	32.9
12H	4H	27.2	28.0	27.8	28.6	29.1	28.6	29.4	29.1	29.9	30.5
	6H	28.4	29.1	29.0	29.6	30.2	30.0	30.6	30.6	31.2	31.8
	8H	28.8	29.4	29.4	30.0	30.6	30.7	31.2	31.3	31.8	32.4
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H		+ 0.1 / - 0.2					+ 0.1 / - 0.1				
1.5H		+ 0.1 / - 0.2					+ 0.1 / - 0.2				
2.0H		+ 0.1 / - 0.2					+ 0.1 / - 0.2				

CIE Pub.117, 385.9 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -3.3)
Area: 0.012 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-14

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:


```

Range: 0 - 180DEG
Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

```

ISOCANDELA DIAGRAM

NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

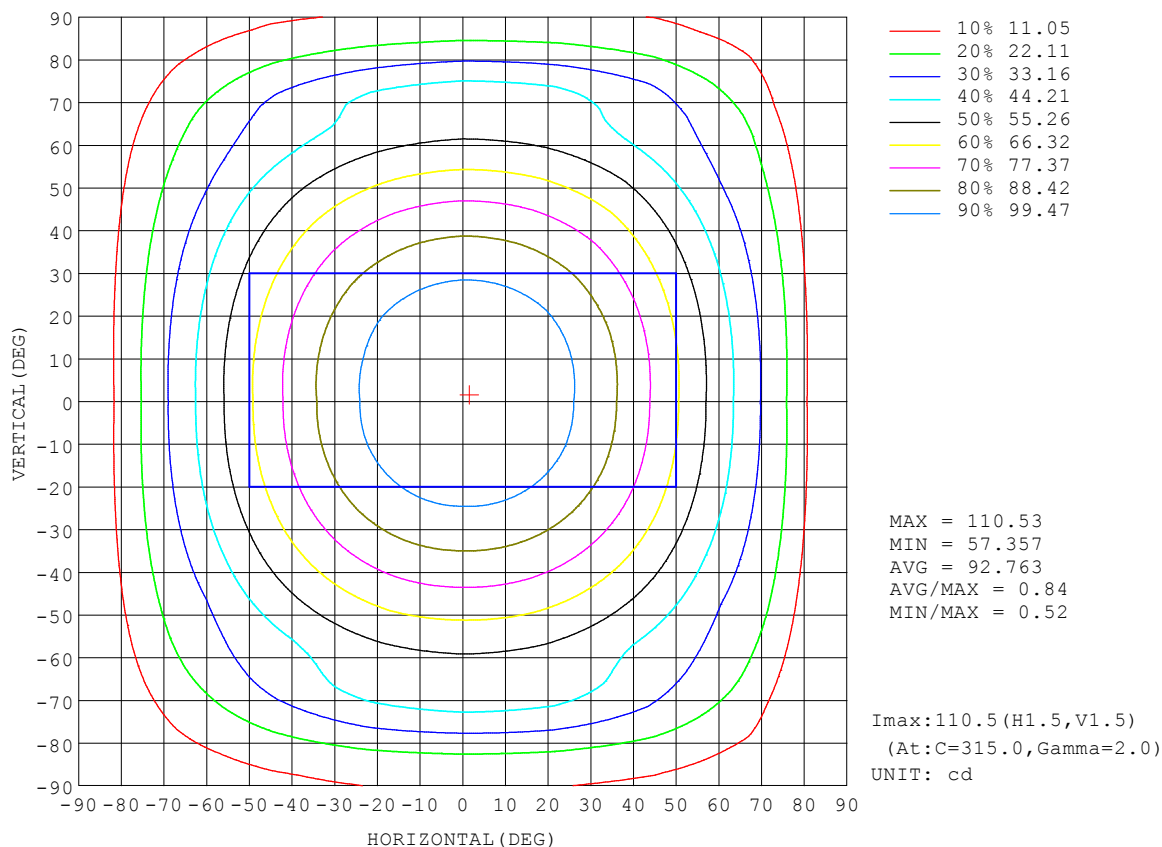


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-04-14

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

AAI Figure

NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

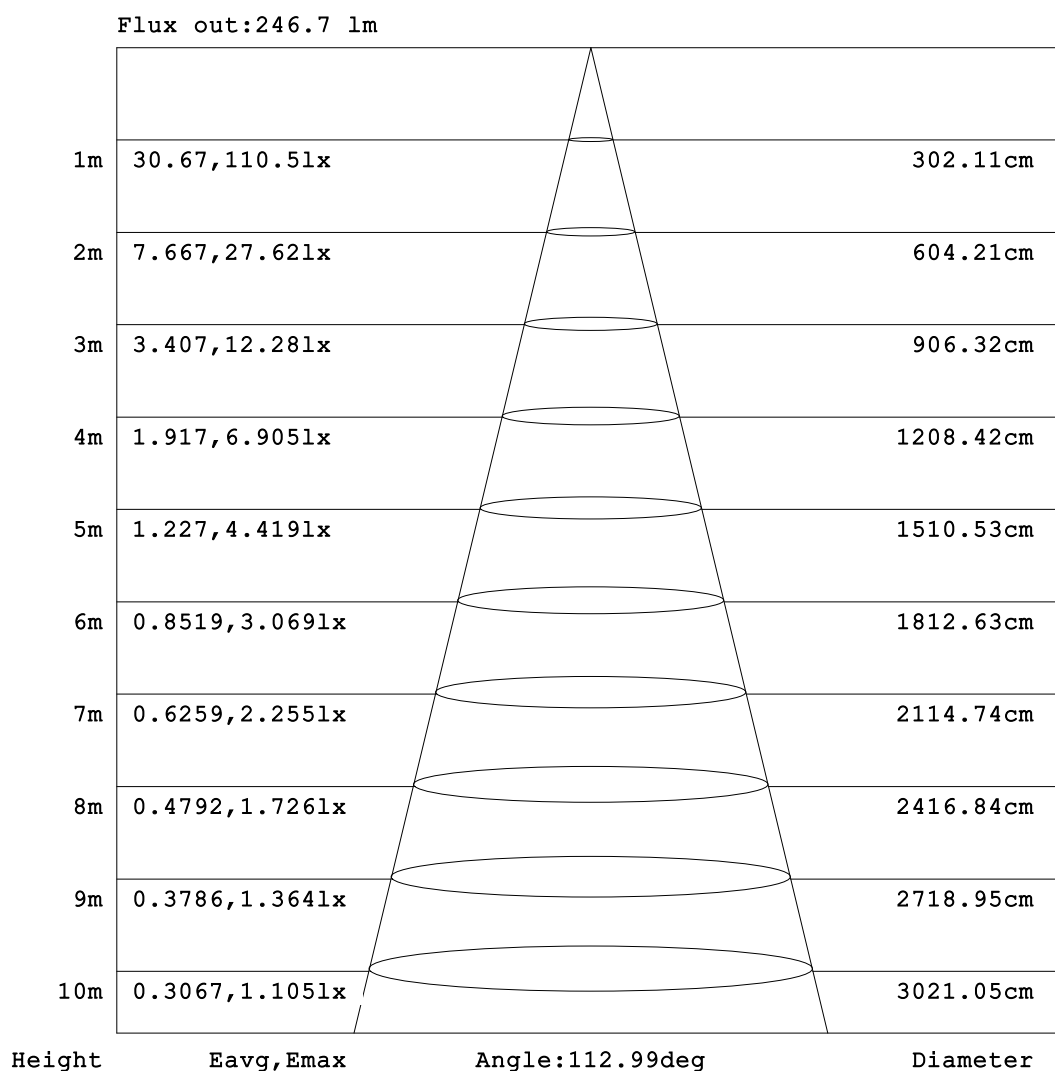


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-14

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

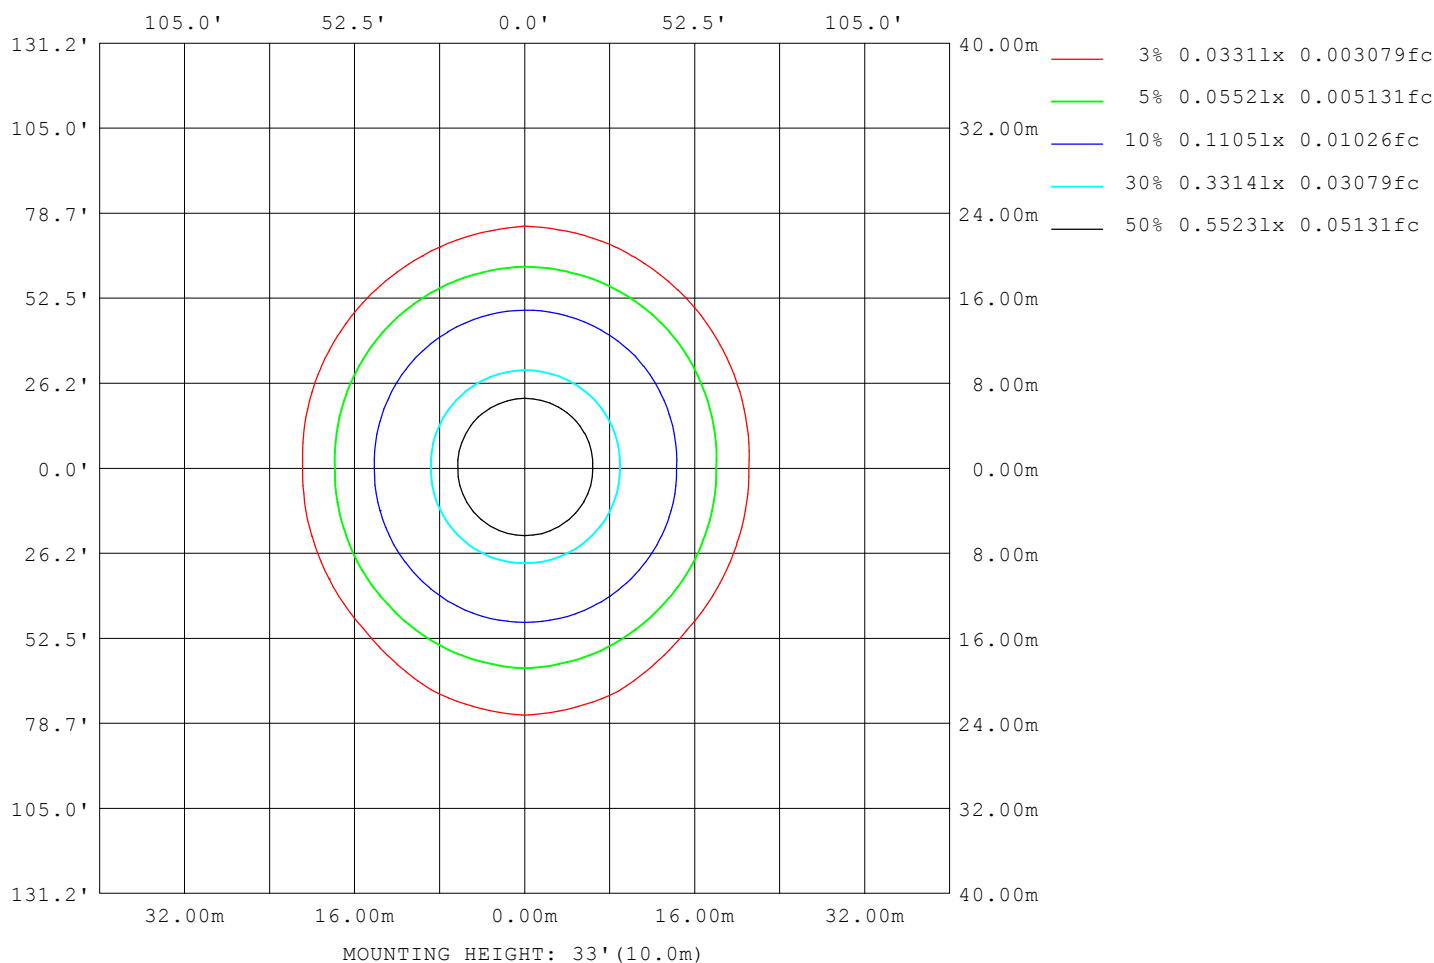

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-14

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

LED Avg.L Report

NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	8037
L_0~180 (75) av	7454
L_0~180 (85) av	2560
L_90~270 (65) av	10377
L_90~270 (75) av	13502
L_90~270 (85) av	18496
L_45 (65) av	8966
L_45 (75) av	11676
L_45 (85) av	15616

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-04-14

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

Planar Illuminance Curve

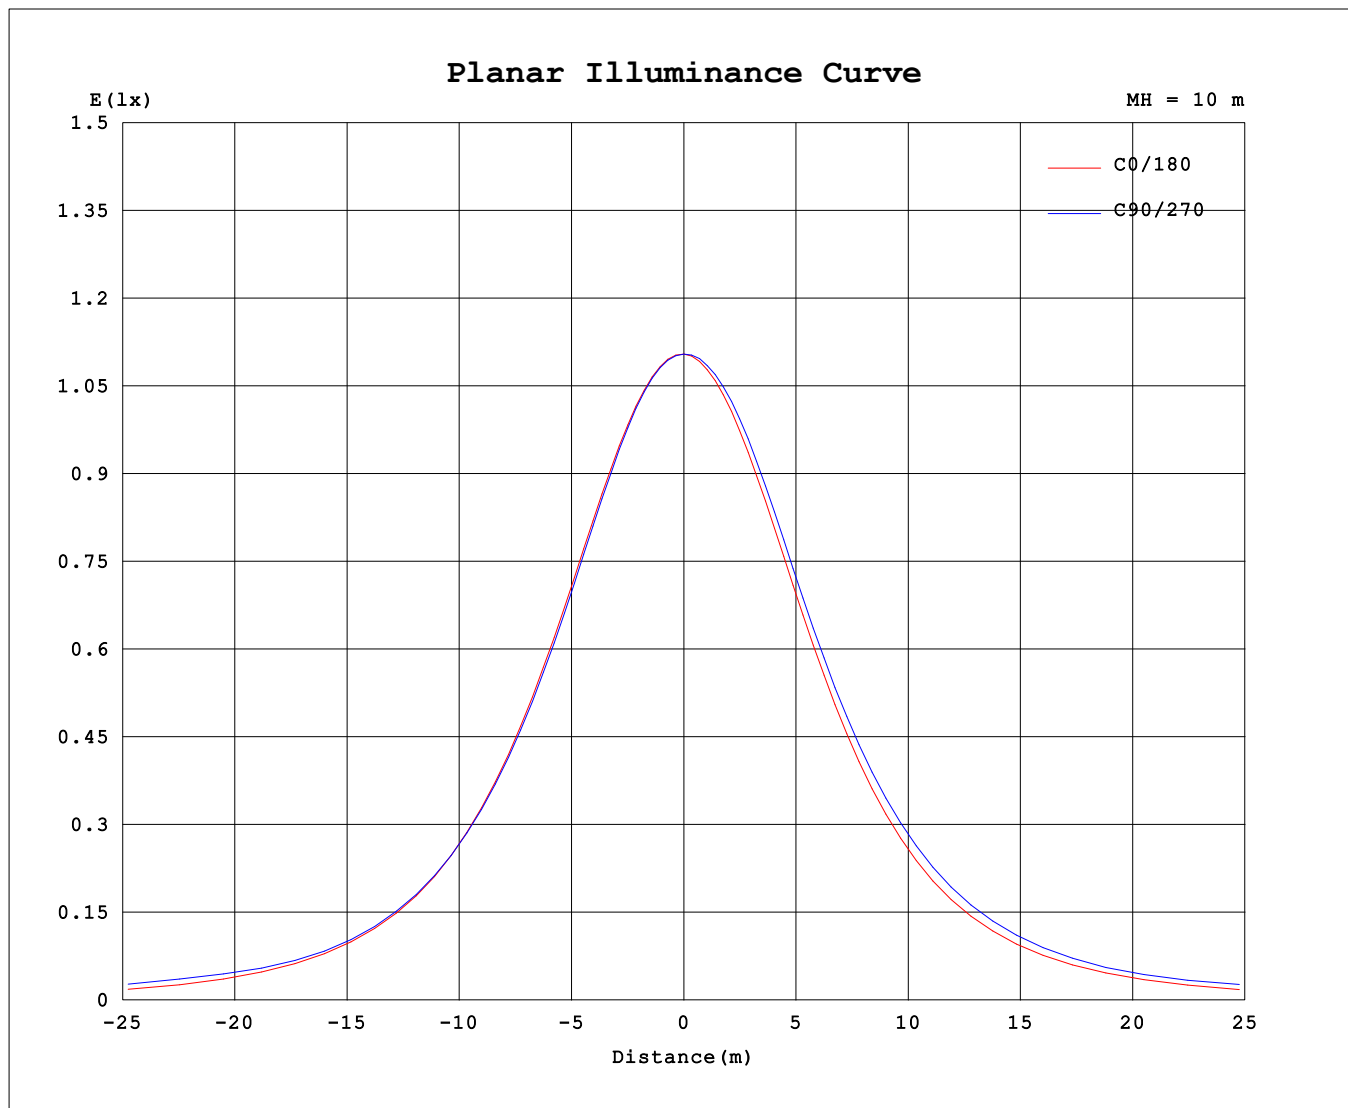

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-04-14

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	110	110	110	110	110	110	110	110	110	110	110	110	110	110	110	110			
5	110	110	110	110	110	110	110	110	110	110	110	110	110	110	110	110			
10	109	109	109	109	109	109	109	108	108	109	109	110	110	110	110	109			
15	108	108	108	107	107	107	107	107	107	107	108	108	109	109	109	108			
20	104	104	104	104	103	103	103	103	103	104	105	106	106	106	106	105			
25	101	101	101	100	100	100.0	99.9	99.8	99.5	101	102	103	103	103	103	102			
30	95.5	95.7	95.1	94.5	94.0	94.1	94.0	93.8	93.5	95.0	96.8	97.4	98.0	98.1	98.1	97.1			
35	91.0	91.1	90.6	90.0	89.6	89.6	89.4	89.1	88.7	90.5	92.4	93.1	93.8	93.9	93.9	92.8			
40	83.0	83.2	82.9	82.6	82.2	82.1	81.6	81.0	80.4	82.7	84.7	86.0	86.8	86.9	86.6	85.2			
45	77.1	77.4	77.2	77.1	76.8	76.7	76.0	75.1	74.4	76.8	79.1	80.6	81.5	81.6	81.3	79.5			
50	67.3	67.9	68.1	68.5	68.1	68.0	66.9	65.7	64.9	67.4	70.1	71.9	72.9	73.0	72.5	70.0			
55	60.4	61.1	61.8	62.5	62.2	62.0	60.6	59.2	58.4	60.9	63.7	65.7	66.7	66.9	66.2	63.3			
60	50.1	50.8	52.1	53.8	54.3	53.3	51.0	49.4	48.5	51.1	54.0	56.1	57.4	57.3	56.3	53.0			
65	43.2	44.0	45.9	50.7	53.6	50.0	44.8	42.8	41.8	44.5	47.6	50.1	52.1	51.4	49.6	46.2			
70	32.7	34.0	40.9	48.9	49.6	47.5	39.9	32.9	31.4	34.6	38.9	47.3	52.0	49.1	40.8	36.1			
75	25.5	28.2	37.6	41.6	41.7	40.1	36.2	27.3	24.4	28.2	36.5	43.7	46.6	46.1	39.1	29.5			
80	13.5	21.5	26.7	27.9	27.8	27.0	24.4	20.0	13.9	21.0	27.2	30.3	32.4	32.2	30.2	23.2			
85	0.43	13.9	17.4	19.2	19.4	18.6	16.0	12.5	7.20	13.8	18.6	21.4	23.1	22.9	20.7	15.6			
90	0.15	5.62	9.46	11.3	11.6	11.1	9.06	5.54	0.14	5.64	9.88	12.1	13.1	12.7	10.9	6.47			
95	0.20	4.79	8.49	10.1	10.4	10.1	8.48	4.99	0.19	4.44	8.30	10.1	10.7	10.3	8.69	4.97			
100	0.31	4.73	8.59	10.0	10.4	10.1	8.55	4.92	0.28	1.94	6.98	9.64	10.2	9.71	7.75	2.57			
105	0.39	4.51	8.46	10.0	10.5	10.1	8.51	4.88	0.35	0.45	3.98	8.60	9.34	8.56	6.03	0.62			
110	0.52	4.29	8.03	9.74	10.3	9.90	8.27	4.69	0.47	0.47	2.89	5.79	7.00	6.03	3.24	0.46			
115	0.60	4.05	8.04	9.85	10.4	10.0	8.40	4.55	0.55	0.53	1.10	3.51	5.59	4.56	1.27	0.52			
120	0.73	3.75	8.38	10.3	10.9	10.5	8.76	4.21	0.67	0.64	0.66	1.28	2.94	1.57	0.65	0.62			
125	0.80	3.52	8.59	10.6	11.3	10.8	8.91	4.04	0.75	0.71	0.72	0.73	0.89	0.73	0.71	0.69			
130	0.91	3.05	9.02	11.6	12.3	11.8	9.15	3.59	0.85	0.81	0.80	0.81	0.80	0.80	0.80	0.79			
135	0.98	2.61	9.01	12.2	13.2	12.3	9.01	3.26	0.92	0.88	0.87	0.86	0.85	0.86	0.85	0.86			
140	1.08	1.52	8.82	12.9	14.1	12.9	8.88	2.41	1.01	0.97	0.95	0.94	0.93	0.93	0.93	0.96			
145	1.14	1.23	8.66	13.4	14.8	13.3	8.41	1.68	1.07	1.03	1.00	0.98	0.97	0.97	0.99	1.02			
150	1.21	1.23	6.68	13.2	15.3	11.8	6.31	1.24	1.14	1.11	1.08	1.06	1.03	1.04	1.07	1.10			
155	1.26	1.27	3.44	10.8	13.3	8.88	3.77	1.28	1.19	1.16	1.13	1.12	1.08	1.09	1.13	1.16			
160	1.33	1.34	1.42	3.62	5.62	3.48	1.52	1.34	1.26	1.23	1.21	1.20	1.18	1.17	1.21	1.24			
165	1.37	1.38	1.37	1.57	2.06	1.64	1.37	1.37	1.32	1.29	1.27	1.26	1.25	1.23	1.27	1.30			
170	1.44	1.45	1.44	1.43	1.45	1.43	1.43	1.44	1.40	1.38	1.36	1.35	1.35	1.34	1.36	1.40			
175	1.49	1.50	1.49	1.48	1.49	1.48	1.48	1.49	1.46	1.45	1.43	1.42	1.42	1.42	1.44	1.46			
180	1.55	1.54	1.53	1.53	1.54	1.53	1.54	1.55	1.55	1.54	1.53	1.53	1.54	1.53	1.54	1.55			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-04-14

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks: