


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 118.70 lm/W
MODEL	6500K RA90 12MM 14.4W	Imax (cd)	121.5	S/MH(C0/180)	1.29	
NOMINAL POWER(W)	3.6	LOR(%)	100.0	S/MH(C90/270)	1.33	
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	438.07	<input type="checkbox"/> UP,DN(C0-180)	5.9,44.8	
NOMINAL FLUX(lm)	5.47581	CIE CLASS	DIRECT	<input type="checkbox"/> UP,DN(C180-360)	2.5,46.8	
LAMPS INSIDE	80	<input type="checkbox"/> up (%)	8.4	CIBSE SHR NOM	1.50	
TEST VOLTAGE(V)	24	<input type="checkbox"/> down (%)	91.6	CIBSE SHR MAX	1.50	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

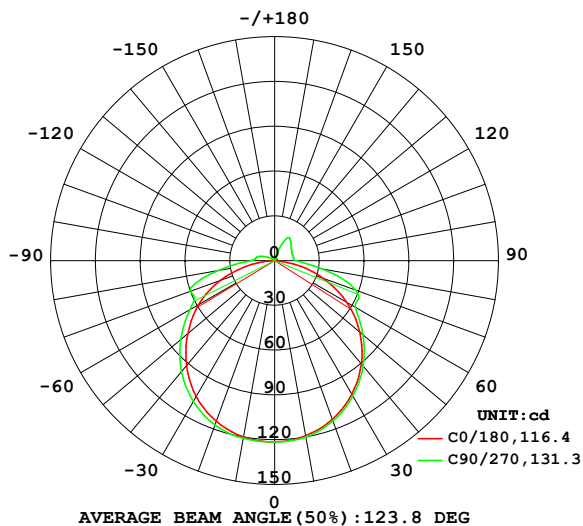

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

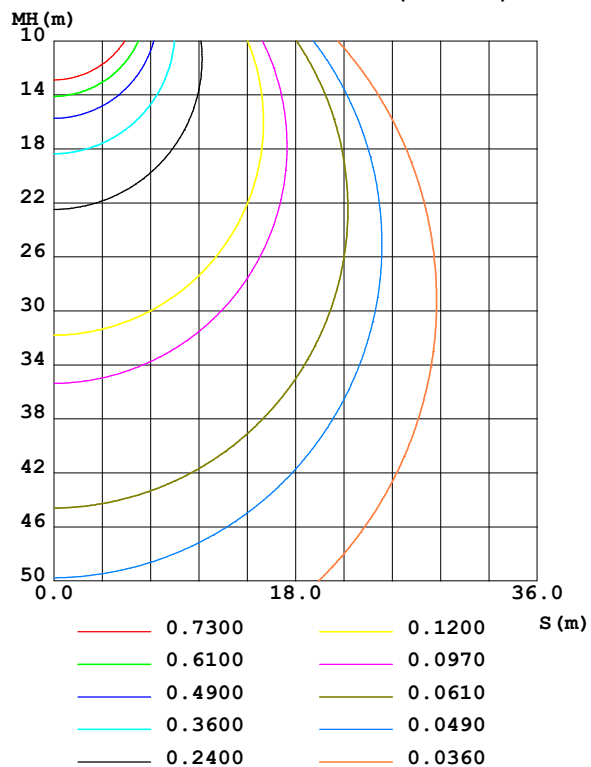

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-04-14

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
 Humidity:65.0%  
 Test Distance:5.749m [K=1.0000]  
 Remarks:

## ZONAL FLUX DIAGRAM

### ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	zone	total	%lum, lamp
10	119.1	119.5	120.0	120.2	120.0	120.6	120.9	120.1	0- 10	11.53	11.53	2.63,2.63
20	113.1	113.7	114.4	115.0	114.6	116.7	117.2	115.8	10- 20	33.34	44.87	10.2,10.2
30	103.4	104.1	104.8	105.8	105.1	108.5	108.9	107.4	20- 30	51.19	96.07	21.9,21.9
40	90.38	91.05	92.27	92.83	91.87	96.17	97.08	95.11	30- 40	62.68	158.7	36.2,36.2
50	74.45	75.40	77.28	77.01	76.01	80.97	82.09	79.92	40- 50	66.37	225.1	51.4,51.4
60	55.89	57.94	62.48	59.94	58.65	63.75	65.53	62.37	50- 60	62.21	287.3	65.6,65.6
70	34.60	44.75	57.91	49.46	38.66	48.72	60.27	45.12	60- 70	53.26	340.6	77.7,77.7
80	12.66	27.74	32.46	30.56	15.96	34.16	38.67	32.14	70- 80	41.61	382.2	87.2,87.2
90	0.1831	10.80	14.10	11.32	0.1572	12.59	16.18	12.08	80- 90	19.21	401.4	91.6,91.6
100	0.3805	10.40	12.92	10.48	0.3048	8.650	12.70	9.448	90-100	9.668	411.1	93.8,93.8
110	0.6303	9.780	12.66	10.13	0.5119	3.545	8.630	3.860	100-110	7.608	418.7	95.6,95.6
120	0.8588	10.09	13.15	10.53	0.7403	0.7327	3.461	0.7586	110-120	5.485	424.2	96.8,96.8
130	1.066	11.10	14.68	10.61	0.9426	0.8873	0.9083	0.9227	120-130	4.400	428.6	97.8,97.8
140	1.237	12.35	16.96	9.893	1.109	1.047	1.039	1.070	130-140	4.034	432.6	98.8,98.8
150	1.375	7.703	17.85	6.760	1.249	1.194	1.148	1.210	140-150	3.256	435.9	99.5,99.5
160	1.490	1.542	5.777	1.636	1.383	1.330	1.308	1.353	150-160	1.590	437.5	99.9,99.9
170	1.611	1.598	1.602	1.574	1.542	1.501	1.491	1.522	160-170	0.4582	437.9	100,100
180	1.711	1.693	1.700	1.705	1.711	1.693	1.700	1.705	170-180	0.1534	438.1	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 198.64 lm

%lum = 45.3%

%lamp = 45.3%

Conical surface Flux(120deg): 287.32 lm

%lum = 65.6%


%lamp = 65.6%

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-04-14

□ Range: 0 - 180DEG  
□ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:

## LUMINANCE LIMITATION CURVES

NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

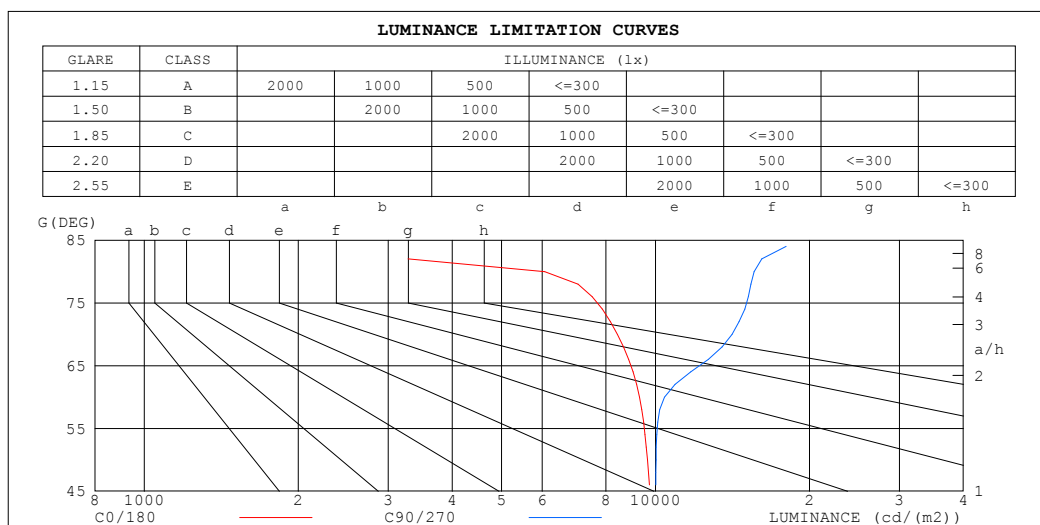

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	437	21588
80	6073	15584
75	8382	15918
70	8424	14114
65	9377	12158
60	9308	10417
55	9775	10302
50	9645	10022
45	9931	10196


C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2022-04-14

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity: 65.0%  
Test Distance: 5.749m [K=1.0000]  
Remarks:

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.17	1.17	1.17	1.13	1.13	1.13	1.06	1.06	1.06	1.00	1.00	1.00	.94	.94	.94	.92
1.0	.00	.95	.90	.97	.92	.88	.91	.87	.84	.85	.82	.80	.80	.78	.76	.73
2.0	.86	.78	.72	.83	.76	.71	.78	.73	.68	.74	.69	.65	.69	.66	.62	.59
3.0	.75	.66	.59	.73	.64	.58	.68	.61	.56	.64	.59	.54	.61	.56	.52	.49
4.0	.66	.57	.50	.64	.55	.49	.60	.53	.47	.57	.51	.46	.54	.48	.44	.42
5.0	.59	.49	.42	.57	.48	.42	.54	.46	.40	.51	.44	.39	.48	.43	.38	.36
6.0	.53	.43	.37	.51	.42	.36	.48	.41	.35	.46	.39	.34	.44	.38	.33	.31
7.0	.48	.39	.32	.46	.38	.32	.44	.36	.31	.42	.35	.30	.40	.34	.29	.27
8.0	.43	.35	.29	.42	.34	.28	.40	.33	.28	.38	.32	.27	.36	.31	.26	.24
9.0	.40	.31	.26	.39	.31	.25	.37	.30	.25	.35	.29	.24	.34	.28	.24	.22
10.0	.37	.28	.23	.36	.28	.23	.34	.27	.22	.33	.26	.22	.31	.26	.21	.20

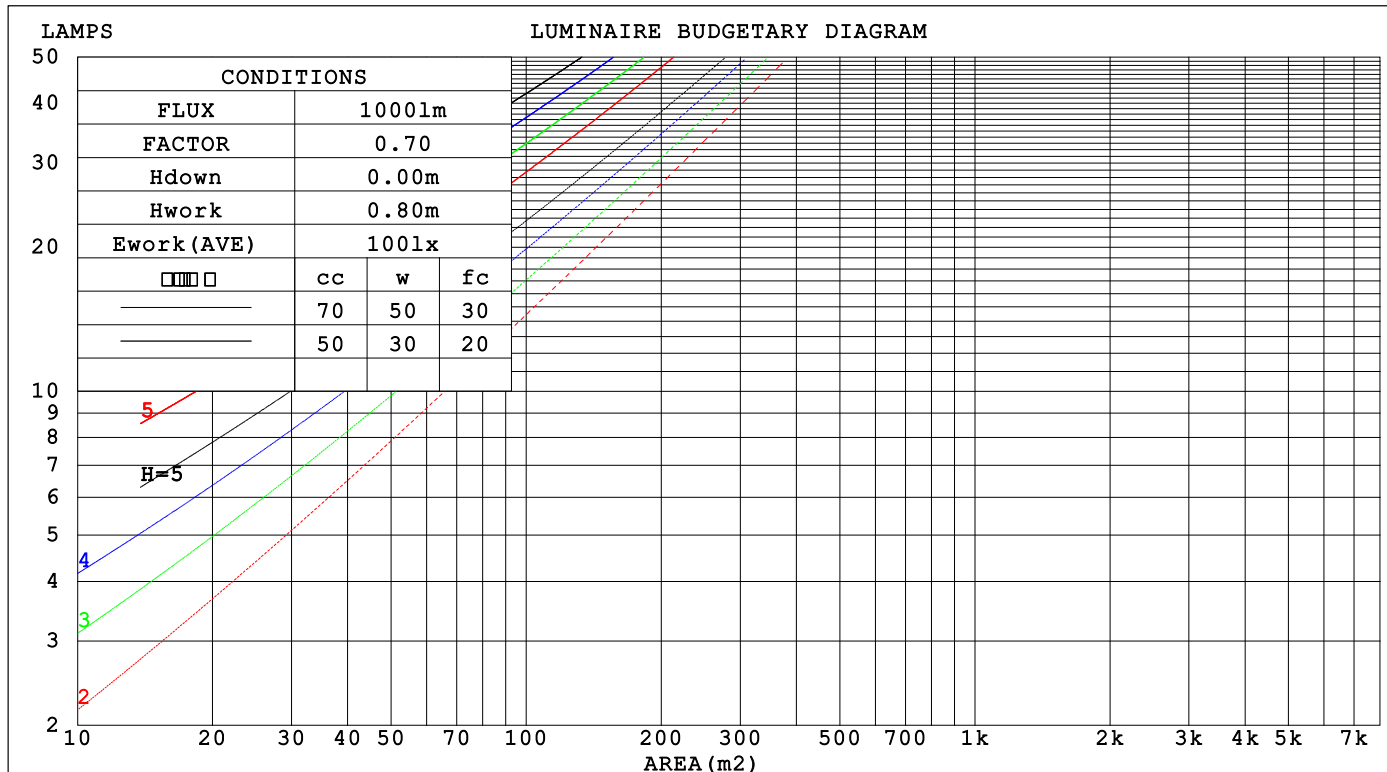

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-04-14

□ Range: 0 - 180DEG  
□ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:

### WEC AND CCEC

NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)					
0.0						
1.0	.351 .200 .063	.342 .195 .062	.323 .185 .059	.307 .177 .057	.291 .169 .054	
2.0	.317 .174 .053	.308 .170 .052	.292 .162 .050	.277 .155 .049	.263 .149 .047	
3.0	.286 .152 .046	.279 .149 .045	.264 .143 .043	.251 .137 .042	.238 .132 .041	
4.0	.261 .135 .040	.254 .133 .039	.240 .128 .038	.228 .123 .037	.217 .118 .036	
5.0	.238 .122 .035	.232 .119 .035	.220 .115 .034	.209 .110 .033	.199 .106 .032	
6.0	.220 .110 .032	.214 .108 .031	.203 .104 .030	.193 .100 .030	.184 .097 .029	
7.0	.203 .100 .028	.198 .099 .028	.188 .095 .027	.179 .092 .027	.171 .089 .026	
8.0	.189 .092 .026	.184 .091 .026	.175 .088 .025	.167 .085 .024	.159 .082 .024	
9.0	.176 .085 .024	.172 .084 .024	.164 .081 .023	.157 .078 .022	.149 .076 .022	
10.0	.165 .079 .022	.162 .078 .022	.154 .076 .021	.147 .073 .021	.141 .071 .020	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)					
0.0	.254 .254 .254	.217 .217 .217	.148 .148 .148	.085 .085 .085	.027 .027 .027	
1.0	.247 .220 .195	.212 .189 .168	.145 .130 .116	.083 .075 .068	.027 .024 .022	
2.0	.240 .196 .160	.206 .169 .138	.141 .117 .096	.081 .068 .056	.026 .022 .018	
3.0	.233 .179 .137	.200 .155 .119	.137 .108 .083	.079 .063 .049	.025 .020 .016	
4.0	.225 .167 .122	.193 .144 .106	.133 .100 .075	.077 .059 .044	.025 .019 .015	
5.0	.217 .156 .112	.187 .135 .097	.129 .095 .069	.074 .056 .041	.024 .018 .013	
6.0	.210 .148 .104	.181 .128 .091	.125 .090 .064	.072 .053 .038	.023 .017 .013	
7.0	.203 .142 .099	.175 .123 .086	.121 .086 .061	.070 .051 .036	.023 .017 .012	
8.0	.196 .136 .094	.169 .118 .082	.117 .083 .058	.068 .049 .035	.022 .016 .012	
9.0	.190 .131 .091	.164 .114 .079	.113 .080 .056	.066 .047 .034	.021 .015 .011	
10.0	.184 .127 .088	.159 .110 .077	.110 .077 .055	.064 .046 .033	.021 .015 .011	

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-04-14

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:

### UGR(Unified Glare Rating) Table

NAME: 2835 IP67					TYPE: 2835 160LED 24V			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.:					SUR.: 0.012*0.5			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.8	24.3	23.2	24.6	25.0	23.2	24.7	23.6	25.0	25.4	
	24.3	25.7	24.8	26.1	26.5	25.9	27.3	26.3	27.6	28.0	
	25.0	26.3	25.4	26.7	27.1	27.2	28.4	27.6	28.8	29.3	
	25.4	26.6	25.9	27.1	27.5	28.1	29.3	28.6	29.8	30.2	
	25.4	26.6	25.9	27.0	27.5	28.5	29.7	29.0	30.1	30.6	
	25.4	26.5	25.9	27.0	27.4	28.9	30.0	29.3	30.4	30.9	
4H	2H	23.5	24.8	23.9	25.2	25.6	23.8	25.1	24.3	25.5	25.9
	3H	25.3	26.4	25.8	26.9	27.4	26.8	27.9	27.2	28.3	28.8
	4H	26.1	27.2	26.6	27.6	28.1	28.2	29.2	28.7	29.7	30.2
	6H	26.8	27.7	27.3	28.2	28.7	29.3	30.2	29.8	30.7	31.3
	8H	26.8	27.7	27.4	28.2	28.8	29.8	30.6	30.3	31.1	31.7
	12H	26.8	27.6	27.4	28.1	28.7	30.2	31.0	30.8	31.5	32.1
8H	4H	26.8	27.7	27.4	28.2	28.8	28.5	29.4	29.1	29.9	30.5
	6H	27.7	28.4	28.3	29.0	29.6	29.9	30.6	30.4	31.1	31.7
	8H	27.9	28.6	28.5	29.1	29.8	30.4	31.1	31.0	31.7	32.3
	12H	28.0	28.6	28.6	29.2	29.8	31.1	31.6	31.7	32.2	32.9
12H	4H	26.9	27.7	27.5	28.3	28.8	28.5	29.3	29.1	29.9	30.4
	6H	27.9	28.6	28.5	29.1	29.8	29.9	30.6	30.5	31.1	31.8
	8H	28.2	28.8	28.8	29.4	30.0	30.6	31.1	31.2	31.7	32.4
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.1					
1.5H	+ 0.1 / - 0.3					+ 0.1 / - 0.2					
2.0H	+ 0.1 / - 0.3					+ 0.1 / - 0.2					

CIE Pub.117, 438.1 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -2.9)  
Area: 0.012 m2

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-04-14

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:


```

Range: 0 - 180DEG
Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

```

### ISOCANDELA DIAGRAM

NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

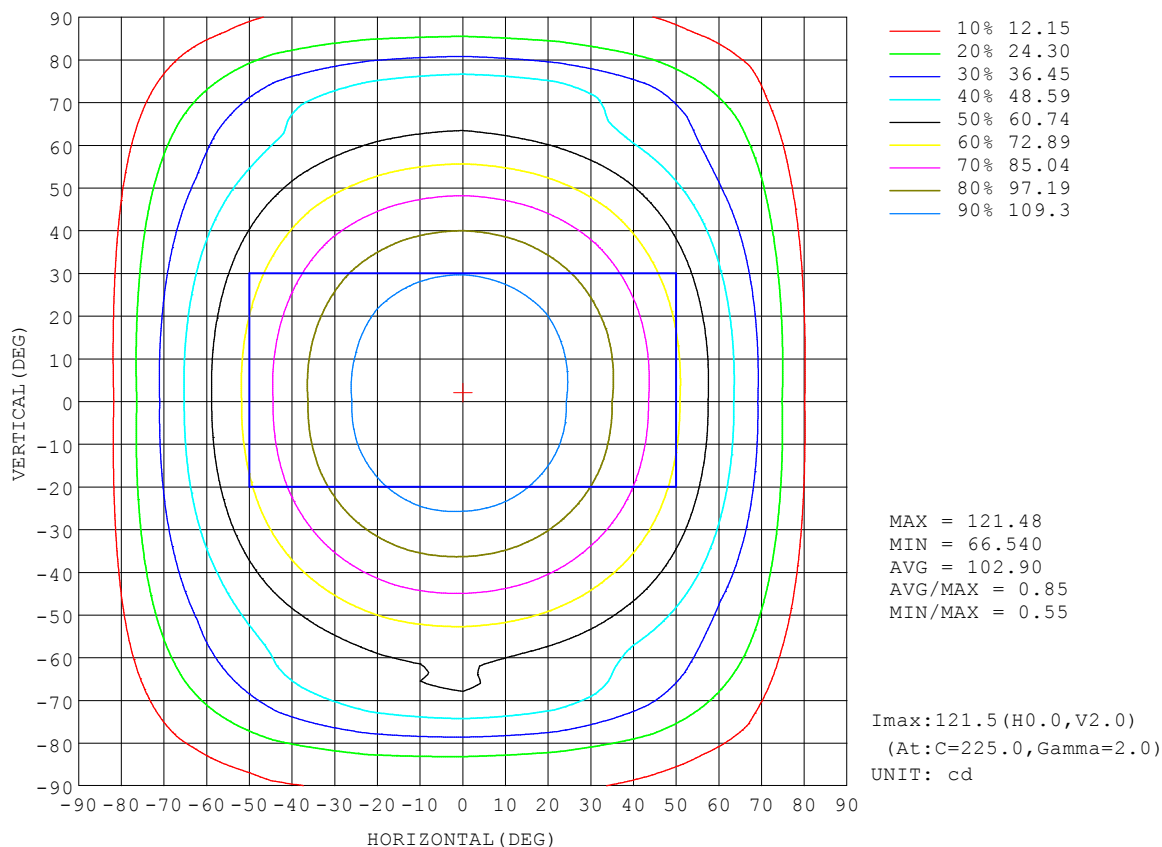


C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2022-04-14

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity: 65.0%  
Test Distance: 5.749m [K=1.0000]  
Remarks:



**AAI Figure**

NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

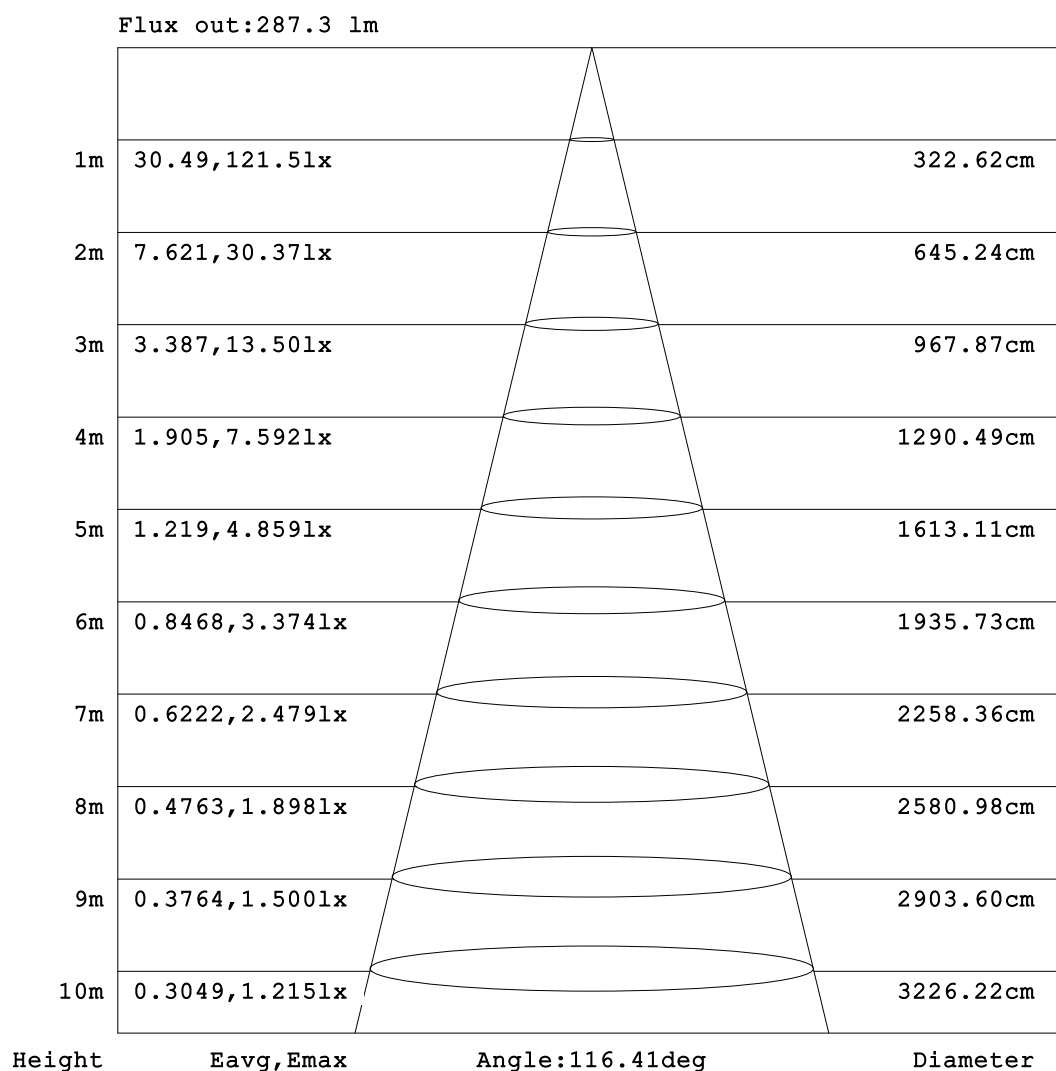


**Note:**The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-04-14

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
 Humidity:65.0%  
 Test Distance:5.749m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**

NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

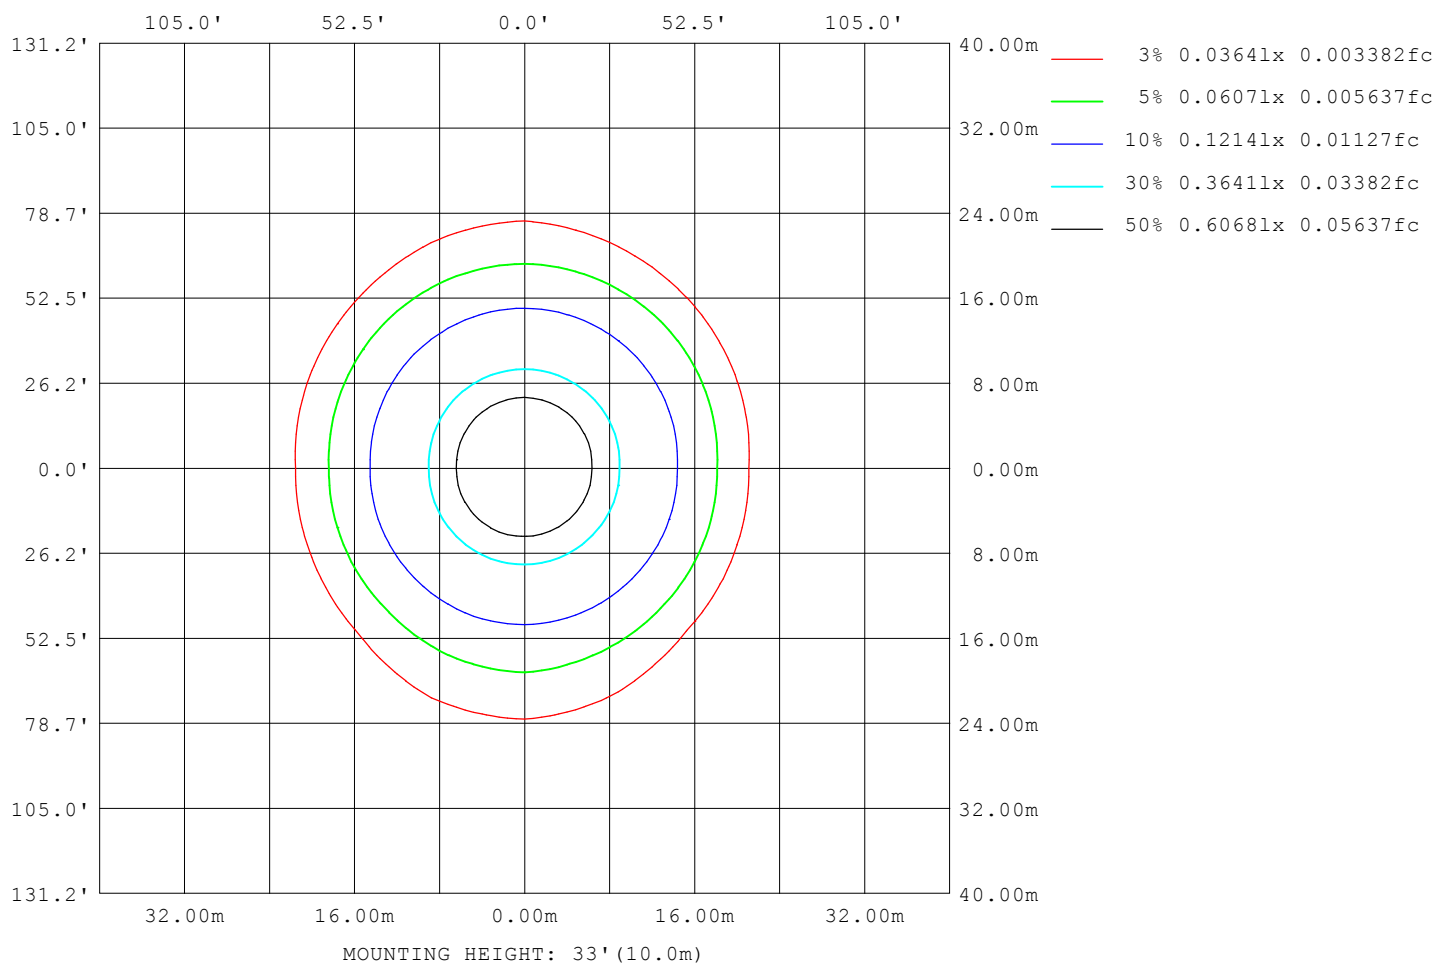

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2022-04-14

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity: 65.0%  
Test Distance: 5.749m [K=1.0000]  
Remarks:

## LED Avg.L Report

NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	9325
L_0~180 (75) av	8271
L_0~180 (85) av	2602
L_90~270 (65) av	11942
L_90~270 (75) av	16072
L_90~270 (85) av	22001
L_45 (65) av	10335
L_45 (75) av	13708
L_45 (85) av	18058

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2022-04-14

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity: 65.0%  
Test Distance: 5.749m [K=1.0000]  
Remarks:

## Planar Illuminance Curve

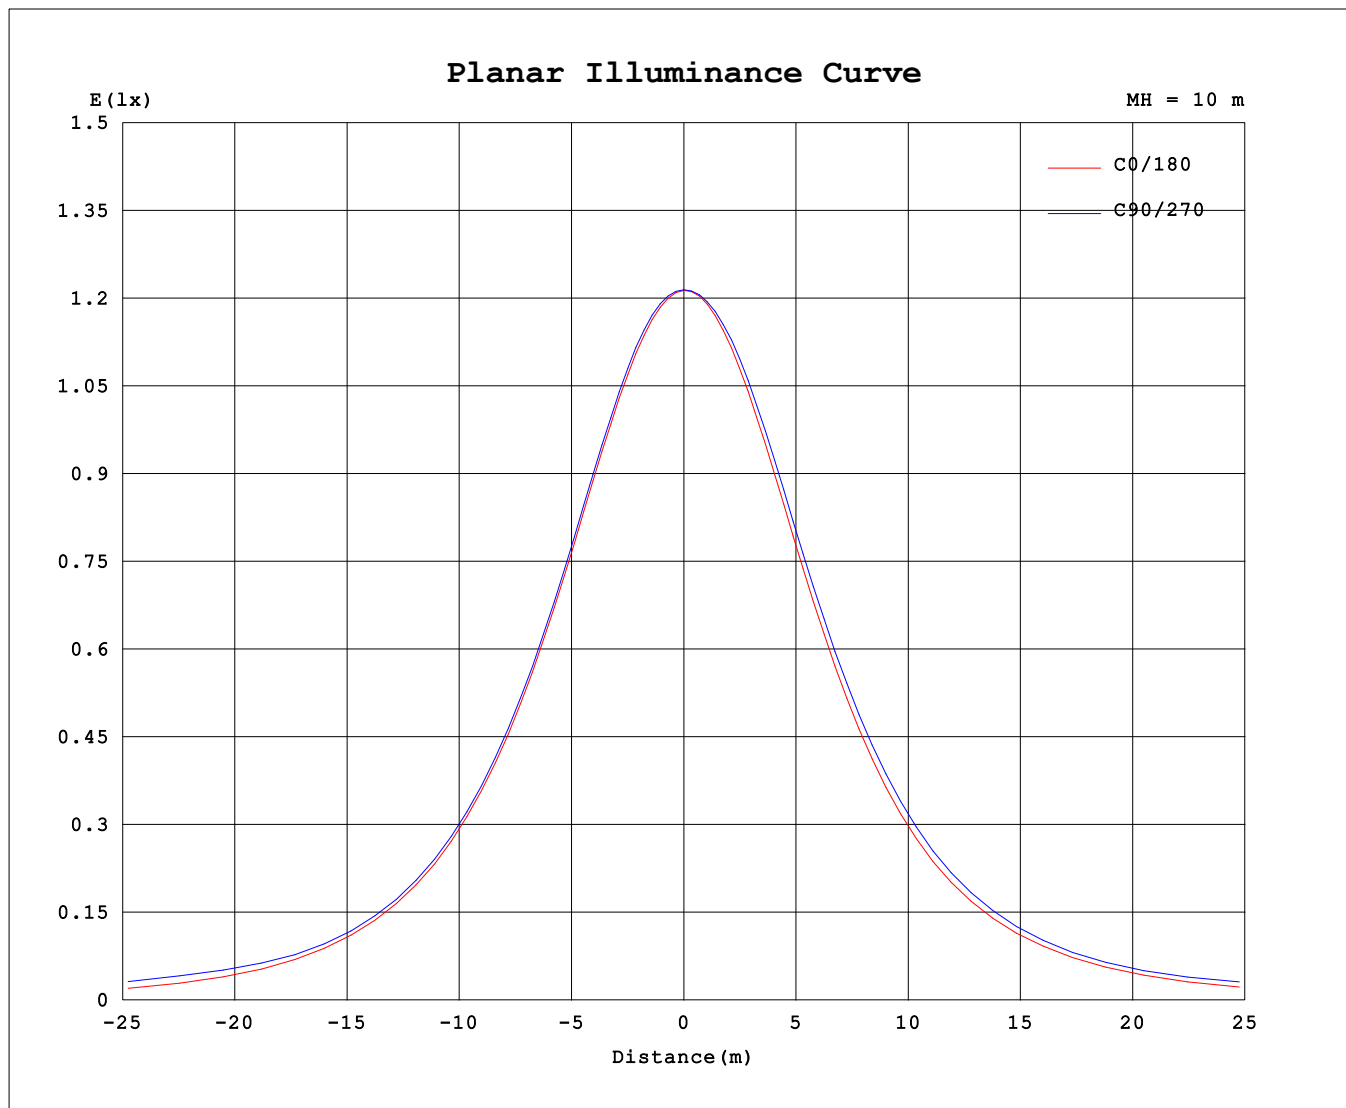

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2022-04-14

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity: 65.0%  
Test Distance: 5.749m [K=1.0000]  
Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: 2835 IP67	TYPE: 2835 160LED 24V	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*0.5	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	121	121	121	121	121	121	121	121	121	121	121	121	121	121	121	121			
5	121	121	121	121	121	121	121	121	121	121	121	121	121	121	121	121			
10	119	119	119	120	120	120	120	120	120	120	121	121	121	121	120	120			
15	117	117	118	118	118	119	119	118	118	119	119	120	120	120	119	118			
20	113	113	114	114	114	115	115	115	115	115	117	117	117	117	116	114			
25	110	110	110	111	111	112	112	112	111	112	114	114	114	114	113	111			
30	103	104	104	104	105	106	106	106	105	107	108	109	109	108	107	106			
35	98.5	99.1	99.2	99.7	100	101	101	101	100	102	104	105	105	104	103	101			
40	90.4	90.9	91.0	91.8	92.3	92.9	92.8	92.6	91.9	94.1	96.2	97.0	97.1	96.4	95.1	93.1			
45	84.3	84.9	85.1	85.9	86.5	87.0	86.8	86.5	85.8	88.1	90.4	91.2	91.4	90.6	89.3	87.2			
50	74.4	75.1	75.4	76.5	77.3	77.6	77.0	76.7	76.0	78.5	81.0	81.8	82.1	81.2	79.9	77.5			
55	67.3	68.1	68.6	69.9	70.9	71.2	70.2	69.8	69.2	71.7	74.3	75.2	75.5	74.6	73.1	70.5			
60	55.9	56.9	57.9	60.1	62.5	61.9	59.9	59.2	58.6	61.2	63.7	65.0	65.5	64.3	62.4	59.3			
65	47.6	49.0	50.8	56.3	61.6	59.3	53.5	51.9	51.1	54.1	56.7	59.0	60.0	57.7	55.0	51.6			
70	34.6	36.9	44.8	55.1	57.9	56.6	49.5	40.9	38.7	42.8	48.7	57.5	60.3	54.4	45.1	39.4			
75	26.0	30.0	41.8	47.6	49.4	48.5	43.8	35.2	29.7	35.8	47.0	53.3	55.5	53.1	43.3	31.8			
80	12.7	20.9	27.7	31.4	32.5	32.7	30.6	24.1	16.0	25.5	34.2	37.7	38.7	36.7	32.1	23.6			
85	0.46	12.9	18.2	21.3	22.6	22.6	20.3	15.1	7.52	16.5	23.7	27.0	27.8	25.8	21.7	15.1			
90	0.18	6.00	10.8	13.5	14.1	13.8	11.3	6.54	0.16	6.76	12.6	15.4	16.2	15.0	12.1	6.80			
95	0.25	5.66	10.3	12.5	12.9	12.4	10.5	5.98	0.20	5.48	10.4	12.7	13.4	12.8	10.5	5.83			
100	0.38	5.67	10.4	12.4	12.9	12.5	10.5	5.92	0.30	2.33	8.65	12.0	12.7	12.1	9.45	2.99			
105	0.48	5.44	10.3	12.4	12.9	12.4	10.4	5.89	0.39	0.50	4.89	10.6	11.6	10.6	7.29	0.71			
110	0.63	5.18	9.78	12.0	12.7	12.1	10.1	5.66	0.51	0.52	3.55	7.15	8.63	7.37	3.86	0.55			
115	0.73	4.90	9.72	12.1	12.7	12.2	10.2	5.46	0.61	0.59	1.27	4.26	6.80	5.48	1.49	0.63			
120	0.86	4.55	10.1	12.4	13.2	12.7	10.5	4.96	0.74	0.71	0.73	1.46	3.46	1.82	0.76	0.74			
125	0.94	4.33	10.4	12.9	13.6	13.1	10.6	4.72	0.82	0.78	0.79	0.82	1.00	0.83	0.82	0.81			
130	1.07	3.99	11.1	14.0	14.7	14.2	10.6	4.08	0.94	0.89	0.89	0.90	0.91	0.92	0.92	0.92			
135	1.14	3.56	11.6	14.9	15.8	14.8	10.2	3.55	1.01	0.97	0.95	0.96	0.96	0.98	0.98	1.00			
140	1.24	1.95	12.3	16.0	17.0	15.4	9.89	2.54	1.11	1.07	1.05	1.04	1.04	1.05	1.07	1.10			
145	1.30	1.44	11.8	17.0	17.9	15.3	9.14	1.78	1.17	1.13	1.11	1.09	1.08	1.10	1.12	1.16			
150	1.38	1.41	7.70	15.9	17.8	13.4	6.76	1.36	1.25	1.21	1.19	1.18	1.15	1.17	1.21	1.25			
155	1.42	1.43	3.61	12.0	14.7	9.73	4.11	1.40	1.30	1.27	1.25	1.23	1.21	1.22	1.27	1.30			
160	1.49	1.50	1.54	3.81	5.78	3.64	1.64	1.46	1.38	1.35	1.33	1.32	1.31	1.31	1.35	1.39			
165	1.54	1.54	1.53	1.72	2.18	1.74	1.50	1.51	1.44	1.41	1.39	1.38	1.38	1.37	1.41	1.45			
170	1.61	1.61	1.60	1.58	1.60	1.58	1.57	1.59	1.54	1.52	1.50	1.49	1.49	1.48	1.52	1.55			
175	1.66	1.66	1.65	1.64	1.65	1.63	1.64	1.65	1.61	1.59	1.58	1.57	1.57	1.57	1.60	1.62			
180	1.71	1.70	1.69	1.69	1.70	1.69	1.70	1.72	1.71	1.70	1.69	1.69	1.70	1.69	1.70	1.71			

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:

Test Date:2022-04-14

□ Range: 0 - 180DEG

□ Interval: 2.0DEG

Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450

Humidity:65.0%

Test Distance:5.749m [K=1.0000]

Remarks: