


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: DL12-W40-V24	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*1	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 94.20 lm/W
MODEL		I <sub>max</sub> (cd)	253.6	S/MH(C0/180)		1.25
NOMINAL POWER(W)	10	LOR(%)	100.0	S/MH(C90/270)		1.30
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	917.16	□ UP,DN(C0-180)		3.1,46.6
NOMINAL FLUX(lm)	917.157	CIE CLASS	DIRECT	□ UP,DN(C180-360)		3.6,46.6
LAMPS INSIDE	1	□ up (%)	6.8	CIBSE SHR NOM		1.50
TEST VOLTAGE(V)	24	□ down (%)	93.2	CIBSE SHR MAX		1.50

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

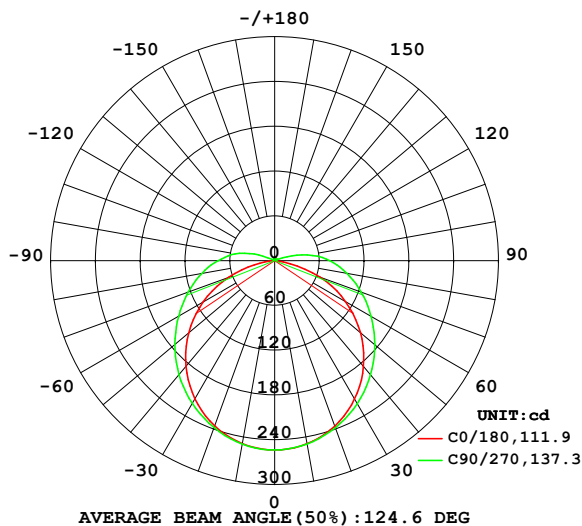

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

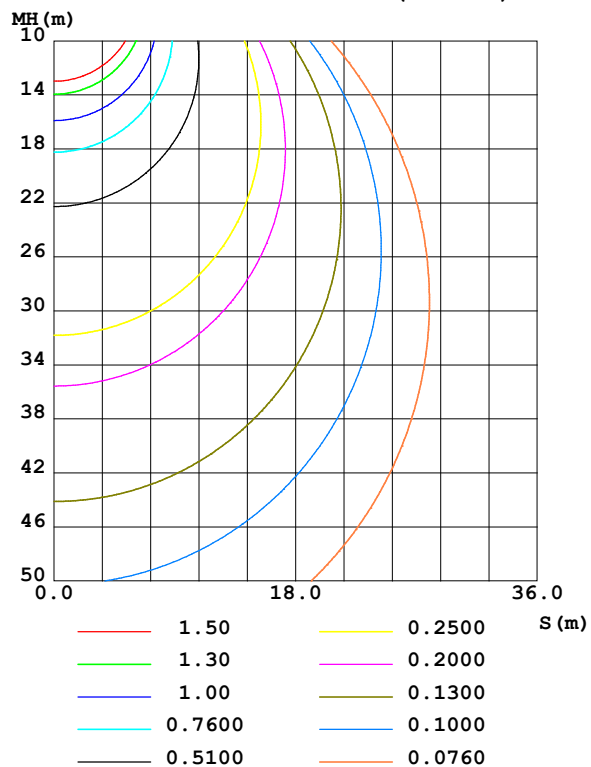

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-07-13

□ Range: 0 - 180DEG  
 □ Interval: 2.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
 Humidity: 65.0%  
 Test Distance: 5.749m [K=1.0000]  
 Remarks:

## ZONAL FLUX DIAGRAM

### ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	249.3	249.2	249.4	249.3	249.0	249.5	249.7	249.5	0- 10	24.01	24.01	2.62,2.62
20	235.8	236.5	238.2	236.7	235.4	236.9	238.0	236.9	10- 20	68.89	92.89	10.1,10.1
30	214.1	217.0	221.4	217.4	213.8	216.7	220.8	217.1	20- 30	105.1	197.9	21.6,21.6
40	185.2	191.7	199.9	192.4	185.0	191.2	199.4	192.0	30- 40	128.5	326.5	35.6,35.6
50	149.9	162.0	175.3	163.3	150.2	161.7	174.6	162.8	40- 50	137.1	463.6	50.5,50.5
60	109.8	130.8	149.2	132.8	110.4	130.1	148.4	131.6	50- 60	131.1	594.7	64.8,64.8
70	64.40	99.93	123.5	102.7	65.89	99.56	123.3	101.4	60- 70	113.1	707.8	77.2,77.2
80	12.18	71.96	98.34	75.14	20.14	72.69	99.19	74.70	70- 80	87.11	794.9	86.7,86.7
90	0.3791	47.01	73.95	50.32	0.4030	47.92	75.81	50.98	80- 90	60.18	855.1	93.2,93.2
100	0.7031	18.64	44.57	21.26	0.6133	26.38	54.06	28.67	90-100	37.16	892.3	97.3,97.3
110	1.170	1.591	11.71	1.628	1.019	1.589	23.18	2.019	100-110	14.77	907.0	98.9,98.9
120	1.647	1.843	1.966	1.791	1.458	1.593	1.824	1.687	110-120	2.762	909.8	99.2,99.2
130	2.060	2.150	2.222	2.090	1.858	1.872	2.066	1.972	120-130	1.680	911.5	99.4,99.4
140	2.430	2.452	2.462	2.378	2.221	2.150	2.247	2.262	130-140	1.686	913.2	99.6,99.6
150	2.752	2.757	2.683	2.651	2.564	2.431	2.451	2.549	140-150	1.546	914.7	99.7,99.7
160	3.059	3.033	2.975	2.922	2.910	2.748	2.743	2.849	150-160	1.270	916.0	99.9,99.9
170	3.360	3.300	3.248	3.216	3.270	3.127	3.083	3.181	160-170	0.8623	916.8	100,100
180	3.587	3.505	3.460	3.513	3.582	3.505	3.458	3.511	170-180	0.3177	917.2	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 408.68 lm

%lum = 44.6%

%lamp = 44.6%

Conical surface Flux(120deg): 594.75 lm

%lum = 64.8%


%lamp = 64.8%

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-07-13

□ Range: 0 - 180DEG  
 □ Interval: 2.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
 Humidity:65.0%  
 Test Distance:5.749m [K=1.0000]  
 Remarks:

## LUMINANCE LIMITATION CURVES

NAME: DL12-W40-V24	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*1	Shielding Angle:

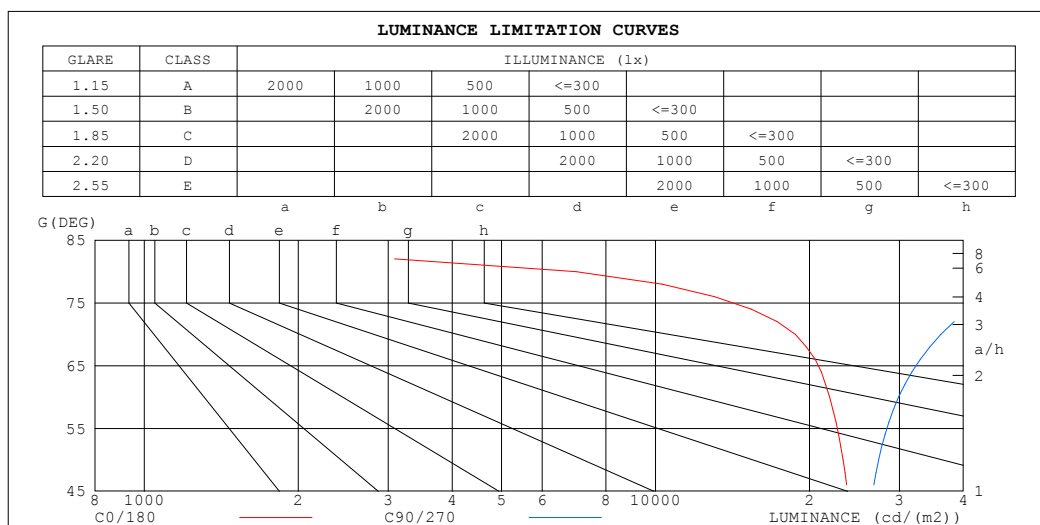

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	451	101583
80	6992	56711
75	16395	43861
70	18775	36159
65	21874	32921
60	21897	29888
55	23372	28804
50	23260	27315
45	24226	26957


C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2022-07-13

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity: 65.0%  
Test Distance: 5.749m [K=1.0000]  
Remarks:

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: DL12-W40-V24	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*1	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.17	1.17	1.17	1.14	1.14	1.14	1.07	1.07	1.07	1.01	1.01	1.01	.96	.96	.96	.93
1.0	.99	.94	.89	.96	.91	.87	.90	.86	.83	.85	.82	.79	.80	.78	.76	.73
2.0	.85	.77	.71	.82	.75	.69	.78	.72	.67	.73	.68	.64	.69	.65	.62	.59
3.0	.74	.65	.58	.72	.64	.57	.68	.61	.55	.64	.58	.53	.61	.56	.51	.49
4.0	.65	.56	.48	.63	.55	.48	.60	.52	.46	.57	.50	.45	.54	.48	.44	.41
5.0	.58	.48	.41	.56	.47	.41	.53	.46	.40	.51	.44	.39	.48	.42	.38	.35
6.0	.52	.43	.36	.51	.42	.35	.48	.40	.35	.46	.39	.34	.44	.38	.33	.31
7.0	.47	.38	.31	.46	.37	.31	.44	.36	.30	.42	.35	.30	.40	.34	.29	.27
8.0	.43	.34	.28	.42	.33	.28	.40	.32	.27	.38	.31	.26	.36	.30	.26	.24
9.0	.39	.31	.25	.38	.30	.25	.37	.29	.24	.35	.29	.24	.34	.28	.23	.21
10.0	.36	.28	.23	.35	.28	.22	.34	.27	.22	.32	.26	.22	.31	.25	.21	.19

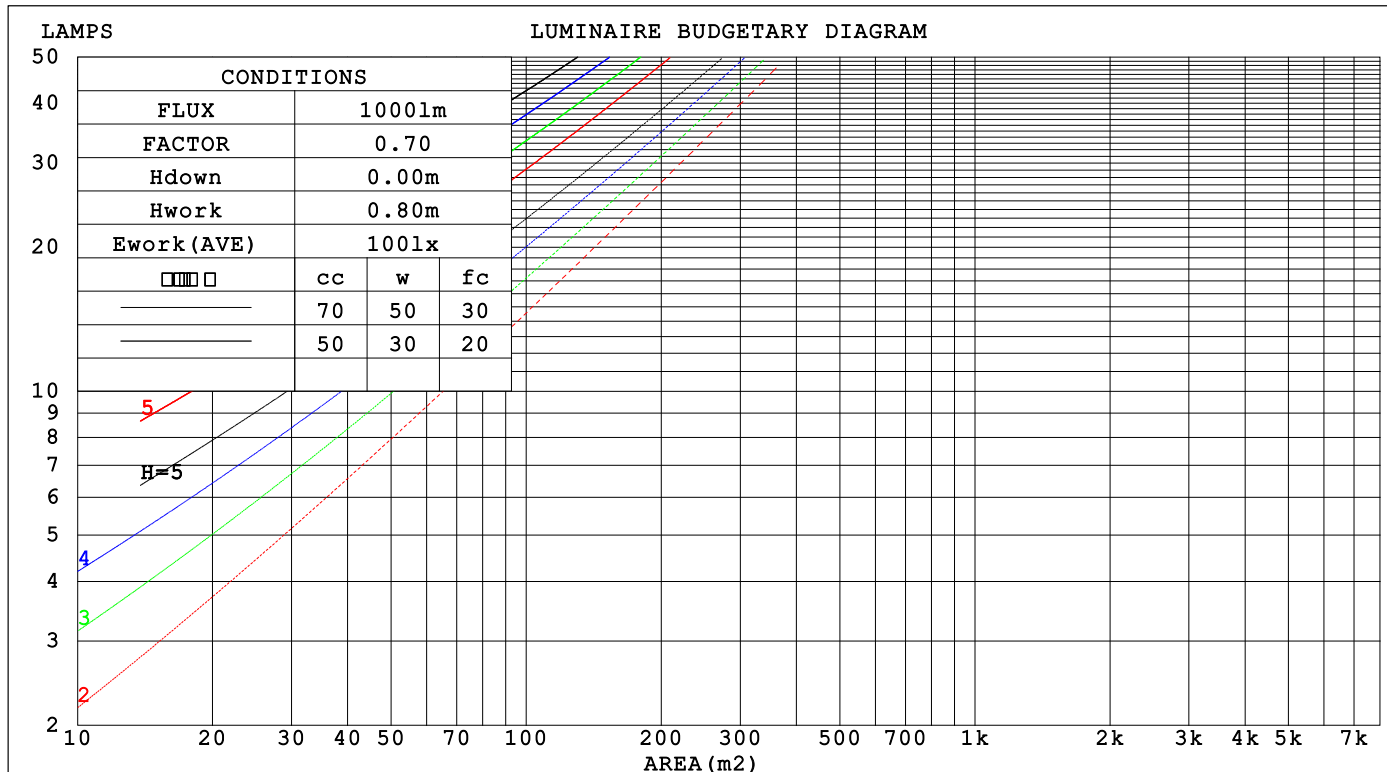

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-07-13

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:

### WEC AND CCEC

NAME: DL12-W40-V24	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*1	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)					
0.0						
1.0	.374 .213 .067	.365 .208 .066	.347 .199 .064	.331 .191 .061	.316 .183 .059	
2.0	.329 .180 .055	.320 .176 .054	.305 .169 .053	.290 .163 .051	.277 .157 .049	
3.0	.294 .157 .047	.287 .154 .046	.273 .148 .045	.260 .142 .044	.248 .137 .042	
4.0	.266 .138 .041	.259 .136 .040	.247 .131 .039	.235 .126 .038	.225 .122 .037	
5.0	.243 .124 .036	.237 .121 .035	.225 .117 .035	.215 .113 .034	.205 .110 .033	
6.0	.223 .112 .032	.217 .110 .032	.207 .106 .031	.198 .103 .030	.189 .100 .030	
7.0	.206 .102 .029	.201 .100 .029	.192 .097 .028	.183 .094 .027	.175 .091 .027	
8.0	.191 .093 .026	.187 .092 .026	.178 .089 .025	.171 .086 .025	.163 .084 .024	
9.0	.178 .086 .024	.174 .085 .024	.167 .082 .023	.160 .080 .023	.153 .078 .022	
10.0	.167 .080 .022	.163 .079 .022	.157 .077 .022	.150 .074 .021	.144 .072 .021	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)					
0.0	.242 .242 .242	.207 .207 .207	.141 .141 .141	.081 .081 .081	.026 .026 .026	
1.0	.237 .208 .181	.203 .178 .156	.139 .123 .108	.080 .071 .063	.026 .023 .020	
2.0	.229 .184 .146	.197 .158 .126	.135 .110 .088	.078 .064 .052	.025 .021 .017	
3.0	.222 .167 .123	.190 .144 .107	.131 .100 .075	.075 .058 .044	.024 .019 .014	
4.0	.214 .154 .109	.184 .133 .094	.126 .093 .066	.073 .054 .039	.023 .018 .013	
5.0	.206 .144 .098	.177 .125 .086	.122 .087 .060	.071 .051 .036	.023 .017 .012	
6.0	.199 .136 .091	.171 .118 .079	.118 .082 .056	.068 .048 .033	.022 .016 .011	
7.0	.191 .129 .086	.165 .112 .075	.114 .078 .053	.066 .046 .031	.021 .015 .010	
8.0	.185 .123 .081	.159 .107 .071	.110 .075 .050	.064 .044 .030	.021 .015 .010	
9.0	.178 .119 .078	.154 .103 .068	.106 .072 .048	.062 .043 .029	.020 .014 .010	
10.0	.172 .114 .076	.149 .099 .066	.103 .070 .047	.060 .041 .028	.019 .014 .009	

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-07-13

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:

### UGR(Unified Glare Rating) Table

NAME: DL12-W40-V24					TYPE:					WEIGHT:				
SPEC.:					DIM.:					SERIAL No.:				
MFR.:					SUR.: 0.012*1					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3				
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3				
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2				
Room dimensions					Viewed crosswise					Viewed endwise				
x = 2H y = 2H					23.3	24.8	23.7	25.1	25.5	24.6	26.1	24.9	26.4	26.7
3H					24.8	26.2	25.2	26.5	26.9	27.0	28.4	27.4	28.7	29.1
4H					25.3	26.6	25.7	27.0	27.4	28.3	29.6	28.7	30.0	30.4
6H					25.5	26.7	25.9	27.1	27.6	29.7	31.0	30.2	31.4	31.8
8H					25.5	26.7	25.9	27.1	27.5	30.5	31.7	31.0	32.1	32.6
12H					25.4	26.6	25.9	27.0	27.5	31.4	32.6	31.9	33.0	33.5
4H 2H					24.2	25.5	24.6	25.9	26.3	25.2	26.5	25.6	26.9	27.3
3H					25.9	27.1	26.4	27.5	28.0	27.8	29.0	28.3	29.4	29.9
4H					26.6	27.7	27.1	28.2	28.7	29.3	30.4	29.8	30.8	31.3
6H					27.1	28.0	27.6	28.5	29.0	31.0	31.9	31.5	32.4	32.9
8H					27.1	28.0	27.7	28.5	29.1	31.9	32.8	32.4	33.3	33.8
12H					27.2	28.0	27.7	28.5	29.1	32.9	33.8	33.5	34.3	34.8
8H 4H					27.5	28.4	28.0	28.9	29.4	29.7	30.6	30.2	31.1	31.6
6H					28.3	29.1	28.8	29.6	30.2	31.6	32.4	32.2	32.9	33.5
8H					28.6	29.3	29.1	29.8	30.4	32.7	33.4	33.3	34.0	34.6
12H					28.8	29.4	29.4	29.9	30.6	34.0	34.6	34.6	35.2	35.8
12H 4H					27.7	28.6	28.3	29.1	29.6	29.7	30.5	30.2	31.0	31.6
6H					28.7	29.4	29.3	30.0	30.6	31.7	32.4	32.3	33.0	33.6
8H					29.2	29.8	29.8	30.4	31.0	33.0	33.6	33.5	34.1	34.7
Variations with the observer position at spacings(CIE Pub.117):														
S = 1.0H					+ 0.1 / - 0.2					+ 0.1 / - 0.1				
1.5H					+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H					+ 0.1 / - 0.4					+ 0.2 / - 0.3				

CIE Pub.117, 917.2 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.3)  
Area: 0.01 m2

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-07-13

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:


```

Range: 0 - 180DEG
Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

```

### ISOCANDELA DIAGRAM

NAME: DL12-W40-V24	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*1	Shielding Angle:

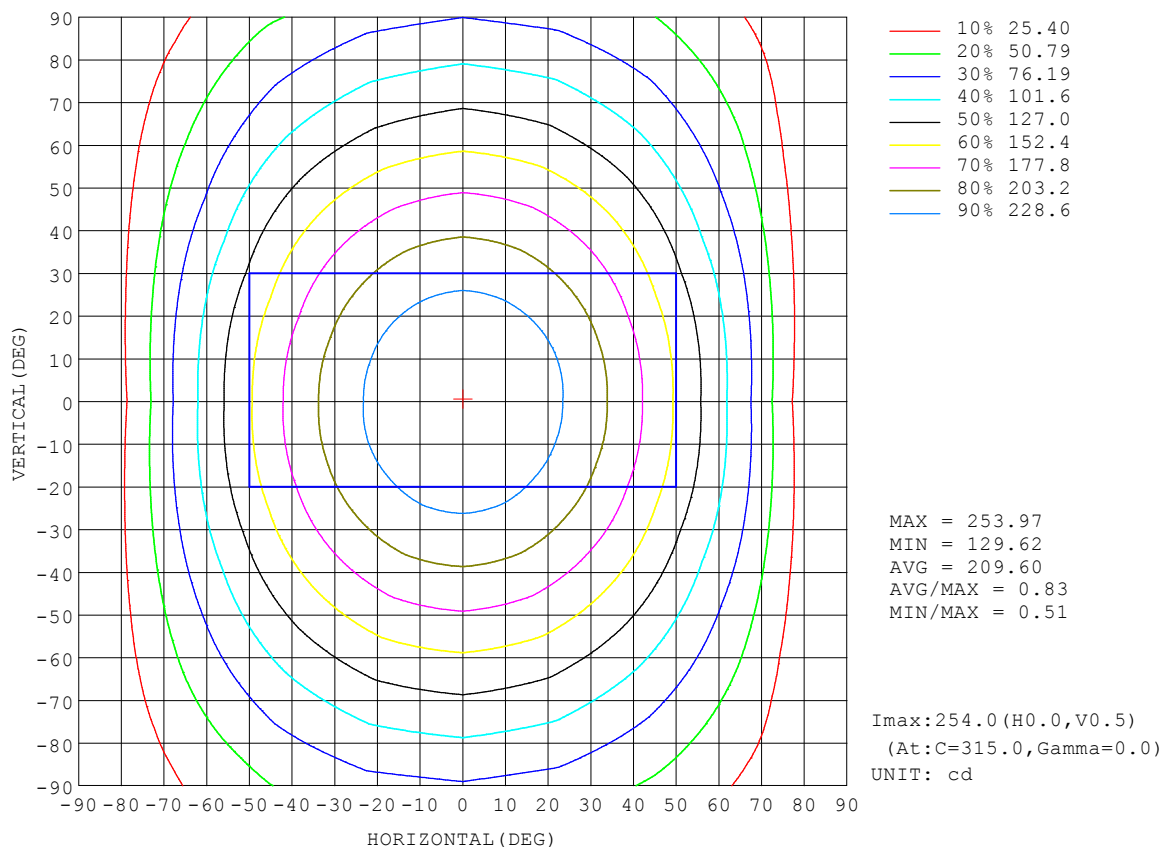


C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2022-07-13

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity: 65.0%  
Test Distance: 5.749m [K=1.0000]  
Remarks:



### AAI Figure

NAME: DL12-W40-V24	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*1	Shielding Angle:

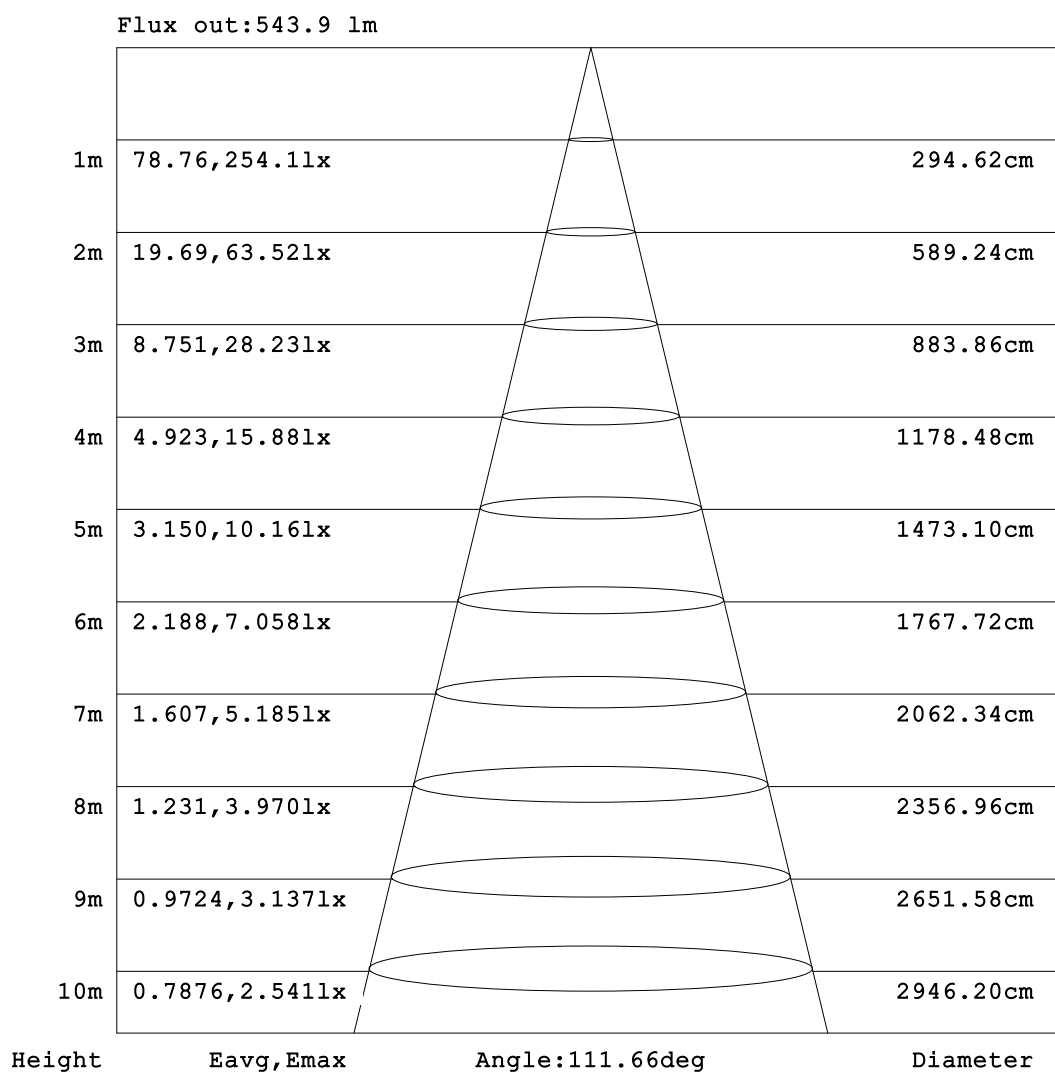


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-07-13

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:

### ISOLUX DIAGRAM

NAME: DL12-W40-V24	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*1	Shielding Angle:

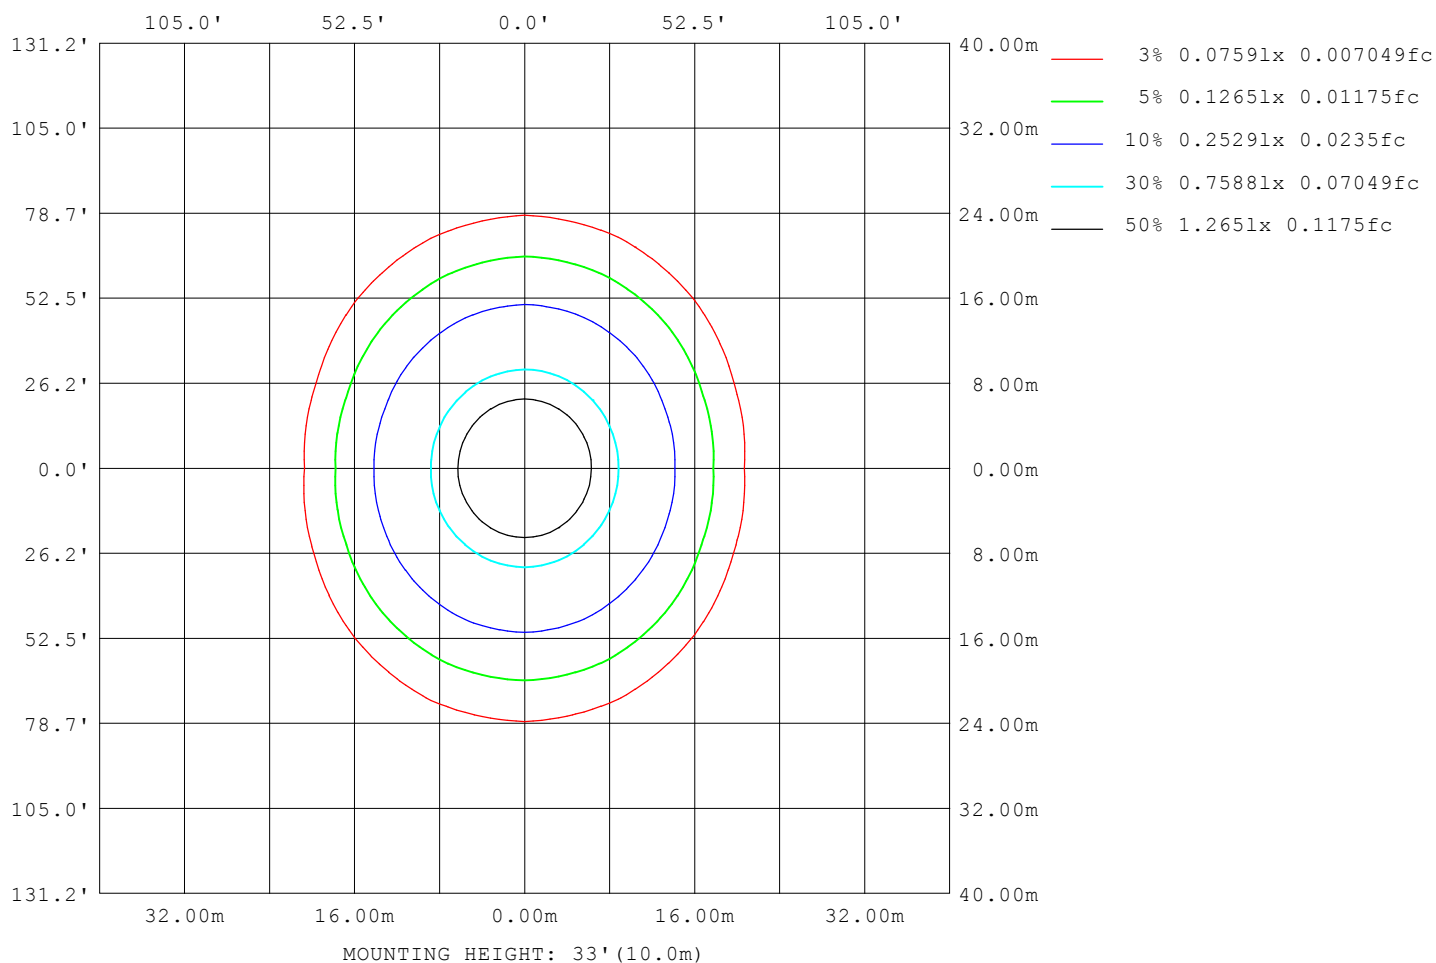

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2022-07-13

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity: 65.0%  
Test Distance: 5.749m [K=1.0000]  
Remarks:

## LED Avg.L Report

NAME: DL12-W40-V24	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*1	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	20983
L_0~180 (75) av	15176
L_0~180 (85) av	3542
L_90~270 (65) av	32174
L_90~270 (75) av	42876
L_90~270 (85) av	99460
L_45 (65) av	27407
L_45 (75) av	33569
L_45 (85) av	70107

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2022-07-13

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity: 65.0%  
Test Distance: 5.749m [K=1.0000]  
Remarks:

### Planar Illuminance Curve

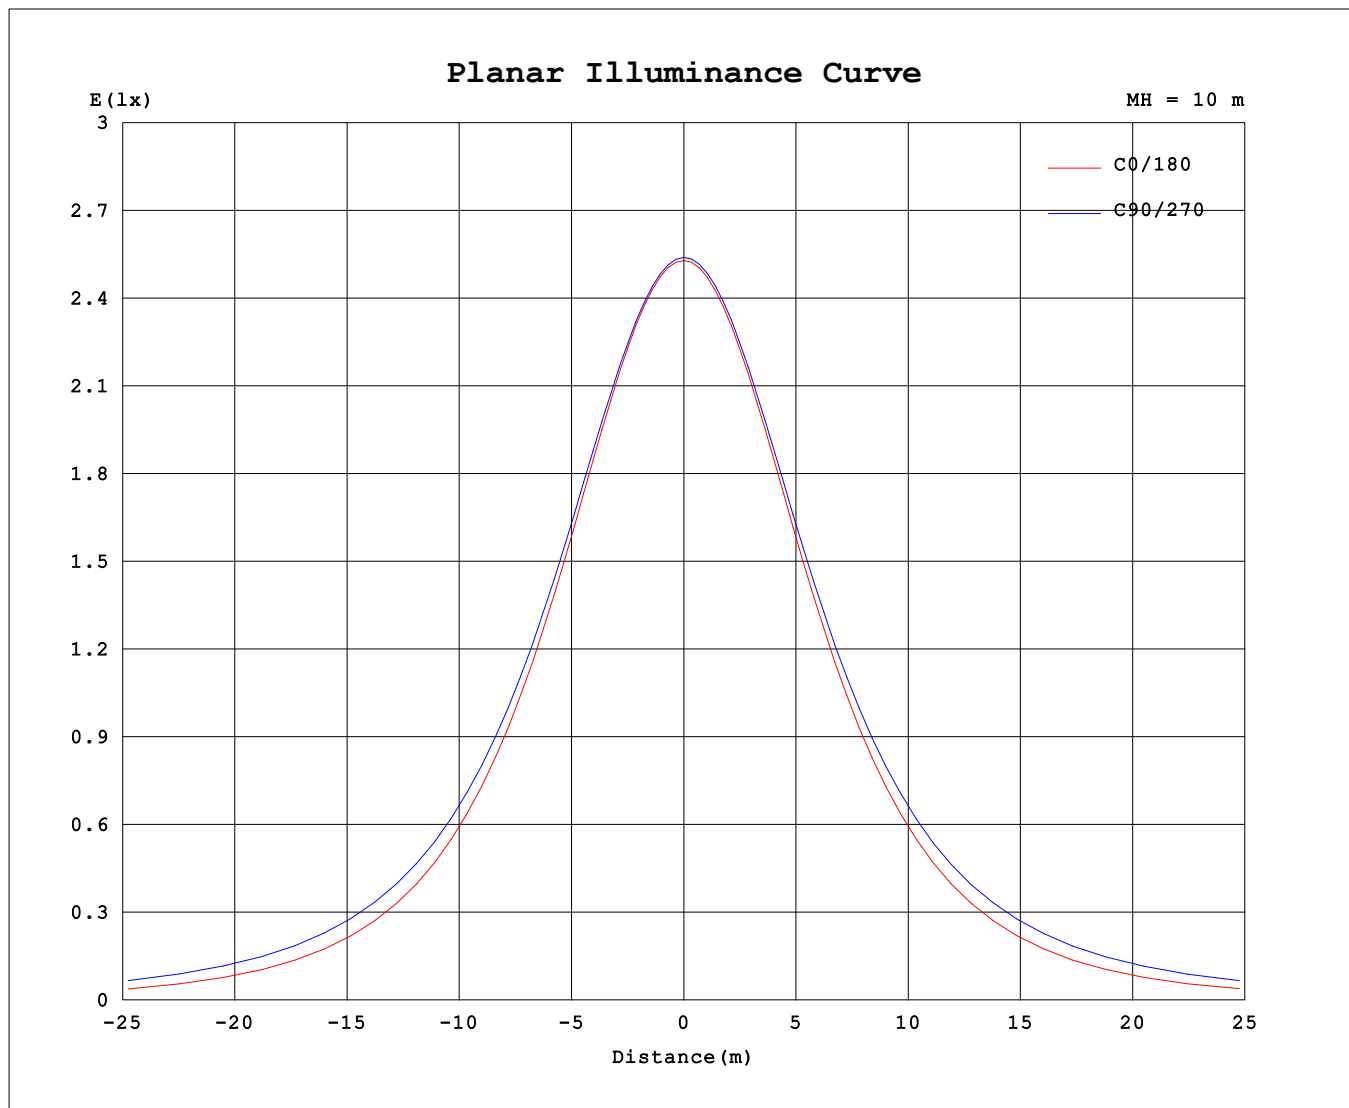

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-07-13

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
 Humidity: 65.0%  
 Test Distance: 5.749m [K=1.0000]  
 Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: DL12-W40-V24	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*1	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	254	254	254	254	254	254	254	254	254	254	254	254	254	254	254	254			
5	253	253	253	253	253	253	253	253	253	253	253	253	253	253	253	253			
10	249	249	249	249	249	249	249	249	249	249	250	250	250	249	250	249			
15	245	245	245	245	246	246	245	245	245	245	245	246	246	245	245	245			
20	236	236	237	238	238	238	237	236	235	236	237	238	238	237	237	236			
25	228	228	229	231	232	232	230	228	228	228	230	231	232	231	230	228			
30	214	215	217	220	221	221	217	215	214	214	217	219	221	220	217	215			
35	203	204	208	212	213	212	208	204	203	204	207	211	213	211	208	204			
40	185	187	192	198	200	198	192	187	185	186	191	197	199	197	192	187			
45	172	174	180	187	190	188	181	174	172	173	180	186	190	187	181	174			
50	150	153	162	172	175	172	163	154	150	152	162	170	175	171	163	153			
55	134	139	150	161	165	162	151	140	135	138	149	159	164	160	150	139			
60	110	116	131	144	149	145	133	118	110	115	130	143	148	144	132	116			
65	92.7	101	118	133	139	135	120	103	93.4	100	118	132	138	133	119	101			
70	64.4	78.7	99.9	117	124	119	103	81.8	65.9	78.0	99.6	116	123	117	101	79.4			
75	42.6	64.8	88.4	107	113	108	91.3	68.2	46.3	64.0	88.4	106	114	107	90.4	65.8			
80	12.2	45.5	72.0	91.3	98.3	93.0	75.1	49.1	20.1	45.1	72.7	91.5	99.2	92.7	74.7	47.5			
85	0.39	34.2	61.6	81.2	88.4	83.0	64.8	37.4	8.22	34.3	62.9	82.0	89.8	83.3	64.9	37.0			
90	0.38	20.1	47.0	66.5	74.0	68.6	50.3	23.0	0.40	21.0	47.9	68.2	75.8	69.4	51.0	23.6			
95	0.49	11.0	36.9	56.7	64.1	58.6	40.0	13.0	0.43	13.8	40.0	59.6	67.0	60.8	42.8	16.6			
100	0.70	1.05	18.6	37.3	44.6	39.2	21.3	1.43	0.61	1.49	26.4	45.6	54.1	47.6	28.7	3.16			
105	0.87	1.08	7.59	24.0	30.8	25.8	9.69	1.09	0.76	0.92	13.4	32.5	41.8	35.1	17.5	0.97			
110	1.17	1.26	1.59	6.43	11.7	7.74	1.63	1.25	1.02	1.08	1.59	16.0	23.2	17.2	2.02	1.13			
115	1.37	1.41	1.68	1.92	2.74	2.07	1.66	1.40	1.20	1.22	1.45	3.91	10.4	4.43	1.53	1.27			
120	1.65	1.66	1.84	1.95	1.97	1.95	1.79	1.63	1.46	1.44	1.59	1.78	1.82	1.82	1.69	1.49			
125	1.82	1.82	1.97	2.05	2.06	2.04	1.91	1.78	1.62	1.59	1.71	1.86	1.92	1.91	1.80	1.64			
130	2.06	2.06	2.15	2.21	2.22	2.20	2.09	2.00	1.86	1.81	1.87	2.00	2.07	2.06	1.97	1.87			
135	2.22	2.22	2.27	2.32	2.32	2.30	2.20	2.14	2.01	1.95	1.99	2.08	2.14	2.16	2.09	2.02			
140	2.43	2.44	2.45	2.48	2.46	2.45	2.38	2.34	2.22	2.14	2.15	2.22	2.25	2.30	2.26	2.24			
145	2.57	2.58	2.58	2.57	2.56	2.55	2.49	2.47	2.36	2.27	2.26	2.32	2.33	2.38	2.38	2.38			
150	2.75	2.76	2.76	2.71	2.68	2.70	2.65	2.65	2.56	2.46	2.43	2.46	2.45	2.51	2.55	2.58			
155	2.87	2.89	2.87	2.81	2.79	2.80	2.76	2.77	2.70	2.60	2.56	2.57	2.55	2.61	2.67	2.72			
160	3.06	3.06	3.03	2.97	2.98	2.95	2.92	2.95	2.91	2.81	2.75	2.75	2.74	2.77	2.85	2.92			
165	3.18	3.18	3.14	3.07	3.10	3.04	3.04	3.09	3.05	2.96	2.89	2.87	2.89	2.89	2.98	3.07			
170	3.36	3.35	3.30	3.23	3.25	3.20	3.22	3.28	3.27	3.19	3.13	3.09	3.08	3.09	3.18	3.27			
175	3.47	3.45	3.41	3.34	3.35	3.32	3.35	3.42	3.42	3.35	3.28	3.24	3.23	3.23	3.32	3.41			
180	3.59	3.55	3.50	3.46	3.46	3.44	3.51	3.58	3.58	3.55	3.50	3.46	3.46	3.44	3.51	3.58			

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:

Test Date:2022-07-13

□ Range: 0 - 180DEG

□ Interval: 2.0DEG

Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450

Humidity:65.0%

Test Distance:5.749m [K=1.0000]

Remarks: