


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: DL12-W27-V24	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*1	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 87.23 lm/W
MODEL		I _{max} (cd)	238.8	S/MH(C0/180)		1.26
NOMINAL POWER(W)	10	LOR(%)	100.0	S/MH(C90/270)		1.34
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	861.67	<input type="checkbox"/> UP,DN(C0-180)		2.9,44.8
NOMINAL FLUX(lm)	861.667	CIE CLASS	DIRECT	<input type="checkbox"/> UP,DN(C180-360)		3.7,48.6
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	6.6	CIBSE SHR NOM		1.50
TEST VOLTAGE(V)	24	<input type="checkbox"/> down (%)	93.4	CIBSE SHR MAX		1.50

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

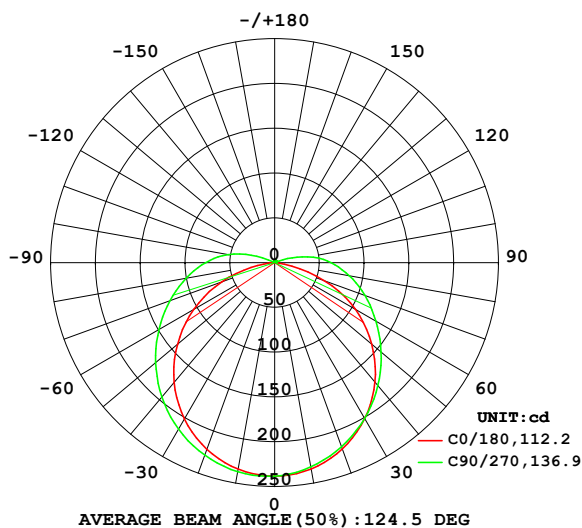

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

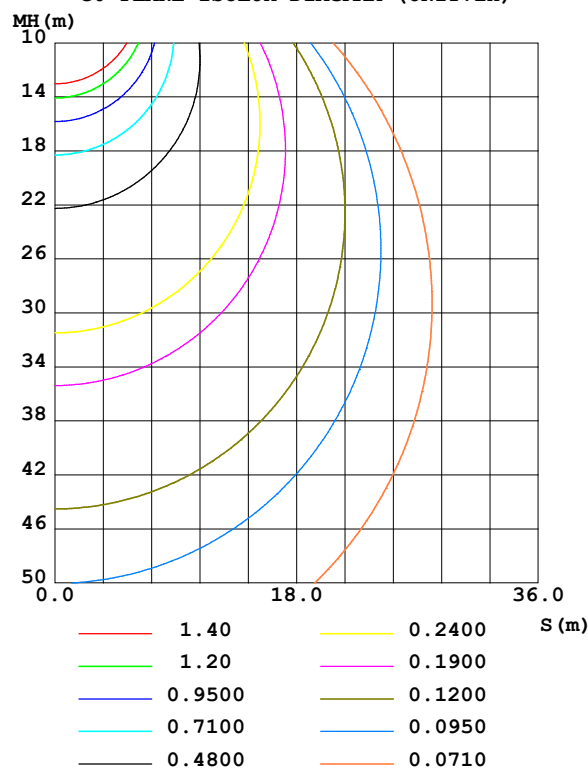

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-07-13

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	zone	total	%lum, lamp
10	233.9	232.1	231.7	232.6	234.2	236.4	237.1	235.9	0- 10	22.55	22.55	2.62,2.62
20	221.3	218.4	218.6	219.2	221.8	226.4	228.6	225.8	10- 20	64.72	87.27	10.1,10.1
30	201.1	198.5	200.9	199.5	201.6	209.5	214.7	208.9	20- 30	98.75	186.0	21.6,21.6
40	174.2	173.7	179.3	175.0	174.6	187.0	195.9	186.6	30- 40	120.9	306.9	35.6,35.6
50	141.5	145.4	155.2	147.0	141.7	160.0	173.4	159.8	40- 50	129.1	436.0	50.6,50.6
60	104.0	115.7	130.5	117.7	104.2	130.6	149.1	130.9	50- 60	123.5	559.6	64.9,64.9
70	58.90	87.48	107.3	89.77	63.03	101.4	124.5	102.2	60- 70	106.5	666.1	77.3,77.3
80	11.32	62.63	84.70	64.78	19.65	74.17	100.3	75.48	70- 80	81.96	748.0	86.8,86.8
90	0.3621	40.42	62.98	42.45	0.3576	48.85	76.99	51.77	80- 90	56.38	804.4	93.4,93.4
100	0.6597	16.07	37.61	17.48	0.5771	25.19	52.78	27.32	90-100	34.60	839.0	97.4,97.4
110	1.103	1.567	10.22	1.547	0.9585	1.281	21.32	1.472	100-110	13.35	852.3	98.9,98.9
120	1.558	1.811	1.953	1.745	1.371	1.436	1.614	1.504	110-120	2.403	854.7	99.2,99.2
130	1.944	2.104	2.193	2.023	1.752	1.703	1.844	1.779	120-130	1.581	856.3	99.4,99.4
140	2.290	2.381	2.409	2.289	2.086	1.967	2.032	2.059	130-140	1.587	857.9	99.6,99.6
150	2.590	2.652	2.592	2.536	2.412	2.241	2.229	2.342	140-150	1.454	859.4	99.7,99.7
160	2.876	2.895	2.842	2.778	2.736	2.550	2.526	2.644	150-160	1.194	860.6	99.9,99.9
170	3.167	3.131	3.082	3.044	3.087	2.924	2.868	2.971	160-170	0.8109	861.4	100,100
180	3.382	3.302	3.248	3.301	3.382	3.302	3.251	3.296	170-180	0.2991	861.7	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 384.32 lm

%lum = 44.6%

%lamp = 44.6%

Conical surface Flux(120deg): 559.55 lm

%lum = 64.9%


%lamp = 64.9%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-07-13

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

NAME: DL12-W27-V24	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*1	Shielding Angle:

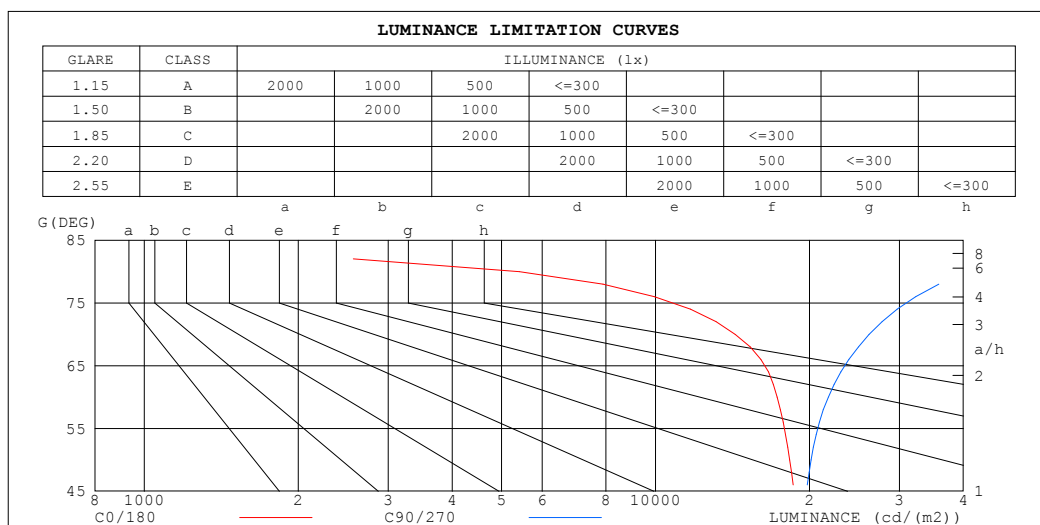

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	360	72447
80	5418	40681
75	12466	31641
70	14319	26175
65	17255	23902
60	17298	21769
55	18410	21128
50	18306	20143
45	19025	20042


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-07-13

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: DL12-W27-V24	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*1	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.17	1.17	1.17	1.14	1.14	1.14	1.07	1.07	1.07	1.01	1.01	1.01	.96	.96	.96	.93
1.0	.99	.94	.89	.96	.91	.87	.90	.87	.83	.85	.82	.79	.81	.78	.76	.73
2.0	.85	.77	.71	.82	.75	.69	.78	.72	.67	.73	.68	.64	.69	.65	.62	.59
3.0	.74	.65	.58	.72	.64	.57	.68	.61	.55	.64	.58	.53	.61	.56	.51	.49
4.0	.65	.56	.48	.63	.55	.48	.60	.52	.46	.57	.50	.45	.54	.48	.44	.41
5.0	.58	.48	.41	.56	.47	.41	.53	.46	.40	.51	.44	.39	.48	.42	.38	.35
6.0	.52	.43	.36	.51	.42	.35	.48	.40	.35	.46	.39	.34	.44	.38	.33	.31
7.0	.47	.38	.31	.46	.37	.31	.44	.36	.30	.42	.35	.30	.40	.34	.29	.27
8.0	.43	.34	.28	.42	.33	.28	.40	.32	.27	.38	.31	.26	.36	.30	.26	.24
9.0	.39	.31	.25	.38	.30	.25	.37	.29	.24	.35	.29	.24	.34	.28	.23	.21
10.0	.36	.28	.23	.35	.28	.22	.34	.27	.22	.32	.26	.22	.31	.25	.21	.19

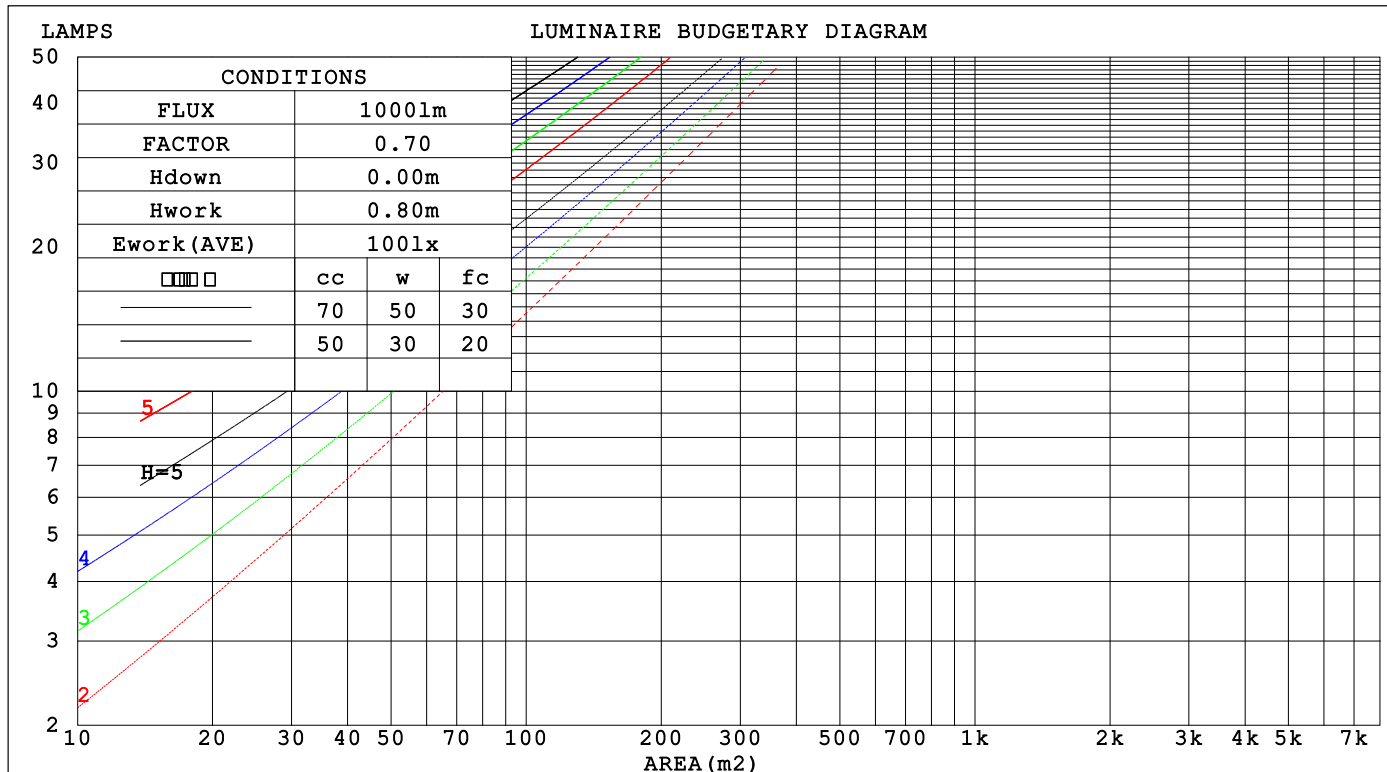

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-07-13

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: DL12-W27-V24	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*1	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)					
0.0						
1.0	.374 .213 .067	.365 .208 .066	.347 .199 .064	.331 .191 .061	.317 .183 .059	
2.0	.329 .180 .055	.320 .177 .054	.305 .170 .053	.291 .163 .051	.277 .157 .049	
3.0	.294 .157 .047	.287 .154 .046	.273 .148 .045	.260 .143 .044	.248 .137 .043	
4.0	.266 .138 .041	.260 .136 .040	.247 .131 .039	.236 .126 .038	.225 .122 .037	
5.0	.243 .124 .036	.237 .122 .035	.226 .117 .035	.215 .114 .034	.205 .110 .033	
6.0	.223 .112 .032	.218 .110 .032	.207 .106 .031	.198 .103 .030	.189 .100 .030	
7.0	.206 .102 .029	.201 .100 .029	.192 .097 .028	.183 .094 .027	.175 .091 .027	
8.0	.191 .093 .026	.187 .092 .026	.179 .089 .025	.171 .087 .025	.164 .084 .024	
9.0	.178 .086 .024	.174 .085 .024	.167 .083 .023	.160 .080 .023	.153 .078 .022	
10.0	.167 .080 .022	.163 .079 .022	.157 .077 .022	.150 .075 .021	.144 .072 .021	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)					
0.0	.241 .241 .241	.206 .206 .206	.141 .141 .141	.081 .081 .081	.026 .026 .026	
1.0	.236 .207 .180	.202 .177 .155	.138 .122 .107	.079 .071 .062	.025 .023 .020	
2.0	.229 .183 .145	.196 .158 .125	.134 .109 .087	.077 .063 .051	.025 .021 .017	
3.0	.221 .166 .123	.189 .143 .106	.130 .100 .075	.075 .058 .044	.024 .019 .014	
4.0	.213 .153 .108	.183 .132 .094	.126 .092 .066	.073 .054 .039	.023 .018 .013	
5.0	.205 .143 .097	.176 .124 .085	.121 .087 .060	.070 .051 .036	.023 .017 .012	
6.0	.198 .135 .090	.170 .117 .078	.117 .082 .055	.068 .048 .033	.022 .016 .011	
7.0	.190 .128 .085	.164 .111 .074	.113 .078 .052	.066 .046 .031	.021 .015 .010	
8.0	.184 .123 .080	.158 .106 .070	.109 .075 .050	.064 .044 .030	.021 .014 .010	
9.0	.177 .118 .077	.153 .102 .067	.106 .072 .048	.062 .042 .029	.020 .014 .009	
10.0	.171 .113 .075	.148 .098 .065	.103 .069 .046	.060 .041 .028	.019 .013 .009	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-07-13

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME: DL12-W27-V24					TYPE:					WEIGHT:				
SPEC.:					DIM.:					SERIAL No.:				
MFR.:					SUR.: 0.012*1					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3				
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3				
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2				
Room dimensions					Viewed crosswise					Viewed endwise				
x = 2H y = 2H					22.5	24.0	22.9	24.3	24.7	23.5	25.0	23.8	25.3	25.7
3H					24.0	25.4	24.4	25.7	26.1	25.9	27.3	26.2	27.6	28.0
4H					24.4	25.8	24.9	26.2	26.6	27.1	28.5	27.6	28.9	29.3
6H					24.6	25.9	25.1	26.3	26.7	28.6	29.8	29.0	30.2	30.6
8H					24.6	25.8	25.1	26.3	26.7	29.3	30.5	29.8	31.0	31.4
12H					24.6	25.8	25.0	26.2	26.6	30.2	31.4	30.7	31.8	32.3
4H 2H					23.3	24.7	23.7	25.0	25.5	24.1	25.4	24.5	25.8	26.2
3H					25.0	26.2	25.5	26.6	27.1	26.7	27.9	27.1	28.3	28.7
4H					25.7	26.8	26.2	27.3	27.7	28.2	29.3	28.6	29.7	30.2
6H					26.1	27.1	26.6	27.6	28.1	29.8	30.8	30.3	31.2	31.8
8H					26.2	27.1	26.7	27.6	28.1	30.7	31.6	31.2	32.1	32.6
12H					26.2	27.1	26.8	27.6	28.1	31.7	32.6	32.2	33.1	33.6
8H 4H					26.5	27.4	27.0	27.9	28.4	28.5	29.4	29.0	29.9	30.5
6H					27.3	28.1	27.8	28.6	29.2	30.4	31.2	31.0	31.7	32.3
8H					27.6	28.3	28.1	28.8	29.4	31.5	32.2	32.1	32.8	33.4
12H					27.8	28.4	28.4	28.9	29.6	32.8	33.4	33.4	34.0	34.6
12H 4H					26.7	27.6	27.3	28.1	28.6	28.5	29.4	29.1	29.9	30.4
6H					27.7	28.4	28.3	29.0	29.6	30.6	31.2	31.1	31.8	32.4
8H					28.2	28.8	28.8	29.4	30.0	31.8	32.4	32.3	32.9	33.5
Variations with the observer position at spacings(CIE Pub.117):														
S = 1.0H					+ 0.1 / - 0.2					+ 0.1 / - 0.1				
1.5H					+ 0.2 / - 0.2					+ 0.2 / - 0.3				
2.0H					+ 0.1 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 861.7 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.5)
Area: 0.012 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-07-13

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:


```

Range: 0 - 180DEG
Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

```

ISOCANDELA DIAGRAM

NAME: DL12-W27-V24	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*1	Shielding Angle:

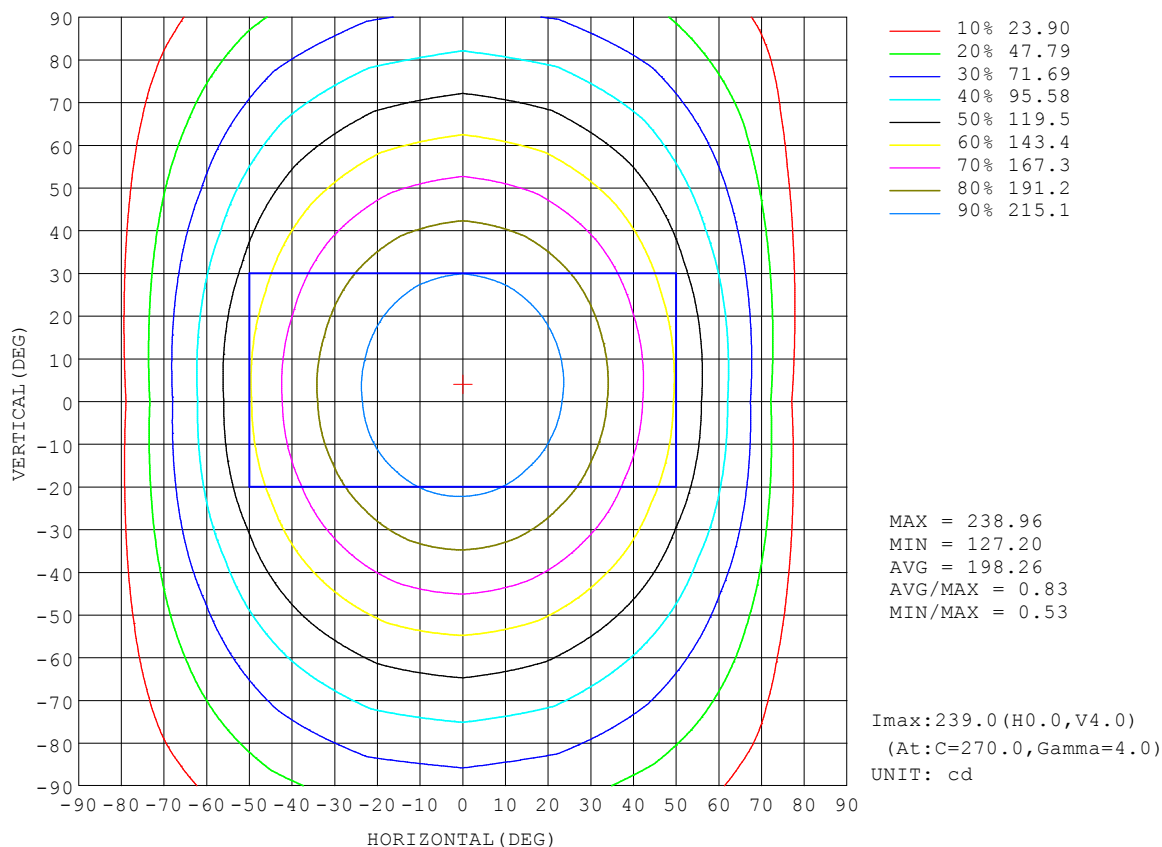


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-07-13

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

AAI Figure

NAME: DL12-W27-V24	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*1	Shielding Angle:

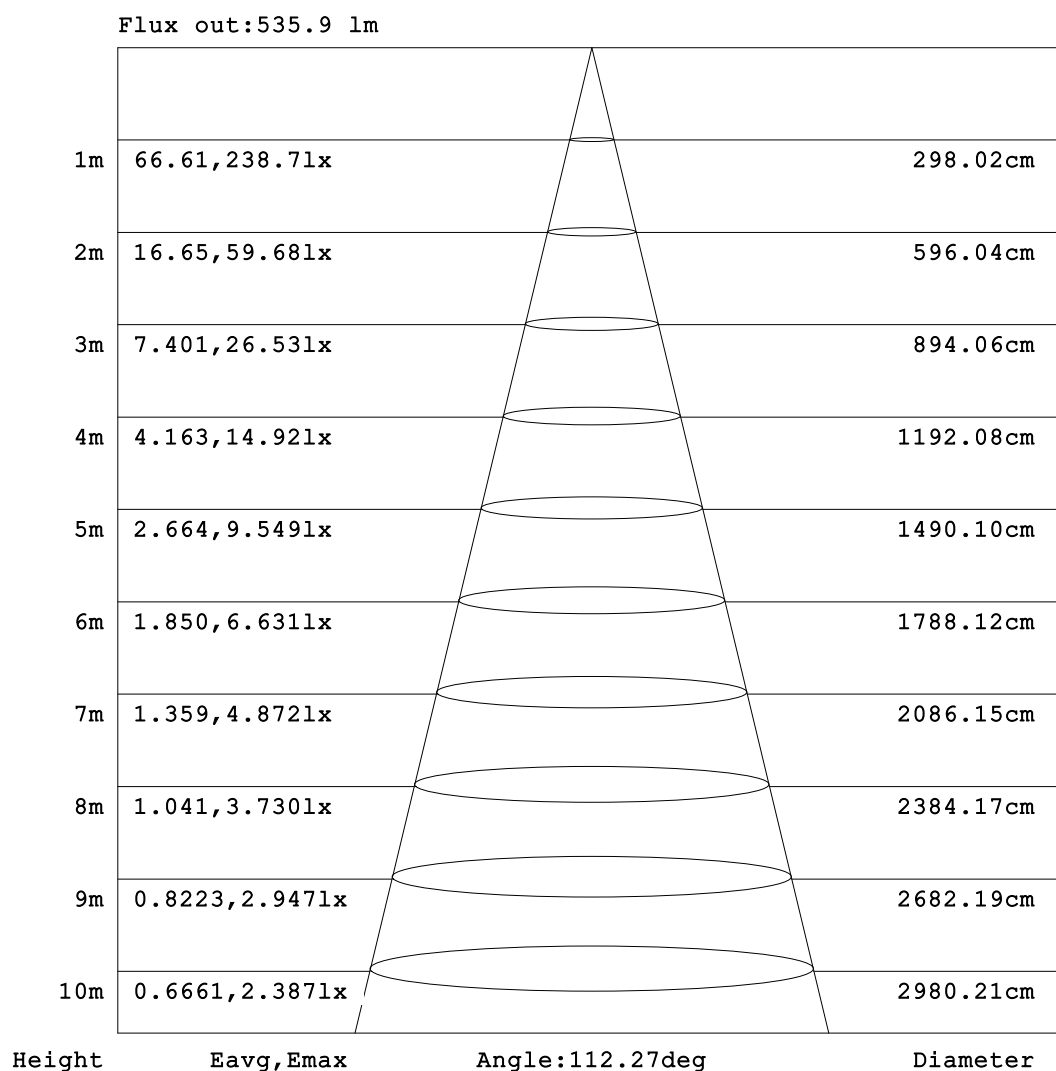


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-07-13

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

NAME: DL12-W27-V24	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*1	Shielding Angle:

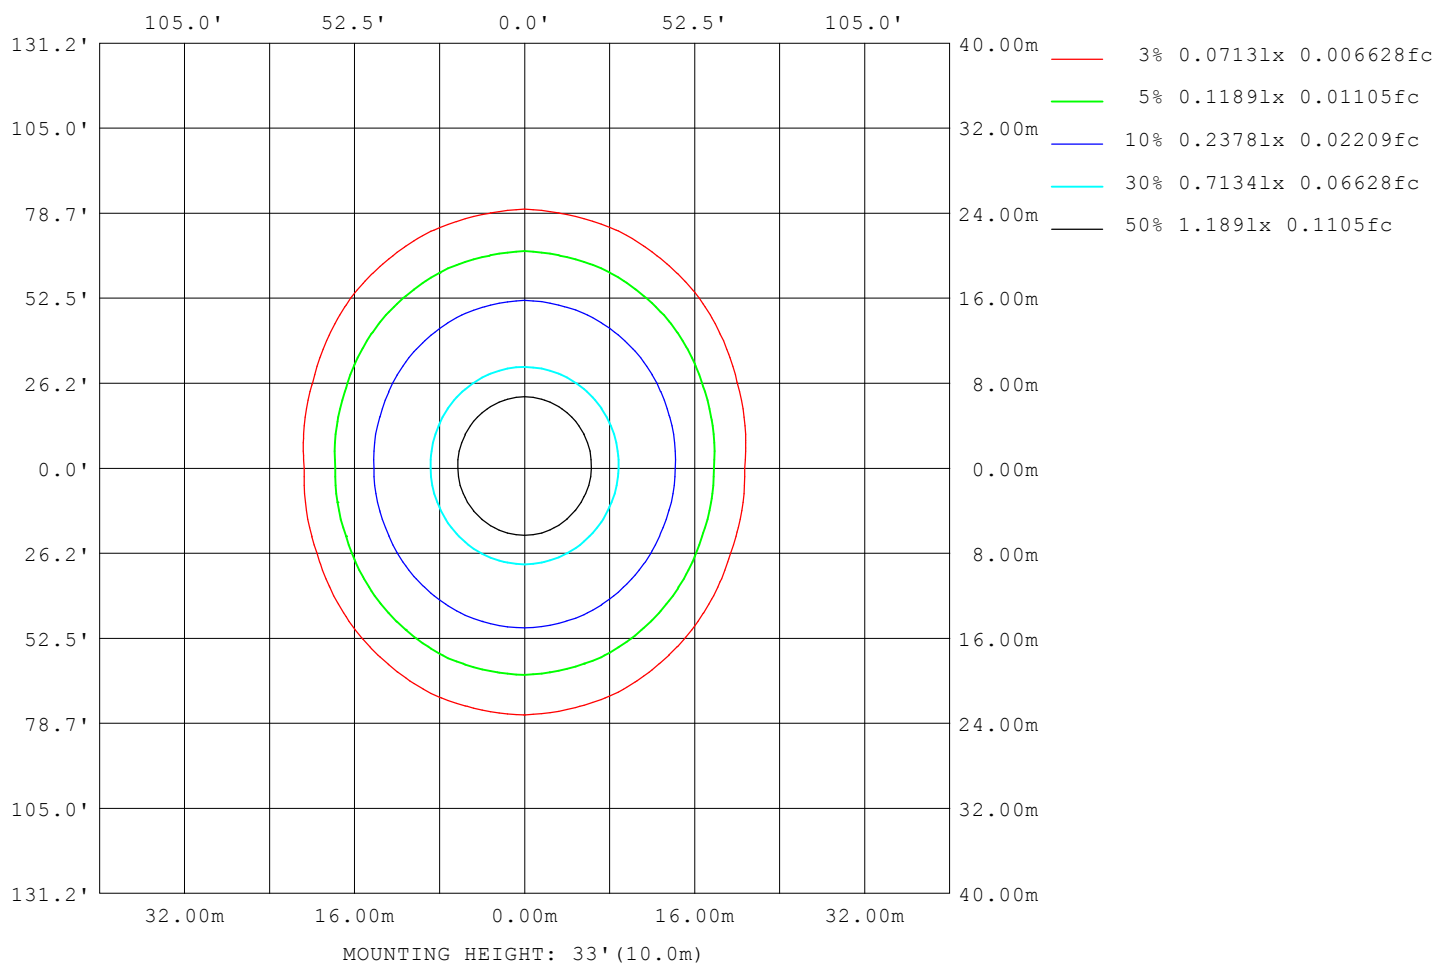

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-07-13

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

LED Avg.L Report

NAME: DL12-W27-V24	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*1	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	16484
L_0~180 (75) av	11902
L_0~180 (85) av	2652
L_90~270 (65) av	25192
L_90~270 (75) av	33523
L_90~270 (85) av	77492
L_45 (65) av	21526
L_45 (75) av	26398
L_45 (85) av	54695

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-07-13

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

Planar Illuminance Curve

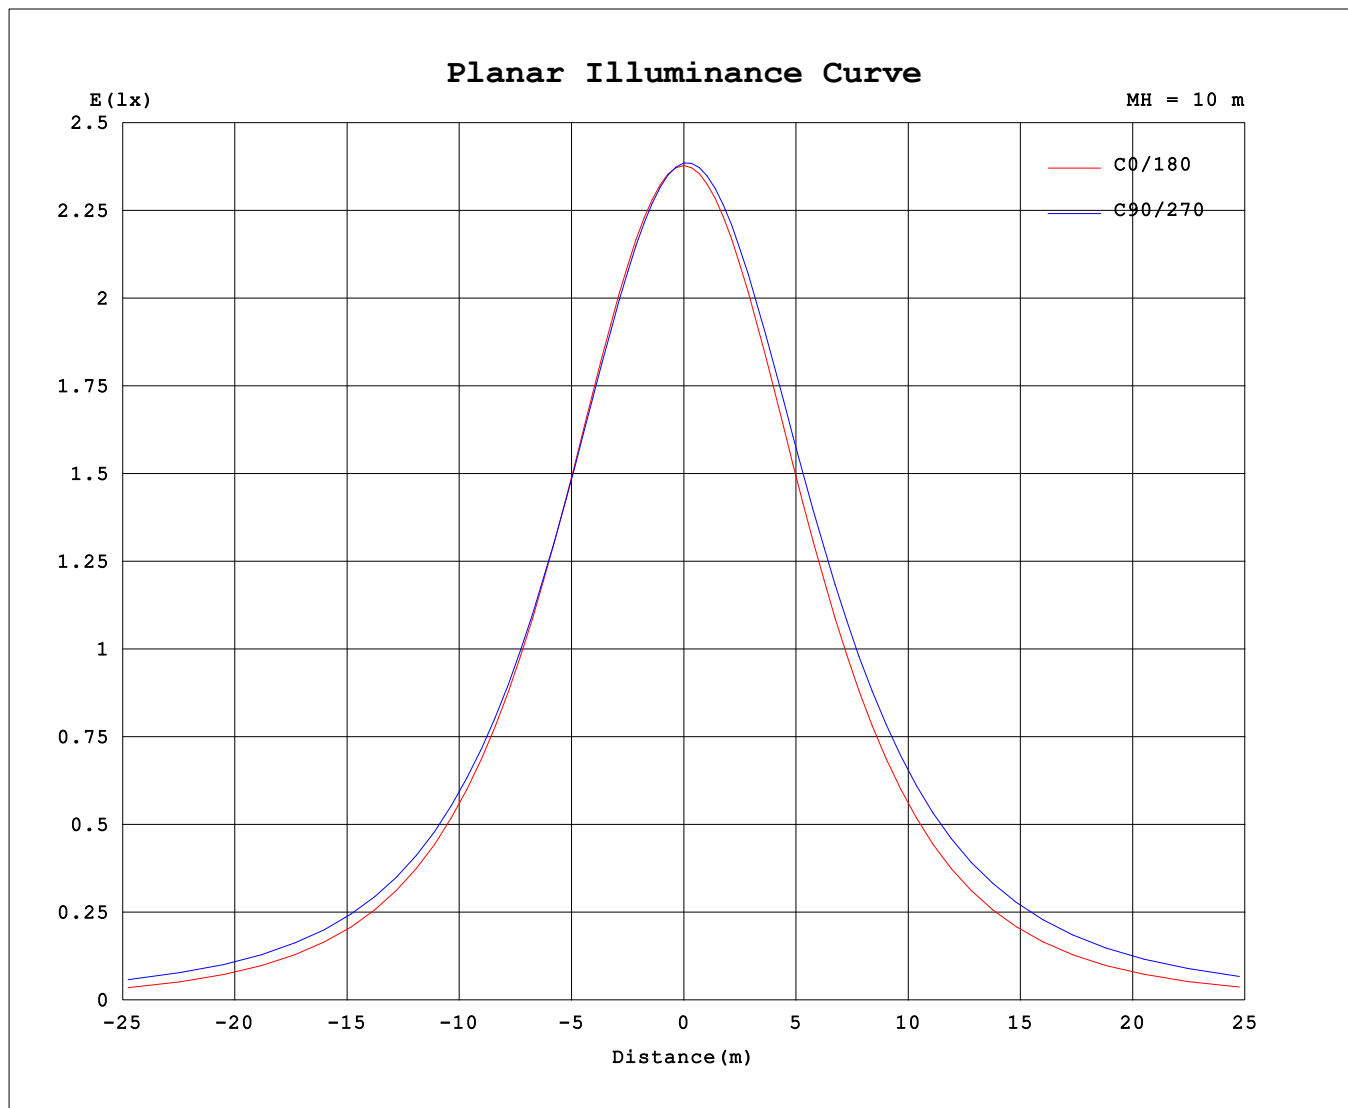

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-07-13

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: DL12-W27-V24	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*1	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	238	238	238	238	238	238	238	238	238	238	238	238	238	238	238	238			
5	238	237	237	237	237	237	237	237	238	238	239	239	239	239	238	238			
10	234	233	232	232	232	232	233	233	234	235	236	237	237	237	236	235			
15	230	229	227	227	227	228	228	229	230	232	233	234	234	234	233	231			
20	221	220	218	218	219	219	219	220	222	224	226	228	229	227	226	223			
25	214	212	211	212	212	212	212	213	215	217	220	223	224	222	220	217			
30	201	199	198	200	201	201	199	200	202	205	209	213	215	213	209	204			
35	191	189	189	192	193	192	190	189	192	195	201	206	208	205	201	195			
40	174	172	174	178	179	179	175	173	175	179	187	193	196	193	187	179			
45	162	160	163	168	170	169	164	161	162	167	177	184	187	184	176	167			
50	142	140	145	152	155	153	147	141	142	148	160	169	173	169	160	148			
55	127	127	134	142	145	143	135	128	127	135	148	159	164	159	148	135			
60	104	105	116	126	131	128	118	107	104	114	131	144	149	144	131	114			
65	87.7	91.2	104	116	121	118	106	92.9	88.1	99.4	119	133	139	133	119	100			
70	58.9	70.4	87.5	102	107	103	89.8	72.4	63.0	77.9	101	118	125	118	102	79.1			
75	38.8	57.4	77.3	92.6	98.2	93.9	79.5	59.5	44.6	64.6	90.3	108	115	108	91.3	66.2			
80	11.3	40.1	62.6	78.8	84.7	80.1	64.8	42.2	19.6	45.7	74.2	92.9	100	93.6	75.5	48.3			
85	0.38	30.2	53.1	69.6	75.7	71.1	55.4	32.1	7.56	34.8	64.0	83.5	90.9	84.2	65.7	37.5			
90	0.36	17.7	40.4	56.9	63.0	58.1	42.5	18.3	0.36	21.2	48.8	69.6	77.0	70.4	51.8	24.0			
95	0.46	9.82	32.3	49.1	55.1	50.2	34.1	11.0	0.41	13.2	40.7	60.6	68.1	61.6	43.4	16.0			
100	0.66	1.01	16.1	31.7	37.6	32.8	17.5	1.21	0.58	0.93	25.2	44.3	52.8	45.9	27.3	2.40			
105	0.82	1.03	6.85	20.5	25.9	21.6	8.04	1.03	0.72	0.84	12.4	31.2	40.2	33.5	16.0	0.89			
110	1.10	1.22	1.57	5.90	10.2	6.71	1.55	1.21	0.96	0.99	1.28	14.0	21.3	15.0	1.47	1.02			
115	1.29	1.38	1.65	1.80	2.40	1.81	1.60	1.35	1.13	1.12	1.29	2.14	7.67	3.01	1.37	1.14			
120	1.56	1.61	1.81	1.94	1.95	1.91	1.75	1.57	1.37	1.32	1.44	1.59	1.61	1.61	1.50	1.35			
125	1.72	1.76	1.93	2.03	2.05	2.00	1.86	1.71	1.53	1.46	1.54	1.67	1.70	1.69	1.61	1.50			
130	1.94	1.99	2.10	2.18	2.19	2.15	2.02	1.92	1.75	1.66	1.70	1.79	1.84	1.84	1.78	1.71			
135	2.09	2.14	2.22	2.28	2.29	2.24	2.13	2.05	1.89	1.79	1.81	1.89	1.92	1.94	1.89	1.86			
140	2.29	2.34	2.38	2.42	2.41	2.38	2.29	2.23	2.09	1.98	1.97	2.02	2.03	2.07	2.06	2.07			
145	2.41	2.46	2.49	2.50	2.48	2.47	2.39	2.35	2.22	2.10	2.08	2.11	2.11	2.16	2.17	2.20			
150	2.59	2.63	2.65	2.62	2.59	2.60	2.54	2.51	2.41	2.29	2.24	2.26	2.23	2.29	2.34	2.40			
155	2.71	2.75	2.75	2.71	2.69	2.69	2.63	2.63	2.54	2.42	2.36	2.37	2.34	2.39	2.46	2.52			
160	2.88	2.90	2.89	2.84	2.84	2.81	2.78	2.79	2.74	2.63	2.55	2.54	2.53	2.55	2.64	2.72			
165	2.99	3.02	2.99	2.92	2.95	2.89	2.88	2.91	2.87	2.78	2.69	2.66	2.67	2.67	2.76	2.87			
170	3.17	3.17	3.13	3.07	3.08	3.03	3.04	3.10	3.09	3.00	2.92	2.88	2.87	2.88	2.97	3.07			
175	3.27	3.26	3.22	3.16	3.17	3.13	3.17	3.22	3.22	3.15	3.09	3.04	3.02	3.03	3.12	3.20			
180	3.38	3.35	3.30	3.25	3.25	3.23	3.30	3.36	3.38	3.35	3.30	3.25	3.25	3.23	3.30	3.36			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-07-13

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks: