


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: DL12-W50-V24	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*1	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 91.00 lm/W
MODEL		I <sub>max</sub> (cd)	250.9	S/MH(C0/180)		1.26
NOMINAL POWER(W)	10	LOR(%)	100.0	S/MH(C90/270)		1.34
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	911.08	□ UP,DN(C0-180)		3.0,45.2
NOMINAL FLUX(lm)	911.077	CIE CLASS	DIRECT	□ UP,DN(C180-360)		3.7,48.1
LAMPS INSIDE	1	□ up (%)	6.7	CIBSE SHR NOM		1.50
TEST VOLTAGE(V)	24	□ down (%)	93.3	CIBSE SHR MAX		1.50

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

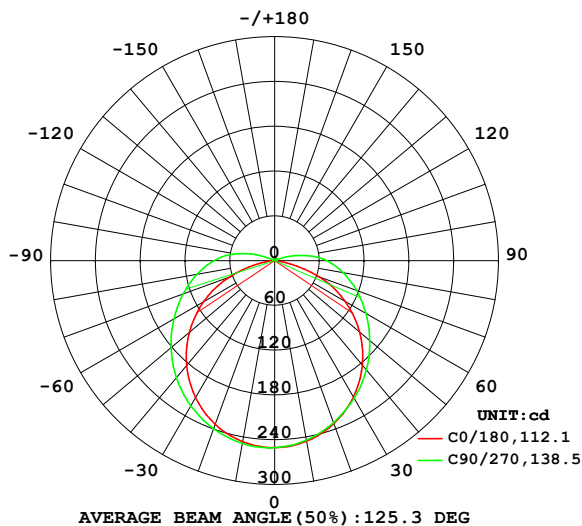

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

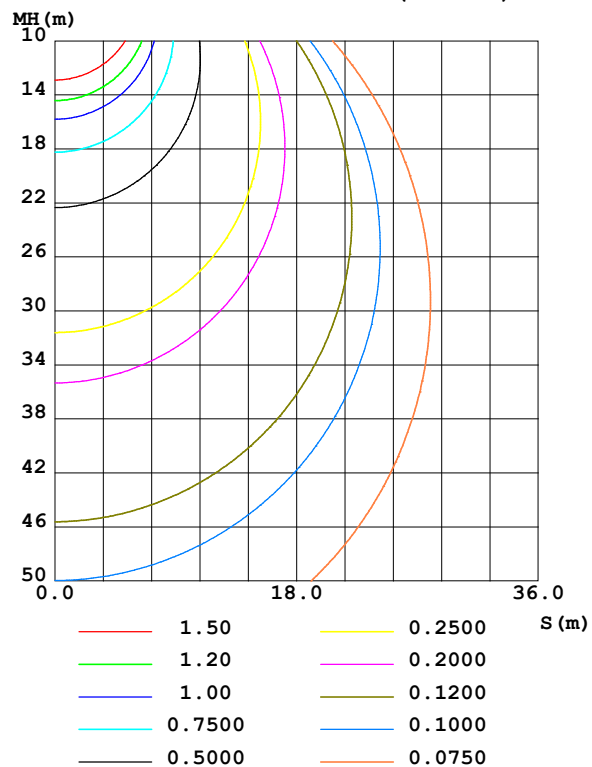

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-07-13

□ Range: 0 - 180DEG  
 □ Interval: 2.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
 Humidity:65.0%  
 Test Distance:5.749m [K=1.0000]  
 Remarks:

## ZONAL FLUX DIAGRAM

### ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	245.7	244.4	244.3	245.1	246.4	248.2	248.7	247.6	0- 10	23.72	23.72	2.6,2.6
20	232.4	230.1	230.9	231.5	233.3	237.5	239.5	236.5	10- 20	68.05	91.77	10.1,10.1
30	211.2	209.4	213.0	211.1	212.1	219.5	224.8	218.7	20- 30	103.9	195.6	21.5,21.5
40	182.8	183.8	191.2	186.0	183.7	195.8	204.9	195.3	30- 40	127.3	322.9	35.4,35.4
50	148.4	154.5	166.6	157.2	149.2	167.3	181.3	167.1	40- 50	136.1	459.0	50.4,50.4
60	109.0	123.8	141.1	126.9	109.5	136.3	155.9	137.0	50- 60	130.5	589.5	64.7,64.7
70	63.22	94.32	117.0	97.72	64.26	105.9	130.7	107.3	60- 70	112.9	702.4	77.1,77.1
80	12.63	67.87	93.03	71.55	19.79	77.57	105.6	79.82	70- 80	87.38	789.8	86.7,86.7
90	0.3817	44.47	69.92	47.31	0.3772	51.12	81.23	54.95	80- 90	60.67	850.5	93.3,93.3
100	0.7013	17.24	40.68	19.66	0.6209	25.02	53.61	27.78	90-100	36.72	887.2	97.4,97.4
110	1.169	1.653	11.91	1.800	1.017	1.443	20.99	1.639	100-110	13.96	901.1	98.9,98.9
120	1.642	1.905	2.051	1.842	1.449	1.527	1.731	1.610	110-120	2.639	903.8	99.2,99.2
130	2.047	2.210	2.300	2.129	1.841	1.806	1.973	1.900	120-130	1.673	905.4	99.4,99.4
140	2.415	2.503	2.531	2.405	2.196	2.080	2.154	2.182	130-140	1.675	907.1	99.6,99.6
150	2.728	2.784	2.723	2.659	2.538	2.368	2.360	2.474	140-150	1.532	908.7	99.7,99.7
160	3.026	3.041	2.989	2.922	2.879	2.682	2.664	2.783	150-160	1.257	909.9	99.9,99.9
170	3.327	3.284	3.227	3.198	3.237	3.075	3.018	3.127	160-170	0.8528	910.8	100,100
180	3.552	3.470	3.412	3.473	3.549	3.470	3.412	3.469	170-180	0.3141	911.1	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 404.46 lm

%lum = 44.4%

%lamp = 44.4%

Conical surface Flux(120deg): 589.47 lm

%lum = 64.7%


%lamp = 64.7%

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-07-13

□ Range: 0 - 180DEG  
□ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:

### LUMINANCE LIMITATION CURVES

NAME: DL12-W50-V24	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*1	Shielding Angle:

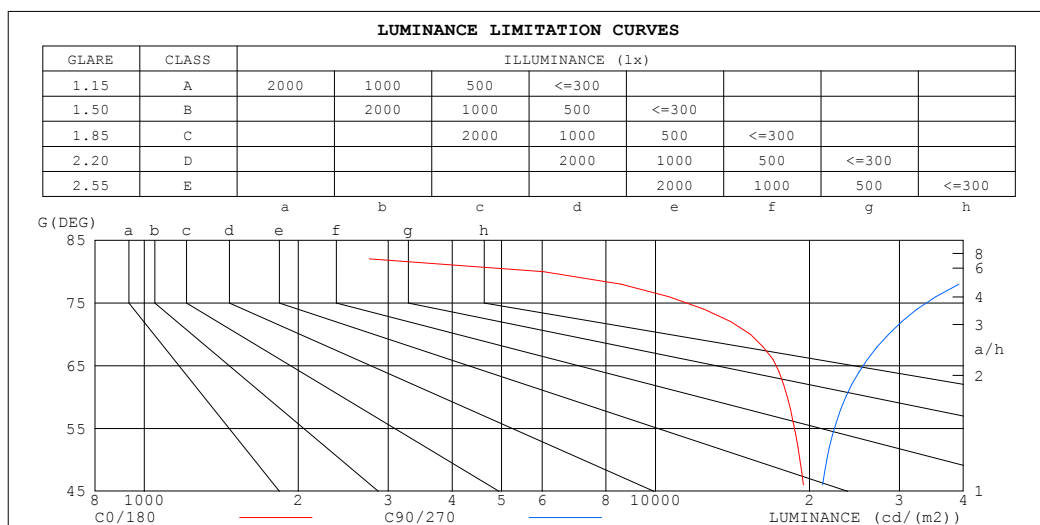

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	386	80133
80	6040	44715
75	13247	34600
70	15347	28561
65	18105	25936
60	18099	23553
55	19275	22751
50	19163	21629
45	19930	21430


C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-07-13

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: DL12-W50-V24	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*1	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.17	1.17	1.17	1.14	1.14	1.14	1.07	1.07	1.07	1.01	1.01	1.01	.96	.96	.96	.93
1.0	.99	.94	.89	.96	.91	.87	.90	.86	.83	.85	.82	.79	.80	.78	.76	.73
2.0	.85	.77	.71	.82	.75	.69	.78	.72	.67	.73	.68	.64	.69	.65	.62	.59
3.0	.74	.65	.58	.72	.63	.57	.68	.61	.55	.64	.58	.53	.60	.56	.51	.49
4.0	.65	.56	.48	.63	.54	.48	.60	.52	.46	.57	.50	.45	.54	.48	.43	.41
5.0	.58	.48	.41	.56	.47	.41	.53	.46	.40	.51	.44	.39	.48	.42	.37	.35
6.0	.52	.42	.36	.51	.42	.35	.48	.40	.34	.46	.39	.34	.43	.37	.33	.30
7.0	.47	.38	.31	.46	.37	.31	.44	.36	.30	.42	.35	.30	.40	.34	.29	.27
8.0	.43	.34	.28	.42	.33	.28	.40	.32	.27	.38	.31	.26	.36	.30	.26	.24
9.0	.39	.31	.25	.38	.30	.25	.37	.29	.24	.35	.28	.24	.34	.28	.23	.21
10.0	.36	.28	.23	.35	.28	.22	.34	.27	.22	.32	.26	.21	.31	.25	.21	.19

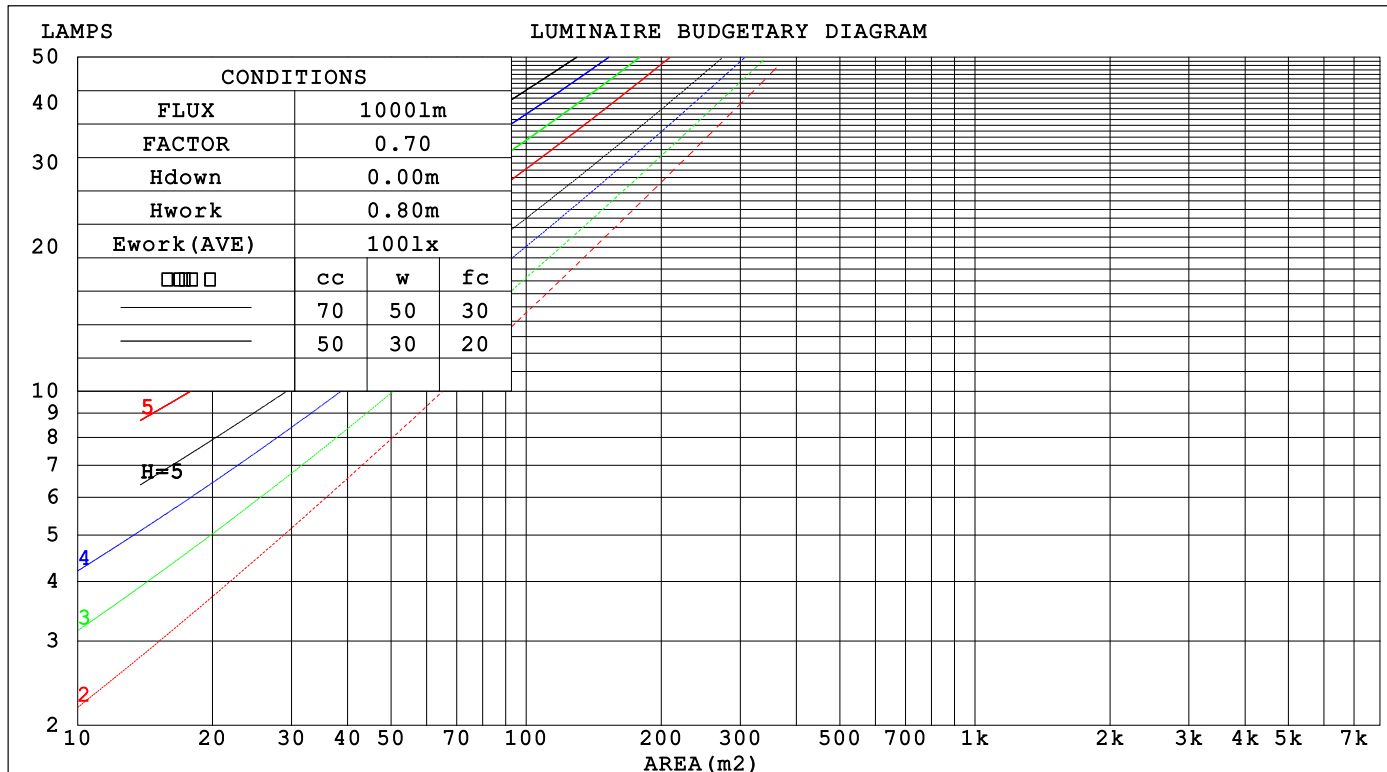

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-07-13

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:

### WEC AND CCEC

NAME: DL12-W50-V24	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*1	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)					
0.0						
1.0	.376 .214 .068	.366 .209 .066	.349 .200 .064	.333 .192 .062	.318 .184 .059	
2.0	.330 .181 .055	.322 .177 .055	.306 .170 .053	.292 .164 .051	.278 .157 .050	
3.0	.295 .157 .047	.288 .154 .046	.274 .148 .045	.261 .143 .044	.249 .138 .043	
4.0	.267 .139 .041	.260 .136 .040	.248 .131 .039	.236 .127 .038	.225 .122 .037	
5.0	.243 .124 .036	.237 .122 .035	.226 .118 .035	.216 .114 .034	.206 .110 .033	
6.0	.223 .112 .032	.218 .110 .032	.208 .106 .031	.198 .103 .030	.190 .100 .030	
7.0	.206 .102 .029	.201 .100 .029	.192 .097 .028	.184 .094 .027	.176 .091 .027	
8.0	.191 .094 .026	.187 .092 .026	.179 .089 .026	.171 .087 .025	.164 .084 .024	
9.0	.179 .086 .024	.175 .085 .024	.167 .083 .023	.160 .080 .023	.153 .078 .023	
10.0	.167 .080 .022	.164 .079 .022	.157 .077 .022	.150 .075 .021	.144 .073 .021	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)					
0.0	.241 .241 .241	.206 .206 .206	.141 .141 .141	.081 .081 .081	.026 .026 .026	
1.0	.236 .207 .180	.202 .177 .155	.138 .122 .107	.079 .071 .062	.025 .023 .020	
2.0	.229 .183 .145	.196 .158 .125	.134 .109 .087	.077 .063 .051	.025 .021 .017	
3.0	.221 .166 .122	.190 .143 .106	.130 .100 .074	.075 .058 .044	.024 .019 .014	
4.0	.213 .153 .108	.183 .133 .094	.126 .092 .066	.073 .054 .039	.023 .018 .013	
5.0	.205 .143 .097	.176 .124 .085	.121 .087 .060	.070 .051 .035	.023 .017 .012	
6.0	.198 .135 .090	.170 .117 .078	.117 .082 .055	.068 .048 .033	.022 .016 .011	
7.0	.191 .128 .085	.164 .111 .074	.113 .078 .052	.066 .046 .031	.021 .015 .010	
8.0	.184 .123 .081	.158 .106 .070	.110 .075 .050	.064 .044 .030	.021 .014 .010	
9.0	.178 .118 .077	.153 .102 .067	.106 .072 .048	.062 .042 .029	.020 .014 .009	
10.0	.172 .113 .075	.148 .098 .065	.103 .069 .046	.060 .041 .028	.019 .013 .009	

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-07-13

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:

### UGR(Unified Glare Rating) Table

NAME: DL12-W50-V24					TYPE:					WEIGHT:				
SPEC.:					DIM.:					SERIAL No.:				
MFR.:					SUR.: 0.012*1					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3				
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3				
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2				
Room dimensions					Viewed crosswise					Viewed endwise				
x = 2H y = 2H					22.5	24.0	22.9	24.3	24.7	23.6	25.1	24.0	25.4	25.8
3H					24.0	25.4	24.4	25.7	26.1	26.0	27.4	26.4	27.8	28.2
4H					24.5	25.8	24.9	26.2	26.6	27.3	28.7	27.7	29.0	29.4
6H					24.7	25.9	25.1	26.3	26.8	28.8	30.0	29.2	30.4	30.8
8H					24.6	25.9	25.1	26.3	26.7	29.5	30.8	30.0	31.2	31.6
12H					24.6	25.8	25.1	26.2	26.7	30.4	31.6	30.9	32.0	32.5
4H 2H					23.3	24.7	23.8	25.1	25.5	24.2	25.5	24.6	25.9	26.3
3H					25.1	26.3	25.5	26.7	27.1	26.8	28.0	27.3	28.4	28.9
4H					25.8	26.9	26.2	27.3	27.8	28.3	29.4	28.8	29.9	30.4
6H					26.2	27.2	26.7	27.7	28.2	30.0	31.0	30.5	31.5	32.0
8H					26.3	27.2	26.8	27.7	28.2	30.9	31.8	31.4	32.3	32.9
12H					26.3	27.1	26.8	27.6	28.2	32.0	32.8	32.5	33.3	33.9
8H 4H					26.6	27.5	27.1	28.0	28.5	28.7	29.6	29.2	30.1	30.6
6H					27.4	28.2	27.9	28.7	29.3	30.6	31.4	31.2	31.9	32.5
8H					27.7	28.4	28.2	28.9	29.5	31.8	32.5	32.3	33.0	33.6
12H					27.9	28.5	28.4	29.0	29.7	33.1	33.7	33.6	34.2	34.9
12H 4H					26.8	27.7	27.4	28.2	28.7	28.7	29.6	29.2	30.1	30.6
6H					27.8	28.5	28.4	29.1	29.7	30.8	31.4	31.3	32.0	32.6
8H					28.3	28.9	28.9	29.5	30.1	32.0	32.6	32.6	33.2	33.8
Variations with the observer position at spacings(CIE Pub.117):														
S = 1.0H					+ 0.1 / - 0.2					+ 0.1 / - 0.1				
1.5H					+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H					+ 0.1 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 911.1 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.3)  
Area: 0.012 m2

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-07-13

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:


```

Range: 0 - 180DEG
Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

```

### ISOCANDELA DIAGRAM

NAME: DL12-W50-V24	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*1	Shielding Angle:

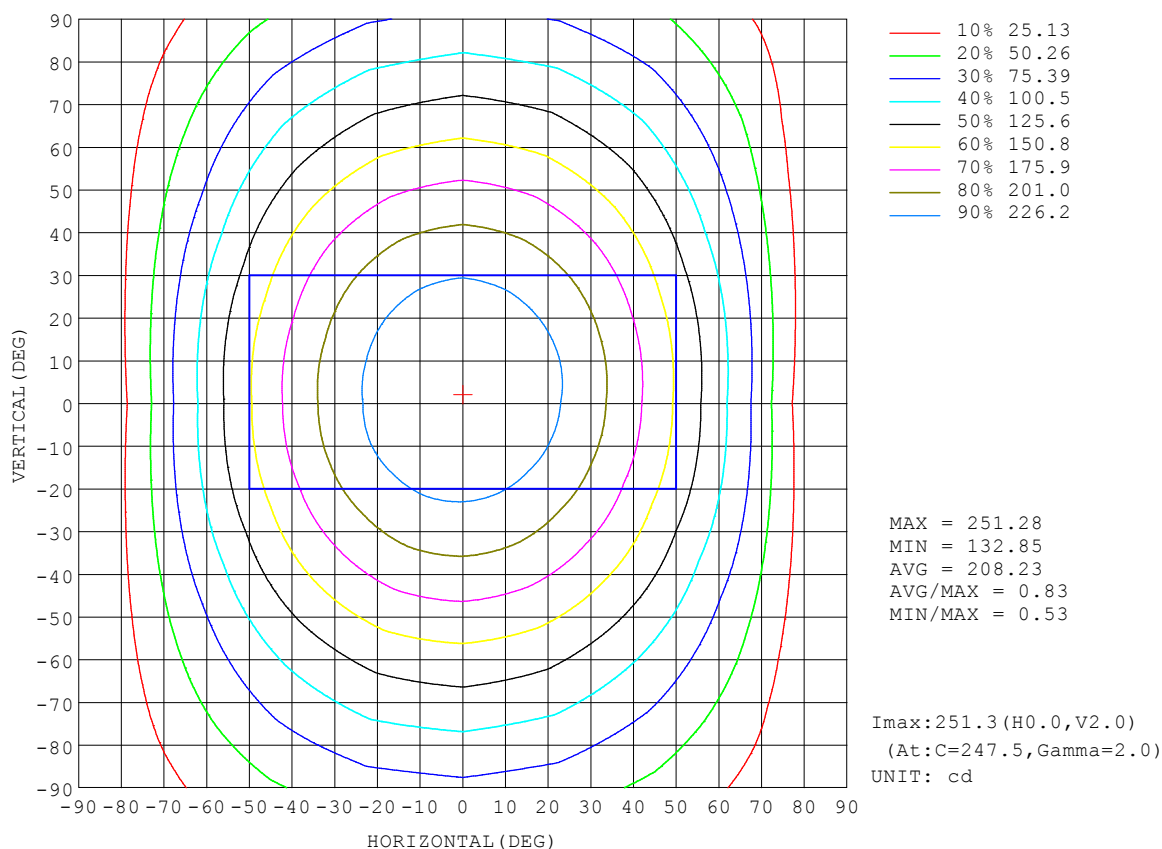


C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2022-07-13

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity: 65.0%  
Test Distance: 5.749m [K=1.0000]  
Remarks:



### AAI Figure

NAME: DL12-W50-V24	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*1	Shielding Angle:

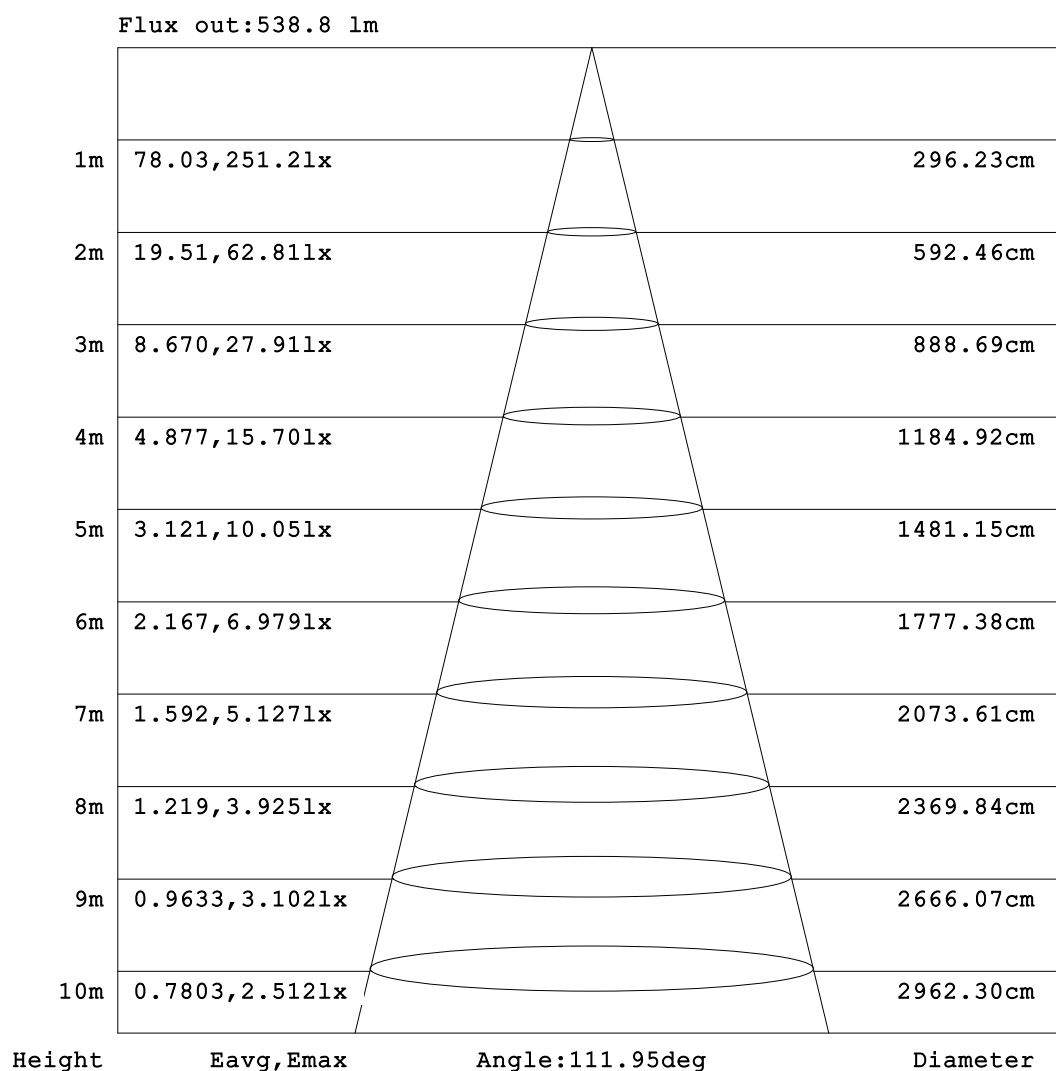


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-07-13

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity:65.0%  
Test Distance:5.749m [K=1.0000]  
Remarks:

### ISOLUX DIAGRAM

NAME: DL12-W50-V24	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*1	Shielding Angle:

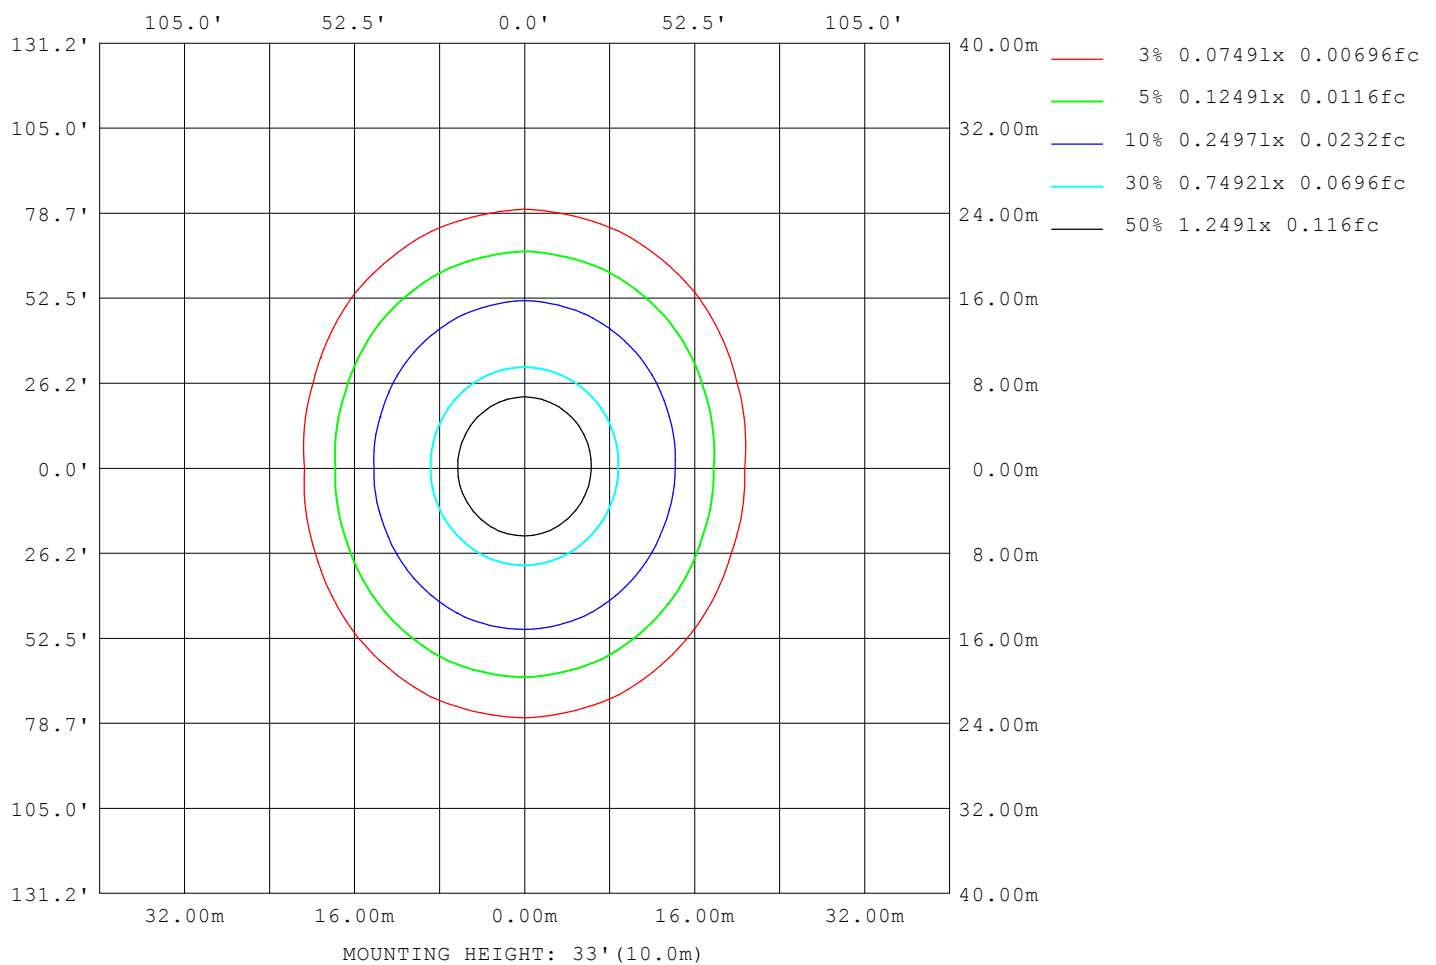

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2022-07-13

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity: 65.0%  
Test Distance: 5.749m [K=1.0000]  
Remarks:

## LED Avg.L Report

NAME: DL12-W50-V24	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*1	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	17339
L_0~180 (75) av	12318
L_0~180 (85) av	2755
L_90~270 (65) av	26834
L_90~270 (75) av	35901
L_90~270 (85) av	83469
L_45 (65) av	22848
L_45 (75) av	28219
L_45 (85) av	58822

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2022-07-13

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity: 65.0%  
Test Distance: 5.749m [K=1.0000]  
Remarks:

## Planar Illuminance Curve

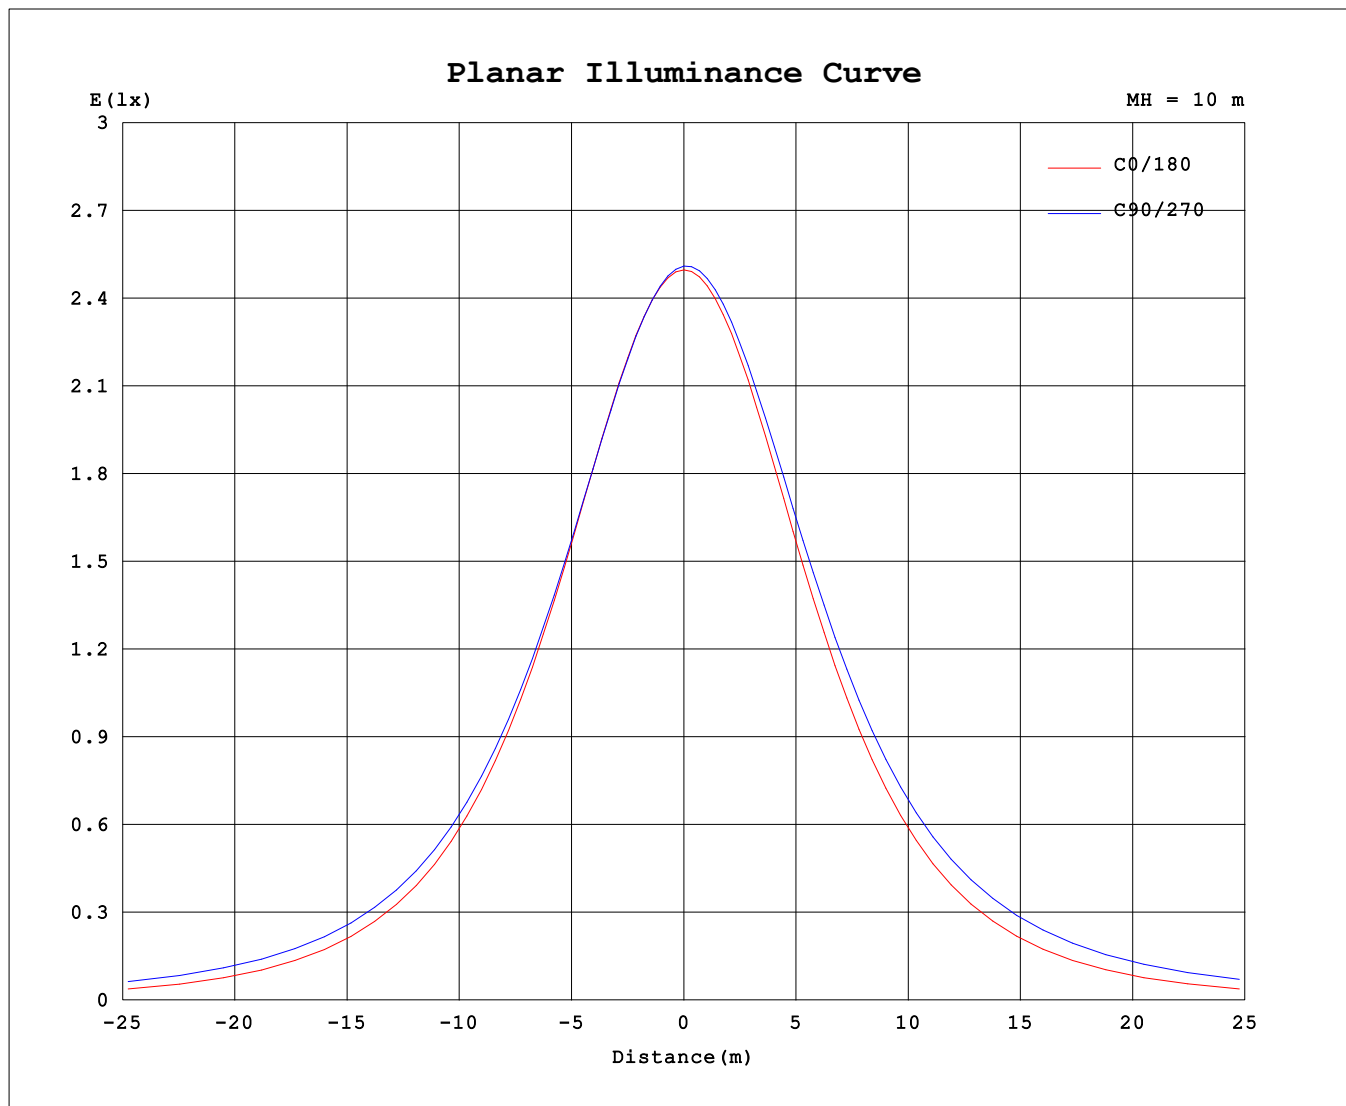

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2022-07-13

☐ Range: 0 - 180DEG  
☐ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.450  
Humidity: 65.0%  
Test Distance: 5.749m [K=1.0000]  
Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: DL12-W50-V24	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*1	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	251	251	251	251	251	251	251	251	251	251	251	251	251	251	251	251			
5	250	249	249	249	249	249	249	250	250	250	251	251	251	251	250	250			
10	246	245	244	244	244	245	245	246	246	247	248	249	249	248	248	247			
15	241	240	240	240	240	240	241	241	242	243	245	246	246	245	244	243			
20	232	231	230	230	231	231	231	232	233	235	237	239	239	238	236	234			
25	225	223	223	224	224	225	224	225	226	228	231	233	234	233	230	227			
30	211	209	209	212	213	213	211	211	212	215	220	223	225	223	219	214			
35	201	199	200	203	205	204	202	200	202	205	211	215	217	215	210	204			
40	183	181	184	189	191	190	186	183	184	188	196	202	205	202	195	187			
45	170	168	172	179	182	180	175	170	171	175	185	193	196	192	184	175			
50	148	148	155	163	167	165	157	150	149	155	167	177	181	177	167	155			
55	133	134	142	152	156	154	145	136	134	141	155	167	171	167	155	141			
60	109	112	124	136	141	138	127	114	110	119	136	150	156	150	137	119			
65	92.2	96.8	112	126	131	128	115	99.5	92.5	104	124	139	146	140	125	105			
70	63.2	75.0	94.3	111	117	113	97.7	77.9	64.3	80.8	106	124	131	124	107	82.8			
75	41.3	61.5	83.7	101	107	103	87.1	64.3	45.1	66.6	94.4	113	121	114	96.2	69.5			
80	12.6	43.2	67.9	86.1	93.0	88.5	71.6	46.3	19.8	47.7	77.6	97.6	106	98.7	79.8	51.0			
85	0.41	32.2	58.2	76.7	83.7	78.6	61.2	35.8	7.77	36.5	67.0	87.7	95.7	88.9	69.5	39.9			
90	0.38	19.2	44.5	62.9	69.9	64.6	47.3	22.0	0.38	22.3	51.1	73.2	81.2	74.4	55.0	25.5			
95	0.49	9.99	34.2	53.0	59.9	54.7	37.2	12.4	0.44	13.3	42.0	63.3	71.5	64.7	45.4	16.4			
100	0.70	1.10	17.2	34.1	40.7	35.8	19.7	1.66	0.62	1.08	25.0	44.6	53.6	46.7	27.8	2.57			
105	0.87	1.09	7.67	22.4	28.4	24.0	9.49	1.11	0.76	0.89	12.0	30.8	40.3	33.6	16.1	0.93			
110	1.17	1.29	1.65	7.26	11.9	8.41	1.80	1.28	1.02	1.06	1.44	13.8	21.0	15.2	1.64	1.08			
115	1.36	1.45	1.74	2.24	3.81	2.58	1.72	1.43	1.19	1.18	1.39	2.80	8.17	3.25	1.47	1.22			
120	1.64	1.70	1.91	2.04	2.05	2.02	1.84	1.66	1.45	1.40	1.53	1.69	1.73	1.73	1.61	1.44			
125	1.81	1.86	2.03	2.14	2.15	2.11	1.96	1.81	1.61	1.54	1.64	1.77	1.83	1.82	1.72	1.59			
130	2.05	2.09	2.21	2.29	2.30	2.27	2.13	2.02	1.84	1.75	1.81	1.90	1.97	1.98	1.90	1.81			
135	2.20	2.24	2.33	2.39	2.40	2.36	2.24	2.15	1.99	1.89	1.91	2.00	2.05	2.07	2.01	1.97			
140	2.41	2.46	2.50	2.54	2.53	2.50	2.40	2.35	2.20	2.09	2.08	2.14	2.15	2.21	2.18	2.18			
145	2.54	2.59	2.61	2.62	2.61	2.59	2.51	2.47	2.33	2.21	2.19	2.24	2.24	2.29	2.30	2.32			
150	2.73	2.77	2.78	2.75	2.72	2.73	2.66	2.64	2.54	2.41	2.37	2.39	2.36	2.43	2.47	2.53			
155	2.85	2.89	2.89	2.84	2.83	2.82	2.76	2.77	2.67	2.54	2.48	2.50	2.47	2.53	2.60	2.66			
160	3.03	3.06	3.04	2.99	2.99	2.95	2.92	2.94	2.88	2.76	2.68	2.68	2.66	2.70	2.78	2.87			
165	3.15	3.17	3.14	3.08	3.10	3.04	3.03	3.06	3.02	2.91	2.83	2.80	2.81	2.82	2.92	3.02			
170	3.33	3.33	3.28	3.22	3.23	3.18	3.20	3.25	3.24	3.15	3.08	3.03	3.02	3.03	3.13	3.22			
175	3.43	3.42	3.39	3.32	3.32	3.29	3.32	3.38	3.38	3.31	3.23	3.19	3.17	3.18	3.27	3.37			
180	3.55	3.52	3.47	3.42	3.41	3.40	3.47	3.53	3.55	3.52	3.47	3.42	3.41	3.40	3.47	3.53			

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:

Test Date:2022-07-13

□ Range: 0 - 180DEG

□ Interval: 2.0DEG

Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.450

Humidity:65.0%

Test Distance:5.749m [K=1.0000]

Remarks: