



EMC TEST REPORT

For

SHENZHEN LEDYI LIGHTING CO., LTD.

Flexible LED Wall Washer

Test Model: LY-FW2621-W

Additional Models : please refer to Model list

Prepared for : SHENZHEN LEDYI LIGHTING CO., LTD.
Address : 7th Floor, Skyworth Digital Building, Songbai Road, Shiyan,
Bao'an District, Shenzhen, China, 518108

Prepared by : Shenzhen Southern LCS Compliance Testing Laboratory Ltd.
Address : 101-201, No.39 Building, Xialang Industrial Zone, Heshuikou
Community, Matian Street, Guangming District, Shenzhen, China

Tel : (+86)755-29871520
Fax : (+86)755-29871521
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : March 29, 2022
Number of tested samples : 1
Serial number : Prototype
Date of Test : March 29, 2022 - April 15, 2022
Date of Report : April 15, 2022



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

101-201, No. 39 Building, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com.

Scan code to check authenticity.

**EMC TEST REPORT****EN IEC 55015:2019+A11:2020**

Emission - Electrical lighting and similar equipment

EN 61547:2009

Equipment for general lighting purposes - EMC immunity requirements

Report Reference No LCS220329010BE

Date of Issue April 15, 2022

Testing Laboratory Name Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

Address 101-201, No.39 Building, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.

Testing Procedure Full application of Harmonised standards
Partial application of Harmonised standards
Other standard testing method **Applicant's Name SHENZHEN LEDYI LIGHTING CO., LTD.**

Address 7th Floor, Skyworth Digital Building, Songbai Road, Shiyan, Bao'an District, Shenzhen, China, 518108

Test Specification:Standard EN IEC 55015:2019+A11:2020
EN IEC 61000-3-2:2019+A1:2021
EN 61000-3-3:2013+A1:2019+A2:2021
EN 61547:2009

Test Report Form No. SLCSEMC-2.3

TRF Originator Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

Master TRF Dated 2016-08

Shenzhen Southern LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Southern LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Southern LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Equipment Under Test..... Flexible LED Wall Washer

Trademark LEDYi

Test Model/Type LY-FW2621-W

Rating DC 24V, 24W/M

Results PASS**Compiled by:***Aimee Yang***Supervised by:***Cherry Chen***Approved by:***Dm Gu*

Aimee Yang / Engineer

Cherry Chen / Technique Director

Dm Gu / Manager



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

101-201, No. 39 Building, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com.

Scan code to check authenticity.



EMC - TEST REPORT

Test Report No.....: LCS220329010BE

Applicant.....:	SHENZHEN LEDYI LIGHTING CO., LTD.
Address.....:	7th Floor, Skyworth Digital Building, Songbai Road, Shiyan, Bao'an District, Shenzhen, China, 518108
Telephone.....:	/
Fax.....:	/

Manufacturer	SHENZHEN LEDYI LIGHTING CO., LTD.
Address.....:	7th Floor, Skyworth Digital Building, Songbai Road, Shiyan, Bao'an District, Shenzhen, China, 518108
Telephone.....:	/
Fax.....:	/

Factory	SHENZHEN LEDYI LIGHTING CO., LTD.
Address.....:	7th Floor, Skyworth Digital Building, Songbai Road, Shiyan, Bao'an District, Shenzhen, China, 518108
Telephone.....:	/
Fax.....:	/

The applicant and manufacturer information, product name, model, trademark and other information in this report are all provided by the applicant, and this laboratory is not responsible for verifying its authenticity.

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.





ENVIRONMENTAL CONDITIONS

The climatic conditions during the test are within the limits specified by the manufacturer for the operation of the EUT and the test equipment. the climatic conditions during the test were in the following Limits:

Ambient temperature	15°C - 30°C
Relative Humidity air	30% - 60%
Atmospheric pressure	86 kPa - 106 kPa

Climate values will be recorded and recorded separately if specifically required in the base standard or application product/product series standard.

POSSIBLE TEST CASE VERDICTS

Test cases does not apply to test object	N/A
Test object does meet requirement	P(Pass) / PASS
Test object does not meet requirement	F(Fail) / FAIL
Not measured	N/M

DEFINITION OF SYMBOLS USED IN THIS TEST REPORT

<input checked="" type="checkbox"/> Indicate that the conditions, standards or equipment listed is applicable to this report / test / EUT.
<input type="checkbox"/> Indicate that the conditions, standards or equipment listed is not applicable to this report / test / EUT.

REVISION HISTORY

Revision	Issue Date	Revision Content	Revised by
000	April 15, 2022	Initial Issue	-

Remark:
000) : “---”





TABLE OF CONTENTS

- 1. GENERAL INFORMATION 6**
 - 1.1. General Description of The Item(s) 6
 - 1.2. Operating Mode(s) Used of Tests 7
 - 1.3. Support / Auxiliary Equipment for The EUT 7
 - 1.4. Description of Test Facility 7
- 2. STATEMENT OF THE MEASUREMENT UNCERTAINTY 8**
- 3. MEASURING DEVICES AND TEST EQUIPMENT 9**
- 4. VERDICT SUMMARY SECTION 11**
 - 4.1. Standard(s) 11
 - 4.2. Overview of Results 12
- 5. EMISSION TESTS 13**
 - 5.1. Conducted Disturbance 13
 - 5.2. Radiated Disturbance (9KHz - 30MHz) 15
 - 5.3. Radiated Disturbance (30MHz - 1GHz) 16
 - 5.4. Harmonic Current 17
 - 5.5. Voltage Fluctuations & Flicker 18
- 6. IMMUNITY TESTS 19**
 - 6.1. Performance Criteria 19
 - 6.2. Electrostatic Discharge 20
 - 6.3. Radio-Frequency Electromagnetic Fields 21
 - 6.4. Electrical Fast Transient / Burst 22
 - 6.5. Injected Currents (Radio-Frequency Common Mode) 23
- ANNEX A - TEST RESULTS 24**
- ANNEX B - TEST PHOTOS 35**
- ANNEX C - EXTERNAL AND INTERNAL PHOTOS OF THE EUT 38**





1. GENERAL INFORMATION

1.1. GENERAL DESCRIPTION OF THE ITEM(S)

Equipment Under Test	Flexible LED Wall Washer
Test Model/Type	LY-FW2621-W
Additional Models/Type	See Model list
Description of Model difference	-
Rating	DC 24V, 24W/M
Mounting position	<input type="checkbox"/> Table top equipment <input type="checkbox"/> Wall /Ceiling mounted equipment <input type="checkbox"/> Floor standing equipment <input type="checkbox"/> Hand-held equipment <input checked="" type="checkbox"/> Other
Non-restricted ELV lamps	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No

Information of the Equipment Under Test(EUT)

The EUT is general luminaires which intended for residential use. the product contains electronic control circuits,and no component susceptible to magnetic fields.

Model	Rating
LY-FW2621-W	DC24V, 24W/M
LY-FWX ₁ - X ₂ X ₁ : Means Product section size, 2621: 26mm*21mm X ₂ : Means light color, it can be W: White light R: Red light G: Green light B: Blue light Y: Yellow light TW: Tunable White light RGB: RGB mixed light RGBW: RGB and W mixed light RGBC1: SPI RGB RGBWC1: SPI RGBW RGBC2: DMX512 RGB RGBWC2: DMX512 RGBW	

for more information refer to client's DoC letter.



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

101-201, No. 39 Building, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com.

Scan code to check authenticity.



1.2. OPERATING MODE(S) USED OF TESTS

During the tests, the following operating mode(s) has(have) been used.

Operating Mode	Operating Mode description	Used for testing	
		Emission	Immunity
1	Lighting on mode	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
2	Maximum light	<input type="checkbox"/>	<input type="checkbox"/>
3	Minimum light	<input type="checkbox"/>	<input type="checkbox"/>
4	Full load	<input type="checkbox"/>	<input type="checkbox"/>

1.3. SUPPORT / AUXILIARY EQUIPMENT FOR THE EUT

EUT has been tested using the following auxiliary equipment :

Auxeq	Model/Type	Manufacturer	Supplied by
-			

1.4. DESCRIPTION OF TEST FACILITY

Test Location 1	Shenzhen Southern LCS Compliance Testing Laboratory Ltd. 101-201, No.39 Building,Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China. CNAS Registration Number is L10160.
Test Location 2	Shenzhen LCS Compliance Testing Laboratory Ltd. 101, 201 Building A and 301 Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, Guangdong, China. NVLAP Accreditation Code is 600167-0. CNAS Registration Number is L4595.
Date of receipt of test item	March 29, 2022
Date(s) of performance of test	March 29, 2022 - April 15, 2022

Note: Radio-Frequency Electromagnetic Field (RS) Test Subcontract to Shenzhen LCS Compliance Testing Laboratory Ltd for Testing.



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

101-201, No. 39 Building, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com.

Scan code to check authenticity.



2. STATEMENT OF THE MEASUREMENT UNCERTAINTY

The data and results referenced in this document are true and accurate. the reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. the measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods - Part 4: Uncertainty in EMC Measurements" and is documented in the LCS quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. the manufacturer has the sole responsibility of continued compliance of the device.

Measurement	Uncertainty (U_{lab})	Uncertainty (U_{cisp})
Conducted disturbance (9kHz - 150kHz)	± 1.40 dB	± 4.0 dB
Conducted disturbance (150kHz - 30MHz)	± 2.80 dB	± 3.6 dB
Magnetic field disturbance (9kHz - 150kHz)	± 3.46 dB	-
Magnetic field disturbance (150kHz - 30MHz)		
Radiated disturbance (9kHz - 30MHz)	± 3.12 dB	N/A
Radiated disturbance (30MHz - 200MHz)	± 4.66 dB	± 5.2 dB
Radiated disturbance (200MHz - 1GHz)	± 4.64 dB	± 5.0 dB
Harmonic current	$\pm 0.64\%$	-
Voltage fluctuations & Flicker	$\pm 0.53\%$	-

Supplementary information:

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

101-201, No. 39 Building, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com.

Scan code to check authenticity.



3. MEASURING DEVICES AND TEST EQUIPMENT

CONDUCTED DISTURBANCE						
Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	EMI Test Receiver	R&S	ESCI	101142	2021-06-08	2022-06-08
2	10dB Attenuator	SCHWARZBECK	VTSD9561-F	9561-F159	2021-06-08	2022-06-08
3	Artificial Mains Network	SCHWARZBECK	NSLK8127	8127716	2021-06-08	2022-06-08
4	EMI Test Software	EZ	EZ_EMG	N/A	/	/
5	Asymmetric Artificial Network	SCHWARZBECK	NTFM 8158	NTFM8158#120	2021-06-08	2022-06-08
6	Voltage Probe	SCHWARZBECK	KT 9420	9420401	2021-06-08	2022-06-08
7	No. 2 shielded Room	CHENGYU	843	/	2020-06-16	2023-06-16

RADIATED DISTURBANCE (9KHz - 30MHz)						
Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	EMI Test Receiver	R&S	ESCI	101142	2021-06-08	2022-06-08
2	Triple-loop Antenna	EVERFINE	LLA-2	9161	2021-06-08	2022-06-08
3	EMI Test Software	EZ	EZ_EMG	N/A	/	/
4	No. 2 shielded Room	CHENGYU	843	/	2020-06-16	2023-06-16

RADIATED DISTURBANCE (30MHz - 1GHz)						
Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2021-06-15	2024-06-15
2	EMI Test Receiver	R&S	ESCI3	101010	2021-06-08	2022-06-08
3	Spectrum Analyzer	Agilent	N9020A	MY49100699	2021-06-08	2022-06-08
4	Log-periodic Antenna	SCHWARZBECK	VULB9163	5094	2019-06-23	2022-06-23
5	Horn Antenna	ETS-LINDGREN	3115	00034771	2019-06-23	2022-06-23
6	EMI Test Software	EZ	EZ_EMG	N/A	/	/
7	Positioning Controller	MF	BK8807-4A-2T	2016-0808-008	/	/

HARMONIC CURRENT & FLICKER						
Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Harmonic Current And Flicker Test System	HTEC	AC2000A	/	2021-06-08	2022-06-08
2	Linear Variable Frequency Power Supply	HTEC	HHF-5010	/	2021-06-08	2022-06-08

ELECTROSTATIC DISCHARGE						
Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	ESD Simulator	TESEQ	NSG 437	1615	2022-03-21	2023-03-21

ELECTRICAL FAST TRANSIENT / BURST						
Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Electrical Fast Transient Generator	HTEC	HEFT51	162201	2021-06-10	2022-06-10



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

101-201, No. 39 Building, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com.

Scan code to check authenticity.



2	Coupling Clamp	HTEC	H3C	163701	2021-05-13	2022-05-13
---	----------------	------	-----	--------	------------	------------

INJECTED CURRENTS (RADIO-FREQUENCY COMMON MODE)

Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Conducted Susceptibility Generator	HTEC	CDG6000	126A140012016	2021-06-08	2022-06-08
2	Coupling Network	HTEC	CDN-M2+M3	A22/0382/2016	2021-06-08	2022-06-08
3	Attenuator 6dB	HTEC	ATT6	HA1601	2021-06-08	2022-06-08
4	Electromagnetic clamp	LUTHI	EM101	35535	2021-06-08	2022-06-08

POWER FREQUENCY MAGNETIC FIELD

Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Power Frequency Mag-Field Generator System	HTEC	HPFMF100	100-2400	2021-06-08	2022-06-08

RADIO-FREQUENCY ELECTROMAGNETIC FIELDS

Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	RS Test Software	Tonscend	/	/	N/A	N/A
2	ESG Vector Signal Generator	Agilent	E4438C	MY42081396	2021-11-14	2022-11-14
3	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2020-06-11	2023-06-11
4	RF Power Amplifier	OPHIR	5225R	1052	2021-11-21	2022-11-21
5	RF Power Amplifier	OPHIR	5273F	1019	2021-11-21	2022-11-21
6	Stacked Broadband Log Periodic Antenna	SCHWARZBECK	STLP 9128	9128ES-145	2021-11-21	2022-11-21
7	Stacked Mikrowellen Log.-Per Antenna	SCHWARZBECK	STLP 9149	9149-484	2021-11-21	2022-11-21



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

101-201, No. 39 Building, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com.

Scan code to check authenticity.



4. VERDICT SUMMARY SECTION

This chapter present an overview of the standards and results. Refer the next chapter for details of measured test results and applied test levels.

4.1. STANDARD(S)

EN IEC 55015:2019+A11:2020 - Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment.

EN 61547:2009 - Equipment for general lighting purposes — EMC immunity requirements.

EN IEC 61000-3-2:2019+A1:2021 - Electromagnetic compatibility (EMC) Part 3-2: Limits for harmonic current emissions (equipment input current ≤ 16 A per phase).

EN 61000-3-3:2013+A1:2019+A2:2021 - Electromagnetic compatibility (EMC)Part 3-3: Limits for voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection.



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

101-201, No. 39 Building, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com.

Scan code to check authenticity.



4.2. OVERVIEW OF RESULTS

EMISSION TESTS - EN IEC 55015, EN IEC 61000-3-2, EN 61000-3-3		
Requirement - Test case	Limit	Verdict
Conducted Disturbance - electric power supply	Table 1, Table 4	PASS
Conducted Disturbance - wired network ports at other than power supply	Table 2, Table 3	N/A
Conducted Disturbance - local wired ports at other than electrical power supply interface of ELV lamp	Table 5, Table 6	N/A
Assessment of the enclosure port	---	---
Radiated Disturbance in the frequency range 9 kHz to 30 MHz	Table 8, Table 9	PASS
Radiated Disturbance in the frequency range 30 MHz to 1 GHz	Table 10	PASS
Harmonic Current	Clause 7	N/A
Voltage Fluctuations and Flicker ²	Clause 5	N/A
IMMUNITY TESTS - EN 61547		
Requirement - Test case	Basic Standard(s)	Verdict
Electrostatic Discharge	IEC/EN 61000-4-2	PASS
Radio-Frequency Electromagnetic Fields	IEC/EN 61000-4-3	PASS
Electrical Fast Transient / Burst	IEC/EN 61000-4-4	PASS
Surge	IEC/EN 61000-4-5	N/A
Injected Currents (Radio-Frequency Common Mode)	IEC/EN 61000-4-6	PASS
Power Frequency Magnetic Field ¹	IEC/EN 61000-4-8	N/A
Voltage Dips and Short Interruptions	IEC/EN 61000-4-11	N/A

Supplementary information:

- 1) Only need to be applied to equipment containing components susceptible to magnetic fields.
- 2) According to EN 61000-3-3:2013+A1:2019+A2:2021 Clause A.2, Incandescent lamp luminaires with ratings less than or equal to 1000W and discharge and LED lamp luminaires with ratings less than or equal to 600W, are deemed to comply with the standard and are not required to be tested.



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

101-201, No. 39 Building, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com.

Scan code to check authenticity.



5. EMISSION TESTS

5.1. CONDUCTED DISTURBANCE

Standard	EN IEC 55015:2019+A11:2020
Basic Standard(s)	EN 55016-2-1

Disturbance voltage limits at the electric power supply interface

Frequency range [MHz]	Limit: Quasi-peak [dB(μ V)]	Limit: Average[dB(μ V)]	IF BW
0,009 - 0,05	110	N/A	200 Hz
0,05 - 0,15	90 - 80	N/A	200 Hz
0,15 - 0,5	66 - 56	56 - 46	9 kHz
0,5 - 5,0	56	46	9 kHz
5,0 - 30	60	50	9 kHz

- 1) At the transition frequency, the lower limit applies.
- 2) The limit decreases linearly with the logarithm of the frequency in the ranges 50 kHz to 150 kHz and 150 kHz to 0,5 MHz.
- 3) If the EUT is non-restricted ELV lamps, the limits add 26dB.

Disturbance voltage limits at wired network interfaces other than power supply

Frequency range [MHz]	Limit: Quasi-peak [dB(μ V)]	Limit: Average[dB(μ V)]	IF BW
0,15 - 5,0	84 - 74	74 - 64	9 kHz
5,0 - 30	74	64	9 kHz

- 1) The limits decrease linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.
- 2) The disturbance voltage limits are derived for use with an artificial asymmetrical network (AAN) which presents a common mode (asymmetric mode) impedance of 150 Ω to the measured interface.

Disturbance current limits at wired network interfaces other than power supply

Frequency range [MHz]	Limit: Quasi-peak [dB(μ A)]	Limit: Average[dB(μ A)]	IF BW
0,15 - 5,0	40 - 30	30 - 20	9 kHz
5,0 - 30	30	20	9 kHz

- 1) The limits decrease linearly with the logarithm of the frequency in the range 0.15MHz to 0.5 MHz.



Disturbance voltage limits at local wired ports: local wired ports other than electrical power supply interface of ELV lamp

Frequency range [MHz]	Limit: Quasi-peak [dB(μ V)]	Limit: Average[dB(μ V)]	IF BW
0,15 - 5,0	80	70	9 kHz
5,0 - 30	74	64	9 kHz

- 1) At the transition frequency, the lower limit applies.



Test configuration

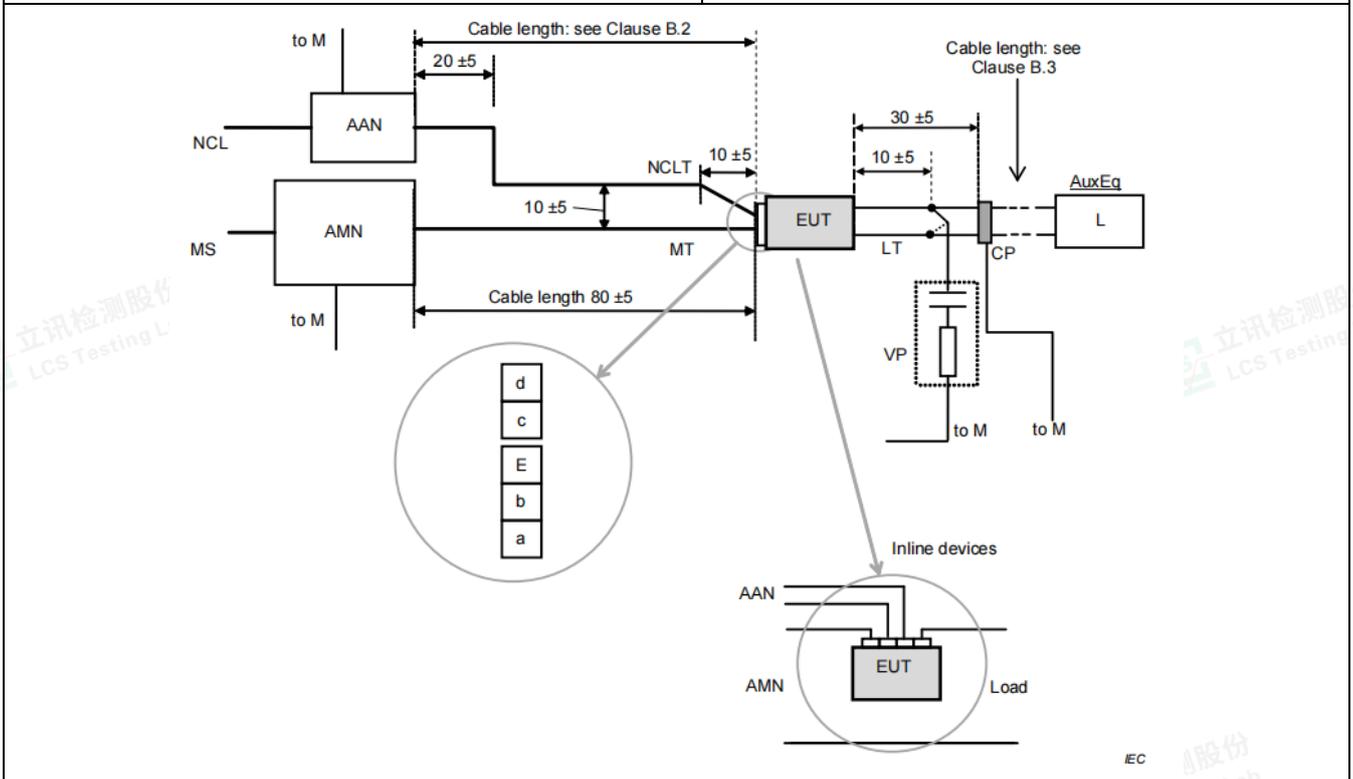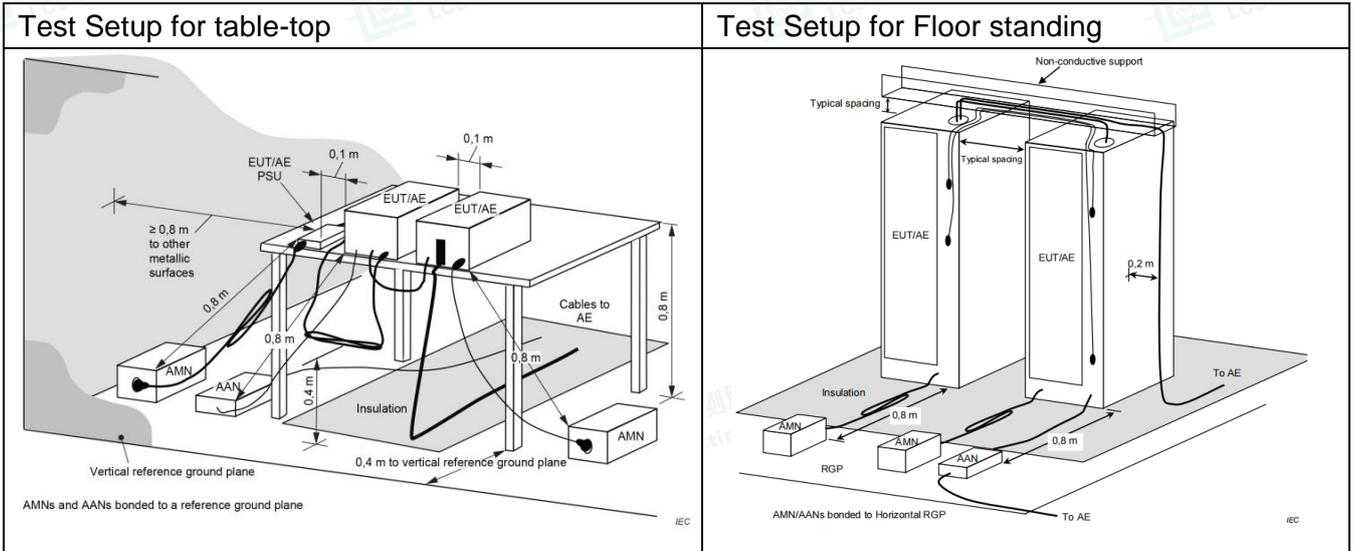

Test Procedure Description

For Table-top, EUT shall be placed at $(0,8 \pm 0,05)$ m above the reference plane of the test site selected for measurement. for Floor standing, EUT shall be placed at $(0,12 \pm 0,04)$ m above the reference plane of the test site selected for measurement.

and connected to the AC mains through artificial mains network (LISN). EUT is powered by V-type artificial power network, and the distance from LISN or ANN is 0,8m. the part of the EUT power cord exceeding 0,8m folds in parallel to form a 0,3-0,4 m eights harness.

Test Results refer to Annex A.1



5.2. RADIATED DISTURBANCE (9KHz - 30MHz)


Standard	EN IEC 55015:2019+A11:2020
Basic Standard(s)	EN 55016-2-3
Test method	Large Loop Antenna (LLA)

LLAS Radiated disturbance limits (2m)

Frequency range [MHz]	Limit: Quasi-peak [dB(μA)]	IF BW
0,009 - 0,07	88	200 Hz
0,07 - 0,15	88 - 58	200 Hz
0,15 - 3,0	58 - 22	9 kHz
3,0 - 30	22	9 kHz

- 1) At the transition frequency the lower limit applies.
- 2) Decreasing linearly with logarithm of the frequency.

Test configuration

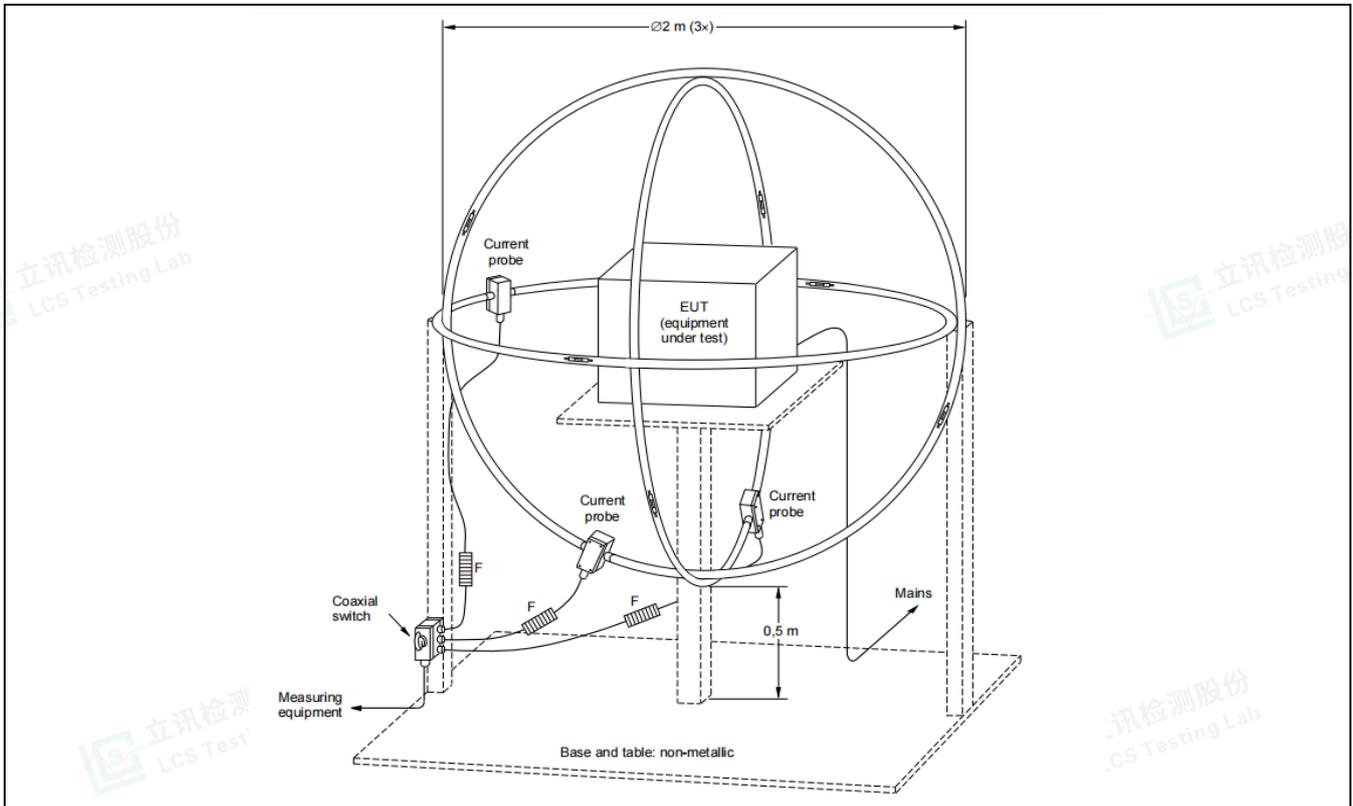

Test Procedure Description

The EUT is placed on a wood table in the center of a loop antenna. the induced current in the loop antenna is measured by means of a current probe and the test receiver. Three field components are checked by means of a coaxial switch.

Test Results refer to Annex A.2



5.3. RADIATED DISTURBANCE (30MHz - 1GHz)


Standard	EN IEC 55015:2019+A11:2020
Basic Standard(s)	EN 55016-2-3
Test method	Semi Anechoic Chamber (SAC)

SAC Radiated disturbance limit

Frequency range [MHz]	Limit: Quasi-peak [dB(μV/m)]		IF BW
	3 m distance	10 m distance	
30 - 230	40	30	120 KHz
230 - 1000	47	37	120 KHz

- 1) At the transition frequency, the lower limit applies.
- 2) Distance refers to the distance in meters between the measuring instrument antenna geometric center and the closed point of any part of the EUT.

Test configuration

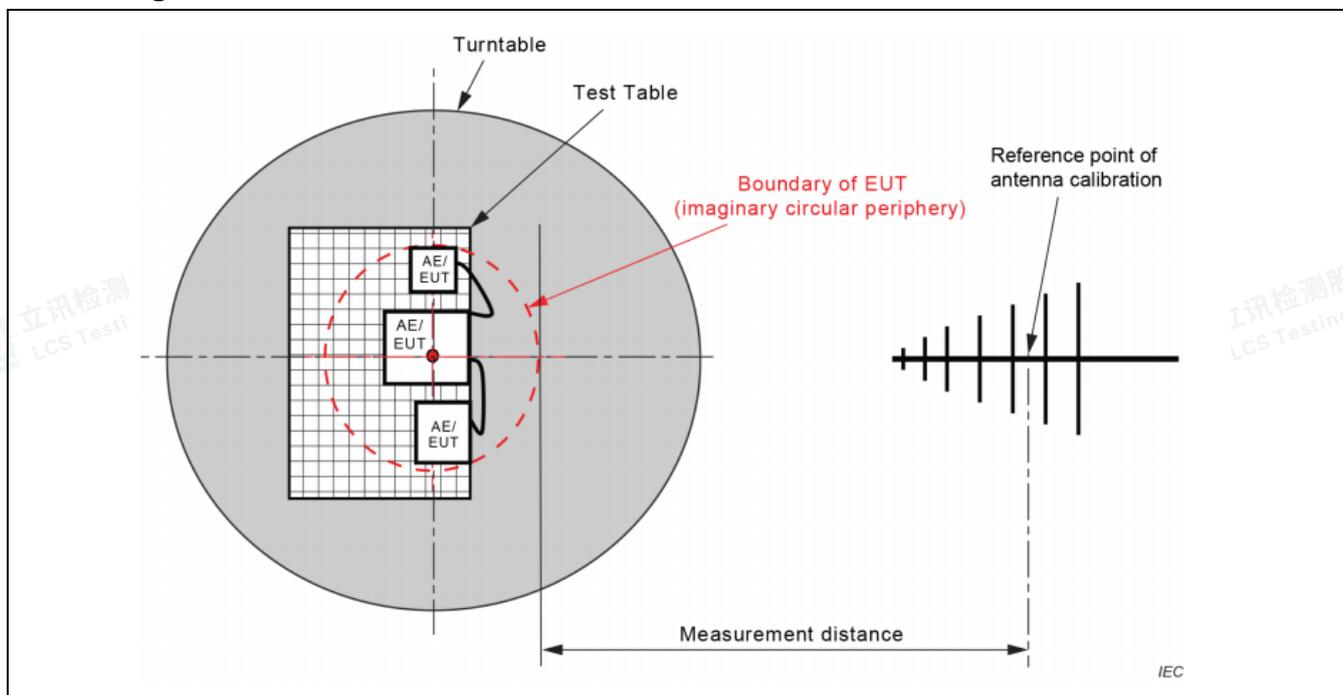

Test Procedure Description

The radiated disturbance test was conducted in a 3m Semi Anechoic Chamber and conforming to CISPR 16-2-3. the EUT is placed on a turntable, which is 0.8 meter high above the ground. the turntable can rotate 360 degrees to determine the position of the maximum emission level. the EUT is set 3 meters away from the receiving antenna, which is mounted on an antenna tower. the antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Log-periodic Antenna (calibrated by Dipole antenna) is used as a receiving antenna. both horizontal and vertical polarization of the antenna is set on test.

Test Results refer to Annex A.3




5.4. HARMONIC CURRENT

Standard	EN IEC 61000-3-2:2019+A1:2021	
Exclusions (For these categories of equipment, limits are not specified in the EN IEC 61000-3-2)	<input checked="" type="checkbox"/>	Systems with nominal voltages less than 220V _{AC} (line-to-neutral)
	<input type="checkbox"/>	Lighting equipment with rated power < 5 W
	<input type="checkbox"/>	Equipment with rated power of ≤ 75 W (other than lighting equipment)
	<input type="checkbox"/>	Professional equipment with a total rated power >1kW
	<input type="checkbox"/>	Symmetrically controlled heating elements with rated power ≤ 200 W
	<input type="checkbox"/>	Independent dimmers for incandescent lamps with rated power ≤ 1kW

Classification		
<input type="checkbox"/>	Class A	All equipment not specified as belonging to Class B, C or D
<input type="checkbox"/>	Class B	Portable tools
<input type="checkbox"/>	Class C	<input type="checkbox"/> Lighting equipment with active input power > 25W
		<input type="checkbox"/> Lighting equipment with active input power ≥ 5W and ≤ 25W
		<input type="checkbox"/> Table 3, column 2 (Power-related limits)
		<input type="checkbox"/> 3rd harmonic ≤ 86%, 5th harmonic ≤ 61% and waveform conditions
<input type="checkbox"/>		<input type="checkbox"/> THD ≤ 70%, Harmonic:3rd ≤ 35%, 5th ≤ 25%, 7th ≤ 30%, 9th and 11th ≤ 20%, 2nd ≤ 5%
<input type="checkbox"/>	Class D	Personal computers, television receivers, refrigerators and freezers having one or more variable-speed drives to control compressor

Test configuration

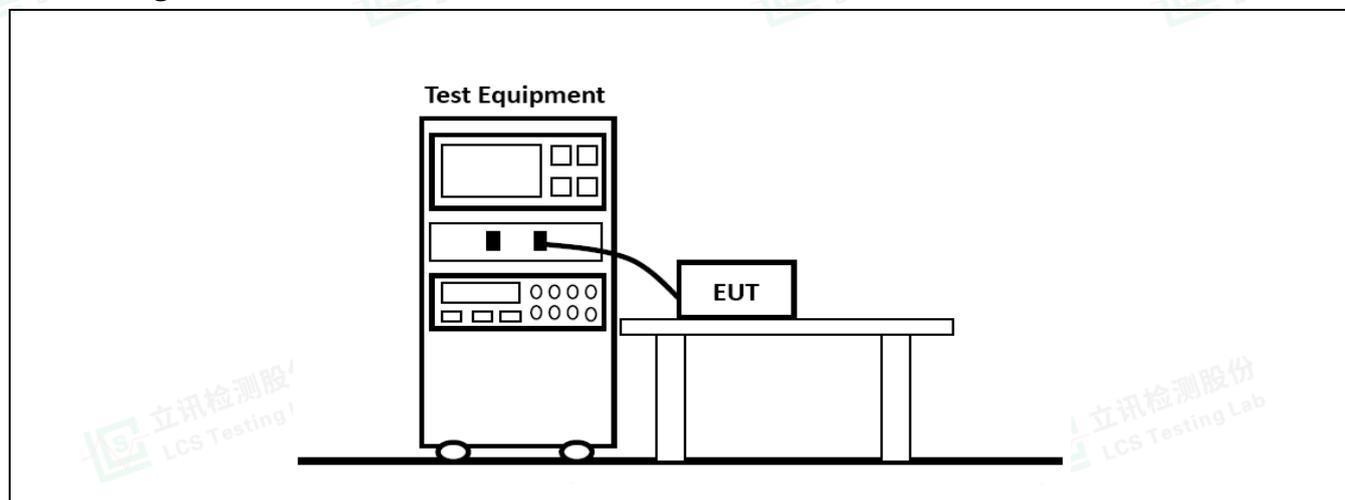


5.5. VOLTAGE FLUCTUATIONS & FLICKER

Standard	EN 61000-3-3:2013+A1:2019+A2:2021
----------	-----------------------------------

Limit

P _{st} (Short term flicker)	<input type="checkbox"/>	≤ 1	<input checked="" type="checkbox"/>	Not applicable
P _{lt} (Long-term flicker)	<input type="checkbox"/>	≤ 0,65	<input checked="" type="checkbox"/>	Not applicable
T _{max} (Accumulated time)	<input type="checkbox"/>	≤ 500 ms	<input checked="" type="checkbox"/>	Not applicable
d _c (Relative voltage change)	<input type="checkbox"/>	≤ 3.3%	<input checked="" type="checkbox"/>	Not applicable
d _{max} (Max.voltage change)	<input type="checkbox"/>	≤ 4%	<input type="checkbox"/>	≤ 6%
	<input type="checkbox"/>	≤ 7%	<input checked="" type="checkbox"/>	Not applicable

Test configuration

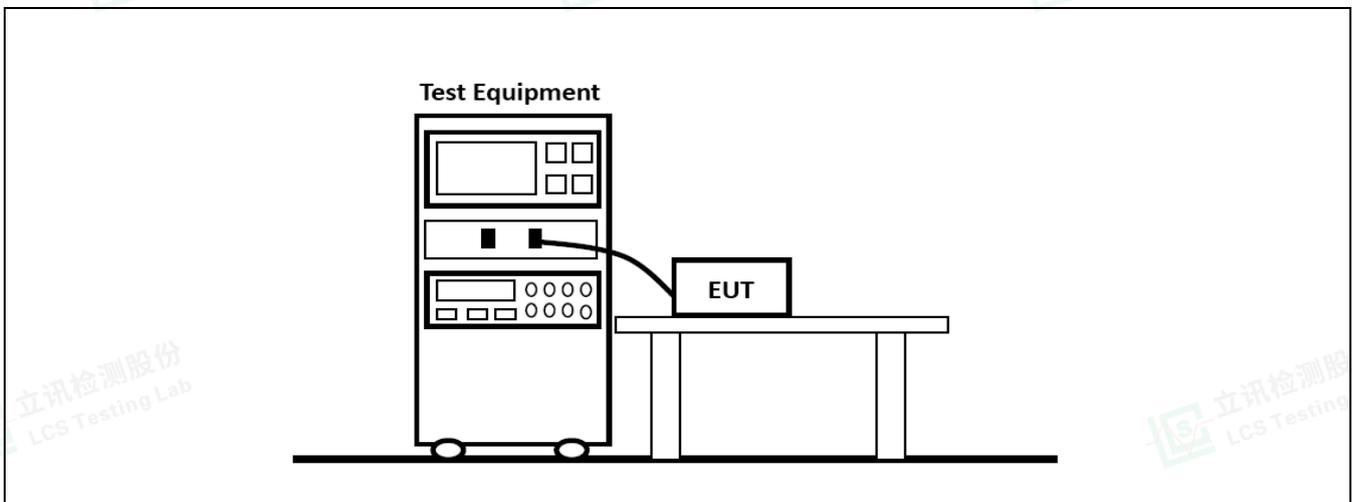



6. IMMUNITY TESTS

6.1. PERFORMANCE CRITERIA

Standard	EN 61547:2009
----------	---------------

The performance of lighting equipment shall be assessed by monitoring:

- the luminous intensity of the luminaire or of the lamp(s).
- the functioning of the control in the case of equipment which includes a regulating control or concerns the regulating control itself.
- the functioning of the starting device, if any.

Performance criterion A: during the test, no change of the luminous intensity shall be observed and the regulating control, if any, shall operate during the test as intended.

Performance criterion B: during the test, the luminous intensity may change to any value. after the test, the luminous intensity shall be restored to its initial value within 1 min. regulating controls need not function during the test, but after the test, the mode of the control shall be the same as before the test provided that during the test no mode changing commands were given.

Performance criterion C: during and after the test, any change of the luminous intensity is allowed and the lamp(s) may be extinguished. after the test, within 30 min, all functions shall return to normal, if necessary by temporary interruption of the mains supply and / or operating the regulating control.

Electronic lighting equipment		Tests and performance criteria							
		5.2 (ESD)	5.3 (RS)	5.4 (PFMF)	5.5 (EFT)	5.6 (CS)	5.7 (Surge)	5.8 (Dips)	5.9 (Interruption)
<input type="checkbox"/>	Self-ballasted lamps	B	A	B	B	A	C	C	B
<input type="checkbox"/>	Independent auxiliaries	B	A	B	B	A	C	C	B ¹
<input checked="" type="checkbox"/>	Luminaire including active electronic components	B	A	B	B	A	C	C	B ¹
<input type="checkbox"/>	Luminaire for emergency lighting	B ²	A	B	B ²	A	B ²	See ³	See ³

Supplementary information:

- 1) For ballasts where the lamp is not able to restart within 1 min, due to the physical constraints of the lamp, performance criterion C applies.
- 2) Luminaires for emergency lighting shall be tested in both the normal and emergency mode of operation.
- 3) These tests do not apply as they are covered by the test in IEC 60598-2-22.
- 4) For emergency luminaires designed to operate in high-risk task areas, after the test, the luminous intensity shall be restored to its initial value within 0,5 s.




6.2. ELECTROSTATIC DISCHARGE

Electrostatic discharge (ESD) is the result of accumulated static electricity from a person or object, for example, walking on a synthetic carpet. ESD can indirectly affect the operation of equipment or damage its electronic components through direct discharge or coupling. Both effects were simulated during the test. Contact discharge is the preferred test method. Twenty discharges (10 with positive and 10 with negative polarity) shall be applied on each accessible metallic part of the enclosure (terminals are excluded). Air discharges shall be used where contact discharges cannot be applied. Discharges shall be applied on the horizontal or vertical coupling planes.

Requirements

Standard	EN 61547:2009							
Basic standard	EN 61000-4-2							
Port under test	Enclosure							
Contact discharge	<input checked="" type="checkbox"/>	± 2 kV	<input checked="" type="checkbox"/>	± 4 kV	<input type="checkbox"/>	±8 kV	<input type="checkbox"/>	±15 kV
Air discharge	<input checked="" type="checkbox"/>	± 2 kV	<input checked="" type="checkbox"/>	± 4 kV	<input checked="" type="checkbox"/>	±8 kV	<input type="checkbox"/>	±15 kV
Number of discharges	≥ 10 per polarity with ≥ 1 sec interval							

Test configuration

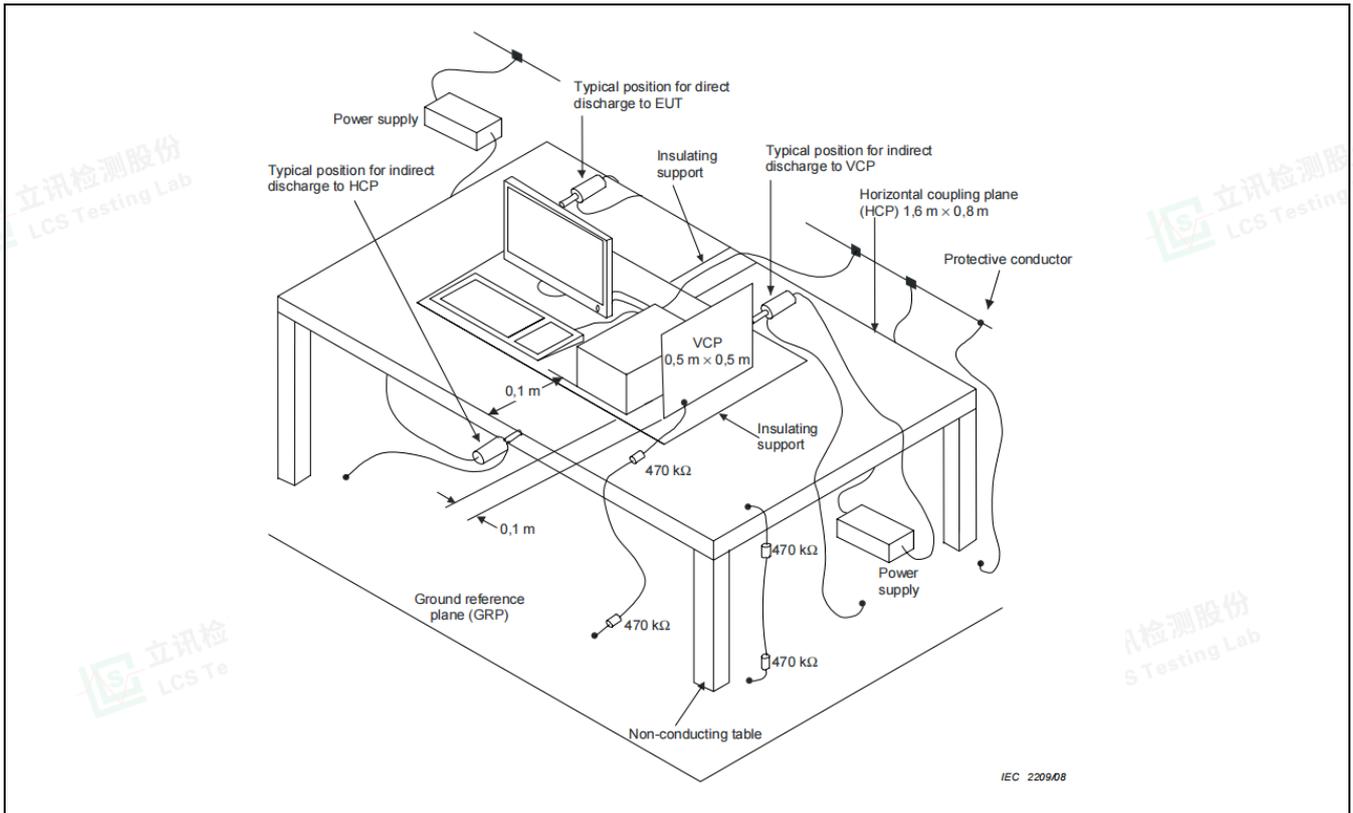

Test Results refer to Annex A.4



6.3. RADIO-FREQUENCY ELECTROMAGNETIC FIELDS

During the test it is verified if the EUT has sufficient immunity against radiated electromagnetic fields.


The test was carried out in a half-wave anechoic chamber with absorbent material attached to a reflective ground plane. Before the test, the test field strength needs to be calibrated. during the calibration, the corresponding relationship between the target field strength and the forward power applied to the transmitting antenna is established. during the test, except for EUT, the indoor layout is consistent with the calibration.

The EUT and its simulators are placed on a turn table which is 0,8 meter above ground. EUT is set 3 meter away from the transmitting antenna which is mounted on an antenna tower. both horizontal and vertical polarization of the antenna are set on test. each of the four sides of EUT must be faced this transmitting antenna and measured individually. in order to judge the EUT performance, a CCD camera is used to monitor EUT screen.

Requirements

Standard	EN 61547:2009			
Basic standard	EN 61000-4-3			
Port under test	Enclosure			
Frequency range	Test level	Modulation	Dwell time	Step size
80 - 1000 MHz	3 V/m	1 kHz, 80 % AM	≥ 0,5 s	≤ 1%

Test configuration

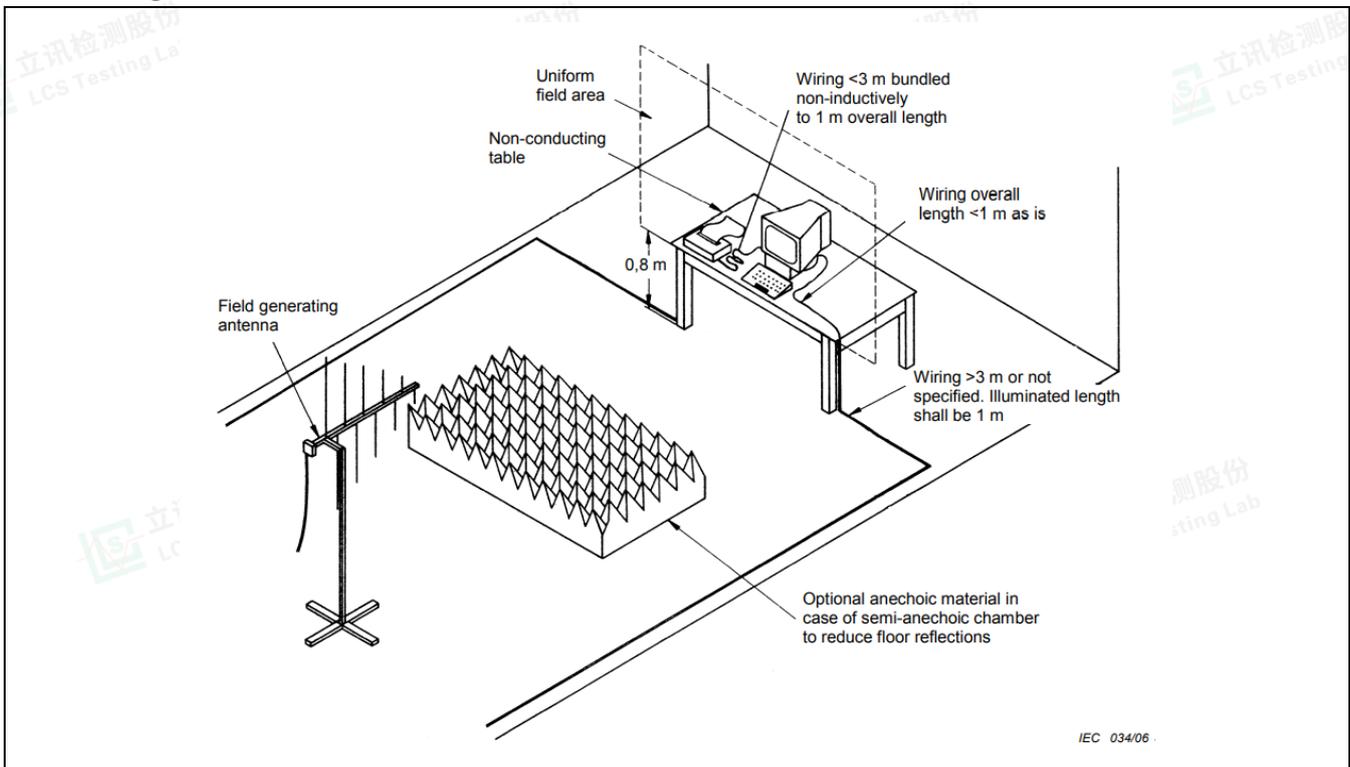

Test Results refer to Annex A.4



6.4. ELECTRICAL FAST TRANSIENT / BURST

The EFT immunity test simulates the disturbances by caused of very short transient bursts.


The EUT is put on the Insulating support which is 0.1 meter high above the ground reference plane. the minimum distance between EUT and all other conductive structure, except the ground plane beneath the EUT, shall be more than 0.5 m. both polarities of the test voltage should be applied during test, fast transients are carried out with a minimum duration of 2 min with a positive polarity and a minimum of 2 min with a negative polarity.

Requirements

Standard	EN 61547:2009			
Basic standard	EN 61000-4-4			
Pulse characteristics	5/50 ns			
Port under test	Test level	Repetition frequency	Duration	
<input type="checkbox"/> AC input / output power	± 1000 V	5 kHz	2 min / polarity	
<input checked="" type="checkbox"/> DC input / output power ²	± 500 V	5 kHz	2 min / polarity	
<input type="checkbox"/> Signal / Control port ^{1 3}	± 500 V	5 kHz	2 min / polarity	

- 1) Only applicable to ports interfacing with cables whose whose total length may exceed 3 m.
- 2) Not applicable to equipment not connected to the mains while in use.
- 3) Change of state commands are not applied during the test.

Test configuration

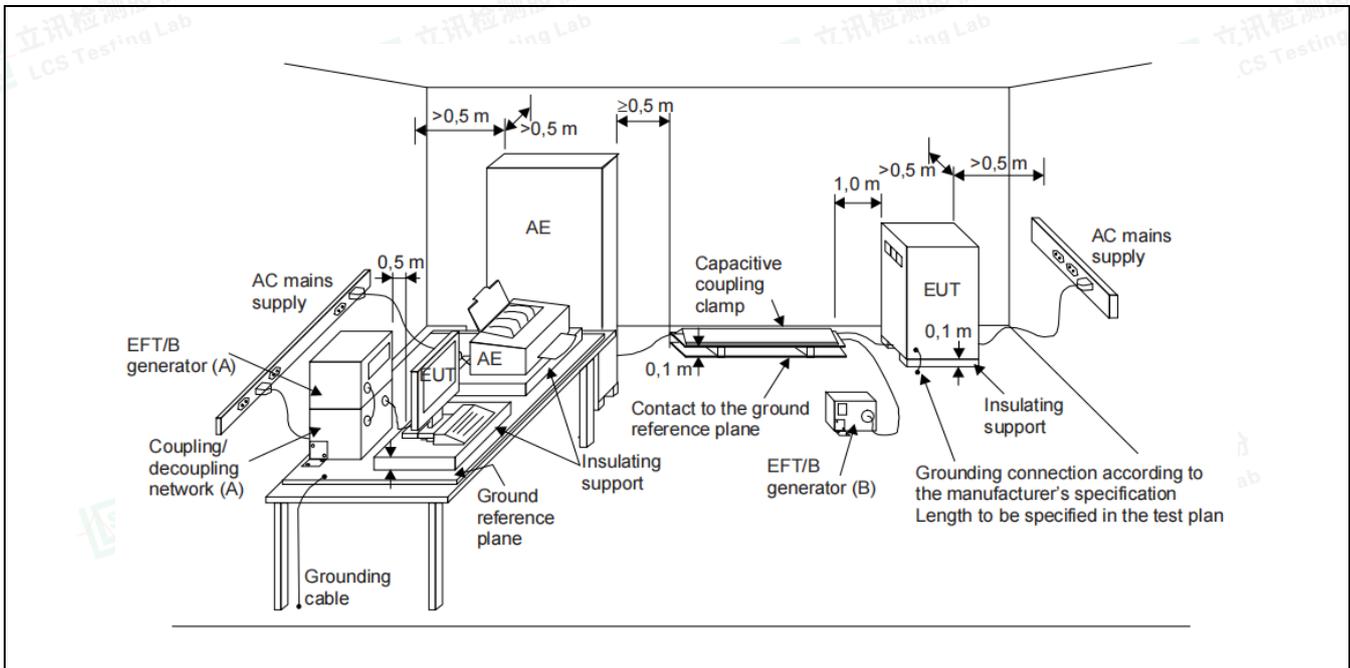

Test Results refer to Annex A.4



6.5. INJECTED CURRENTS (RADIO-FREQUENCY COMMON MODE)

During the test the immunity of the EUT for conducted electromagnetic fields is checked .


The equipment to be tested is placed on an insulating support of $0,1\text{ m} \pm 0,05\text{ m}$ height above a reference ground plane. a non conductive roller / caster in the range of $0,1\text{ m} \pm 0,05\text{ m}$ above the reference ground plane can be used as an alternative to an insulating support. all cables exiting the EUT shall be supported at a height of at least 30 mm above the reference ground plane. The coupling and decoupling devices shall be placed on the reference ground plane, making direct contact with it at a distance of 0,1 m to 0,3 m from the EUT.

Requirements

Standard		EN 61547:2009			
Basic standard		EN 61000-4-6			
Frequency range		0,15 - 80 MHz			
Port under test		Test level	Modulation	Dwell time	Step size
<input type="checkbox"/>	AC input / output power	3 V	1 kHz, 80 % AM	$\geq 0,5\text{ s}$	$\leq 1\%$
<input checked="" type="checkbox"/>	DC input / output power ¹	3 V	1 kHz, 80 % AM	$\geq 0,5\text{ s}$	$\leq 1\%$
<input type="checkbox"/>	Signal / Control port ²	3 V	1 kHz, 80 % AM	$\geq 0,5\text{ s}$	$\leq 1\%$

1) Not applicable to equipment not connected to the mains while in use.
 2) Only applicable to ports interfacing with cables whose whose total length may exceed 3 m.

Test configuration

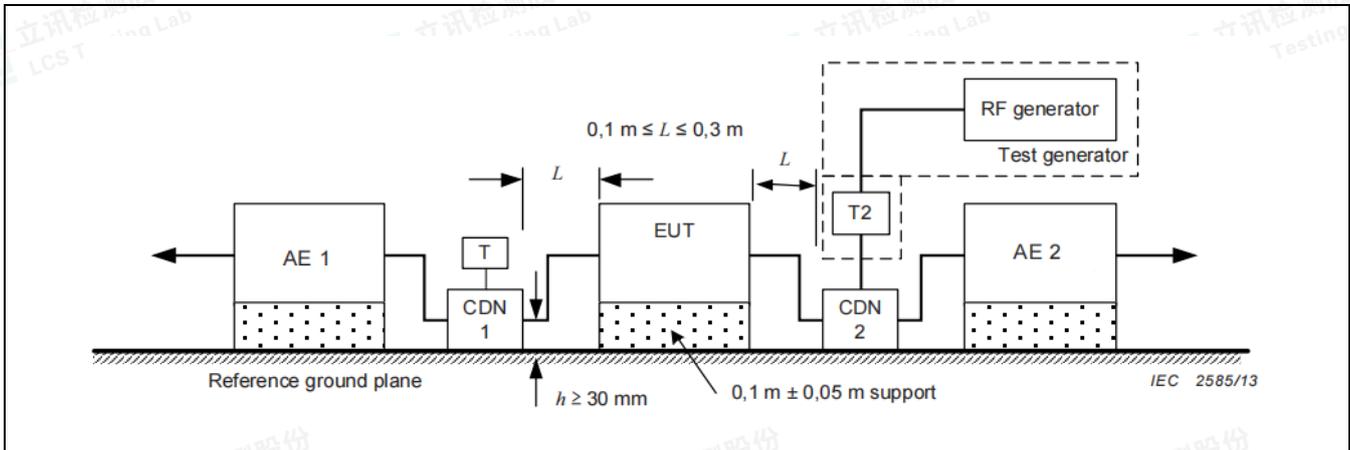

Test Results refer to Annex A.4






ANNEX A - TEST RESULTS

A.1. CONDUCTED DISTURBANCE TEST RESULTS

Environmental Conditions	23.9°C, 53% RH
Model	LY-FW2621-W
Operating mode	Mode 1 (worst case)
Test voltage	DC 24V
Test engineer	Peng Dong
Pol	Line

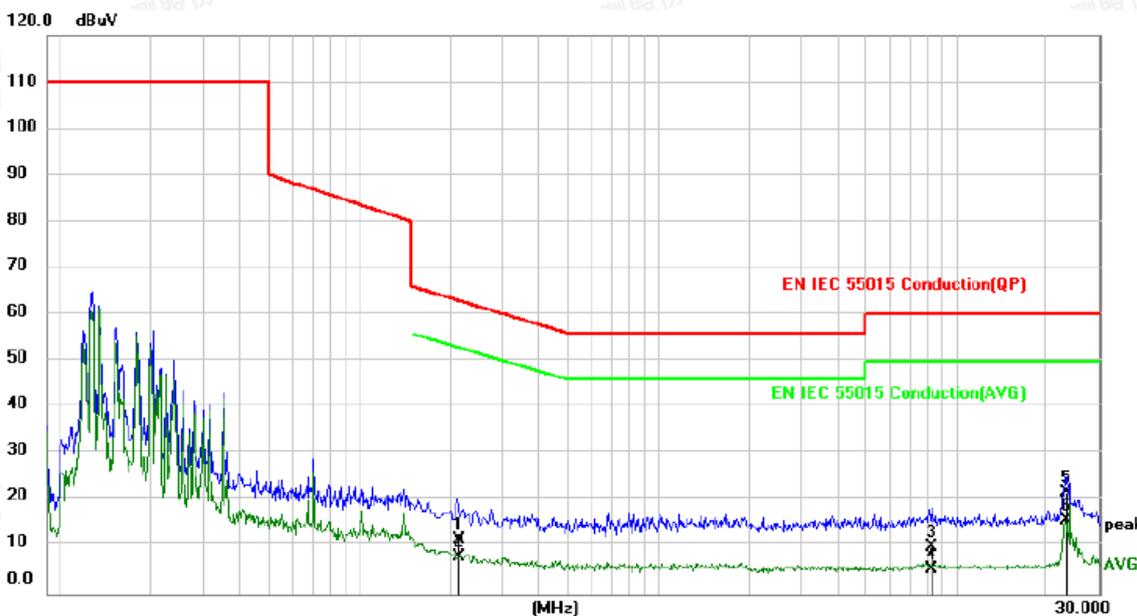


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.2159	1.32	10.22	11.54	62.98	-51.44	QP	
2		0.2159	-2.19	10.22	8.03	52.98	-44.95	AVG	
3		8.1531	-0.19	10.20	10.01	60.00	-49.99	QP	
4		8.1531	-4.85	10.20	5.35	50.00	-44.65	AVG	
5		23.2413	11.40	10.20	21.60	60.00	-38.40	QP	
6	*	23.2413	5.43	10.20	15.63	50.00	-34.37	AVG	





Environmental Conditions	23.9°C, 53% RH
Model	LY-FW2621-W
Operating mode	Mode 1 (worst case)
Test voltage	DC 24V
Test engineer	Peng Dong
Pol	Neutral

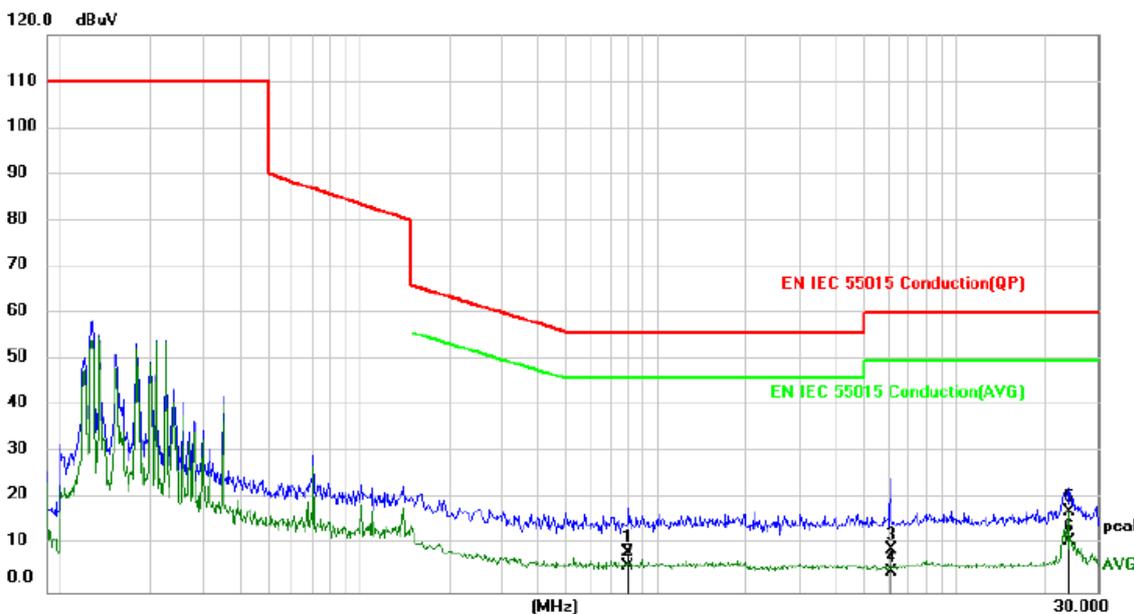


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.8081	-1.68	10.20	8.52	56.00	-47.48	QP	
2		0.8081	-4.55	10.20	5.65	46.00	-40.35	AVG	
3		6.1059	-1.15	10.20	9.05	60.00	-50.95	QP	
4		6.1059	-5.71	10.20	4.49	50.00	-45.51	AVG	
5		24.0196	7.12	10.20	17.32	60.00	-42.68	QP	
6	*	24.0196	0.80	10.20	11.00	50.00	-39.00	AVG	





A.2. RADIATED DISTURBANCE TEST RESULTS (9kHz - 30MHz)

Environmental Conditions	23.9°C, 53% RH
Model	LY-FW2621-W
Operating mode	Mode 1 (worst case)
Test voltage	DC 24V
Test engineer	Peng Dong
Pol	X

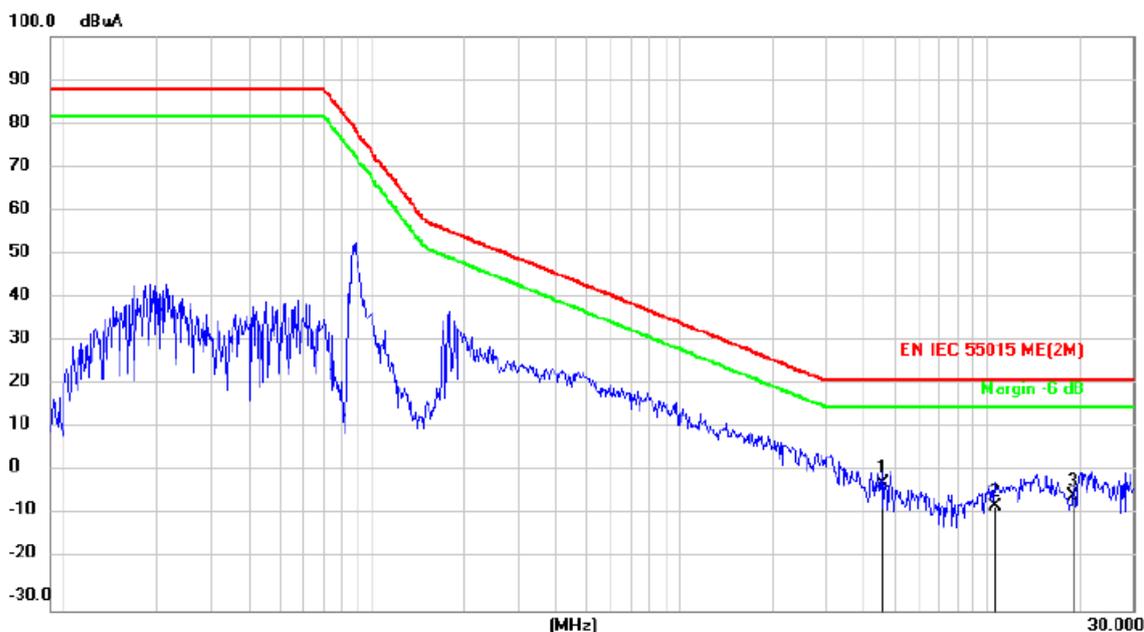


No.	Mk.	Freq. MHz	Reading Level dBuA	Correct Factor dB	Measure- ment dBuA	Limit dBuA	Over dB	Detector	Comment
1	*	4.5689	10.20	-11.54	-1.34	22.00	-23.34	QP	
2		10.6217	14.21	-20.59	-6.38	22.00	-28.38	QP	
3		19.0472	23.20	-27.35	-4.15	22.00	-26.15	QP	





Environmental Conditions	23.9°C, 53% RH
Model	LY-FW2621-W
Operating mode	Mode 1 (worst case)
Test voltage	DC 24V
Test engineer	Peng Dong
Pol	Y

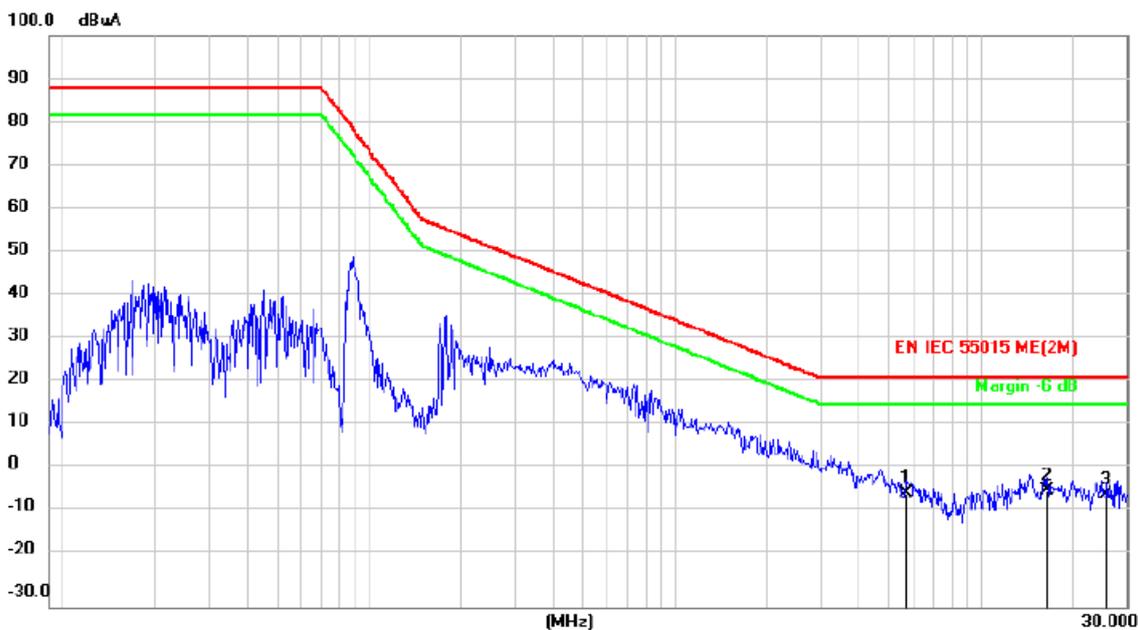

No.	Mk.	Freq. MHz	Reading Level dBuA	Correct Factor dB	Measure- ment dBuA	Limit dBuA	Over dB	Detector	Comment
1		5.6875	10.15	-14.17	-4.02	22.00	-26.02	QP	
2	*	16.4599	23.29	-26.78	-3.49	22.00	-25.49	QP	
3		25.7149	30.38	-34.79	-4.41	22.00	-26.41	QP	





Environmental Conditions	23.9°C, 53% RH
Model	LY-FW2621-W
Operating mode	Mode 1 (worst case)
Test voltage	DC 24V
Test engineer	Peng Dong
Pol	Z




No.	Mk.	Freq. MHz	Reading Level dBuA	Correct Factor dB	Measure- ment dBuA	Limit dBuA	Over dB	Detector	Comment
1		5.9713	10.49	-14.83	-4.34	22.00	-26.34	QP	
2		14.1089	20.08	-22.90	-2.82	22.00	-24.82	QP	
3	*	25.9237	33.41	-34.94	-1.53	22.00	-23.53	QP	





A.3. RADIATED DISTURBANCE TEST RESULTS (30MHz - 1GHz)

Environmental Conditions	23.9°C, 51% RH
Model	LY-FW2621-W
Operating mode	Mode 1 (worst case)
Test voltage	DC 24V
Test engineer	Peng Dong
Pol	Vertical

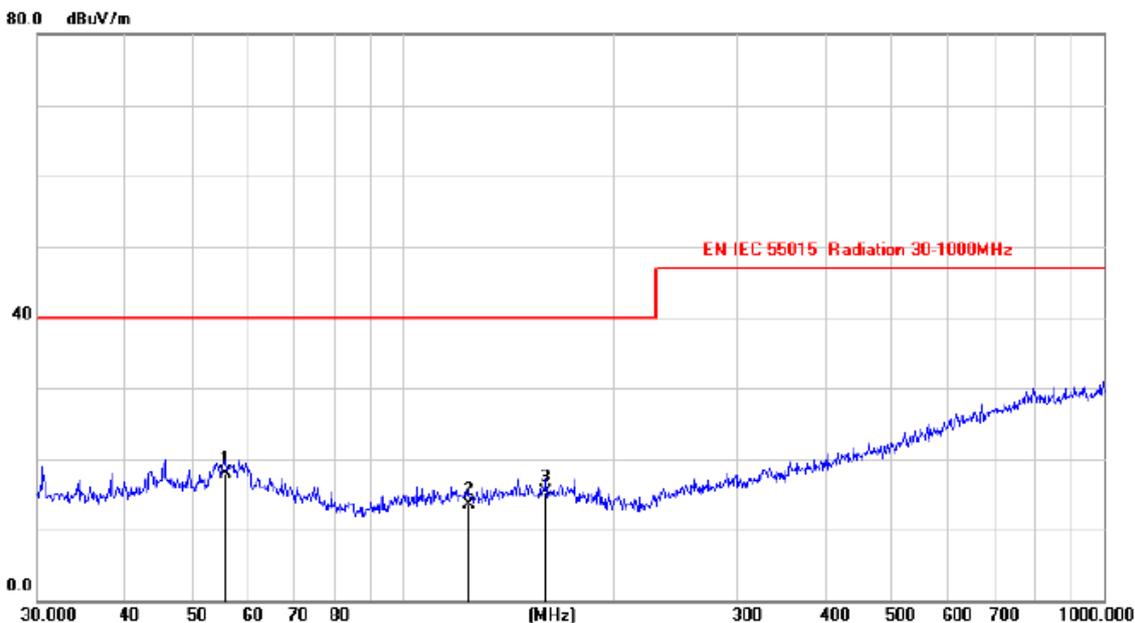


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	*	55.7069	5.32	12.63	17.95	40.00	-22.05	QP			
2		123.8069	2.26	11.25	13.51	40.00	-26.49	QP			
3		159.9947	4.17	11.13	15.30	40.00	-24.70	QP			





Environmental Conditions	23.9°C, 51% RH
Model	LY-FW2621-W
Operating mode	Mode 1 (worst case)
Test voltage	DC 24V
Test engineer	Peng Dong
Pol	Horizontal

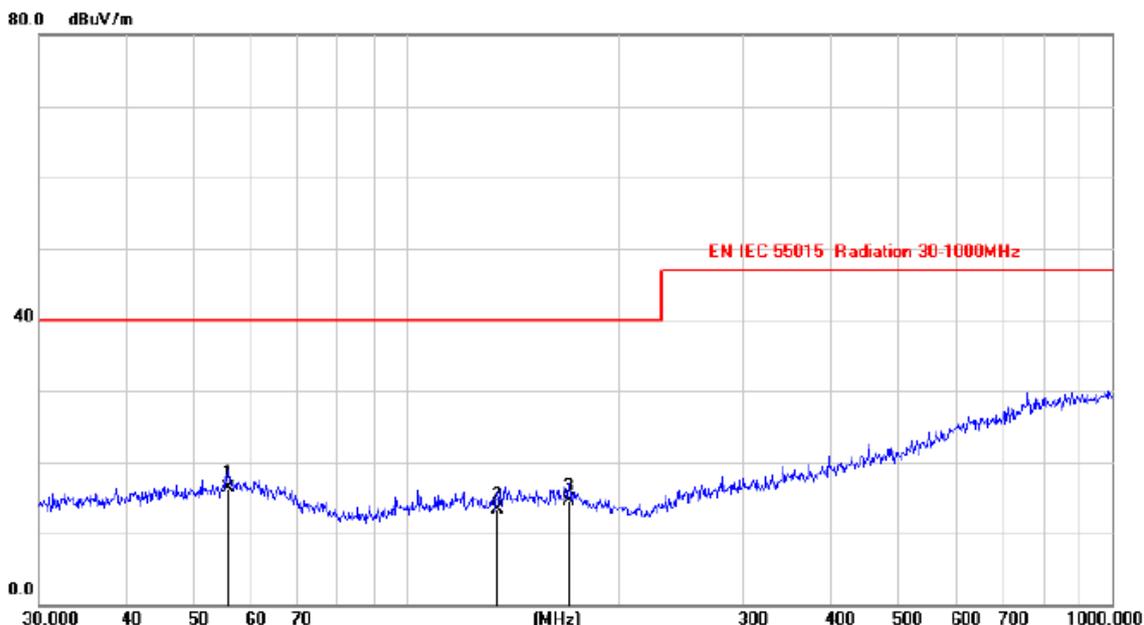

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	*	55.9026	3.12	13.14	16.26	40.00	-23.74	QP			
2		134.2058	4.14	9.12	13.26	40.00	-26.74	QP			
3		170.1948	4.14	10.45	14.59	40.00	-25.41	QP			





A.4. IMMUNITY TEST RESULTS

ELECTROSTATIC DISCHARGE IMMUNITY TEST RESULTS					
Standard	<input checked="" type="checkbox"/> EN 61547:2009		<input checked="" type="checkbox"/> EN 61000-4-2		
EUT	Flexible LED Wall Washer		Temperature	23.2°C	
M/N	LY-FW2621-W		Humidity	50%	
Test Mode	Mode 1		Pressure	1008mbar	
Input voltage	DC 24V		Test Results	Pass	
Test engineer	Peng Dong				
Discharge Mode	Test Points	Test Voltage (kV) & polarity	Number of discharges/polarity	Discharge interval (s)	Performance Criteria
Contact Discharge	-	± 2&4	10	1	B
Air Discharge	-	± 2&4&8	10	1	B
VCP	-	± 4	10	1	B
HCP	-	± 4	10	1	B



**RADIO-FREQUENCY ELECTROMAGNETIC FIELD IMMUNITY TEST RESULTS**

Standard	<input checked="" type="checkbox"/> EN 61547:2009		<input checked="" type="checkbox"/> EN 61000-4-3	
EUT	Flexible LED Wall Washer	Temperature	24.1°C	
M/N	LY-FW2621-W	Humidity	55%	
Test Mode	Mode 1	Pressure	1008mbar	
Input voltage	DC 24V	Test engineer	Baron.wen	
Modulation	1 kHz, 80 % AM	Test Results	Pass	
Steps	1%			
Angle of EUT	Antenna polarization	Frequency Range	Test Level	Performance Criteria
0°	Vertical Horizontal	80 - 1000 MHz	3 V/m	A
90°	Vertical Horizontal	80 - 1000 MHz	3 V/m	A
180°	Vertical Horizontal	80 - 1000 MHz	3 V/m	A
270°	Vertical Horizontal	80 - 1000 MHz	3 V/m	A

Note :



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

101-201, No. 39 Building, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com.

Scan code to check authenticity.



ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST RESULTS

Standard	<input checked="" type="checkbox"/> EN 61547:2009		<input checked="" type="checkbox"/> EN 61000-4-4	
EUT	Flexible LED Wall Washer	Temperature	23.9°C	
M/N	LY-FW2621-W	Humidity	52%	
Test Mode	Mode 1	Pressure	1008mbar	
Input voltage	DC 24V	Test Results	Pass	
Test engineer	Peng Dong			
Port under test	Test Level & polarity	Repetition Frequency	Test duration / polarity	Performance Criteria
AC Input / Output Power				
DC Input / Output Power	± 0.5 kV	5 kHz	2min	B
Signal / Control Port				


Note:






INJECTED CURRENTS (RADIO-FREQUENCY COMMON MODE) TEST RESULTS

Standard	<input checked="" type="checkbox"/> EN 61547:2009		<input checked="" type="checkbox"/> EN 61000-4-6	
EUT	Flexible LED Wall Washer		Temperature	24.1°C
M/N	LY-FW2621-W		Humidity	54%
Test Mode	Mode 1		Pressure	1008mbar
Input voltage	DC 24V		Test Results	Pass
Frequency range	0,15 - 80 MHz		Test engineer	Peng Dong
Port under test	Test Level	Coupling method	Dwell time	Performance Criteria
AC Input / Output Power				
DC Input / Output Power	3 V	CDN	3 seconds	A
Signal / Control Port				

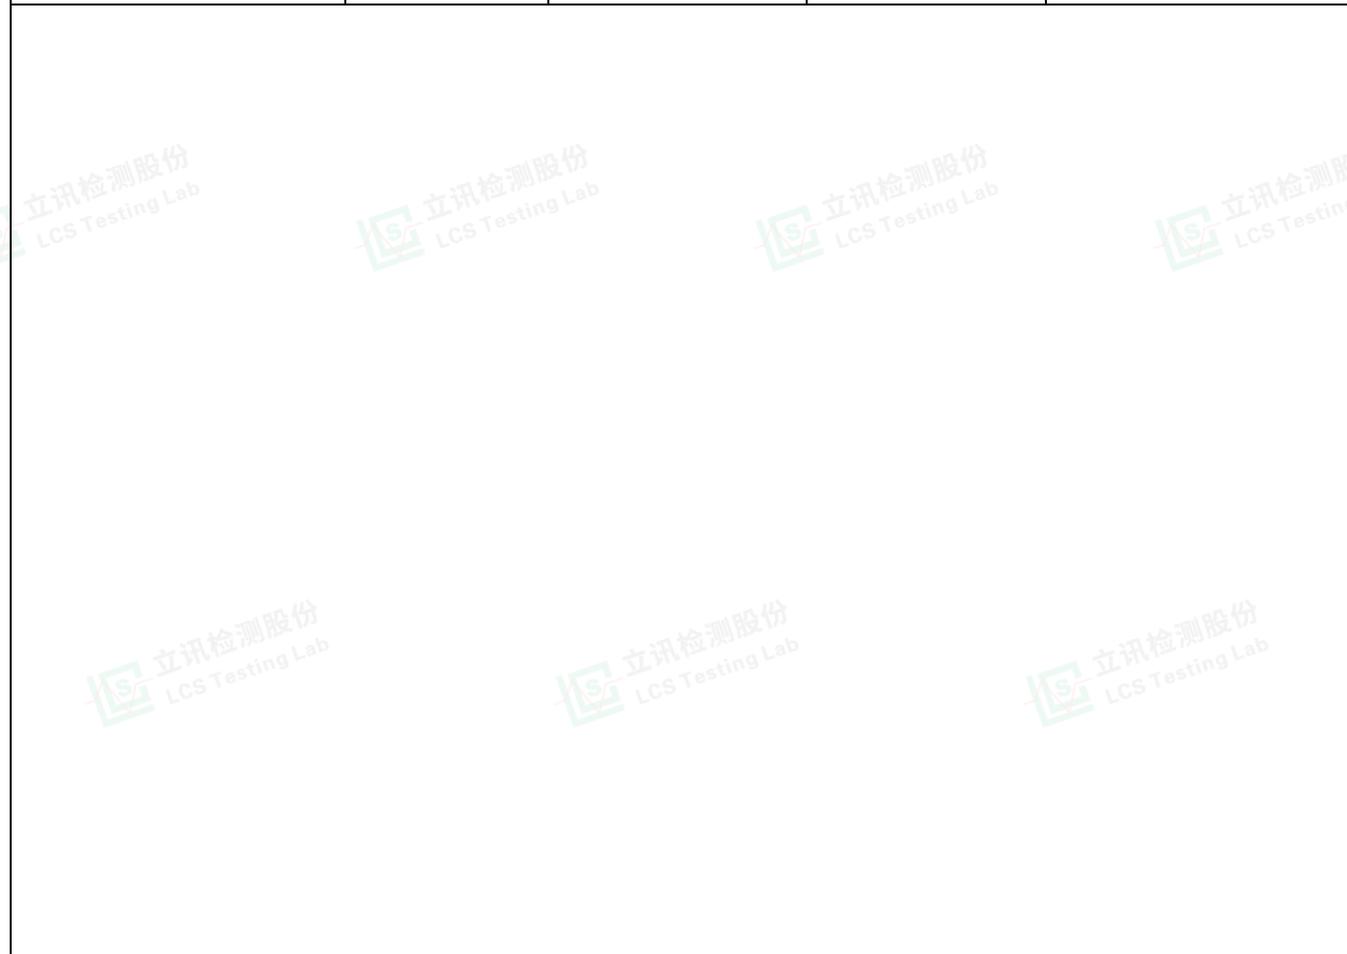

ANNEX B - TEST PHOTOS

B.1. Conducted Disturbance at electric power supply

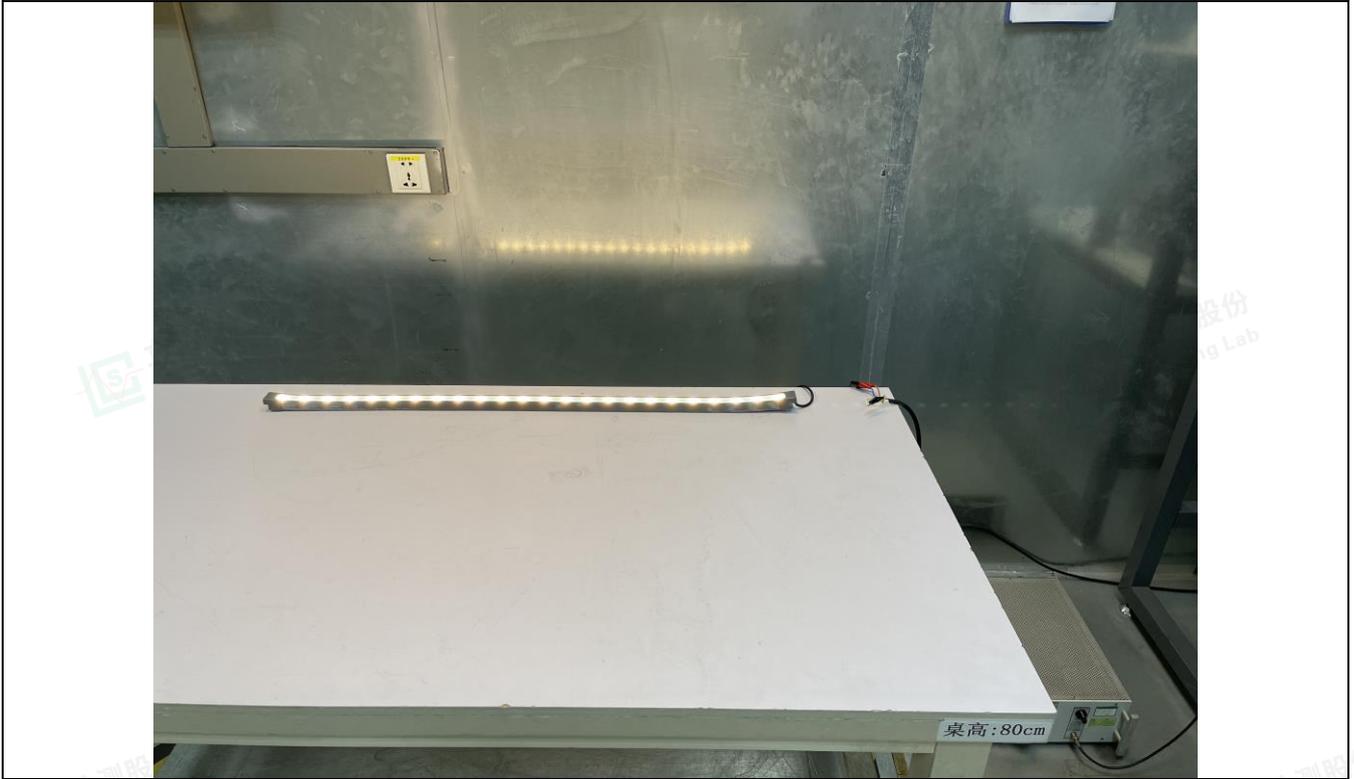


B.2. Radiated Disturbance (9kHz - 30MHz)






B.3. Radiated Disturbance (30MHz to 1GHz)

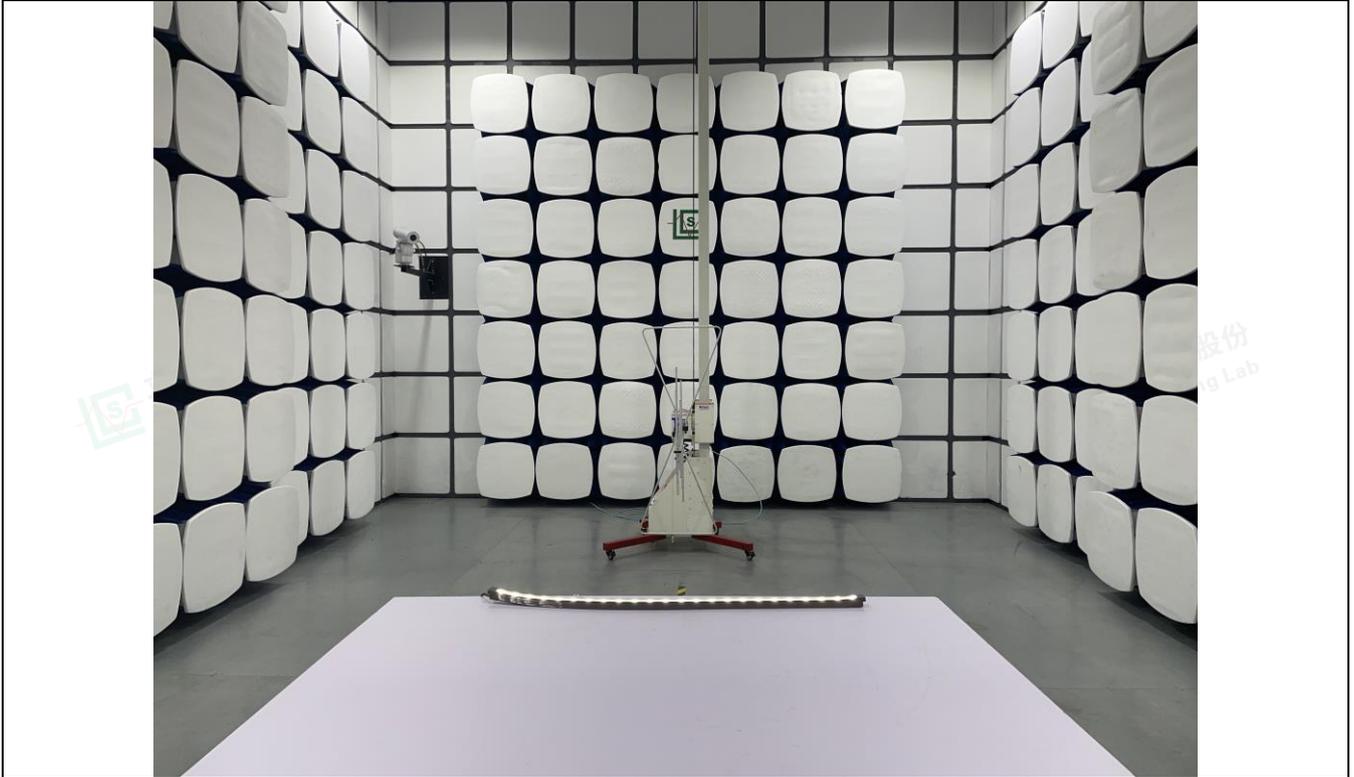


B.4. Electrostatic Discharge

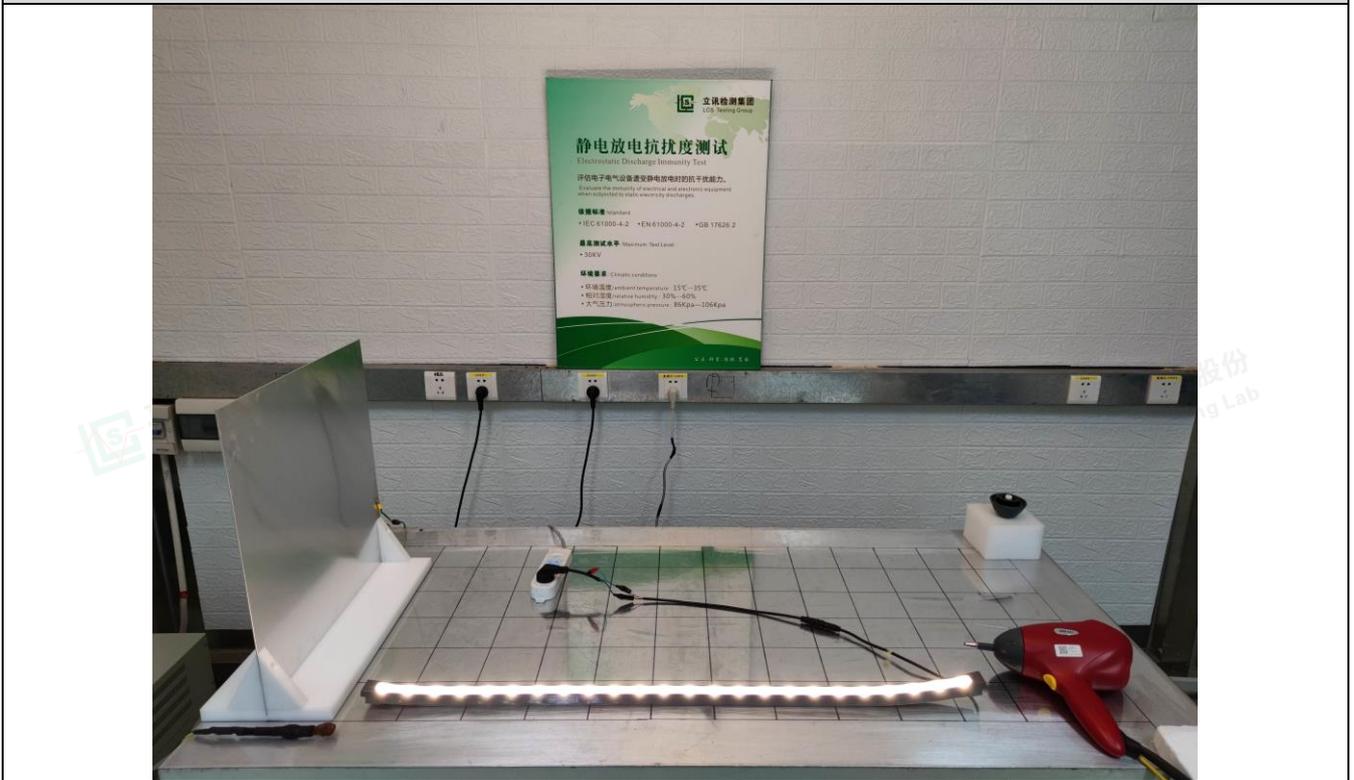



B.5. Electrical Fast Transient / Burst

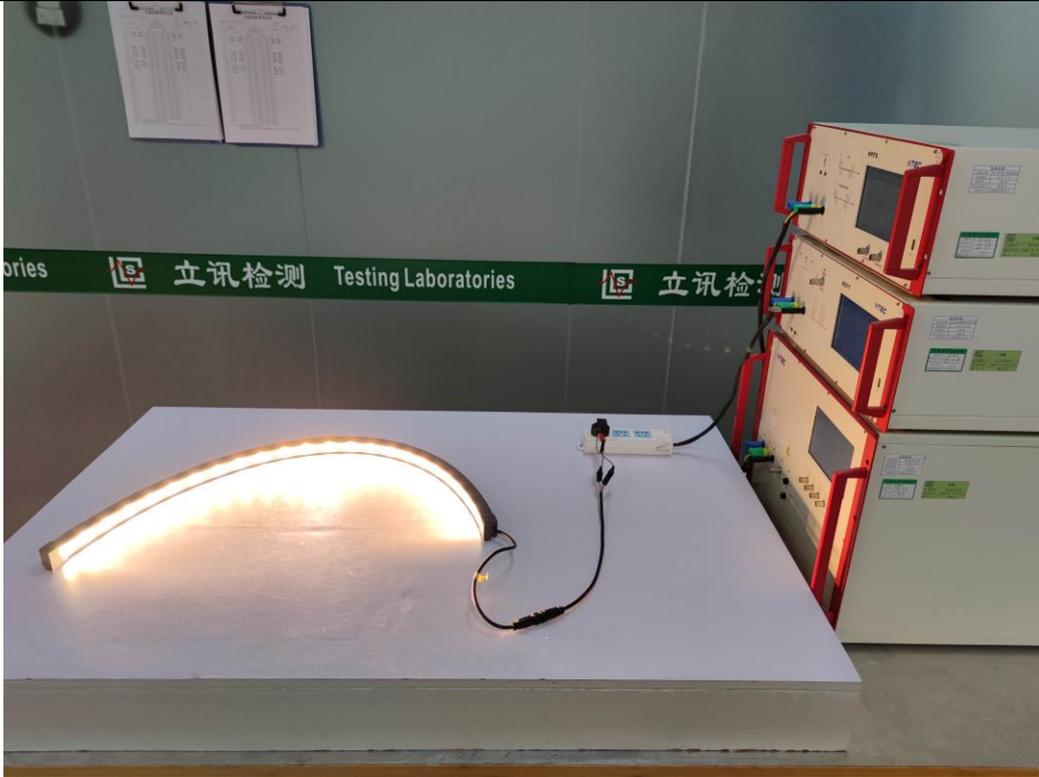

B.6. Injected Currents (Radio-Frequency Common Mode)





ANNEX C - EXTERNAL AND INTERNAL PHOTOS OF THE EUT

The photographs show the equipment under test.

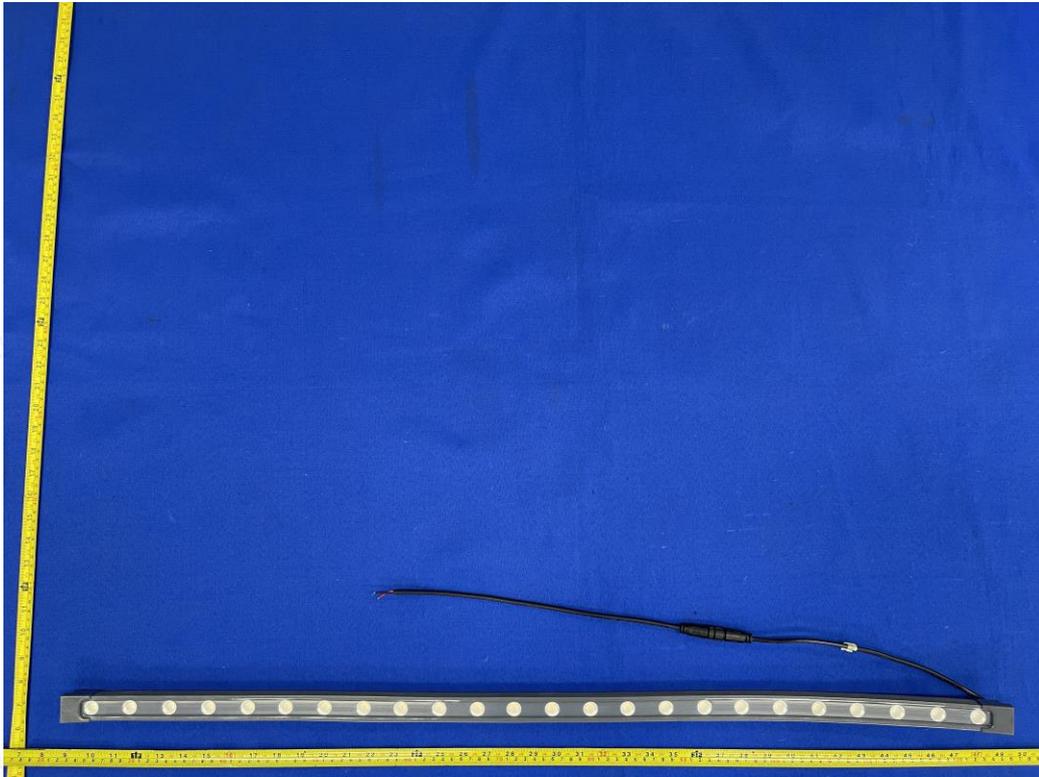


Figure. 1 (LY-FW2621-W)

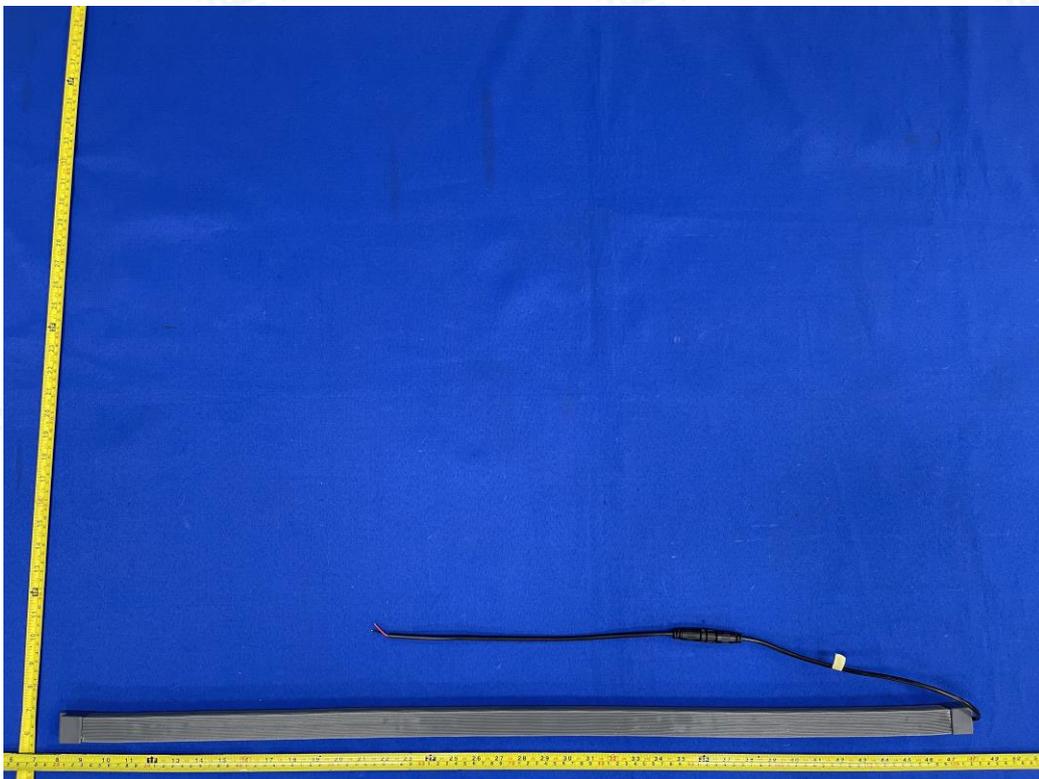


Figure. 2



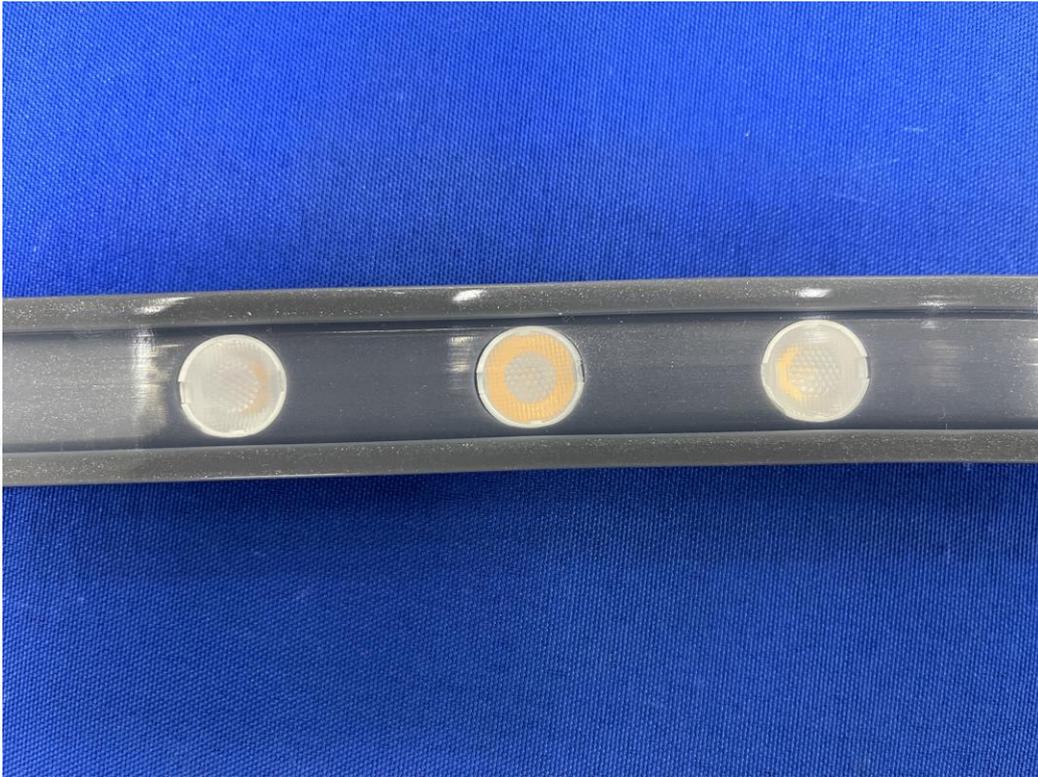


Figure. 3

----- END -----

