


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: LY60-S5050RGBW-HT-W24-10	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.014*1	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 21.08 lm/W
MODEL	B	I _{max} (cd)	17.67	S/MH(C0/180)	1.14	
NOMINAL POWER(W)	2.4	LOR(%)	100.0	S/MH(C90/270)	1.28	
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	50.997	η UP,DN(C0-180)	2.0,50.0	
NOMINAL FLUX(lm)	0.849798	CIE CLASS	DIRECT	η UP,DN(C180-360)	1.9,46.1	
LAMPS INSIDE	60	η up (%)	3.9	CIBSE SHR NOM	1.25	
TEST VOLTAGE(V)	24	η down (%)	96.1	CIBSE SHR MAX	1.35	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

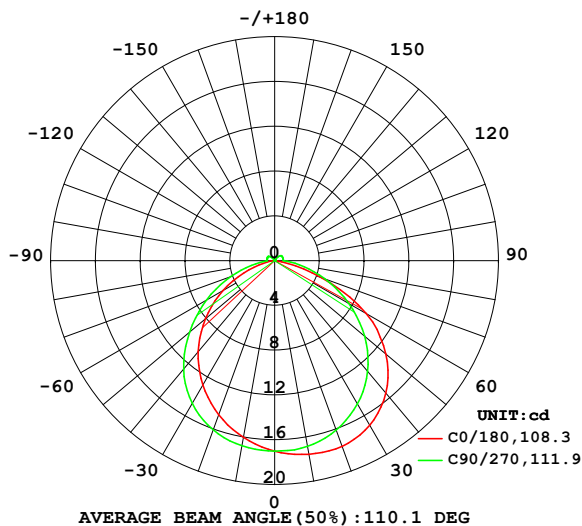

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

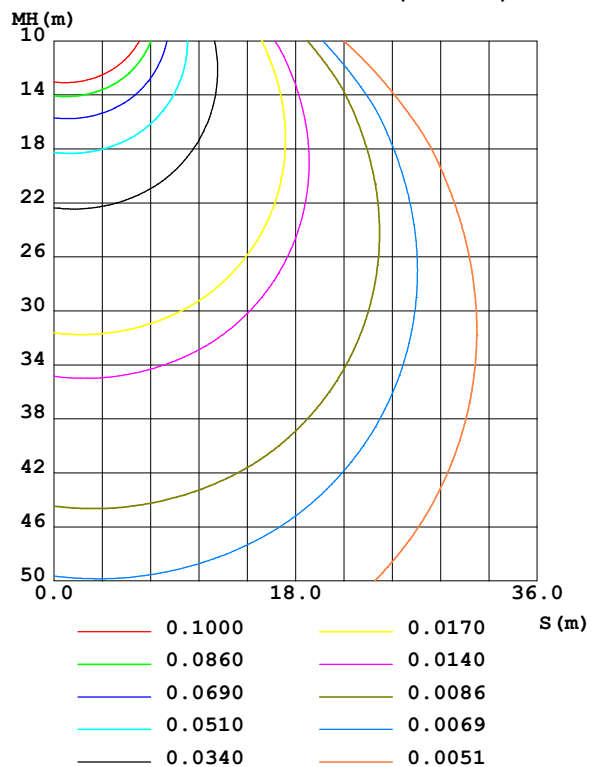

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-08-24

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:6.040m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	17.55	17.35	16.85	16.28	16.04	16.26	16.79	17.32	0- 10	1.614	1.614	3.17,3.17
20	17.65	17.20	16.10	15.09	14.64	15.09	16.08	17.17	10- 20	4.669	6.284	12.3,12.3
30	16.98	16.32	14.79	13.43	12.84	13.39	14.73	16.29	20- 30	7.173	13.46	26.4,26.4
40	15.45	14.63	12.92	11.29	10.63	11.16	12.66	14.54	30- 40	8.730	22.19	43.5,43.5
50	12.95	12.19	10.48	8.786	8.072	8.475	9.911	11.88	40- 50	9.017	31.20	61.2,61.2
60	9.404	9.031	7.649	6.055	5.329	5.618	7.013	8.495	50- 60	7.919	39.12	76.7,76.7
70	4.459	5.860	4.757	3.629	2.470	3.299	4.155	5.261	60- 70	5.738	44.86	88,88
80	0.6784	2.622	2.257	1.759	0.4717	1.346	1.738	2.035	70- 80	3.109	47.97	94.1,94.1
90	0	0.7203	0.8326	0.6848	0	0.5516	0.6851	0.7564	80- 90	1.037	49.01	96.1,96.1
100	0	0.6462	0.7926	0.6110	0.0026	0.5384	0.7218	0.5716	90-100	0.5601	49.57	97.2,97.2
110	0	0.5832	0.7856	0.5477	0.0079	0.4964	0.7245	0.5271	100-110	0.4998	50.07	98.2,98.2
120	0	0.5071	0.7786	0.4774	0.0158	0.4017	0.7271	0.4535	110-120	0.4191	50.49	99,99
130	0	0.2578	0.7037	0.2389	0.0184	0.1757	0.5955	0.2147	120-130	0.3081	50.79	99.6,99.6
140	0	0.0369	0.3497	0.0604	0.0184	0.0236	0.2593	0.0236	130-140	0.1477	50.94	99.9,99.9
150	0.0026	0.0289	0.0474	0.0315	0.0184	0.0236	0.0315	0.0262	140-150	0.0338	50.97	100,100
160	0.0053	0.0236	0.0315	0.0315	0.0184	0.0236	0.0341	0.0288	150-160	0.0120	50.99	100,100
170	0.0105	0.0236	0.0315	0.0315	0.0184	0.0236	0.0367	0.0288	160-170	0.0074	50.99	100,100
180	0.0289	0.0236	0.0315	0.0315	0.0158	0.0236	0.0367	0.0288	170-180	0.0025	51.00	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 27.652 lm

%lum = 54.2%

%lamp = 54.2%

Conical surface Flux(120deg): 39.122 lm

%lum = 76.7%


%lamp = 76.7%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2023-08-24

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity:65.0%
 Test Distance:6.040m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

NAME: LY60-S5050RGBW-HT-W24-10	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.014*1	Shielding Angle:

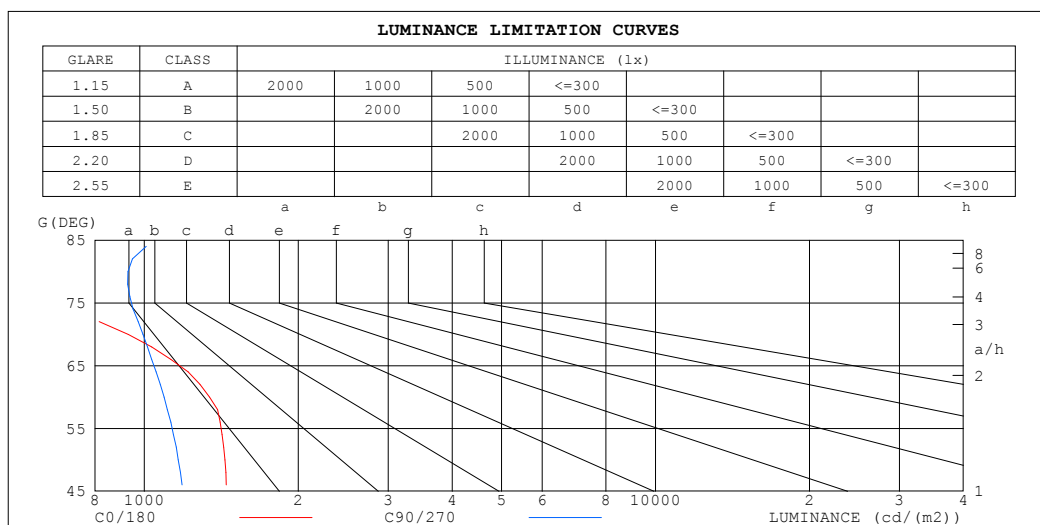


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2023-08-24

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 γ Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 6.040m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: LY60-S5050RGBW-HT-W24-10	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.014*1	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

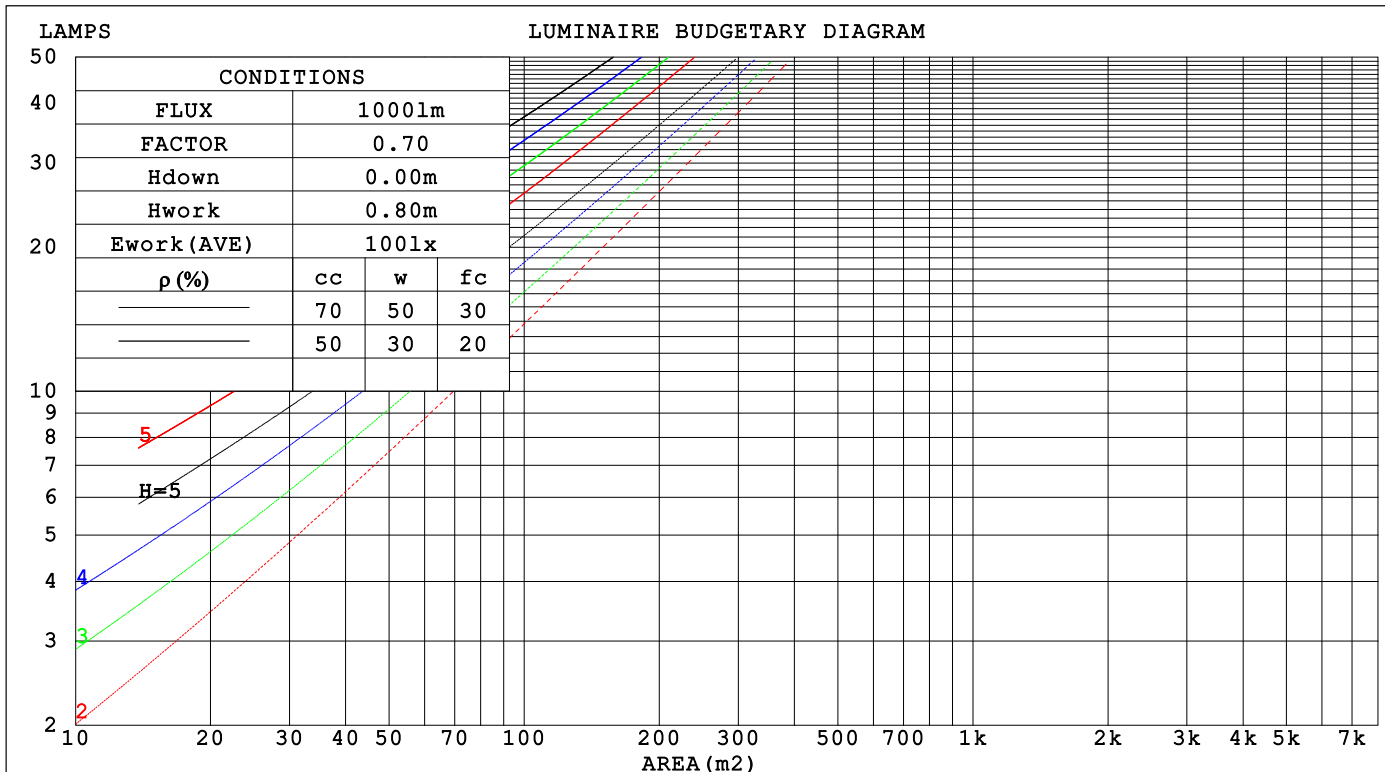

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-08-24

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:6.040m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: LY60-S5050RGBW-HT-W24-10	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.014*1	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.306	.174	.055	.297	.170	.054	.282	.162	.052	.268	.154	.050	.255	.148	.048		
2.0	.287	.157	.048	.280	.154	.047	.266	.148	.046	.253	.142	.044	.242	.137	.043		
3.0	.266	.141	.042	.259	.139	.042	.247	.134	.041	.236	.129	.040	.225	.125	.039		
4.0	.246	.128	.038	.240	.126	.037	.229	.121	.036	.219	.117	.035	.209	.114	.035		
5.0	.227	.116	.034	.222	.114	.033	.212	.111	.033	.203	.107	.032	.195	.104	.031		
6.0	.211	.106	.030	.206	.104	.030	.198	.101	.029	.190	.098	.029	.182	.096	.028		
7.0	.197	.097	.028	.193	.096	.027	.185	.093	.027	.177	.091	.026	.170	.088	.026		
8.0	.184	.090	.025	.180	.089	.025	.173	.086	.025	.166	.084	.024	.160	.082	.024		
9.0	.172	.083	.023	.169	.082	.023	.163	.080	.023	.156	.078	.022	.151	.077	.022		
10.0	.162	.078	.022	.159	.077	.021	.153	.075	.021	.148	.073	.021	.142	.072	.021		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.220	.220	.220	.188	.188	.188	.128	.128	.128	.074	.074	.074	.024	.024	.024		
1.0	.210	.186	.165	.180	.160	.142	.123	.110	.098	.071	.064	.057	.023	.020	.018		
2.0	.202	.162	.129	.173	.140	.111	.118	.097	.078	.068	.056	.046	.022	.018	.015		
3.0	.194	.145	.105	.166	.125	.091	.114	.087	.064	.066	.051	.038	.021	.016	.012		
4.0	.186	.131	.089	.160	.114	.078	.110	.079	.055	.064	.046	.032	.020	.015	.011		
5.0	.179	.121	.078	.154	.105	.068	.106	.073	.048	.061	.043	.029	.020	.014	.009		
6.0	.172	.113	.070	.148	.098	.061	.102	.068	.043	.059	.040	.026	.019	.013	.008		
7.0	.165	.106	.064	.142	.092	.056	.098	.064	.040	.057	.038	.024	.018	.012	.008		
8.0	.159	.100	.060	.137	.087	.052	.095	.061	.037	.055	.036	.022	.018	.012	.007		
9.0	.153	.095	.056	.132	.083	.049	.091	.058	.035	.053	.034	.021	.017	.011	.007		
10.0	.147	.091	.054	.127	.079	.047	.088	.056	.033	.051	.033	.020	.017	.011	.007		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-08-24

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:6.040m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME: LY60-S5050RGBW-HT-W24-10					TYPE:					WEIGHT:				
SPEC.:					DIM.:					SERIAL No.:				
MFR.:					SUR.: 0.014*1					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3				
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3				
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2				
Room dimensions					Viewed crosswise					Viewed endwise				
x = 2H y = 2H					24.9	26.3	25.2	26.6	26.9	24.1	25.5	24.4	25.8	26.1
3H					26.1	27.5	26.5	27.8	28.1	25.5	26.8	25.8	27.1	27.4
4H					26.5	27.7	26.8	28.0	28.4	26.1	27.3	26.4	27.7	28.0
6H					26.5	27.7	26.9	28.0	28.4	26.5	27.7	26.9	28.1	28.4
8H					26.5	27.6	26.9	28.0	28.3	26.7	27.9	27.1	28.2	28.6
12H					26.4	27.5	26.8	27.9	28.3	26.9	28.0	27.3	28.3	28.7
4H 2H					25.4	26.7	25.8	27.0	27.3	24.8	26.1	25.2	26.4	26.7
3H					26.9	28.1	27.4	28.4	28.8	26.4	27.6	26.9	27.9	28.3
4H					27.5	28.5	27.9	28.9	29.3	27.2	28.2	27.6	28.6	29.0
6H					27.6	28.5	28.1	29.0	29.4	27.8	28.7	28.2	29.1	29.5
8H					27.6	28.5	28.1	28.9	29.4	28.0	28.8	28.5	29.3	29.7
12H					27.6	28.4	28.1	28.8	29.3	28.2	29.0	28.7	29.4	29.9
8H 4H					27.8	28.6	28.2	29.0	29.5	27.5	28.4	28.0	28.8	29.3
6H					28.1	28.8	28.6	29.3	29.8	28.3	29.0	28.8	29.5	30.0
8H					28.2	28.8	28.7	29.3	29.9	28.6	29.3	29.2	29.7	30.3
12H					28.3	28.8	28.8	29.3	29.9	29.0	29.5	29.5	30.0	30.6
12H 4H					27.8	28.5	28.3	29.0	29.5	27.5	28.3	28.0	28.7	29.2
6H					28.2	28.8	28.7	29.3	29.9	28.4	29.0	28.9	29.5	30.0
8H					28.4	28.9	28.9	29.4	30.0	28.8	29.3	29.3	29.8	30.4
Variations with the observer position at spacings(CIE Pub.117):														
S = 1.0H					+ 0.1 / - 0.2					+ 0.2 / - 0.2				
1.5H					+ 0.2 / - 0.5					+ 0.2 / - 0.4				
2.0H					+ 0.2 / - 0.5					+ 0.2 / - 0.5				

CIE Pub.117, 50.99 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -10.3)
Area: 0.014 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-08-24

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:6.040m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

NAME: LY60-S5050RGBW-HT-W24-10	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.014*1	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	57	45	38	56	45	38	54	44	38	31
0.80	67	55	48	65	54	47	64	54	47	40
1.00	75	64	57	74	63	56	71	64	56	48
1.25	82	72	64	81	71	64	78	69	63	55
1.50	87	77	70	85	76	69	82	74	68	60
2.00	94	85	79	92	84	78	88	81	76	68
2.50	98	90	84	96	88	83	91	85	81	72
3.00	101	94	89	99	92	87	94	89	85	75
4.00	105	99	95	102	97	93	98	93	90	80
5.00	108	103	98	105	100	97	100	96	93	83
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2023-08-24

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 6.040m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME: LY60-S5050RGBW-HT-W24-10	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.014*1	Shielding Angle:

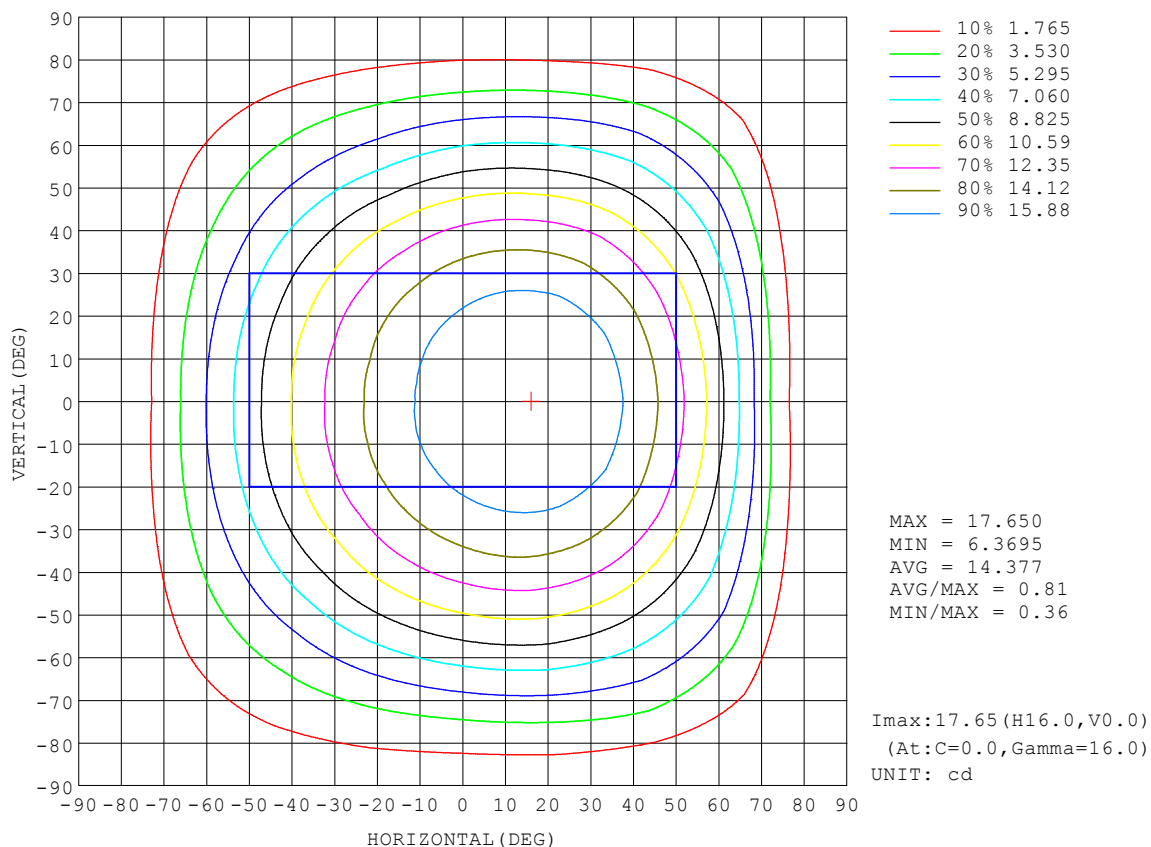


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-08-24

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:6.040m [K=1.0000]
Remarks:

AAI Figure

NAME: LY60-S5050RGBW-HT-W24-10	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.014*1	Shielding Angle:

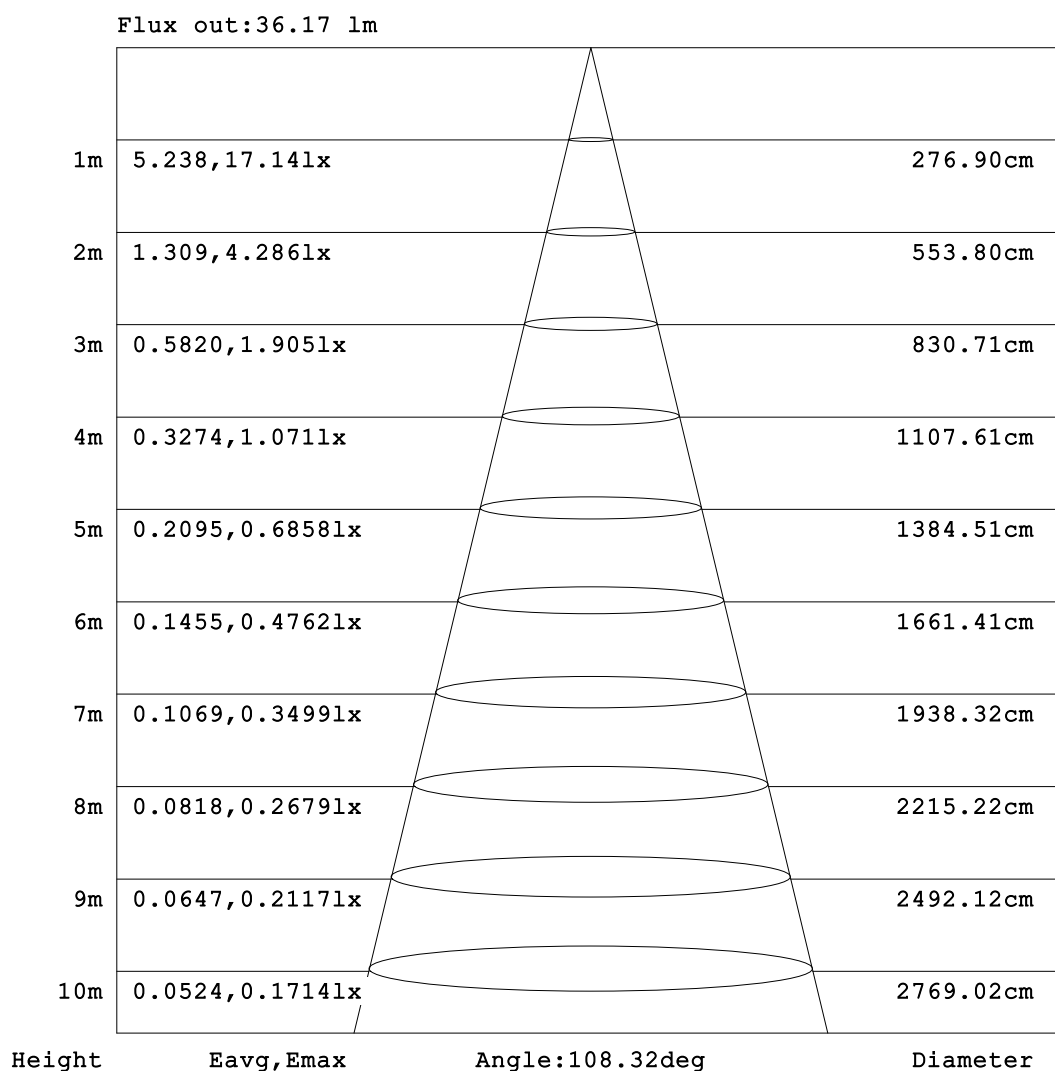


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2023-08-24

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity:65.0%
 Test Distance:6.040m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

NAME: LY60-S5050RGBW-HT-W24-10	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.014*1	Shielding Angle:

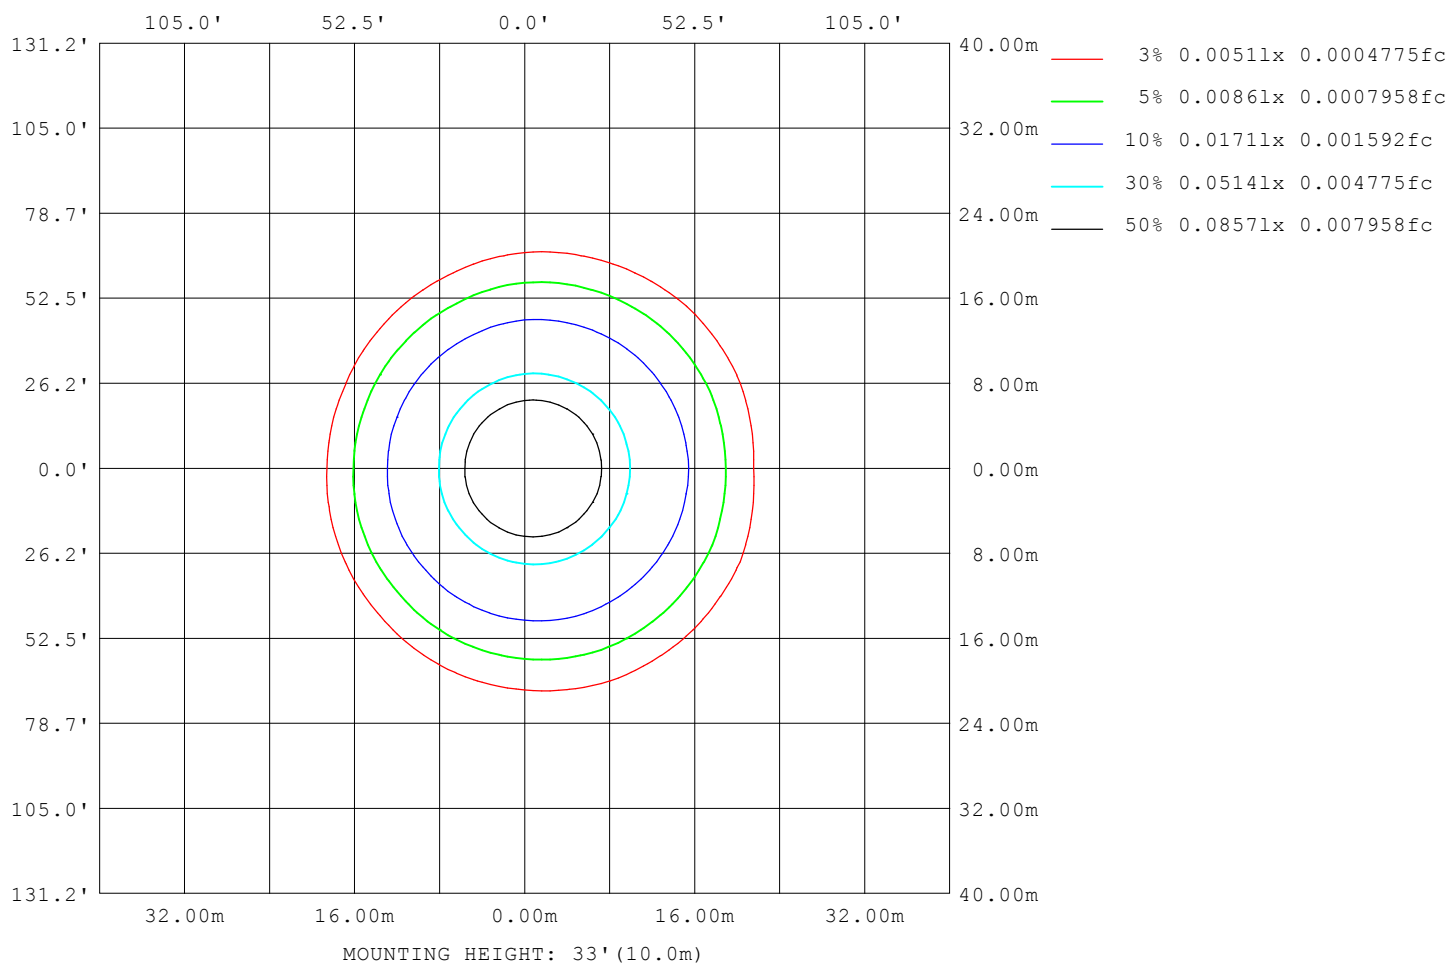

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2023-08-24

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 6.040m [K=1.0000]
Remarks:

LED Avg.L Report

NAME: LY60-S5050RGBW-HT-W24-10	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.014*1	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	913
L_0~180 (75) av	498
L_0~180 (85) av	12
L_90~270 (65) av	994
L_90~270 (75) av	868
L_90~270 (85) av	920
L_45 (65) av	990
L_45 (75) av	875
L_45 (85) av	820

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-08-24

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:6.040m [K=1.0000]
Remarks:

Planar Illuminance Curve

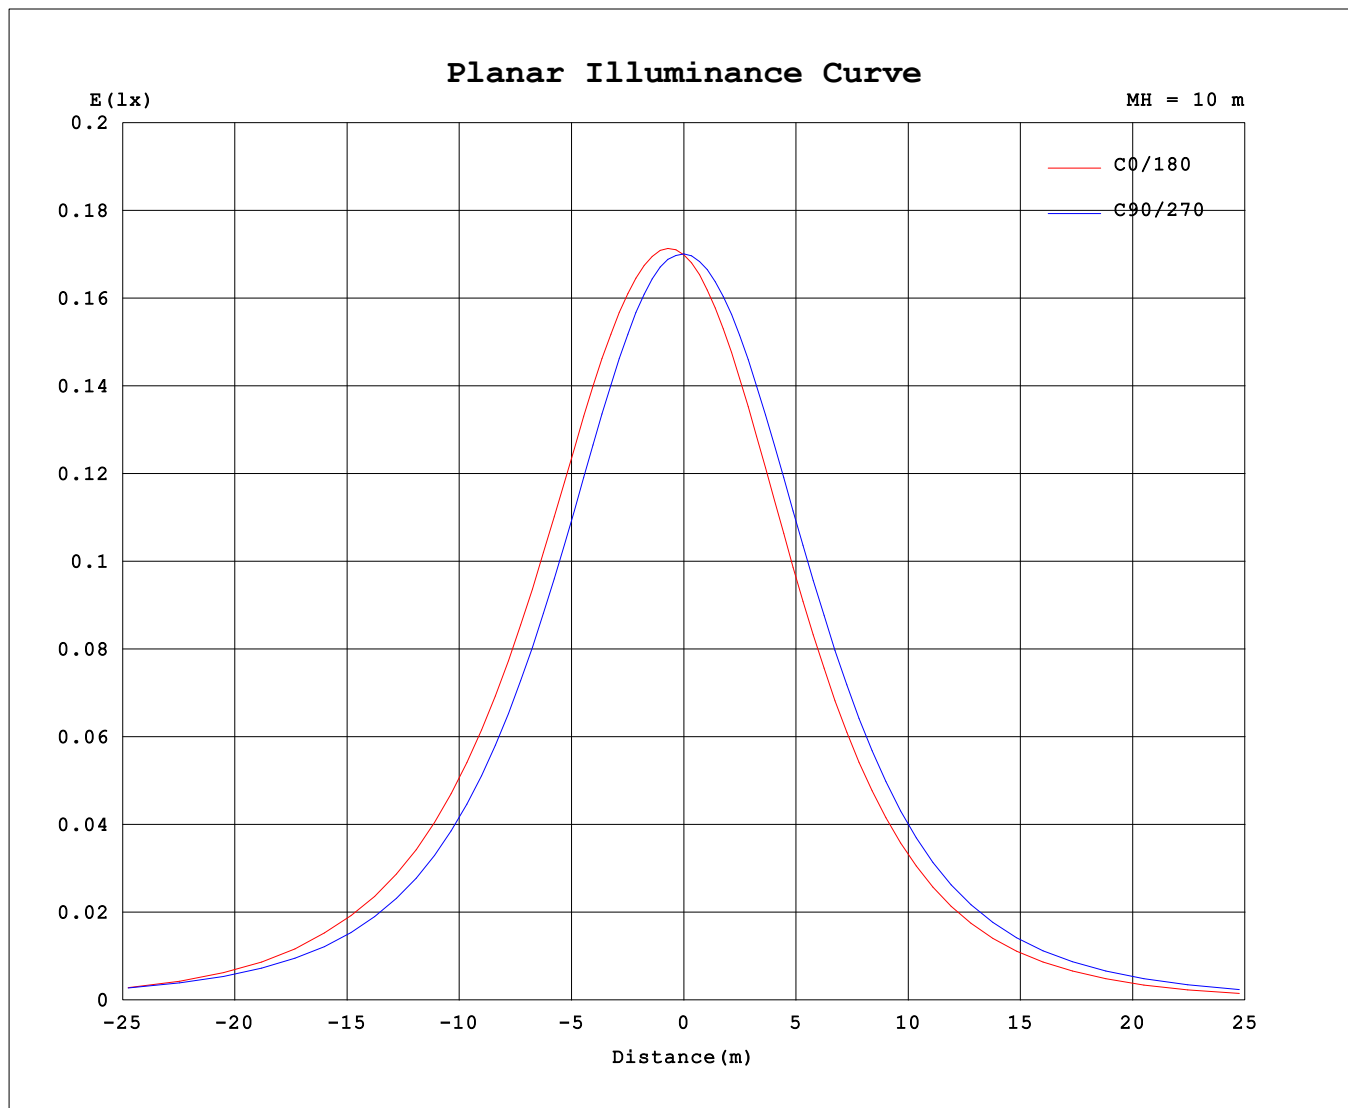

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2023-08-24

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 6.040m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: LY60-S5050RGBW-HT-W24-10	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.014*1	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	17.0	17.0	17.0	17.0	17.0	17.0	17.0	17.0	17.0	17.0	17.0	17.0	17.0	17.0	17.0	17.0			
5	17.3	17.3	17.2	17.1	17.0	16.9	16.8	16.7	16.7	16.7	16.8	16.9	17.0	17.1	17.2	17.3			
10	17.6	17.5	17.4	17.1	16.8	16.5	16.3	16.1	16.0	16.1	16.3	16.5	16.8	17.1	17.3	17.5			
15	17.6	17.6	17.4	17.0	16.6	16.2	15.9	15.6	15.5	15.6	15.8	16.2	16.6	17.0	17.3	17.6			
20	17.6	17.5	17.2	16.7	16.1	15.6	15.1	14.8	14.6	14.7	15.1	15.5	16.1	16.7	17.2	17.5			
25	17.5	17.3	16.9	16.3	15.6	15.0	14.5	14.2	14.0	14.1	14.5	15.0	15.6	16.3	16.9	17.3			
30	17.0	16.8	16.3	15.5	14.8	14.1	13.4	13.1	12.8	12.9	13.4	14.0	14.7	15.5	16.3	16.8			
35	16.5	16.3	15.7	15.0	14.1	13.3	12.6	12.2	12.0	12.1	12.6	13.1	14.0	14.9	15.7	16.3			
40	15.4	15.3	14.6	13.9	12.9	12.1	11.3	10.9	10.6	10.7	11.2	11.8	12.7	13.6	14.5	15.2			
45	14.6	14.4	13.8	13.0	12.0	11.1	10.3	9.91	9.65	9.73	10.1	10.7	11.6	12.6	13.6	14.3			
50	13.0	12.8	12.2	11.4	10.5	9.61	8.79	8.35	8.07	8.12	8.48	8.98	9.91	10.8	11.9	12.6			
55	11.7	11.5	11.0	10.3	9.38	8.52	7.69	7.26	6.97	6.99	7.32	7.82	8.75	9.58	10.6	11.3			
60	9.40	9.42	9.03	8.49	7.65	6.85	6.06	5.62	5.33	5.28	5.62	6.14	7.01	7.73	8.50	9.13			
65	7.48	7.94	7.70	7.26	6.47	5.78	5.02	4.57	4.16	4.22	4.59	5.10	5.88	6.53	7.23	7.64			
70	4.46	5.87	5.86	5.38	4.76	4.22	3.63	3.19	2.47	2.81	3.30	3.68	4.15	4.69	5.26	5.29			
75	2.72	4.35	4.66	4.17	3.67	3.29	2.87	2.38	1.50	2.03	2.39	2.76	3.13	3.47	3.80	3.76			
80	0.68	2.17	2.62	2.55	2.26	2.08	1.76	1.29	0.47	1.07	1.35	1.54	1.74	1.85	2.03	1.83			
85	0.00	1.14	1.48	1.59	1.47	1.37	1.11	0.77	0.08	0.63	0.85	0.98	1.06	1.10	1.15	0.93			
90	0.00	0.38	0.72	0.79	0.83	0.86	0.68	0.35	0.00	0.31	0.55	0.67	0.69	0.68	0.76	0.37			
95	0.00	0.34	0.68	0.77	0.80	0.81	0.60	0.34	0.00	0.30	0.55	0.67	0.70	0.68	0.67	0.35			
100	0.00	0.29	0.65	0.73	0.79	0.75	0.61	0.29	0.00	0.28	0.54	0.67	0.72	0.67	0.57	0.32			
105	0.00	0.26	0.61	0.73	0.79	0.74	0.57	0.27	0.01	0.25	0.53	0.65	0.72	0.67	0.56	0.27			
110	0.00	0.18	0.58	0.72	0.79	0.73	0.55	0.20	0.01	0.20	0.50	0.64	0.72	0.67	0.53	0.20			
115	0.00	0.11	0.57	0.72	0.78	0.73	0.53	0.14	0.01	0.13	0.46	0.64	0.73	0.67	0.51	0.13			
120	0.00	0.01	0.51	0.71	0.78	0.71	0.48	0.03	0.02	0.05	0.40	0.63	0.73	0.65	0.45	0.04			
125	0.00	0.01	0.43	0.68	0.78	0.66	0.38	0.02	0.02	0.03	0.32	0.63	0.71	0.64	0.38	0.02			
130	0.00	0.01	0.26	0.57	0.70	0.56	0.24	0.02	0.02	0.02	0.18	0.50	0.60	0.55	0.21	0.01			
135	0.00	0.01	0.14	0.45	0.59	0.41	0.15	0.03	0.02	0.02	0.08	0.37	0.47	0.42	0.10	0.01			
140	0.00	0.02	0.04	0.22	0.35	0.20	0.06	0.03	0.02	0.02	0.02	0.17	0.26	0.20	0.02	0.01			
145	0.00	0.02	0.03	0.08	0.19	0.09	0.04	0.03	0.02	0.02	0.02	0.08	0.10	0.08	0.02	0.01			
150	0.00	0.03	0.03	0.02	0.05	0.03	0.03	0.03	0.02	0.02	0.02	0.04	0.03	0.03	0.03	0.01			
155	0.01	0.03	0.02	0.02	0.04	0.03	0.03	0.03	0.02	0.02	0.02	0.04	0.03	0.03	0.03	0.01			
160	0.01	0.03	0.02	0.02	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.04	0.03	0.03	0.03	0.01			
165	0.01	0.03	0.02	0.02	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.04	0.03	0.03	0.03	0.01			
170	0.01	0.03	0.02	0.02	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.04	0.04	0.03	0.03	0.01			
175	0.01	0.03	0.02	0.02	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.04	0.04	0.03	0.03	0.01			
180	0.03	0.03	0.02	0.02	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.04	0.04	0.03	0.03	0.02			

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:

Test Date:2023-08-24

γ Range: 0 - 180DEG

γ Interval: 2.0DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450

Humidity:65.0%

Test Distance:6.040m [K=1.0000]

Remarks: